

FAST ATTACK VEHICLE



FAST ATTACK VEHICLE



POWER TRAIN

ENGINE	HORSEPOWER (EST)	@RPM	FUEL	COOLING
STD	94	@4400	Gasoline	Air
Optional	90	@4200	Diesel	Water
Optional	100	@4200	Diesel H.P.	Water

TRANSAXLE
High Performance: — 4-Speed — Close ratio synchromesh — 5.4:1 Axle Ratio

PERFORMANCE

- Top Speed (with STD Axle Ratio) — Over 80 mph
- Low Speed (with STD Axle Ratio) — Less than 10 mph
- 0-60 mph with 480 lb. load — Less than 12 sec.

ARMAMENT/SYSTEMS ALTERNATES


- 30mm Chain Gun
- .50 Cal M/G
- TOW
- 40mm Grenade Launcher
- Unmanned Reconnaissance EW Vehicle
- Target Designator Vehicle
- 3-4 Man Crew
- Demon Vehicle

CHASSIS

- Type: High strength tubular frame with unitized roll cage
- Electrical: 12 Vdc, negative ground, maintenance free battery
- Weight: (curb) Gasoline Engine: 1, 540 pounds
- Brakes: Front & Rear: Drum
- Steering: Rack & Pinion
- Shock Absorbers: High performance: 2 per each front wheel
3 per each rear wheel

NOMINAL DIMENSIONS:

- A) Length: 150 inches
- B) Height: 60 inches
- C) Wheelbase: "100 inch class"

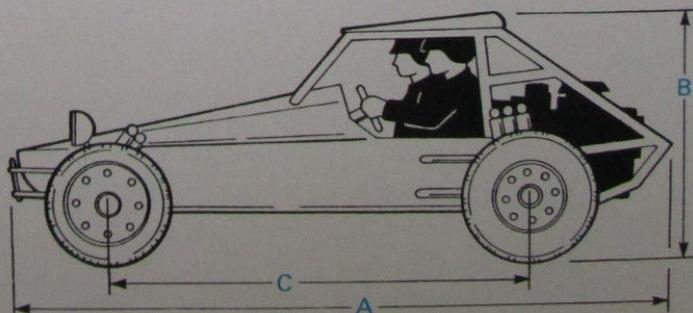

On the Front Line with
defense systems since 1940.



EMERSON ELECTRIC CO.
Government & Defense Group

8100 West Florissant Avenue, St. Louis, Missouri 63136

W1182D85M