



1800 37 43 43

CATALOG

A Step Above the Standard




EVEREST
REFRIGERATION



Blizzard R290

Blizzard R290 Is the latest innovation in refrigeration technology. Patented by Everest. This all-in-one eco-friendly and easy to install condensing unit will surely blow away the competition.

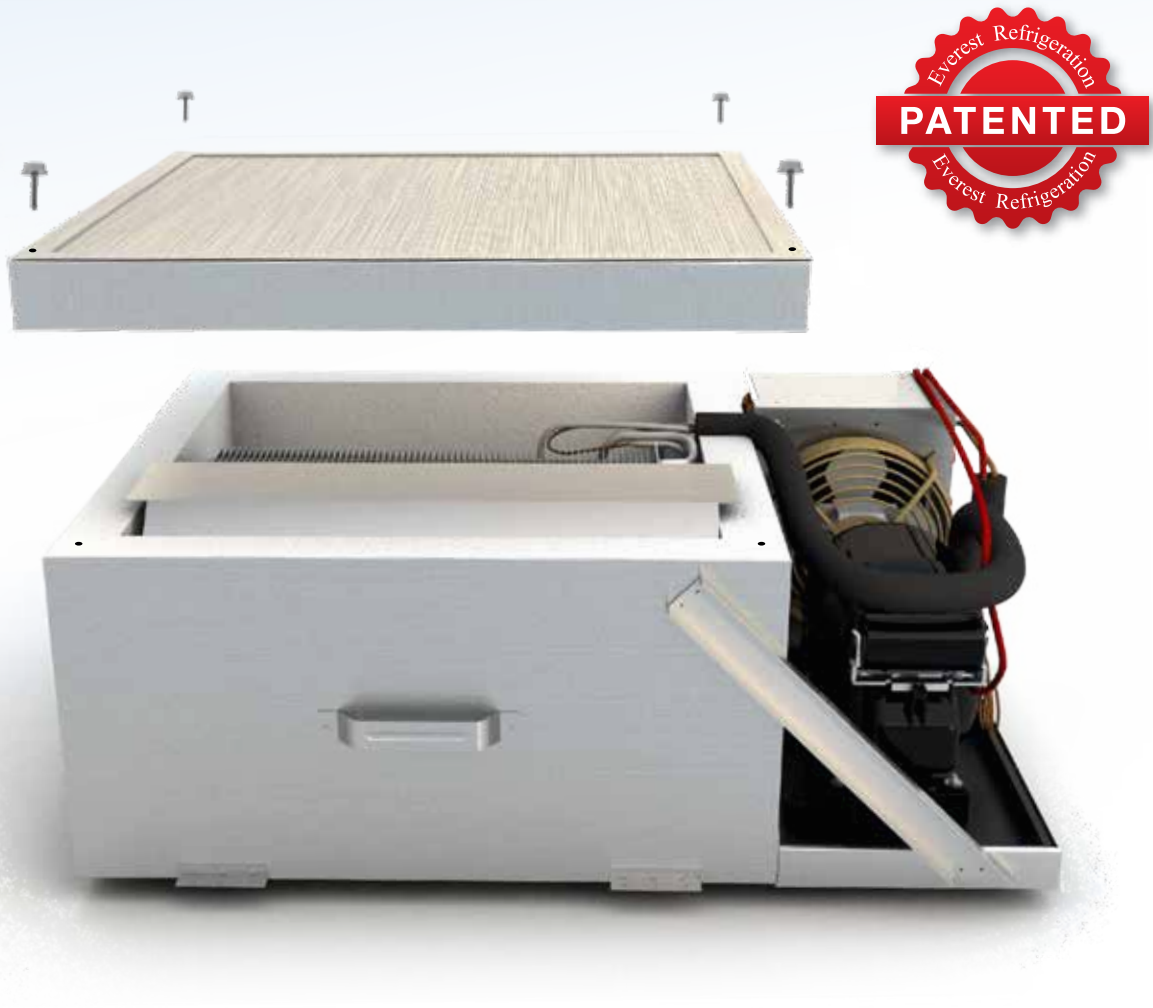

The Blizzard uses R290, a natural, climate friendly, hydrocarbon refrigerant with zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP). It's an effective alternative to hydrofluorocarbon (HFC) based refrigerants. Without harmful effects to the environment. Blizzard and all Everest equipment meet the daily energy consumption standards of the U.S. Department of Energy & Environment Protection Agency.




U.S. DEPARTMENT OF
ENERGY




Blizzard R290

Self Contained Condensing Unit Setup.


Top / Bottom Mounted Condensing Unit

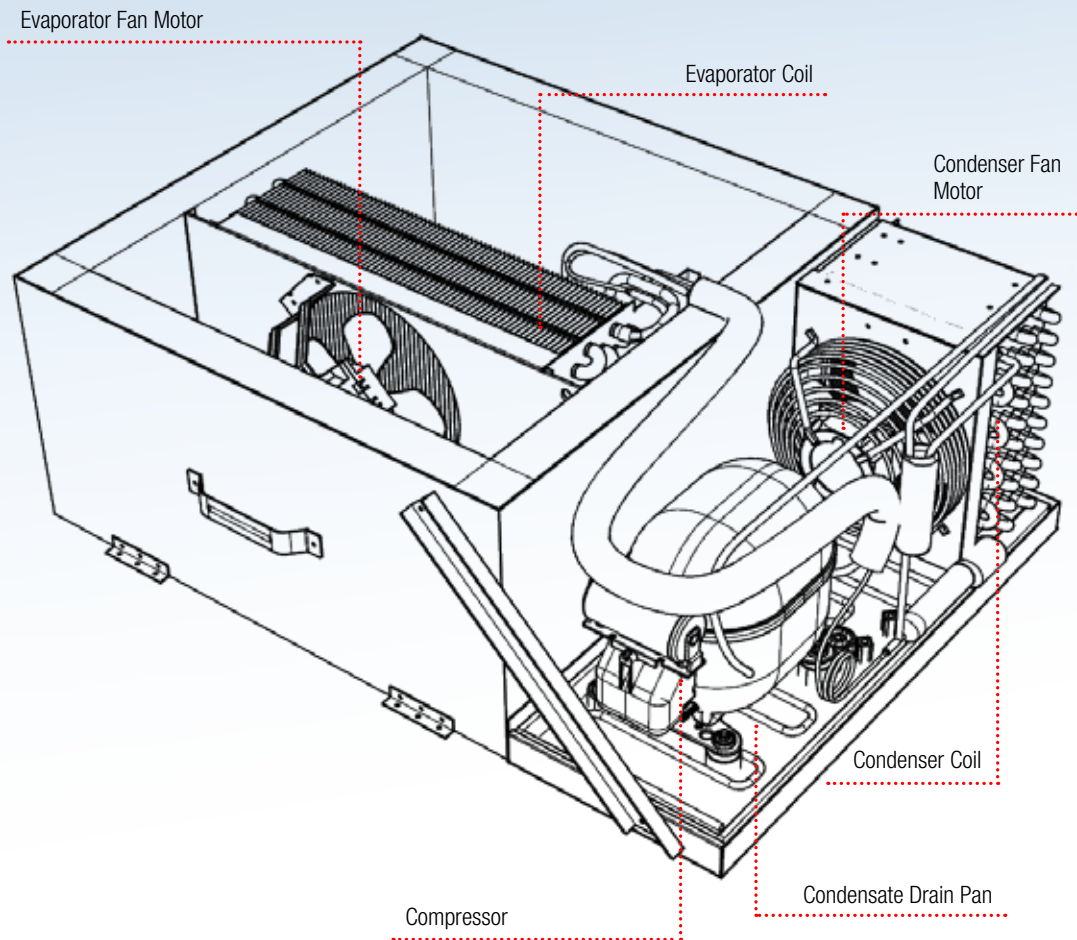

Back Mounted Condensing Unit

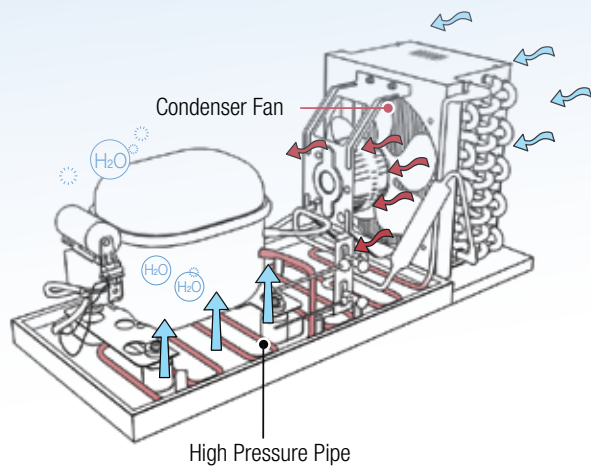


Side Mounted Condensing Unit

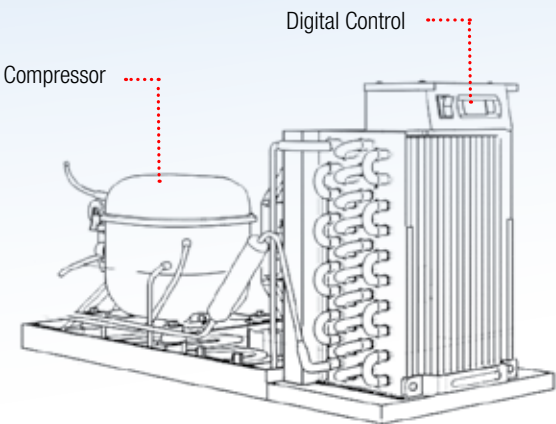

Compressor

Unconfined to ensure uninterrupted cooling and prolonged life.


Optimized HP rating for energy efficiency.

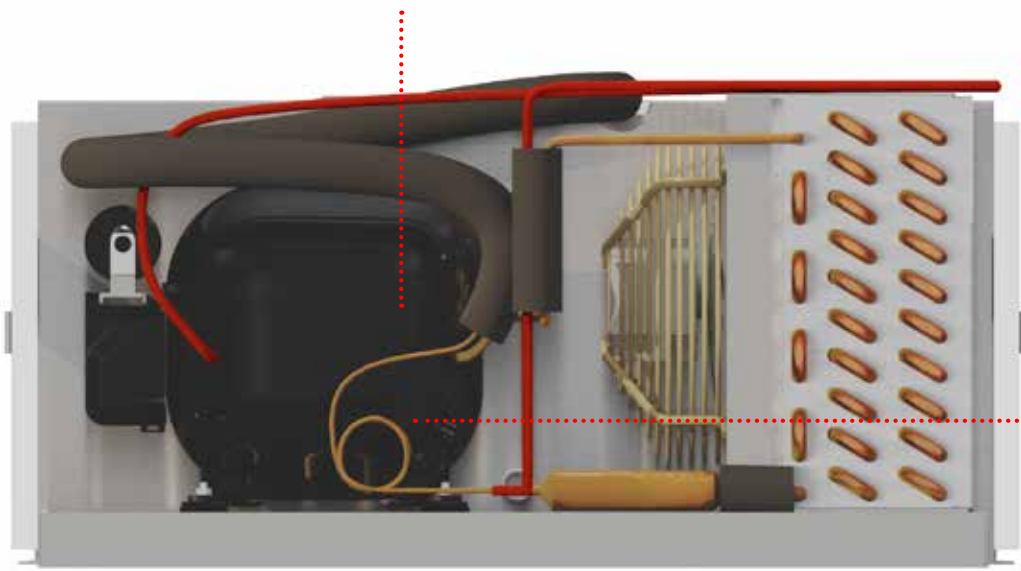


High performance for rapid cooling.

Condenser Coil

Overheat protection sensor measures condenser coil temperature.

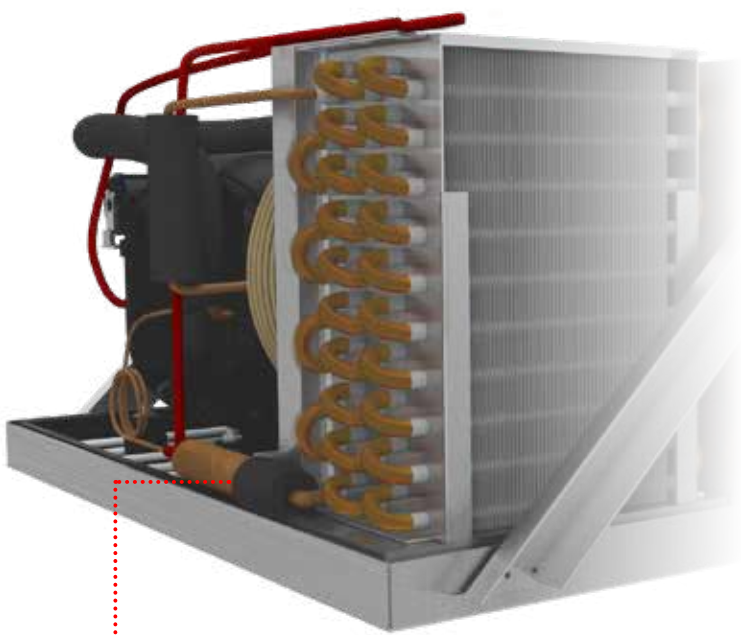

Overheat Protection Sensor. →




Alerts users to high ambient temperature conditions or a clogged condenser coil. This not only prolongs compressor life but serves as a fire safety feature.

Condenser Fan Motor

Energy saving EC motor performs multiple functions simultaneously.


- Auto fan rotation blows out dust and debris from condenser coil periodically.
- Vents heat from condenser coil.
- Cools off compressor.
- Synergizes with hot gas coil in accelerating the evaporation of surplus moisture that collects in the condensate drain pan (Air Movement System).
- Large fan blade with high RPM rating vents out heat faster.

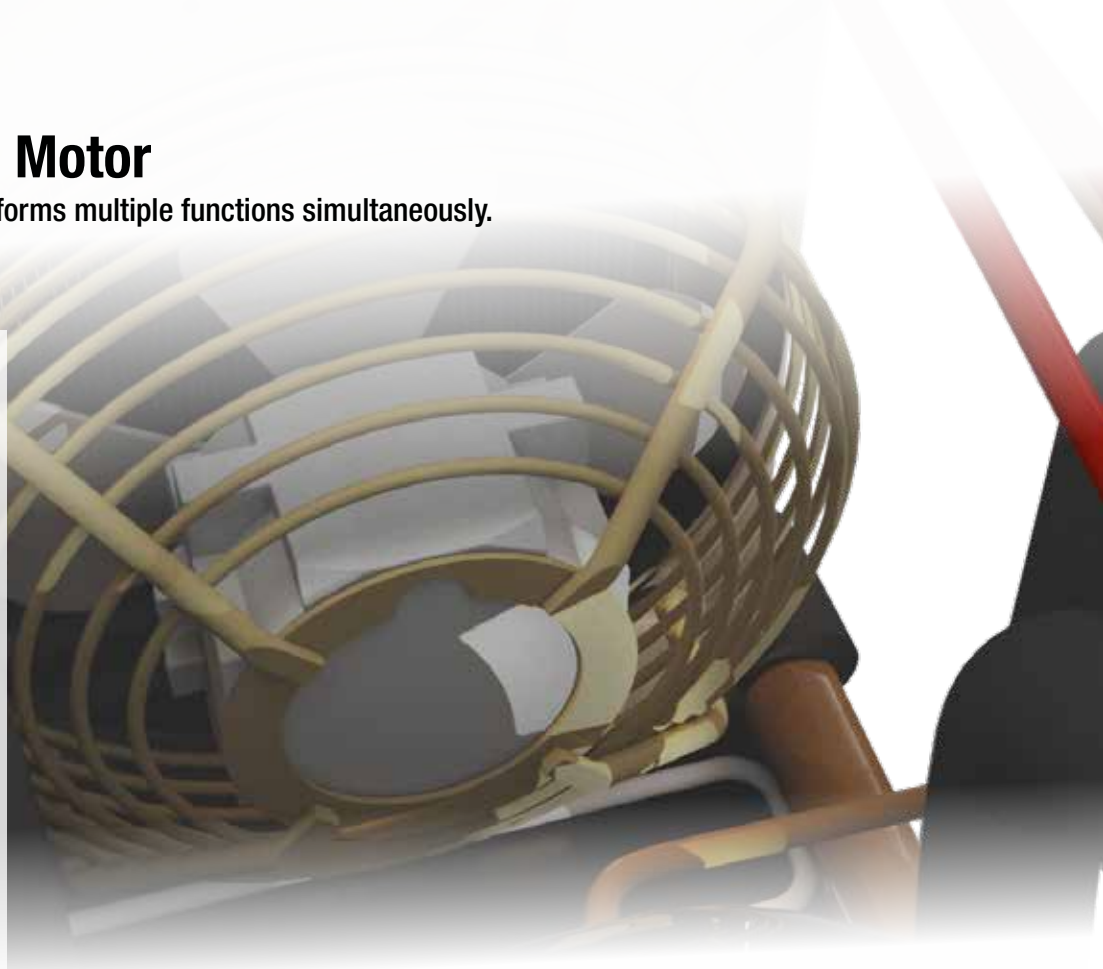

Condensate Drain Pan

Hot Gas Coil Evaporates surplus moisture from the condensate drain pan.


Condenser fan motor
creates air movement.

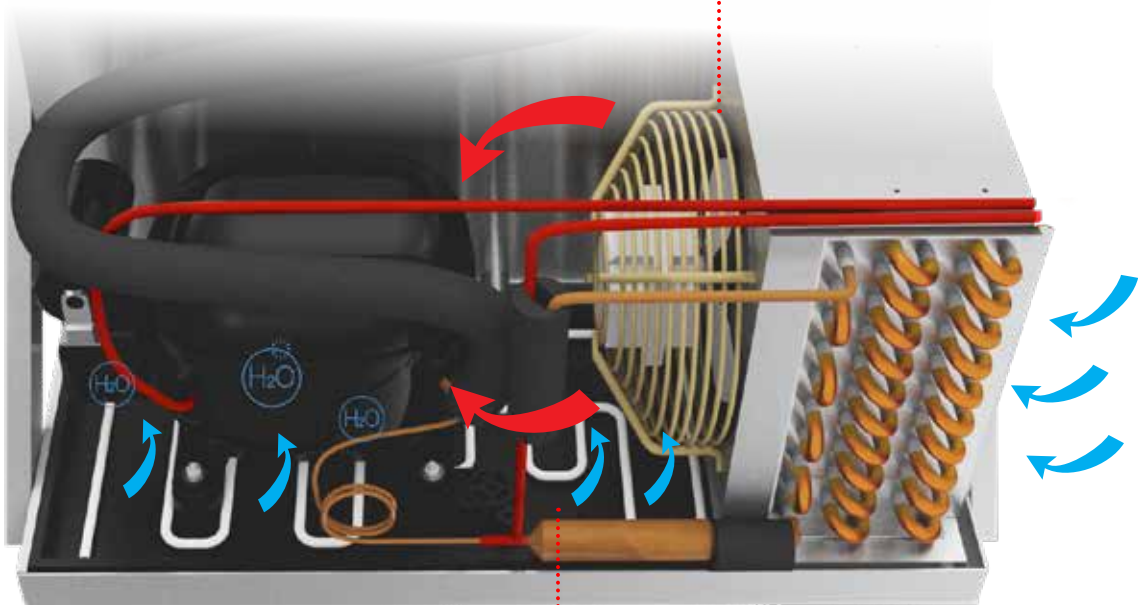

Hot gas coil produces
thermal evaporation.


Evaporator Coil

Oversized Evaporator Coil for the faster cold dispersion.

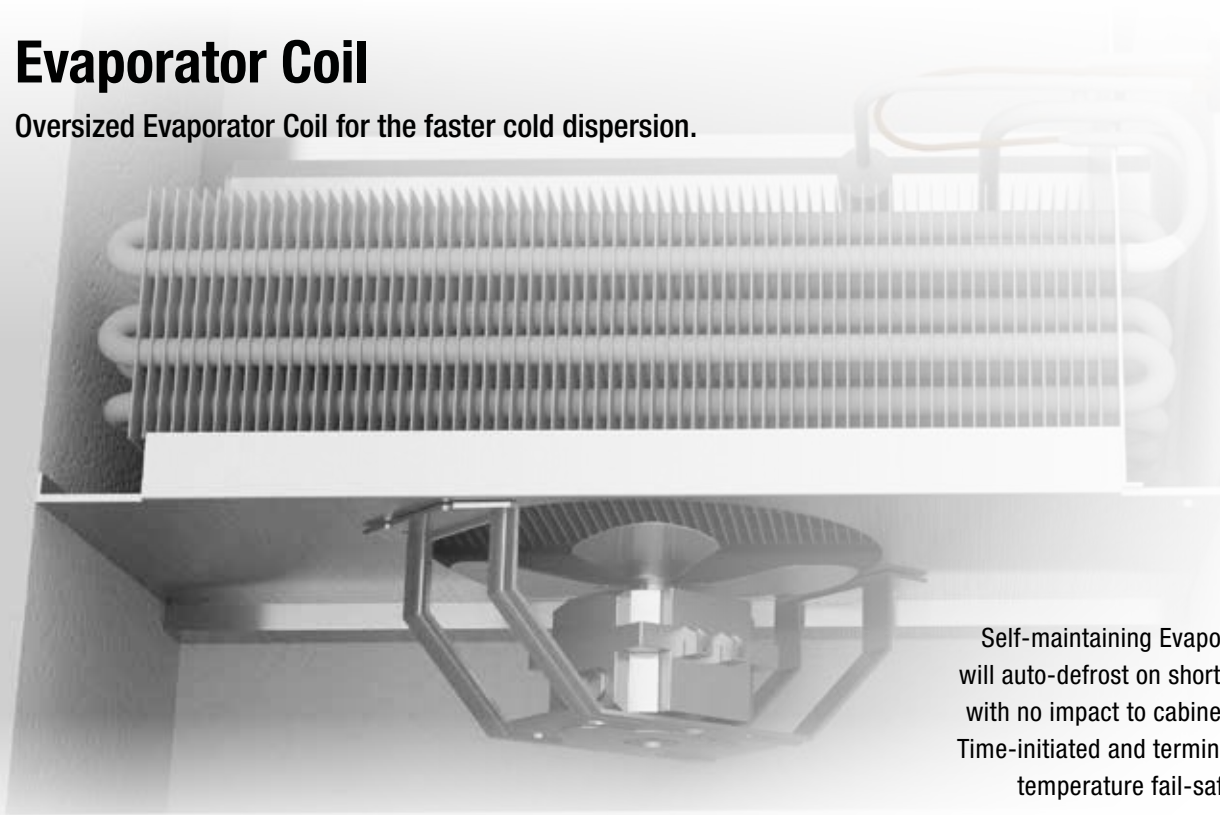

Self-maintaining Evaporator Coil will auto-defrost on short intervals with no impact to cabinet cooling. Time-initiated and terminated with temperature fail-safe sensor.

Evaporator Fan Motor & Air Duct

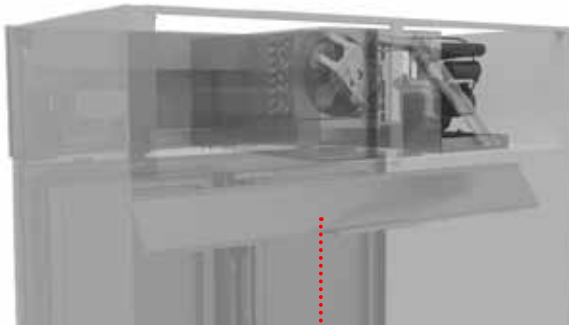

Cool Air Duct

Provides even distribution of cooled air to the cabinet interior.

Evaporator Fan Motor

Energy saving EC (Electronically Commutated) motor.



UPRIGHT REACH-IN REFRIGERATORS

Top Mounted Condensing Unit

ER SERIES



Upright Reach-Ins
(Top Mount)



▲ ER74-1



▲ ER74-2



▲ ER126-2



▲ ER126-4



▲ ER150-2



▲ ER190-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Top mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible (does not apply to model ER126-4).

Shelving

- Three epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C. Temperature setting range from 2-5°C
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (does not apply to model ER126-4).

Dimensions



ABS Legs




Two additional front adjustable stainless steel clad ABS legs for model ER74-1 and ER126-2 to provide extra stability when opening and closing doors, and one additional leg for ER190-3 for weight support.

Equipped with Australia 10amp plug for all models


Side View

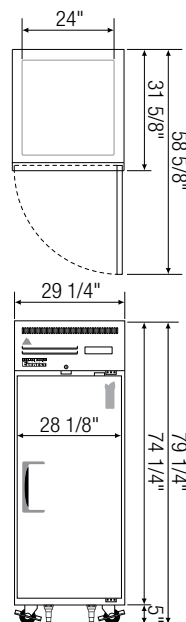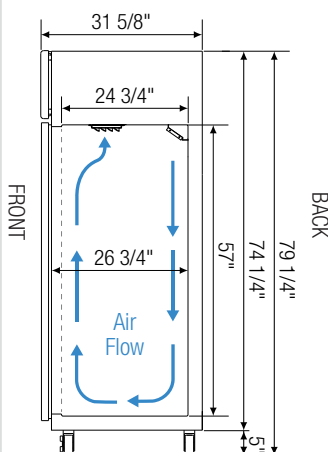


▲ ER74-1

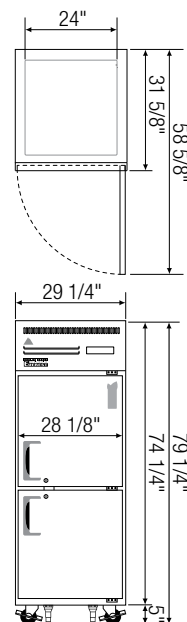


▲ ER74-2

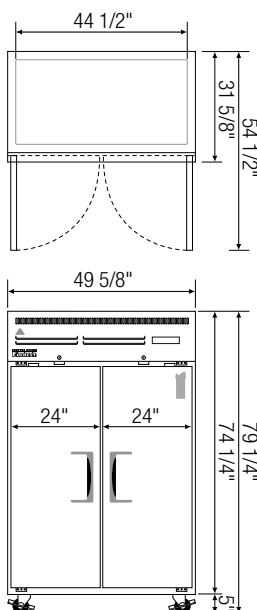


▲ ER126-2

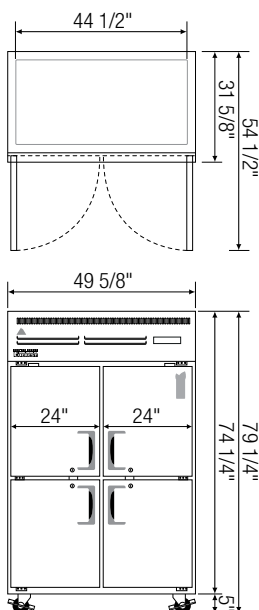

▲ ER126-4

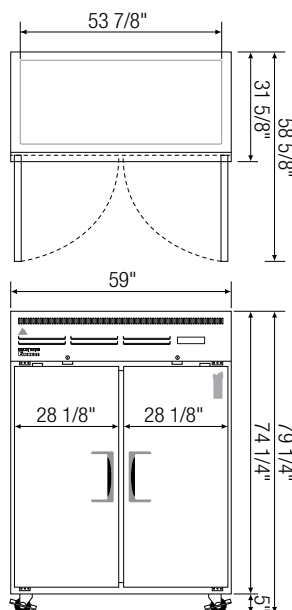

▲ ER150-2

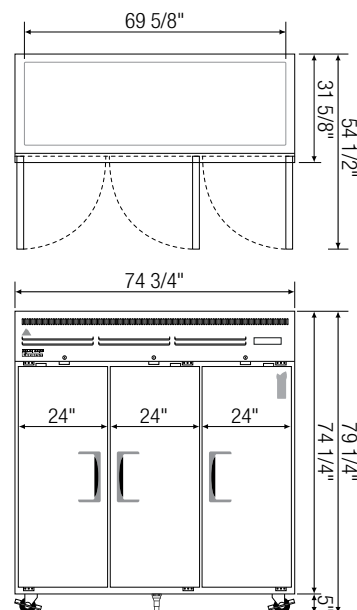

▲ ER190-3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (mm)		
										L	D	H*
ER74-1	Ref	1	557	1/4+	1,926	R290	3	240-50-1	134	740	803	1910
ER74-2	Ref	2 (H)	557	1/4+	1,926	R290	3	240-50-1	135	740	803	1910
ER126-2	Ref	2	1032	1/4+	1,926	R290	6	240-50-1	181	1260	803	1910
ER126-4	Ref	4 (H)	1032	1/4+	1,926	R290	6	240-50-1	183	1260	803	1910
ER150-2	Ref	2	1251	1/3	2,311	R290	6	240-50-1	206	1500	803	1910
ER190-3	Ref	3	1616	3/4	4,445	R290	9	240-50-1	261	1900	803	1910

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator | (H) = Half Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more information
<http://www.austunecommercial.com/>

UPRIGHT REACH-IN FREEZERS

Top Mounted Condensing Unit

EF - SERIES



▲ EF74-1



▲ EF74-2



▲ EF126-2



▲ EF150-2



▲ EF190-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible.

Shelving

- Three epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, -20°C
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door.



Dimensions


ABS Legs



Two additional front adjustable stainless steel clad ABS legs for model EF74-1 and EF126-2 to provide extra stability when opening and closing doors, and one additional leg for EF190-3 for weight support.


Equipped with Australian 10amp plug for all models

Side View

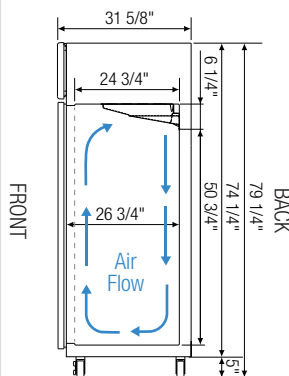


R404A models


Side View

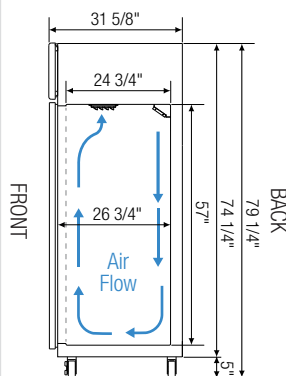


R290 models

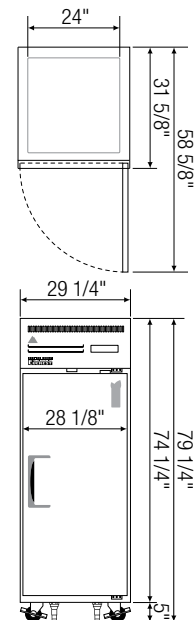


▲ EF74-1




▲ EF74-2







▲ EF126-2



▲ EF150-2

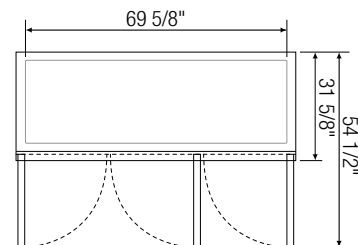

▲ EF190-3

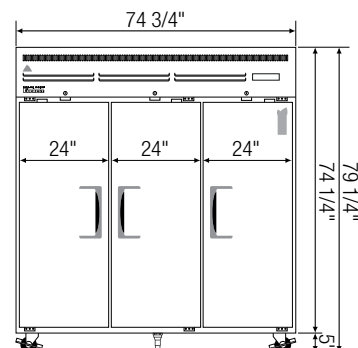

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	BTU/HR	Refrigerant	# of Shelves	Power	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H*
EF74-1	Frz	1	557	1/2	1,670	R290	3	240-50-1	144	740	803	1910
EF74-2	Frz	2 (H)	557	1/2	1,670	R290	3	240-50-1	146	740	803	1910
EF126-2	Frz	2	1032	1/2 x 2	3,435 x 2	R-404A/R290^	6	240-50-1	212	1260	803	1910
EF150-2	Frz	2	1251	1/2 x 2	3,435 x 2	R-404A/R290^	6	240-50-1	229	1500	803	1910
EF190-3	Frz	3	1616	1/2 x 2	3,435 x 2	R-404A/R290^	9	240-50-1	299	1900	803	1910

* : Height does not include 5" for casters.

Frz = Freezer | (H) = Half Door

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

^ : Contact factory for R290 information.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more information.
<http://www.austunecommercial.com/>

UPRIGHT REACH-IN DUAL TEMPS

Top Mounted Condensing Unit

ERF SERIES



▲ ERF74-2



▲ ERF126-2



▲ ERF150-2



▲ ERF150-3



▲ ERF190-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for R404A and R290 freezers. Air defrost for R290 refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240v/50HZ/1

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible (does not apply to model ERF150-3).

Shelving

- Epoxy coated, steel wire shelves (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C for refrigerators and -20°C for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (does not apply to model ERF150-3).

Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs for model ERF74-2 to provide extra stability when opening and closing doors.




Equipped with 10amp Australian plug

Side View

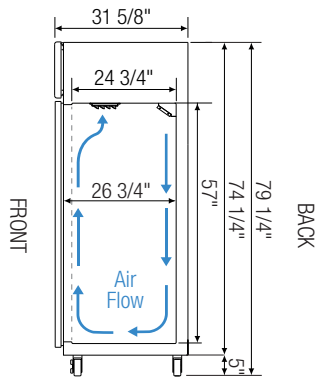


ERF126-2, ERF150-2, ERF190-3, ERF150-3 (left compartment)

Side View

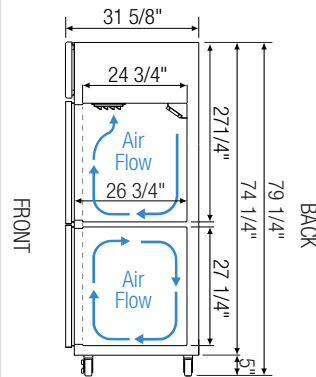


ERF150-3 (right compartment)

Side View

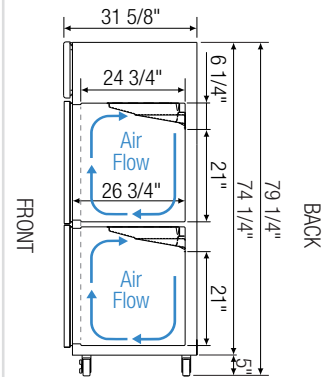

ERF74-2

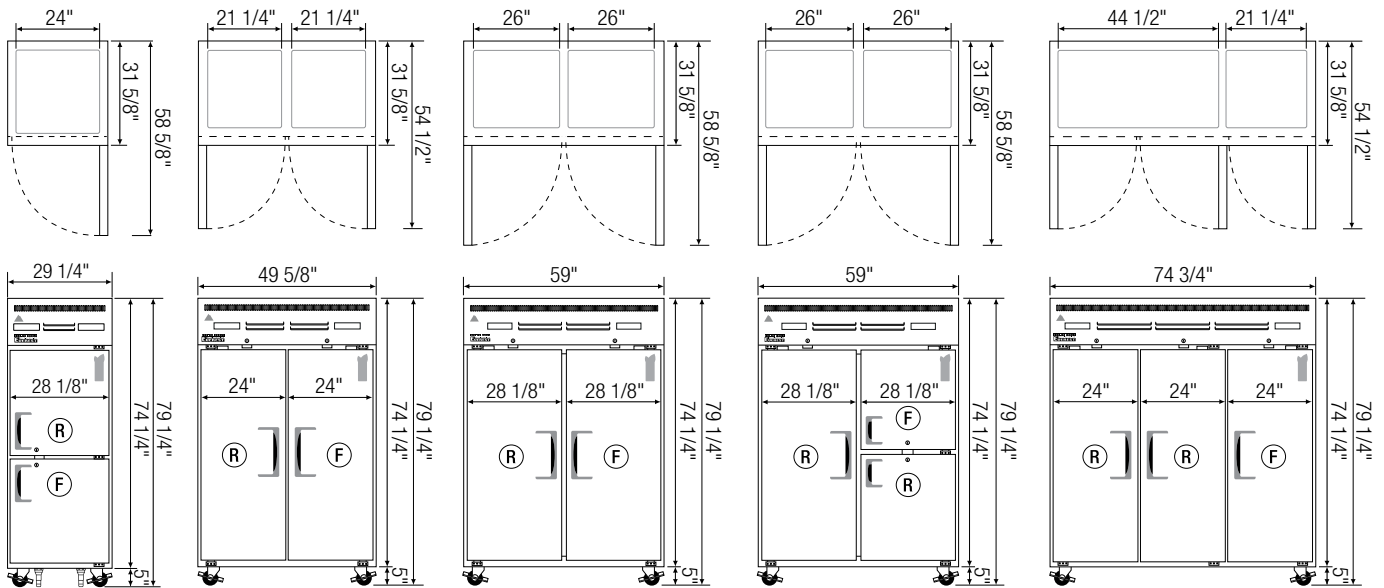

▲ ERF74-2

▲ ERF126-2

▲ ERF150-2

▲ ERF150-3

▲ ERF190-3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H*
ERF74-2	Dual	2 (H)	311 (R) 311 (F)	1/2	3,435	R-404A / R290 [^]	2	240-50-1	155	740	803	1910
ERF126-2	Dual	2	622(R)	1/4+ (R)	1,926 (R)	R290	6	240-50-1	226	1260	803	1910
			622 (F)	1/2 (F)	1670 (F)	R290						
ERF150-2	Dual	2	736 (R)	1/4+ (R)	1,926 (R)	R290	6	240-50-1	239	1500	803	1910
			736(F)	1/2 (F)	1670 (F)	R290						
ERF150-3	Dual	2 (H)	1104 (R)	1/4+ (R)	1,926 (R)	R290	5	240-50-1	237	1500	803	1910
		1 (FD)	368 (F)	1/3 (F)	1,119 (F)	R290						
ERF190-3	Dual	3	1302 (R)	1/4+ (R)	1,926 (R)	R290	9	240-50-1	296	1900	803	1910
			622 (F)	1/2 (F)	1,670 (F)	R290						

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

^: Contact factory for R290 information.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Dual = Ref & Frz Combo | (FD) = Full Door | (H) = Half Door
(R) = Refrigerator | (F) = Freezer



Please visit our website for more information
<http://www.austunecommercial.com/>

DOOR & DRAWER COMBO UPRIGHT REACH-INS

Top Mounted Condensing Unit

ER,ERF - Series



▲ ER74-1S2D



▲ ER126-2S2D



▲ ER126-2S4D



▲ ERF126-2S2D
▲ (Dual Temp)



▲ ERF150-2S2D
▲ (Dual Temp)

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for model ER74-1S2D

Refrigeration System

- Top mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10amp Australian plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Snap-in magnetic door and drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft (does not apply to drawers).

Shelving

- Epoxy coated, steel wire shelves (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C for refrigerators and -20°C for freezers.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

ABS Legs





Two additional front adjustable stainless steel clad ABS legs for model ER74-1S2D to provide extra stability when opening and closing doors.




Equipped with 10amp Australian Plug


Side View

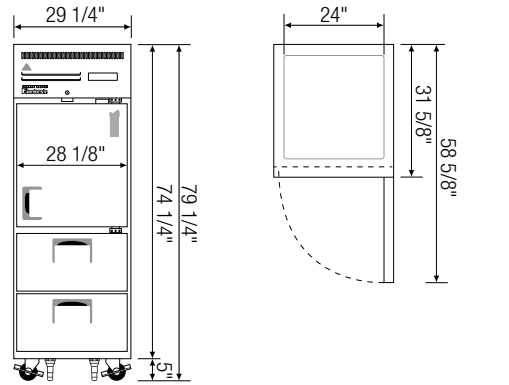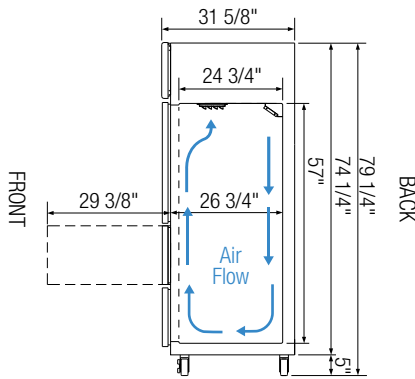


▲ ER74-1S2D

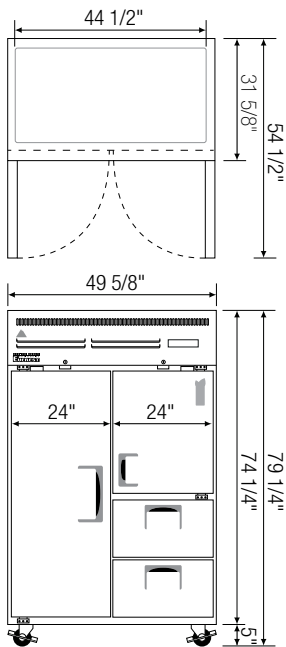


▲ ER126-2S2D

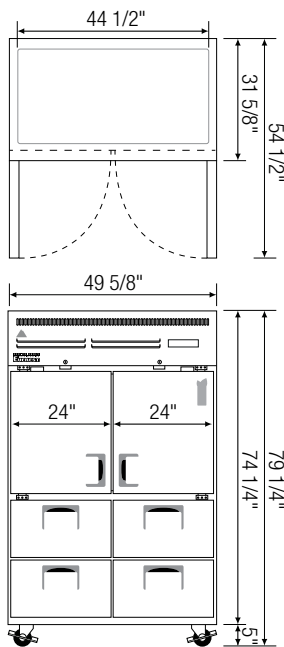

▲ ER126-2S4D

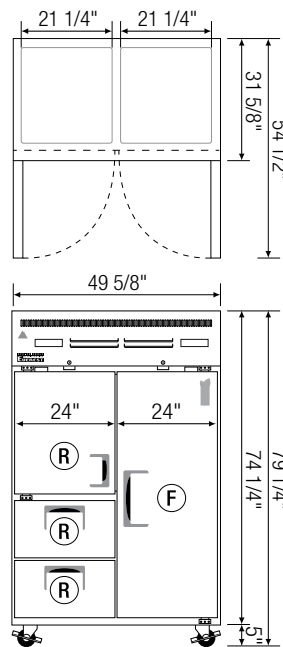

▲ ERF126-2S2D
(Dual Temp)

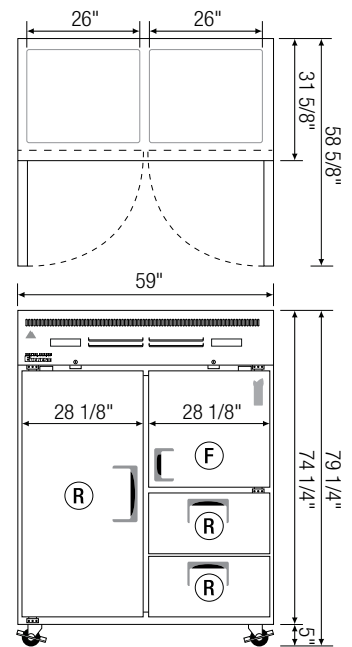

▲ ERF150-2S2D
(Dual Temp)

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Liters)	HP	BTU/HR	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H*
ER74-1S2D	Ref	1 (H) 2 (DR)	651	1/4+	1,926	R290	2	240-50-1	154	740	803	1910
ER126-2S2D	Ref	1 (FD) / 1 (H) 2 (DR)	1359	1/3	2,311	R290	5	240-50-1	210	1260	803	1910
ER126-2S4D	Ref	2 (H) 4 (DR)	1359	1/3	2,311	R290	4	240-50-1	217	1260	803	1910
ERF126-2S2D	Dual	1 (FD) / 1 (H)	622	1/4+ (R)	1,926 (R)	R290	5	240-50-1	238	1260	803	1910
		(R) 2 (DR)	622 (F) 1	1/2 (F)	1,670 (F)	R290						
ERF150-2S2D	Dual	(FD) / 1 (H)	1104 (R)	1/4+ (R)	1,926 (R)	R290	4	240-50-1	252	1500	803	1910
		2 (DR)	368 (F)	1/3 (F)	2,311 (F)	R290						

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator | Dual = Ref & Frz Combo
(H) = Half Door | (FD) = Full Door | (DR) = Drawer

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more
information
<http://www.austunecommercial.com/>

UPRIGHT REACH-IN GLASS DOOR REFRIGERATORS

Top Mounted Condensing Unit

ER - Series STAINLESS STEEL DOORS



▲ ER74-1G



▲ ER74-2G



▲ ER126-2G



▲ ER126-4G



▲ ER150-2G



▲ ER190-3G

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Top mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Matte finish aluminum door frames.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft
- Field reversible (does not apply to model ER126-4G).

Shelving

- Four epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

ABS Legs





Two additional front adjustable stainless steel clad ABS legs for models ER74-1G and ER74-2G to provide extra stability when opening and closing door, and one additional leg for model ER190-3G for weight support.




Equipped with 10amp Australian plug


Side View

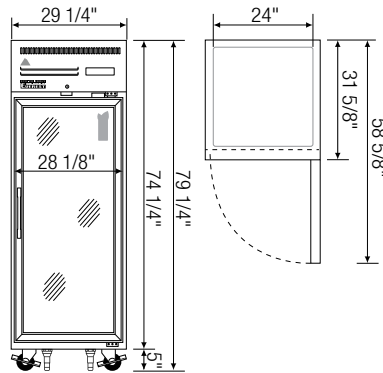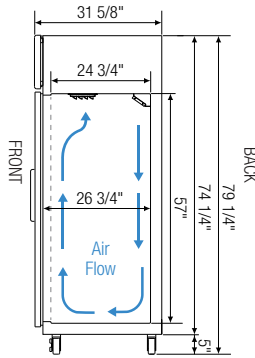


▲ ER74-1G

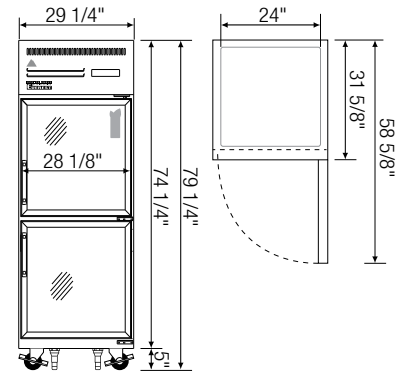


▲ ER74-2G




▲ ER126-2G







▲ ER126-4G



▲ ER150-2G

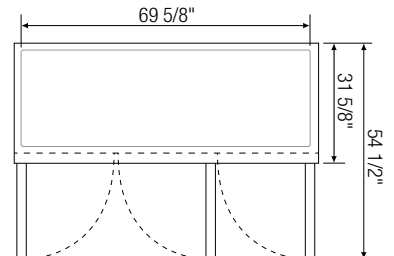

▲ ER190-3G

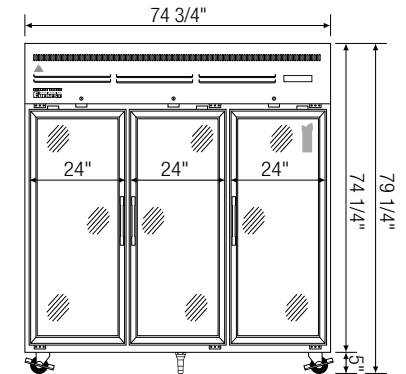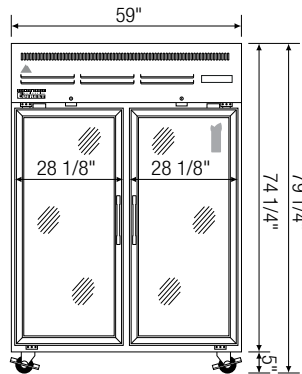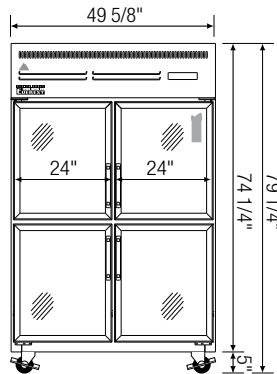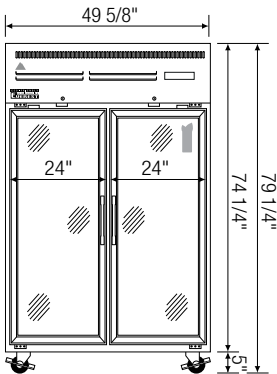

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D ^a	H [*]
ER74-1G	Ref	1	651	1/4+	1,926	R290	4	240-50-1	149	740	803	1910
ER74-2G	Ref	2 (H)	651	1/4+	1,926	R290	4	240-50-1	149	740	803	1910
ER126-2G	Ref	2	1359	1/3	2,311	R290	8	240-50-1	211	1260	803	1910
ER126-4G	Ref	4 (H)	1359	1/3	2,311	R290	8	240-50-1	211	1260	803	1910
ER150-2G	Ref	2	1557	1/2	1,670	R290	8	240-50-1	244	1500	803	1910
ER190-3G	Ref	3	2010	3/4	4,445	R290	12	240-50-1	300	1900	803	1910

* : Height does not include 5" for casters.

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a : Exterior depth dimension does not include 1-1/2" for door handles.

(H) = Half Door | Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more
information
<http://www.austunecommercial.com/>

GLASS & SOLID COMBINATION HALF-DOOR UPRIGHT REACH-IN REFRIGERATORS

Top Mounted Condensing Unit

ER,ERF - Series



▲ ER74-1G1S



▲ ERF74-1G1S
(DUAL TEMP)



▲ ER126-2G2S



▲ ER150-2G2S



▲ ER190-3G3S

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for models ER74-1G1S, ERF74-1G1S, ER190-3G3S

Refrigeration System

- Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for R404A and R290 freezers. Air defrost for R290 refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes and matte finish aluminum door frames for glass doors.
- Heavy duty stainless steel interior / exterior with 2.5" thick high density polyurethane insulation for solid doors.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gaskets make cleaning and replacement an easy process.
- Heavy duty, die-cast door handles for glass doors. High strength, recessed door handles for solid doors.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Four epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C for refrigerators and -20°C for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs for models ER74-1G1S and ERF74-1G1S to provide extra stability when opening and closing door, and one additional leg for model EGS6 for weight support.




Equipped with 10Amp Australian Plug

Side view

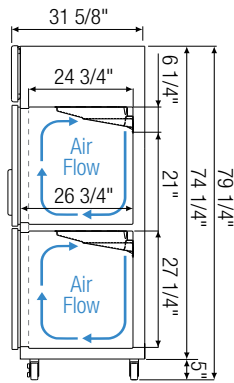


ER74-1G1S






Side view

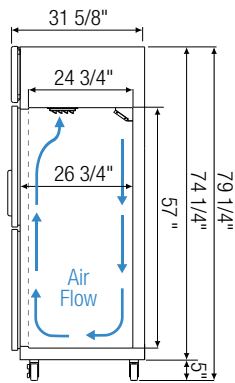


ER74-1G1S, ER126-2G2S
ER150-2G2S, ER190-3G3S

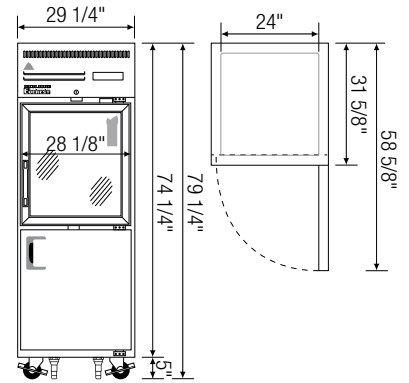


▲ ER74-1G1S

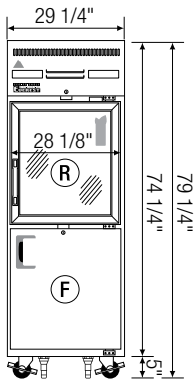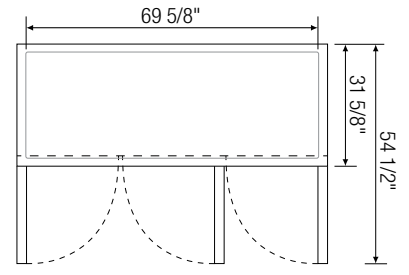


▲ ERF74-1G1S
(Dual Temp)

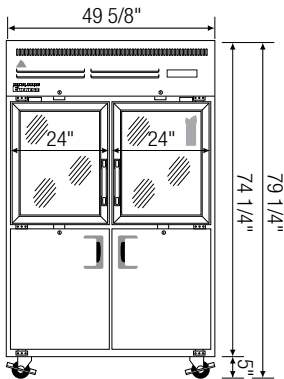

▲ ER126-2G2S

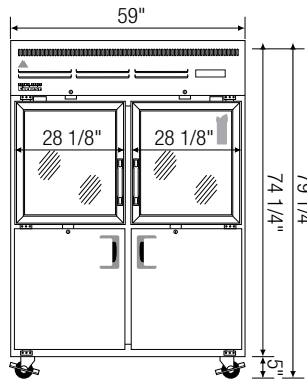

▲ ER150-2G2S

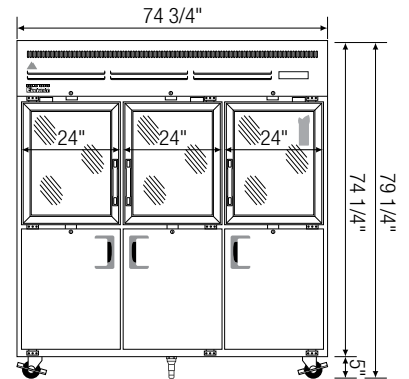

▲ ER190-3G3S

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Liters)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D ^a	H [*]
ER74-1G1S	Ref	2 (H)	651	1/4+	1,926	R290	4	240-50-1	146	740	803	1910
ERF74-1G1S	Dual	2 (H)	311 (R) 311 (F)	1/2	3,435	R-404A / R290 [^]	4	240-50-1	161	740	803	1910
ER126-2G2S	Ref	4 (H)	1359	1/3	2,311	R290	8	240-50-1	203	1260	803	1910
ER150-2G2S	Ref	4 (H)	1557	1/2	1,670	R290	8	240-50-1	220	1500	803	1910
ER190-3G3S	Ref	6 (H)	2010	3/4	4,445	R290	12	240-50-1	288	1900	803	1910

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Exterior depth dimension does not include 1-1/2" for door handles.

^: Contact factory for R290 information.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator | Dual = Ref & Frz Combo
(H) = Half Door | (R) = Refrigerator | (F) = Freezer



Please visit our website for more
information
<http://www.austunecommercial.com/>

SIDE MOUNT UNDERCOUNTER REFRIGERATORS

Side Mounted Condensing Unit

EUR- Series SOLID DOORS



▲ EUR90-1



▲ EUR120-2



▲ EUR150-2



▲ EUR180-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, Australian 10amp plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.

Options

- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

Air Flow





Front view of cabinet interior demonstrates air circulation from left to right.




Equipped with 10amp plug


Side View

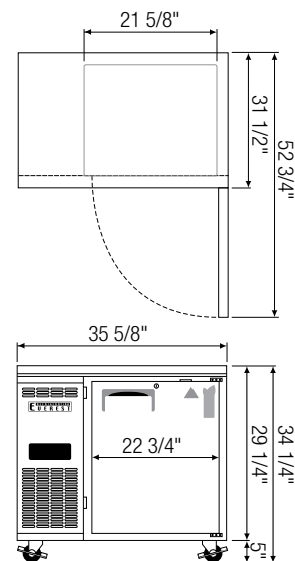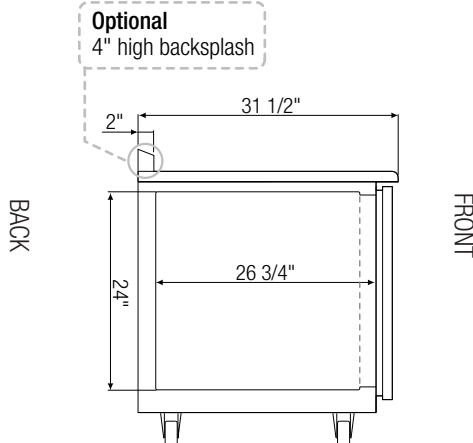


▲ EUR90-1

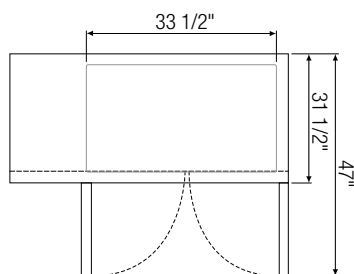

▲ EUR120-2

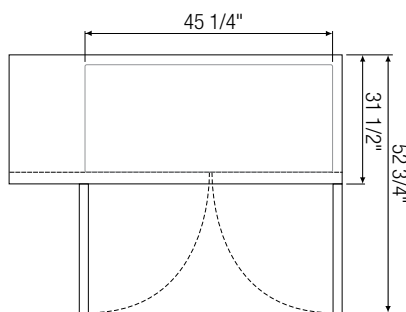

▲ EUR150-2

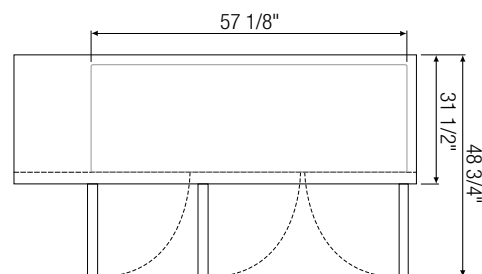

▲ EUR180-3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Crated Weight (LBS)	Exterior Dimensions (Inches)		
										L	D	H*
EUR90-1	Ref	1	254	1/4+	1,926	R290	2	240-50-1	95	906	700	840
EUR120-2	Ref	2	368	1/4+	1,926	R290	4	240-50-1	116	1206	700	840
EUR150-2	Ref	2	509	1/4+	1,926	R290	4	240-50-1	134	1506	700	840
EUR180-3	Ref	3	622	1/4+	1,926	R290	6	240-50-1	155	1806	700	840

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more information
<http://www.austunecommercial.com/>

SIDE MOUNT UNDERCOUNTER FREEZERS

Side Mounted Condensing Unit

EUF - Series SOLID DOORS



▲ EUF90-1



▲ EUF120-2



▲ EUF150-2



▲ EUF180-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10amp Australian plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.




Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature -20°C
- Audible overheat protection alarm for compressor and condenser coil.


Options

- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.


Dimensions

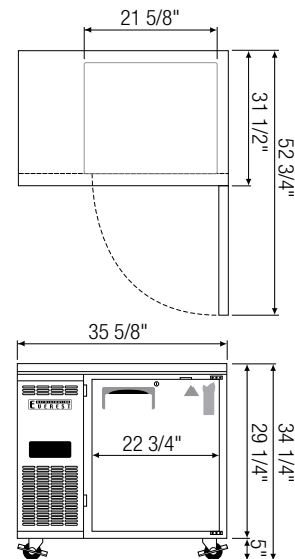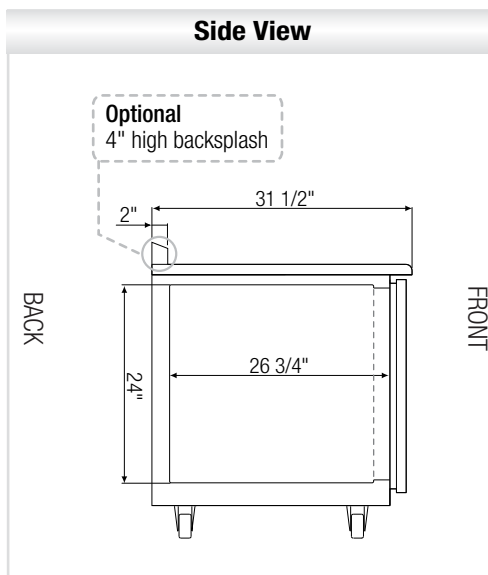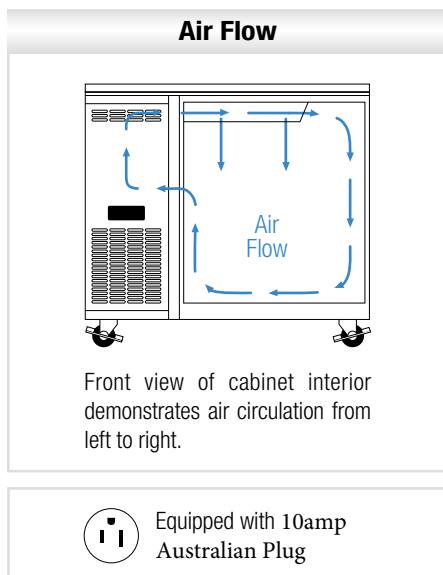


▲ EUF90-1

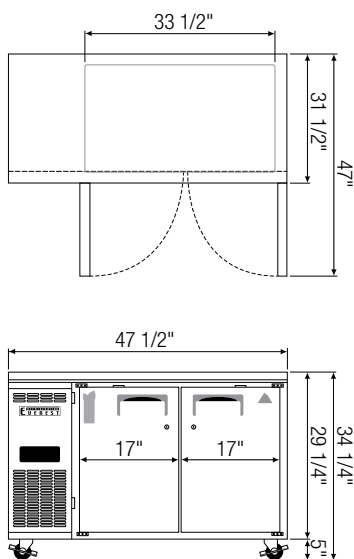

▲ EUF120-2

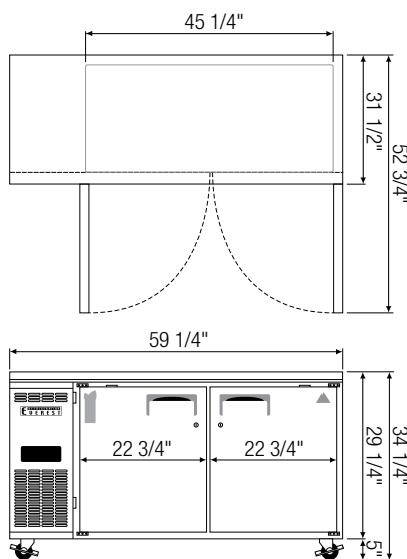

▲ EUF150-2

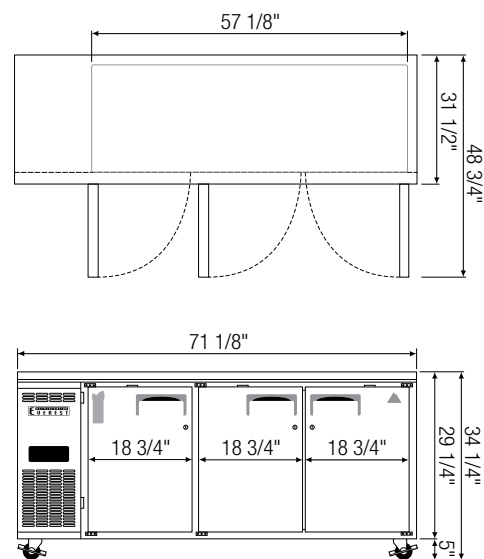

▲ EUF180-3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	Refrigerant	# of Shelves	BTU/HR [†]	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H [*]
EUF90-1	Frz	1	254	1/3	R290	2	1,119	240-50-1	98	906	700	840
EUF120-2	Frz	2	368	1/2	R290	4	1,670	240-50-1	122	1206	700	840
EUF150-2	Frz	2	509	1/2	R290	4	1,670	240-50-1	138	1506	700	840
EUF180-3	Frz	3	622	1/2	R290	6	1,670	240-50-1	160	1806	700	840

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 14°F (-10°C) & condensing temperature of 131°F (55°C).

Frz = Freezer

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more
information
<http://www.austunecommercial.com/>

SIDE MOUNT UNDERCOUNTER DUAL TEMPS

Side Mounted Condensing Unit

EURF - Series



▲ EURF150-2



▲ EURF180-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and retractable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for freezers. Air defrost for refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Removable and washable condenser coil air filter for R404A models. R290 models do not require condenser coil air filters.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10amp Australian Plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.




Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C for refrigerators and -20°C for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.



Options

- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

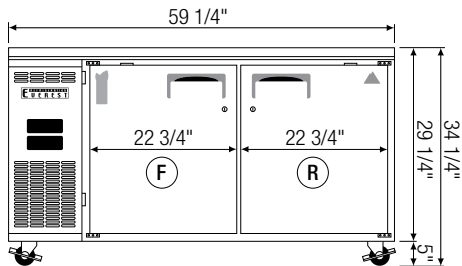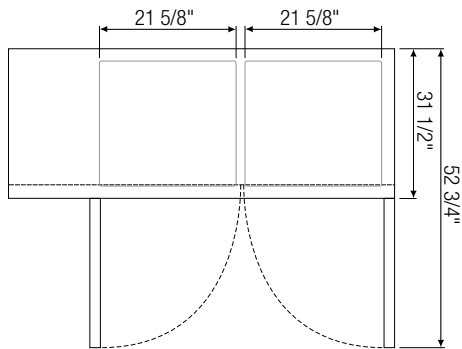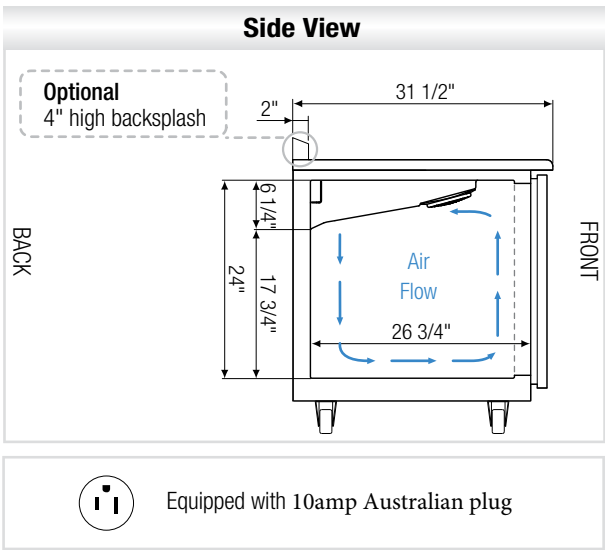

▲ EURF150-2

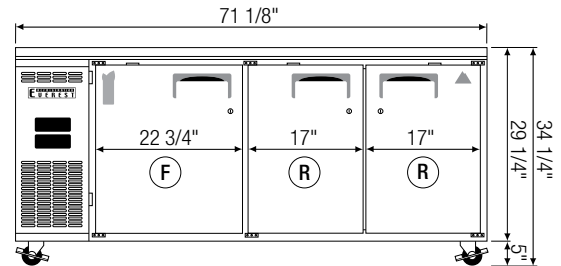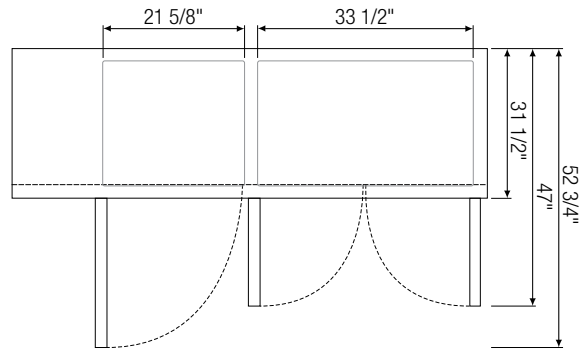

▲ EURF180-3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	BTU/HR [†]	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H*
EURF150-2	Dual	2	254 (R) 254 (F)	1/2	R-404A / R290^	4	3,435	240-50-1	143	1506	700	840
EURF180-3	Dual	3	396 (R) 254 (F)	1/2	R-404A / R290^	6	3,435	240-50-1	161	1806	700	840

(R) = Refrigerator | (F) = Freezer
Dual = Ref & Frz Combo

Dual = Ref & Frz Combo

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more information
<http://www.austunecommercial.com/>

SIDE MOUNT GLASS DOOR UNDERCOUNTER REFRIGERATORS

Side Mounted Condensing Unit

EUG - Series SLIDING & SWING



▲ EUG120-2SL



▲ EUG120-2



▲ EUG150-2SL



▲ EUG150-2



▲ EUG180-2SL



▲ EUG180-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10amp Australian plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Gray PVC door frames.
- Self-closes by weight.
- Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control



- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.

Options


- 4" high stainless steel backplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

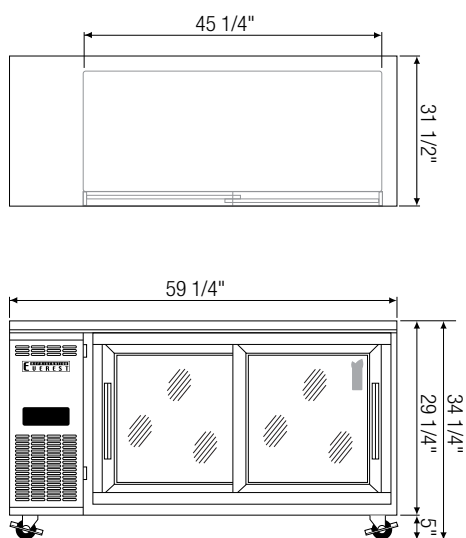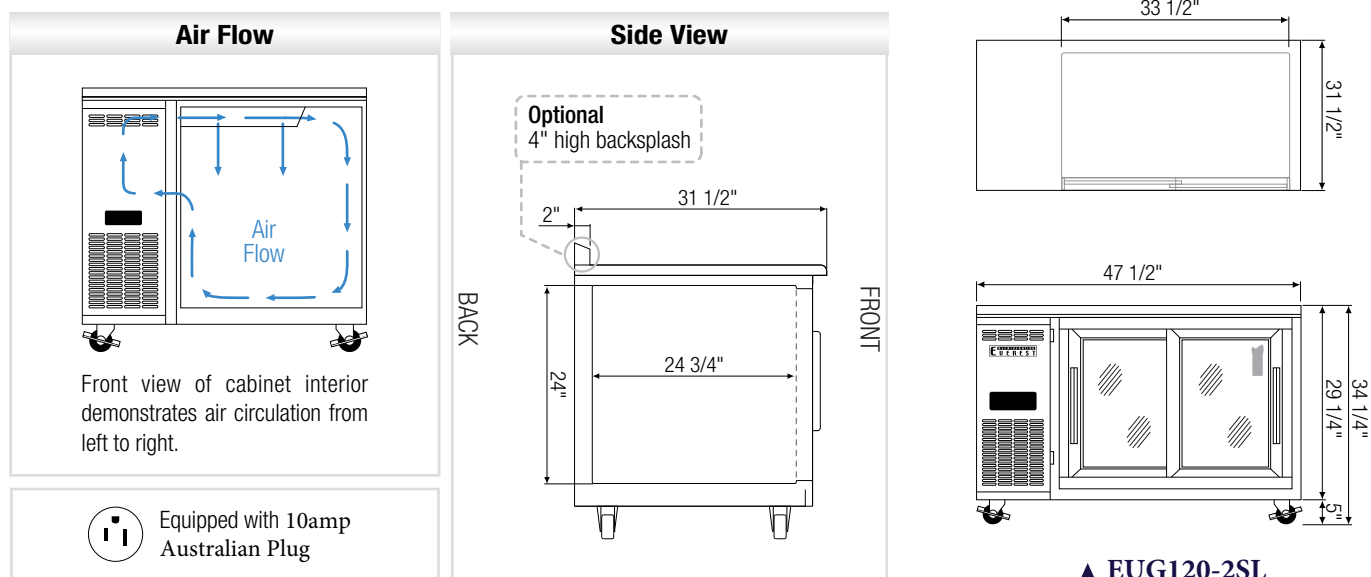

▲ EUG150-2SL

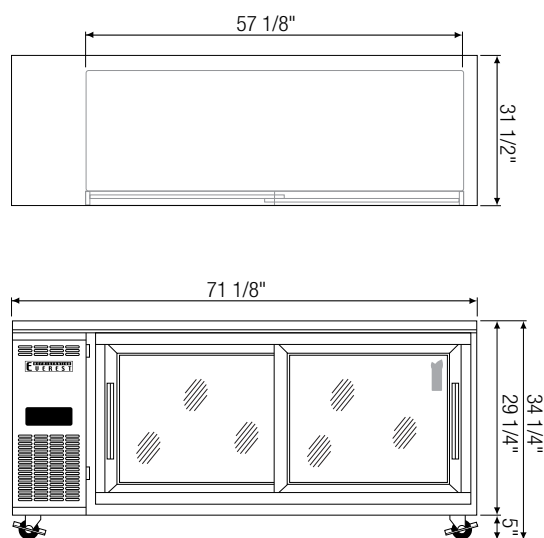

▲ EUG180-2SL

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	Refrigerant	# of Shelves	BTU/HR [†]	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H*
EUG120-2SL/EUG120-2	Ref	2 (sliding) 2 (swing)	368	1/3	R290	4	2,311	240-50-1	121	1206	700	840
EUG150-2SL/EUG150-2	Ref	2 (sliding) 2 (swing)	509	1/3	R290	4	2,311	240-50-1	139	1506	700	840
EUG180-2SL/EUG180-3	Ref	2 (sliding) 3 (swing)	622	1/3	R290	4	2,311	240-50-1	159	1806	700	840

*: Height does not include 5" for casters.

Ref = Refrigerator

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more
information
<http://www.austunecommercial.com/>

CHEF BASES (TWO DRAWER)

Side Mounted Condensing Unit

EUL - Series



Chef Bases



▲ EUL36D2



▲ EUL48D2



▲ EUL52D2



▲ EUL52-60D2

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- 16-gauge stainless steel worktop is built with unique air chamber and vents that channel heat produced by mounted cooking equipment away from the unit. Additional layer of high grade insulation material withstands extreme heat. These features prevent the worktop from heat-induced warping, keep the cabinet cold and reduce overall energy costs.
- Thick gauge stainless steel corner guards keep mounted cooking equipment from sliding off the worktop.
- Heavy duty stainless steel grips provide secure maneuverability for the unit.
- 12-gauge metal caster brackets support additional weight of mounted cooking equipment.
- Four 5" swivel casters with locks on front set. Two front leg stabilizers standard for all models.

Recommended Operating Conditions

- A minimum clearance of 6" is required between the cooking equipment's heating element and the chefbase worktop.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Refrigeration System


- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening drawers.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Snap-in, heat resistant, magnetic drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed drawer handles.
- NSF certified polycarbonate 4" deep pans (refer to the website for pan configurations).


Dimensions

Side View




Corner Guards

Durable stainless steel corner guards mounted on the top surface prevent cooking equipment from accidentally sliding off the unit.




Stainless Steel Grips

Heavy duty stainless steel top surface grips for easy and safe maneuverability of the unit.

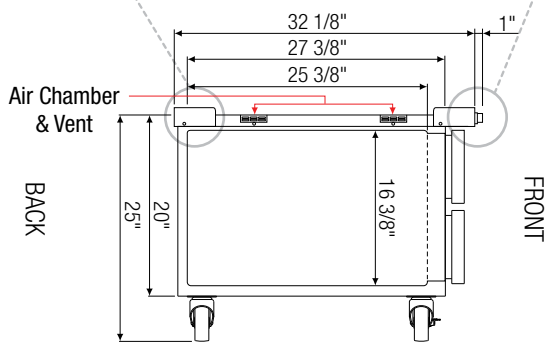


Air Flow

Front view of cabinet interior demonstrates air circulation from left to right.




ABS Legs




Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening, closing doors and weight support.




Equipped with 10Amp Australian Plug




▲ EUL36D2







▲ EUL48D2



▲ EUL52D2

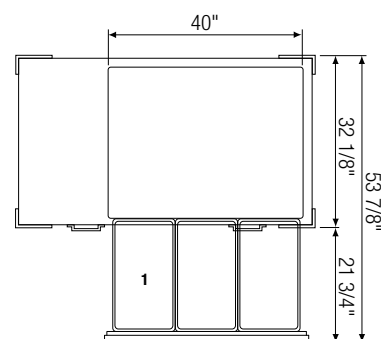

▲ EUL52-60D2

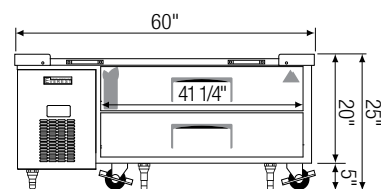

Model	Ref/ Frz/ Dual	# of Drawers	Max. Weight Support Capacity (KG)	HP	Refrigerant	# of Pans	BTU/HR [†]	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D ^a	H [*]
EUL36D2	Ref	2	325	1/4+	R290	1 x 2 1/6 x 6	1,926	240-50-1	114	906	700	635
EUL48D2	Ref	2	325	1/4+	R290	1 x 4 1/6 x 6	1,926	240-50-1	136	1214	700	635
EUL52D2	Ref	2	325	1/4+	R290	1x6	1,926	240-50-1	145	1484	700	635
EUL52-60D2	Ref	2	325	1/4+	R290	1x6	1,926	240-50-1	155	1815	700	635

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Depth does not include 1" for stainless steel grip.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more
information
<http://www.austunecommercial.com/>

CHEF BASES (FOUR DRAWER)

Side Mounted Condensing Unit

EUL - Series



▲ EUL72D4



▲ EUL82D4



▲ EUL82-84D4



▲ EUL82-86D4



▲ EUL96D4



Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- 16-gauge stainless steel worktop is built with unique air chamber and vents that channel heat produced by mounted cooking equipment away from the unit. Additional layer of high grade insulation material withstands extreme heat. These features prevent the worktop from heat-induced warping, keep the cabinet cold and reduce overall energy costs.
- Thick gauge stainless steel corner guards keep mounted cooking equipment from sliding off the worktop.
- Heavy duty stainless steel grips provide secure maneuverability for the unit.
- 12-gauge metal caster brackets support additional weight of mounted cooking equipment.
- Six 5" swivel casters with locks on front set. Three front leg stabilizers standard for all models.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C.
- Audible overheat protection alarm for compressor and condenser coil.

Recommended Operating Conditions

- A minimum clearance of 6" is required between the cooking equipment's heating element and the Chef Base worktop.

Options

- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Refrigeration System


- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening drawers.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Snap-in, heat resistant, magnetic drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed drawer handles.
- NSF certified polycarbonate 4" deep pans (refer to the website for pan configurations).


Dimensions

Side View



Corner Guards


Durable stainless steel corner guards mounted on the top surface prevent cooking equipment from accidentally sliding off the unit.



Stainless Steel Grips

Heavy duty stainless steel top surface grips for easy and safe maneuverability of the unit.

ABS Legs






Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening, closing doors and weight support.




Equipped with 10Amp Australian Plug

Air Flow


Front view of cabinet interior demonstrates air circulation from left to right.

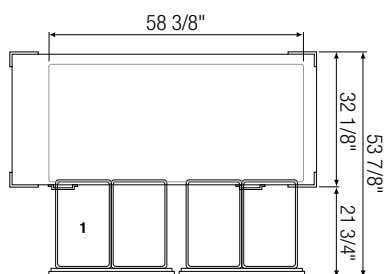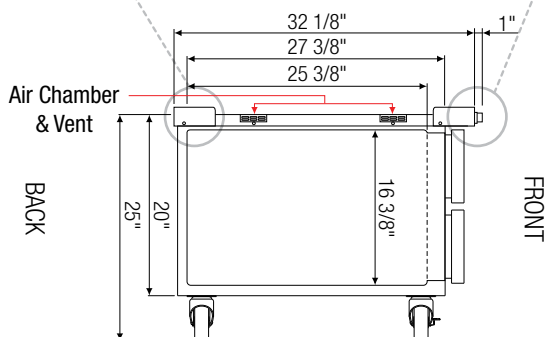




▲ EUL72D4

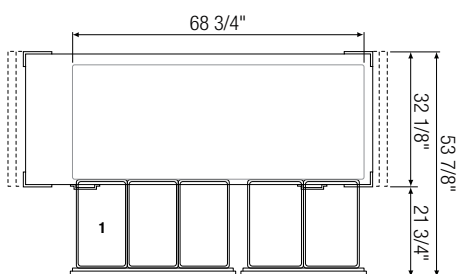

▲ EUL82D4, EUL82-84D4, EUL82-86D4

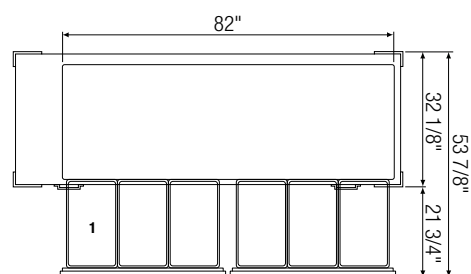

▲ EUL96D4

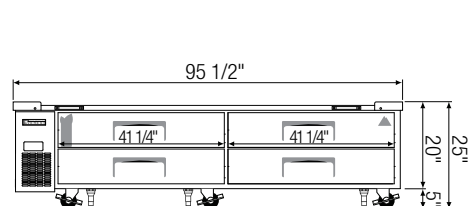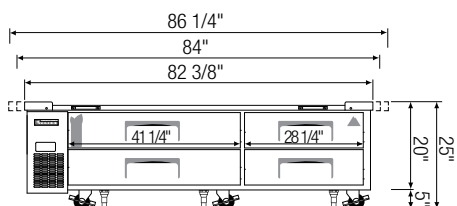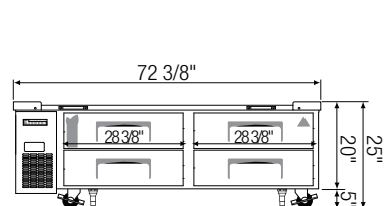

Model	Ref/ Frz/ Dual	# of Drawers	Max. Weight Support Capacity (KG)	HP	Refrigerant	# of Pans	BTU/HR [†]	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D ^a	H [*]
EUL72D4	Ref	4	491	1/4+	R290	1 x 8	1,926	240-50-1	190	1838	816	635
EUL82D4	Ref	4	491	1/3	R290	1 x 10	2,311	240-50-1	219	2092	816	635
EUL82-84D4	Ref	4	491	1/3	R290	1 x 10	2,311	240-50-1	221	2134	816	635
EUL82-86D4	Ref	4	491	1/3	R290	1 x 10	2,311	240-50-1	224	2191	816	635
EUL96D4	Ref	4	491	1/3	R290	1 x 12	2,311	240-50-1	257	2426	816	635

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Depth does not include 1" for stainless steel grip.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.




Please visit our website for more information
<http://www.austunecommercial.com/>

Standard Features & Benefits


Heat Defense & Anti-Warp Features for Chef Bases

This unique Everest patented system prevents the chefbase worktop from heat-induced warping caused by prolonged exposure and very close proximity to mounted cooking equipment. A combination of high strength 16-gauge stainless steel worktop, extra heat insulation material, dual air chambers and vents not only mitigate but also channel heat away from the chefbase. These heat defense and anti-warp features not only preserve the structural integrity of the chefbase, it also keeps the cabinet cold and effectively reduces overall energy costs.

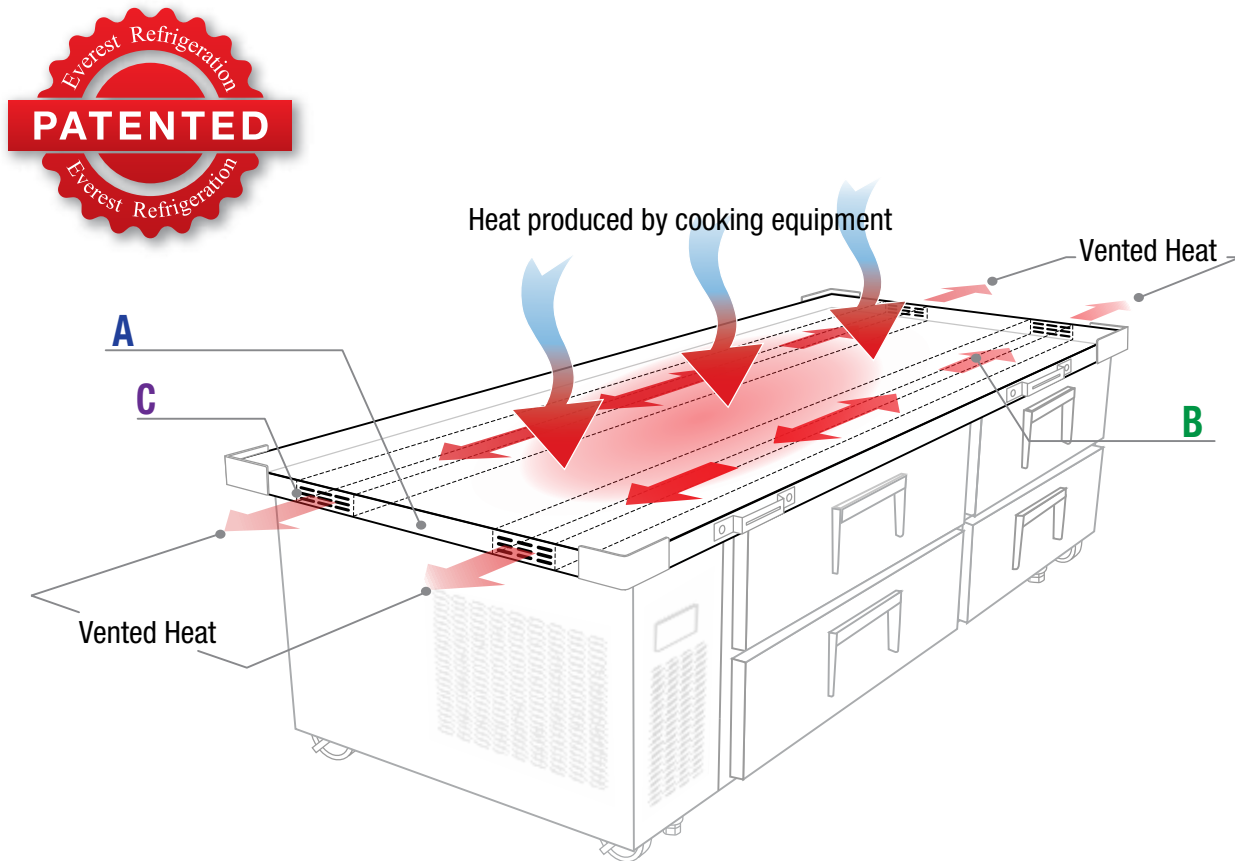


A. Covered High Heat Insulation

In addition to the standard 2.5" thick high density polyurethane insulation, chefbases are also equipped with high heat insulation material that can withstand extreme heat of up to 500°F. Layered between the worktop panel and unit body, it keeps the heat of mounted cooking equipment from reaching the cabinet interior.

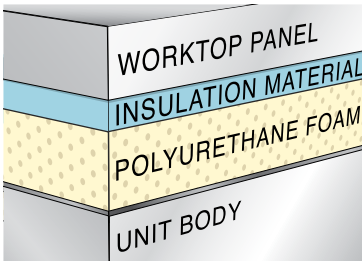


B. Dual Air Chambers

Two, 4" wide and 1" deep full length air chambers located directly underneath the worktop allow heat to travel across horizontal channels and exit out of vents. By expelling majority of the heat, the system only needs to mitigate a significantly less amount.

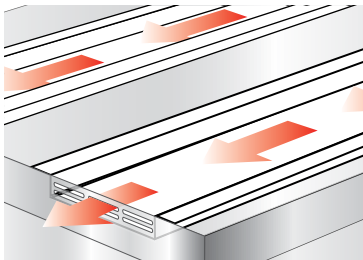

C. Air Vents

Multiple vents located on each side of the dual air chambers allow hot air to escape freely.

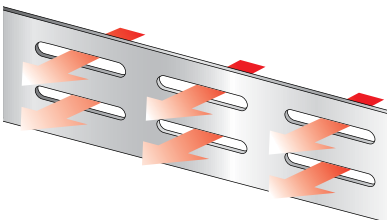

SIDE MOUNT SANDWICH PREP. TABLES

Side Mounted Condensing Unit

EHR - Series 700mm Depth



▲ EHR90-1(700)



▲ EHR120-2(700)



▲ EHR150-2(700)



▲ EHR180-3(700)

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10amp Australian Plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 12 ¼" deep cutting board is removable for ease of cleaning.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- NSF certified stainless steel double overshef.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

Air Flow




Front view of cabinet interior demonstrates air circulation from left to right.




Equipped with 10amp Australian Plug





Side View

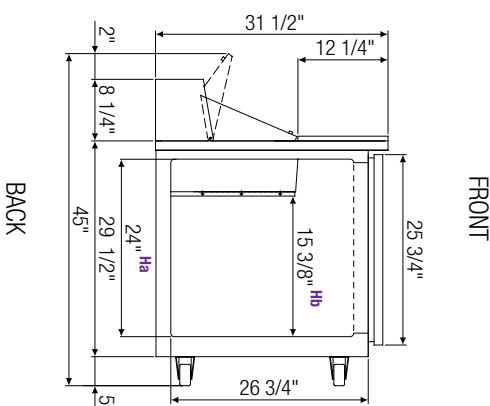


✓ : Mounting space for standard aftermarket overshef.

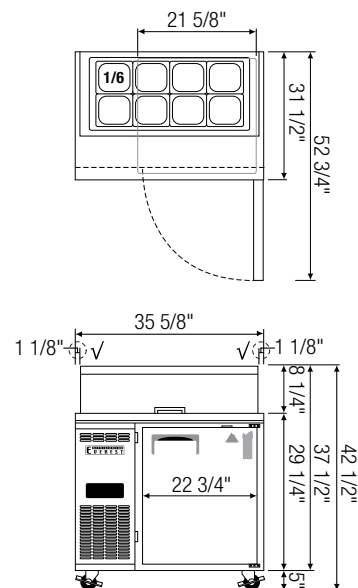


▲ EHR90-1(700)

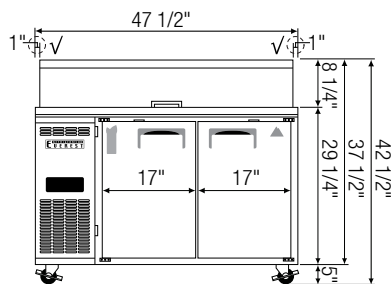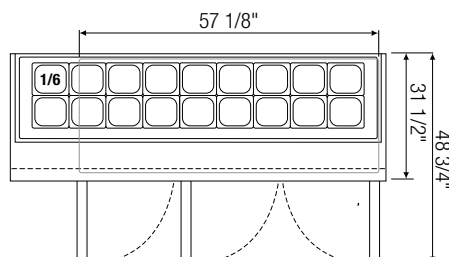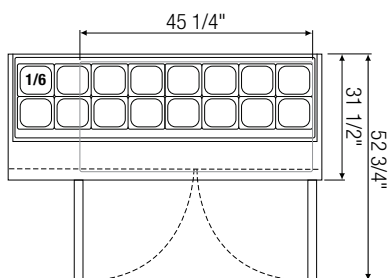

▲ EHR120-2(700)

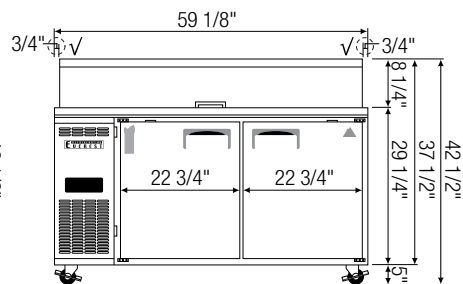

▲ EHR150-2(700)

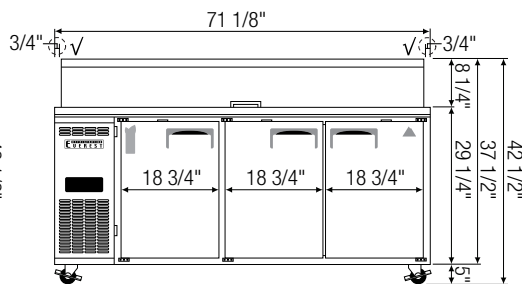

▲ EHR180-3(700)

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Liters)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H*
EHR90-1(700)	Ref	1	254	1/4+	R290	2	1/6 x 8	240-50-1	121	906	700	1055
EHR120-2(700)	Ref	2	368	1/4+	R290	4	1/6 x 12	240-50-1	147	1206	700	1055
EHR150-2(700)	Ref	2	486	1/4+	R290	4	1/6 x 16	240-50-1	173	1506	700	1055
EHR180-3(700)	Ref	3	594	1/3	R290	6	1/6 x 18	240-50-1	206	1806	700	1055

*: Height does not include 5" for casters.

Ha, Hb : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more information
<http://www.austunecommercial.com/>

PIZZA PREP. TABLES

Side Mounted Condensing Unit

EPT - Series Doors Model



▲ EPT90-1(800)



▲ EPT150-2(800)



▲ EPT180-2(800)



▲ EPT240-3(800)

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set (six casters for model EPT240) Leg stabilizers standard for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10amp Australian Plug

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 19¼" deep cutting board is removable for ease of cleaning.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.

Options

- NSF certified stainless steel double overshef.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing doors, and three additional leg for EPT240 for weight support.





Equipped with 10amp Australian Plug

Air Flow




Front view of cabinet interior demonstrates air circulation from left to right.


Side View

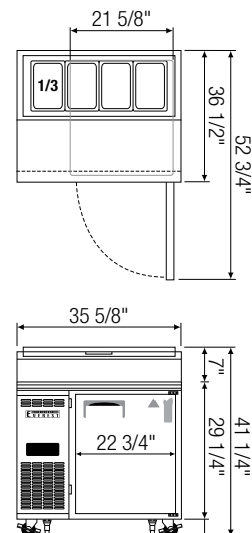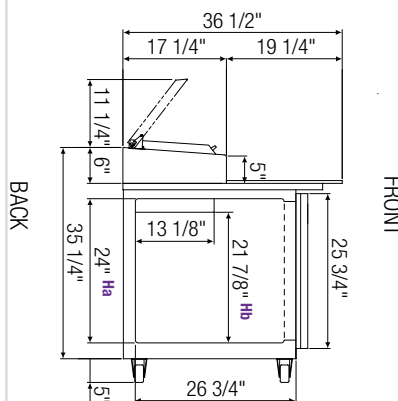


▲ EPT90-1(800)

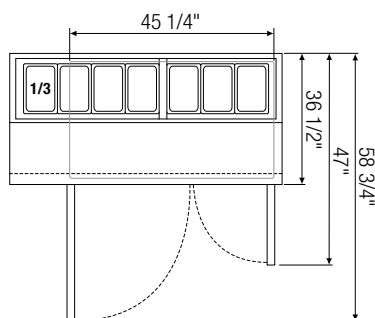




▲ EPT150-2(800)

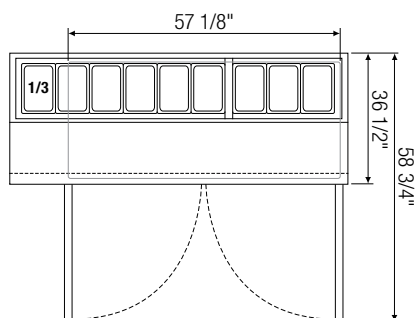

▲ EPT180-2(800)

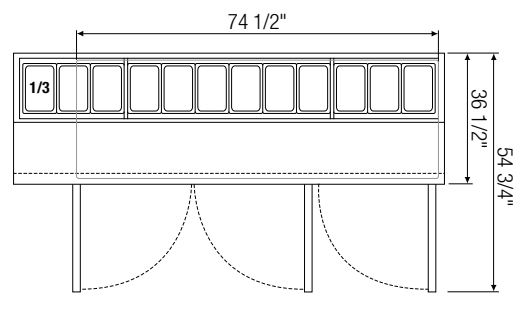

▲ EPT240-3(800)

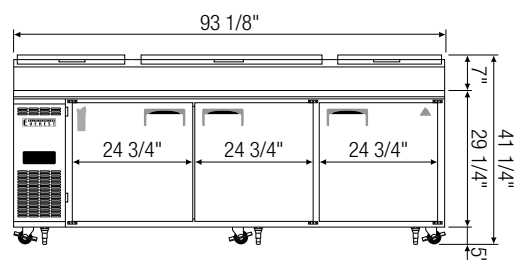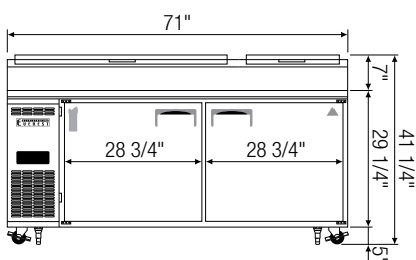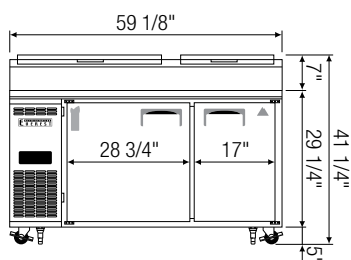

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Liters)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (MM)		
										L	D ^a	H [*]
EPT90-1(800)	Ref	1	169	1/3	R290	2	1/3 X 4	240-50-1	133	906	845	1030
EPT150-2(800)	Ref	2	453	1/3	R290	4	1/3 X 7	240-50-1	180	1506	845	1030
EPT180-2(800)	Ref	2	651	1/3	R290	4	1/3 X 9	240-50-1	204	1806	845	1030
EPT240-3(800)	Ref	3	849	1/3+	R290	6	1/3 X 12	240-50-1	270	2370	845	1030

*: Height does not include 5" for casters ; height includes top lid and handle.

a: Depth includes 19 1/4" cutting board.

Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for more information
<http://www.austunecommercial.com/>

DRAWERED PIZZA PREP. TABLES

Side Mounted Condensing Unit

EPT - Series DOOR AND DRAWERS COMBI



▲ EPT90-(800)D2



▲ EPT180-(800)D2



▲ EPT180-(800)D4



▲ EPT240-(800)D2



▲ EPT240-(800)D4

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set (six casters for models EPT240 Leg stabilizers standard for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10amp Australian Plug

Doors & Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Self-closing door with adjustable torsion system for a positive seal.
- Snap-in magnetic door and drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed door and drawer handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 19 ¼" deep cutting board is removable for ease of cleaning.

Shelving

- Epoxy coated, steel wire shelves for applicable models (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.

Options

- NSF certified stainless steel double overshell.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

Air Flow




Front view of cabinet interior demonstrates air circulation from left to right.



Equipped with 10amp Australian Plug


Side View

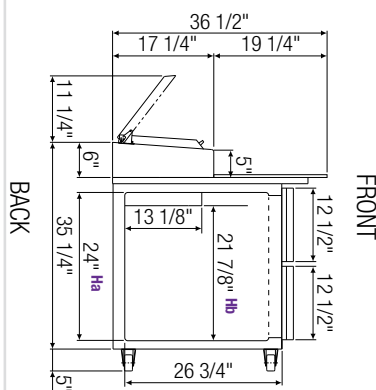

ABS Legs




Standard adjustable stainless steel clad ABS legs provide extra stability when opening and closing door.

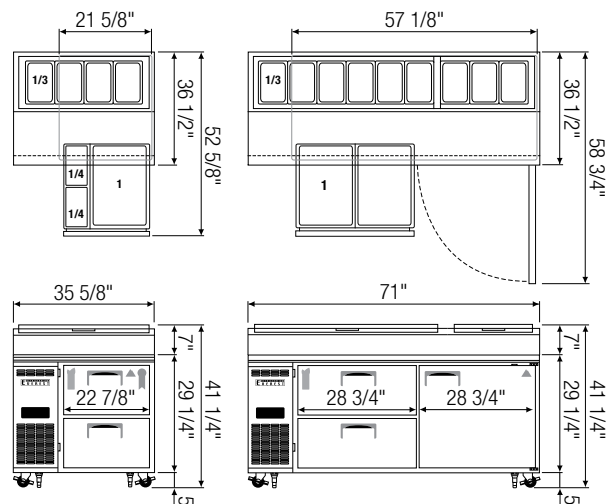


▲ EPT90-(800)D2


▲ EPT180-(800)D2

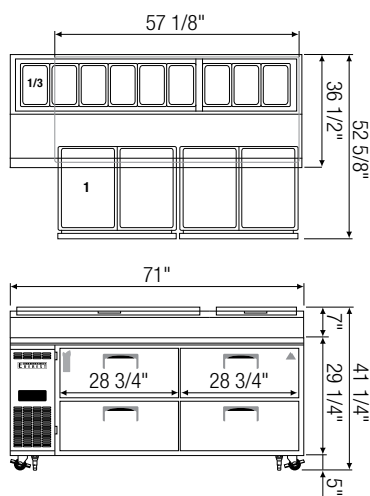

▲ EPT180-(800)D4

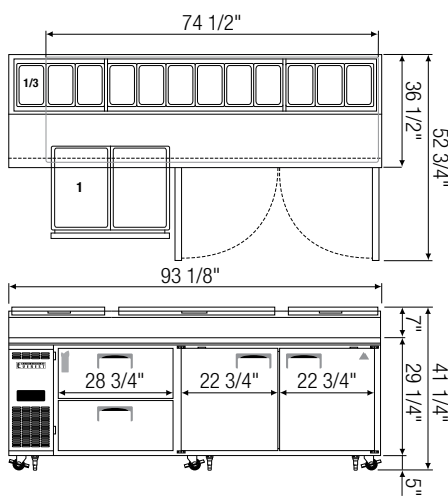

▲ EPT240-(800)D2

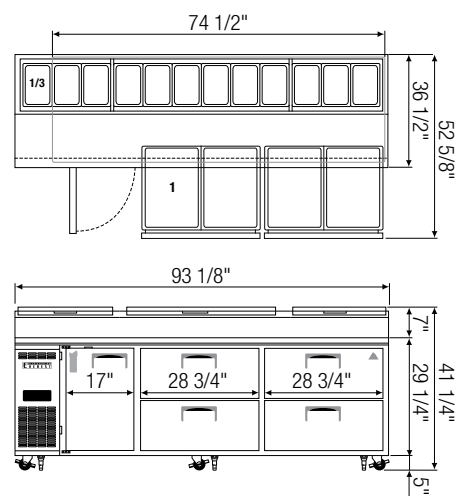

▲ EPT240-(800)D4

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Liters)	HP	Refrigerant	# of Shelves	# of Pans (Top)	# of [†] Pans (Drawer)	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (MM)		
											L	D ^a	H [*]
EPT90-(800)D2	Ref	2(DR)	254	1/3	R290	N/A	1/3 X 4	1 x 2 1/4 x 4	240-50-1	142	906	845	1030
EPT180-(800)D2	Ref	1(D) 2(DR)	651	1/3	R290	2	1/3 X 9	1 x 4	240-50-1	223	1806	845	1030
EPT180-(800)D4	Ref	4(DR)	651	1/3	R290	N/A	1/3 X 9	1 x 8	240-50-1	224	1806	845	1030
EPT240-(800)D2	Ref	2(D) 2(DR)	849	1/3	R290	4	1/3 X 12	1 x 4	240-50-1	278	2370	845	1030
EPT240-(800)D4	Ref	1(D) 4(DR)	849	1/3	R290	2	1/3 X 12	1 x 8	240-50-1	291	2370	845	1030

*: Height does not include 5" for casters ; height includes top lid and handle.

a : Depth includes 19 1/4" cutting board.

† : Drawer pans are not included.

Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator | (DR) = Drawer | (D) = Door



Please visit our website for more information
<http://www.austunecommercial.com/>

BACK BAR COOLERS

EBB - Series



▲ E59BB



▲ E124BB



▲ E124BBSS



▲ E146BB



▲ E146BBSS



▲ E172BB



▲ E226BB

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set (applies only to model E59BB).
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing (Blizzard R290 condensing unit is back mounted for model EBB23).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.

Options


- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

Side View (all models except E59BB)

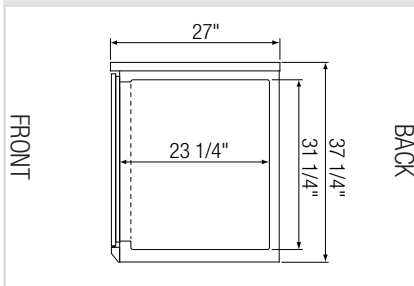


Air Flow (all models except E59BB)




Front view of cabinet interior demonstrates air circulation from left to right.

Side View (E59BB)

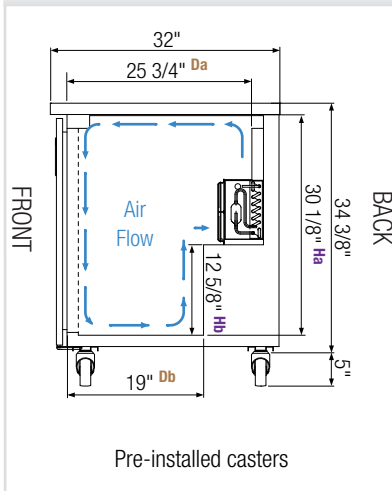


Equipped with 10Amp Plug

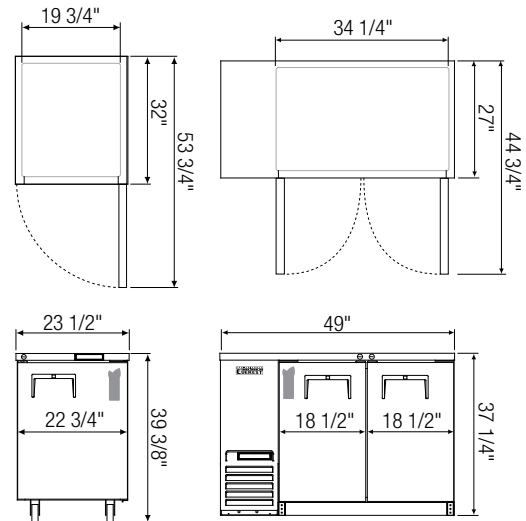


▲ E59BB


▲ E124BBSS

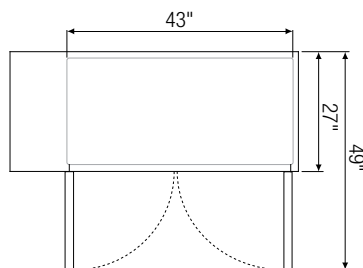

▲ E146BBSS

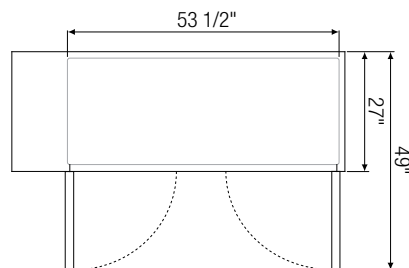

▲ E172BB

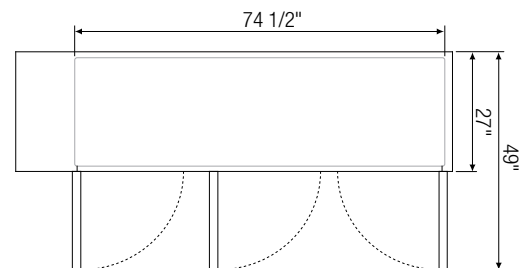

▲ E226BB

Model	Ref/ Frz/ Dual	# of Doors	Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
E59BB	Ref	1	2	8	1/5	1,655	R290	220	125	240-50-1	2.5	167	23 1/2	32	39 3/8*
E124BBSS	Ref	2	4	14	1/4+	1,926	R290	490	344	240-50-1	3.5	269	49	27	37 1/4
E146BBSS	Ref	2	4	20	1/4+	1,926	R290	640	408	240-50-1	3.5	291	57 3/4	27	37 1/4
E172BB	Ref	2	4	24	1/4+	1,926	R290	800	504	240-50-1	3.5	323	68	27	37 1/4
E226BB	Ref	3	6	32	1/3	2,311	R290	1120	696	240-50-1	2.5	436	89 1/4	27	37 1/4

*: Height includes 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Da, Db : Interior Depth Ha, Hb, Hc : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated Energy Efficiency information.

24" DEEP BACK BAR COOLERS

EBB - Series



▲ E124BB(620)



▲ E146BB(620)



▲ E172BB(620)



▲ E226BB(620)

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.



Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C.
- Audible overheat protection alarm for compressor and condenser coil.



Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.





Dimensions

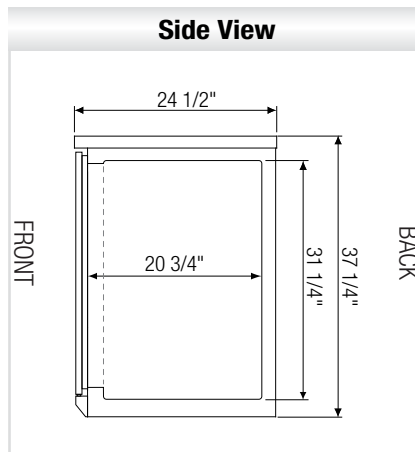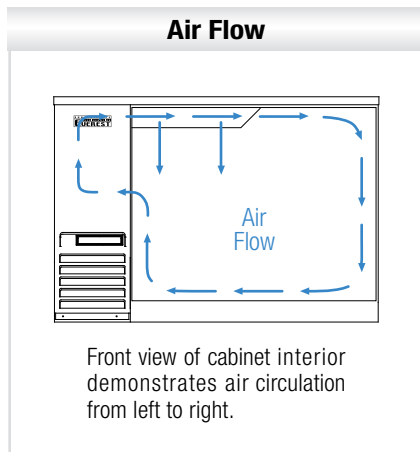


Equipped with 10Amp Australian Plug




▲ E124BB(620)

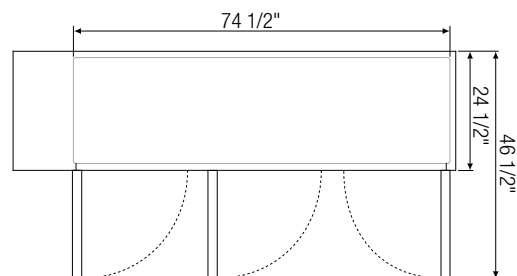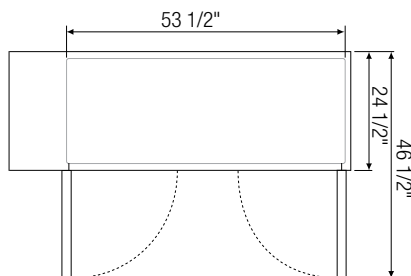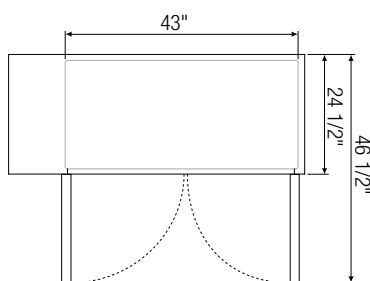

▲ E146BB(620)

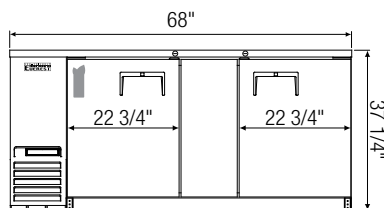

▲ E172BB(620)

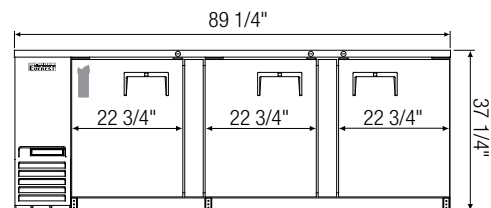

▲ E226BB(620)

Model	Ref/ Frz/ Dual	# of Doors	Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
E124BB(620)	Ref	2	4	13	1/4+	1,926	R290	420	294	240-50-1	3.5	262	49	24 1/2	37 1/4
E146BB(620)	Ref	2	4	17	1/4+	1,926	R290	560	357	240-50-1	3.5	274	57 3/4	24 1/2	37 1/4
E172BB(620)	Ref	2	4	20	1/4+	1,926	R290	700	441	240-50-1	3.5	301	68	24 1/2	37 1/4
E226BB(620)	Ref	3	6	28	1/3	2,311	R290	980	609	240-50-1	2.5	397	89 1/4	24 1/2	37 1/4

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

GLASS DOOR BACK BAR COOLERS

EBB - Series



▲ E59BBG



▲ E124BBG



▲ E124BBGSS



▲ E146BBG



▲ E146BBGSS



▲ E172BBG



▲ E226BBG

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set (applies only to model EBB23G).
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing (Blizzard R290 condensing unit is back mounted for model EBB23G).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames. Matte finish aluminum door frames for models EBB48G-SS and EBB59G-SS.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions


Side View (all models except E59BBG)

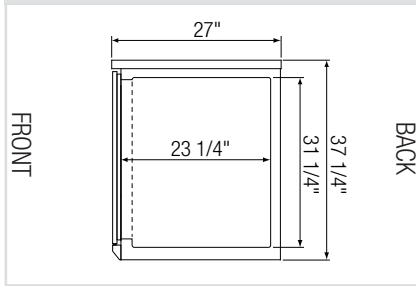


Air Flow (all models except E59BBG)

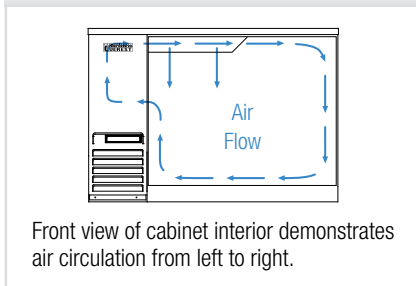

Side View E59BBG)

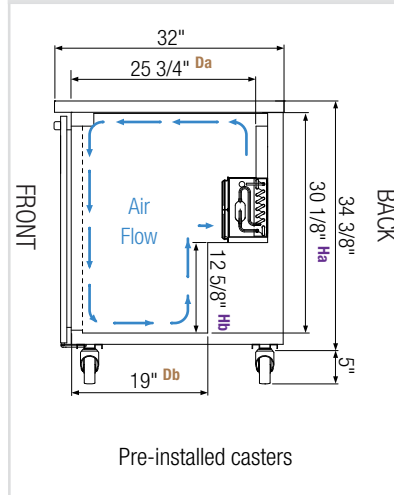


Equipped with 10Amp Australian Plug

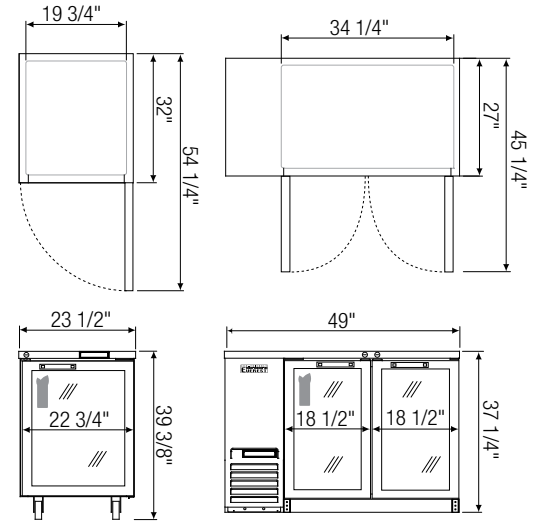


▲ E59BBG


▲ E124BBGSS

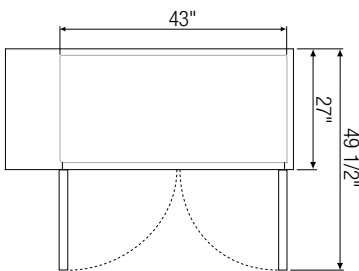




▲ E146BBGSS

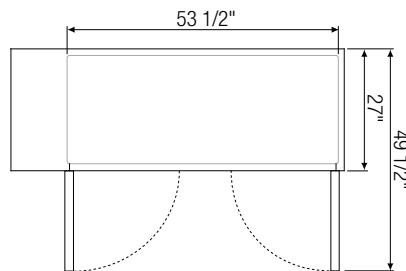

▲ E172BBG

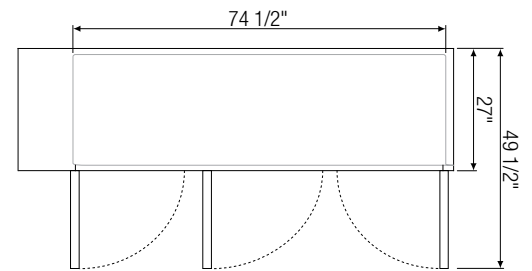

▲ E226BBG

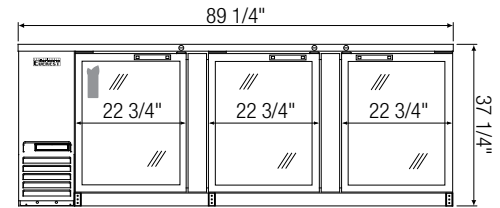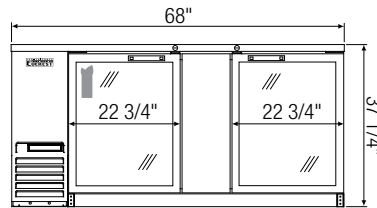

Model	Ref/ Frz/ Dual	# of Doors	Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D*	H
E59BBG	Ref	1	2	8	1/5	1,655	R290	220	125	240-50-1	2.5	179	23 1/2	32	39 3/8 ^a
E124BBGSS	Ref	2	4	14	1/4+	1,926	R290	490	344	240-50-1	3.5	288	49	27	37 1/4
E146BBGSS	Ref	2	4	20	1/4+	1,926	R290	640	408	240-50-1	3.5	313	57 3/4	27	37 1/4
E172BBG	Ref	2	4	24	1/4+	1,926	R290	800	504	240-50-1	3.5	347	68	27	37 1/4
E226BBG	Ref	3	6	32	1/3	2,311	R290	1120	696	240-50-1	2.5	472	89 1/4	27	37 1/4

★: Depth does not include protruding door handles.

a: Height includes 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Da, Db : Interior Depth Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated Energy Efficiency information.

24" DEEP GLASS DOOR BACK BAR COOLERS

EBB - Series



▲ E124BBG(620)



▲ E146BBG(620)



▲ E172BBG(620)



▲ E226BBG(620)

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.



Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.



Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.





Dimensions

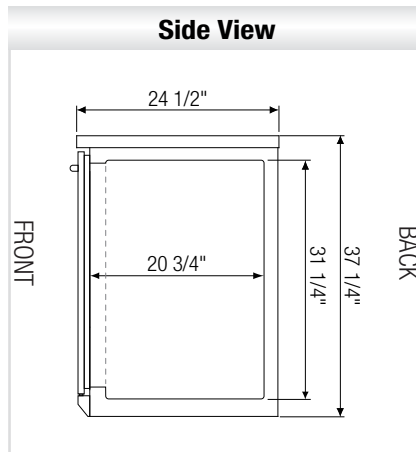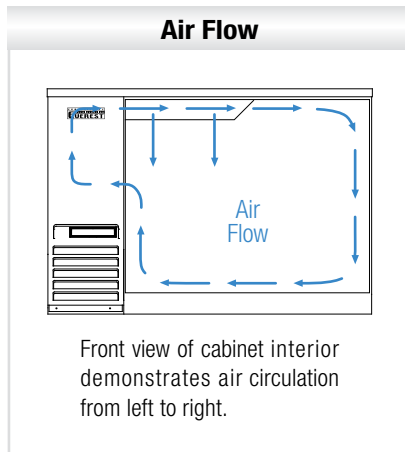


Equipped with 10Amp Australian Plug




▲ E124BBG(620)

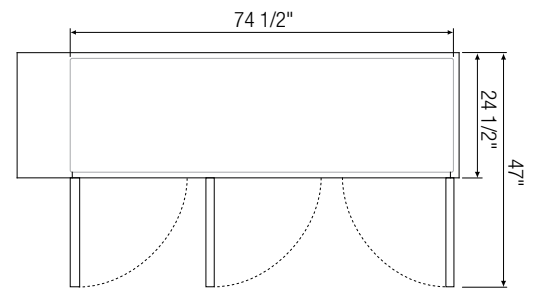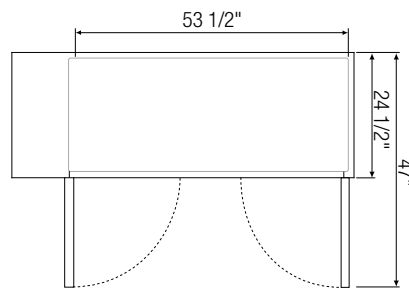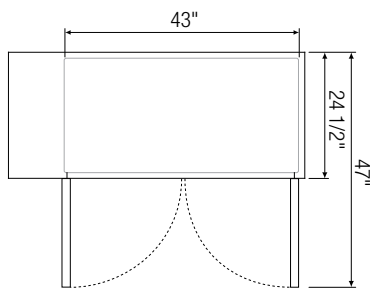

▲ E146BBG(620)

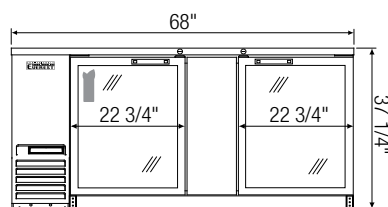

▲ E172BBG(620)

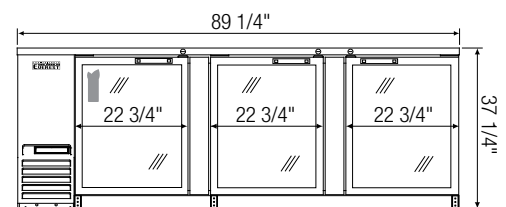

▲ E226BBG(620)

Model	Ref/ Frz/ Dual	# of Doors	# of Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D*	H
E124BBG(620)	Ref	2	4	13	1/4+	1,926	R290	420	294	240-50-1	3.5	277	49	24 1/2	37 1/4
E146BBG(620)	Ref	2	4	17	1/4+	1,926	R290	560	357	240-50-1	3.5	297	57 3/4	24 1/2	37 1/4
E172BBG(620)	Ref	2	4	20	1/4+	1,926	R290	700	441	240-50-1	3.5	328	68	24 1/2	37 1/4
E226BBG(620)	Ref	3	6	28	1/3	2,311	R290	980	609	240-50-1	2.5	446	89 1/4	24 1/2	37 1/4

*: Depth does not include protruding door handles.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

24" DEEP SLIDING GLASS DOOR BACK BAR COOLERS

EBB - Series



▲ E124BBGSL



▲ E124BBGSLSS



▲ E146BBGSL



▲ E146BBGSLSS



▲ E172BBGSL



▲ E226BBGSL

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Self-closes by weight.
- Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

Air Flow





Front view of cabinet interior demonstrates air circulation from left to right.





Side View

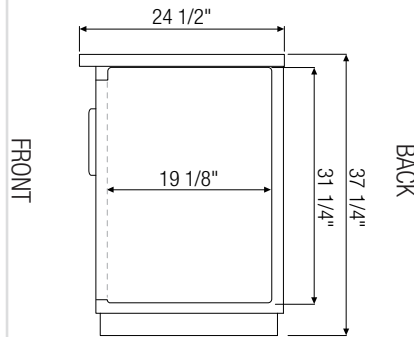


Equipped with 10Amp Australian Plug




▲ E124BBGSL

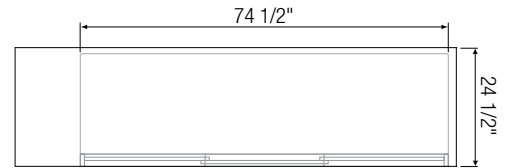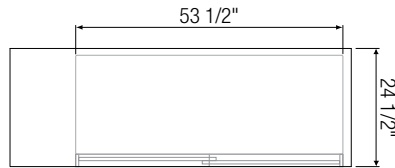

▲ E146BBGSLSS

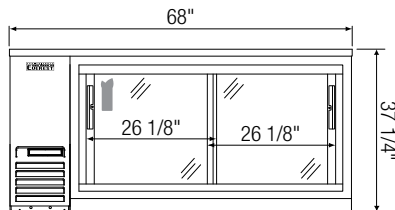

▲ E172BBGSL

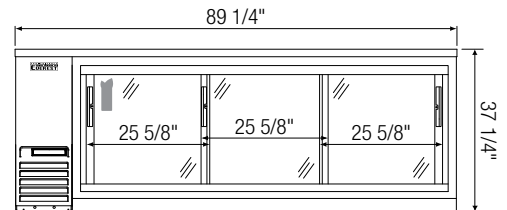

▲ E226BBGSL

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
E124BBGSL	Ref	2	13	1/4+	1,926	R290	4	420	294	240-50-1	3.5	278	49	24 1/2	37 1/4
E146BBGSLSS	Ref	2	17	1/4+	1,926	R290	4	560	357	240-50-1	3.5	295	57 3/4	24 1/2	37 1/4
E172BBGSL	Ref	2	20	1/4+	1,926	R290	4	700	441	240-50-1	3.5	340	68	24 1/2	37 1/4
E226BBGSL	Ref	3	28	1/3	2,311	R290	6	980	609	240-50-1	2.5	406	89 1/4	24 1/2	37 1/4

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

DIRECT DRAW KEG REFRIGERATORS

EBD - Series



▲ E59BD



▲ E124BD



▲ E146BDSS



▲ E172BD



▲ E226BD



▲ E226BDSS

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior. Stainless steel exterior for models E146BDSS and E226BDSS.
- Stainless steel rails for model E59BD.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set (applies only to model EBD1).
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing (Blizzard R290 condensing unit is back mounted for model E59BD).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior. Stainless steel exterior and galvanized interior for models E146BDSS and E226BDSS.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with matching air distributor. One single faucet draft arm for model E59BD. Two single faucet draft arms for models E124BD and E146BDSS. One single faucet and one dual faucet draft arms for model E172BD. Two dual faucet draft arms for models E226BD and E226BDSS.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Dual faucet draft arms and matching air distributors.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

Side View (all models except E59BD)

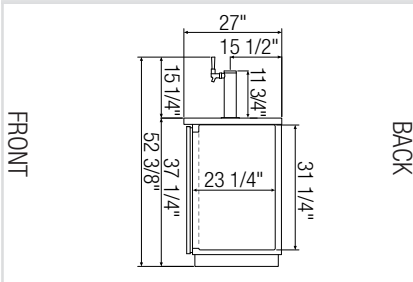


Air Flow (all models except E59BD)




Front view of cabinet interior demonstrates air circulation from left to right.

Side View (E59BD)

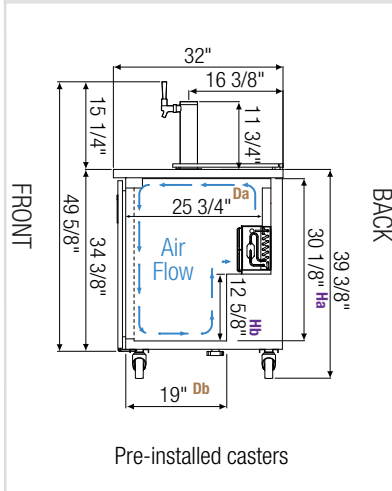


Equipped with 10Amp Plug

✓ : Drain




T-Shaped PVC Drain Fittings w/ Movable Plug.


It is required to use a hose attachment w/ 3/4" inner diameter.

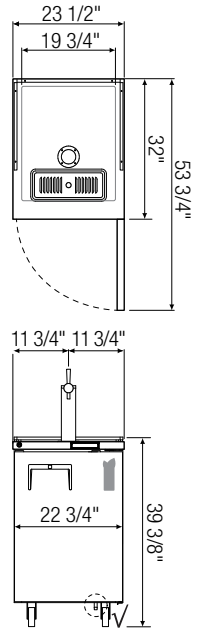


▲ E59BD






▲ E146BDSS

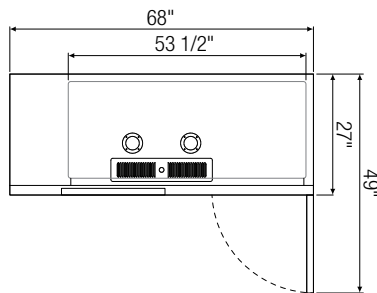

▲ E172BD

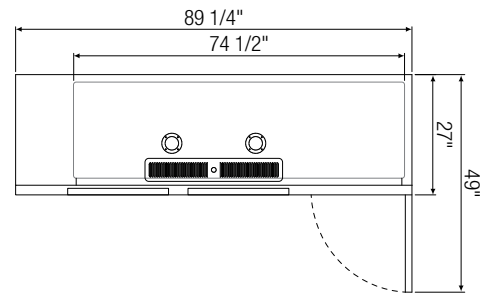

▲ E226BDSS

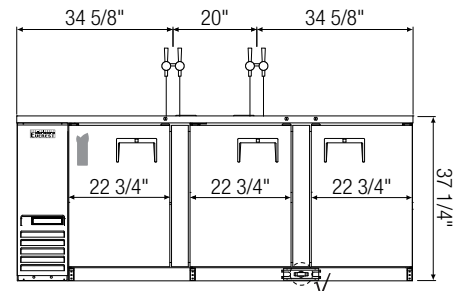

Model	Ref/ Frz/ Dual	# of Doors	# of 1/2 Barrels	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H
E59BD	Ref	1	1	8	1/5	1,655	R290	240-50-1	2.5	167	23 1/2	32	39 3/8 ^a
E146BDSS	Ref	2	2	20	1/4+	1,926	R290	240-50-1	3.5	282	57 3/4	27	37 1/4
E172BD	Ref	2	3	24	1/4+	1,926	R290	240-50-1	3.5	320	68	27	37 1/4
E226BDSS	Ref	3	4	32	1/3	2,311	R290	240-50-1	2.5	405	89 1/4	27	37 1/4

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

^a : Height includes 5" for casters.

Da, Db : Interior Depth Ha, Hb : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity ([†]) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

24" DEEP DIRECT DRAW KEG REFRIGERATORS

EBD - Series



▲ E124BD(620)



▲ E146BD(620)



▲ E172BD(620)



▲ E226BD(620)

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 240V/50Hz/1Ph, 10Amp Australian Plug

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with matching air distributor. Two single faucet draft arms for models E124BD(620) and E146BD(620)
- One single faucet and one dual faucet draft arms for model E172BD(620). Two dual faucet draft arms for model E226BD(620).





Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Dual faucet draft arms and matching air distributors.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.


Dimensions

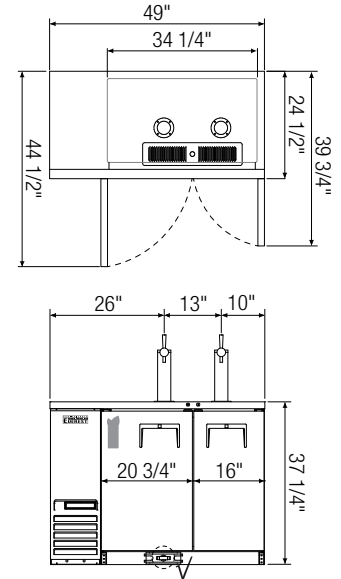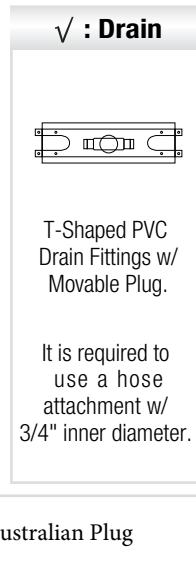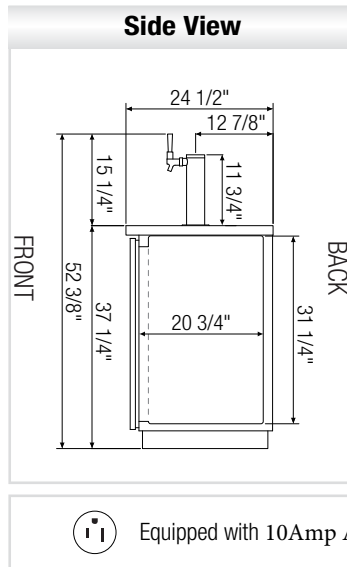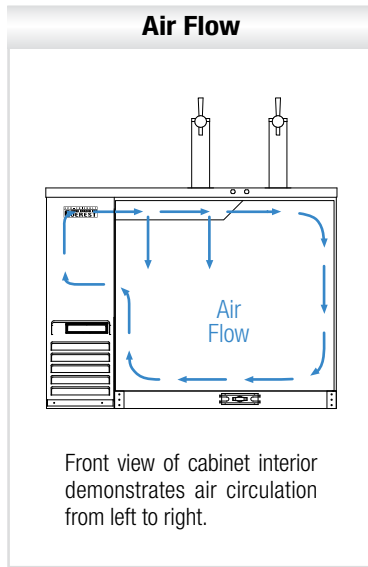


▲ E124BD(620)

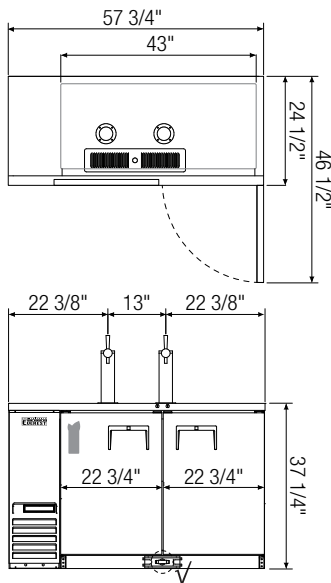

▲ E146BD(620)

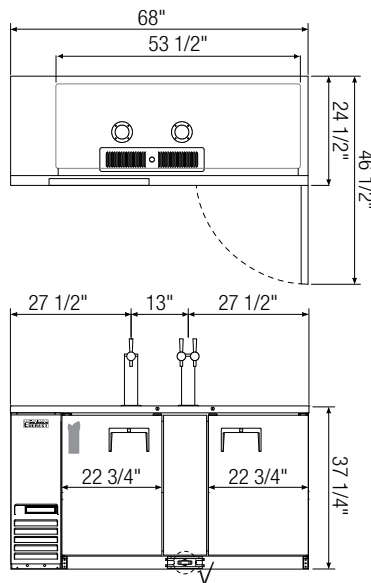

▲ E172BD(620)

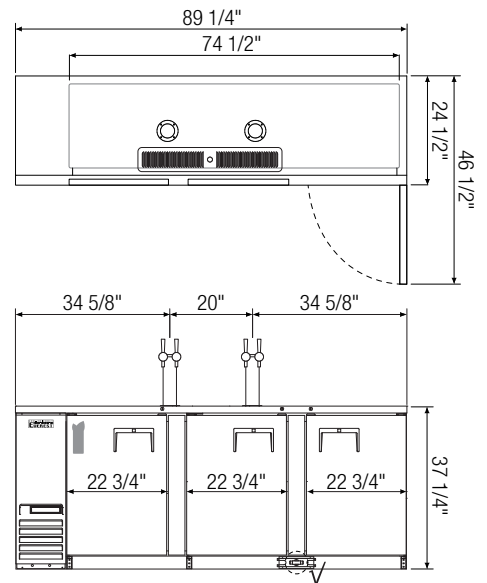

▲ E226BD(620)

Model	Ref/ Frz/ Dual	# of Doors	Capacity & Size of Barrels	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H
E124BD(620)	Ref	2	(1) 1/2 (1) 1/4 slim	13	1/4+	1,926	R290	240-50-1	3.5	266	49	24 1/2	37 1/4
E146BD(620)	Ref	2	(2) 1/2	17	1/4+	1,926	R290	240-50-1	3.5	272	57 3/4	24 1/2	37 1/4
E172BD(620)	Ref	2	(3) 1/2	20	1/4+	1,926	R290	240-50-1	3.5	299	68	24 1/2	37 1/4
E226BD(620)	Ref	3	(4) 1/2	28	1/3	2,311	R290	240-50-1	2.5	390	89 1/4	24 1/2	37 1/4

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.