

UPRIGHT REACH-IN DUAL TEMPS

Top Mounted Condensing Unit

ERF SERIES



▲ ERF74-2



▲ ERF126-2



▲ ERF150-2



▲ ERF150-3



▲ ERF190-3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for R404A and R290 freezers. Air defrost for R290 refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 240v/50HZ/1

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible (does not apply to model ERF150-3).

Shelving

- Epoxy coated, steel wire shelves (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 2°C for refrigerators and -20°C for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (does not apply to model ERF150-3).

Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs for model ERF74-2 to provide extra stability when opening and closing doors.




Equipped with 10amp Australian plug

Side View

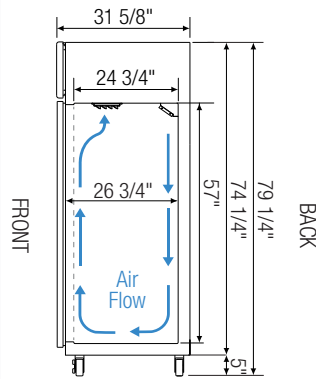


ERF126-2, ERF150-2, ERF190-3, ERF150-3 (left compartment)

Side View

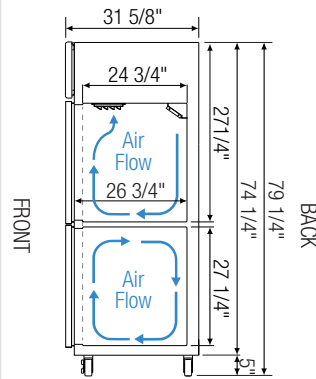


ERF150-3 (right compartment)

Side View

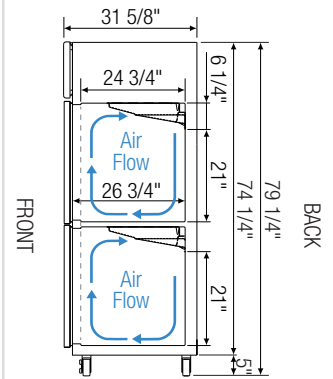

ERF74-2

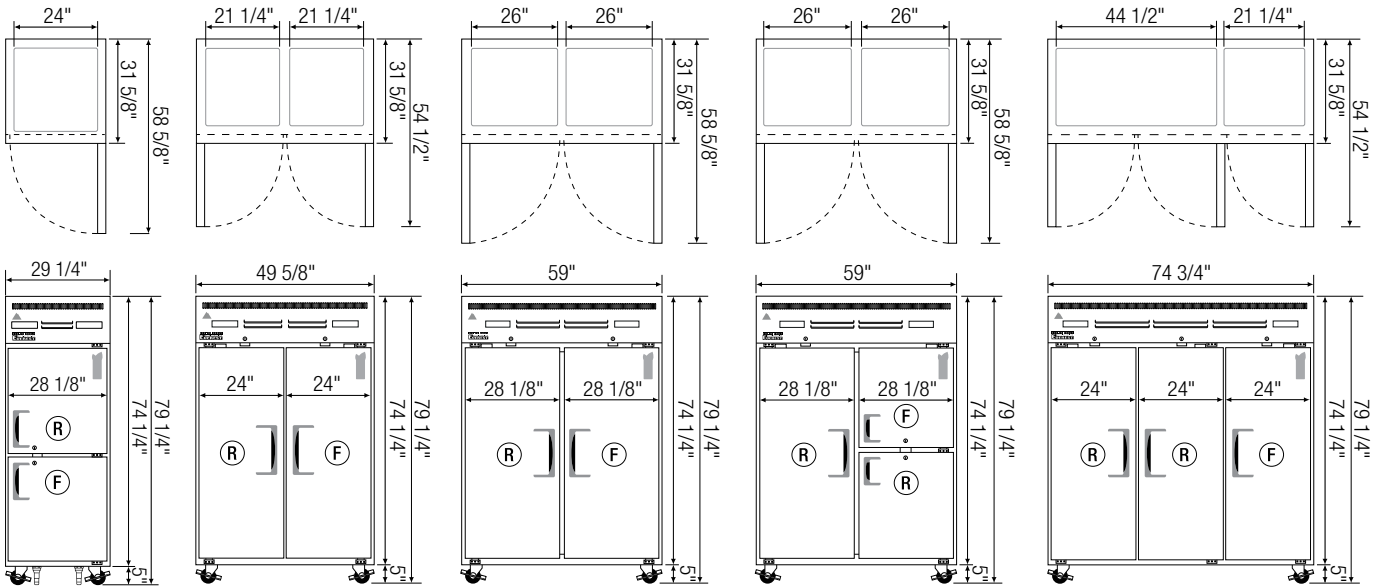

▲ ERF74-2

▲ ERF126-2

▲ ERF150-2

▲ ERF150-3

▲ ERF190-3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Litres)	HP	BTU/HR †	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Crated Weight (KG)	Exterior Dimensions (Inches)		
										L	D	H*
ERF74-2	Dual	2 (H)	311 (R) 311 (F)	1/2	3,435	R-404A / R290 [^]	2	240-50-1	155	740	803	1910
ERF126-2	Dual	2	622(R) 622 (F)	1/4+ (R) 1/2 (F)	1,926 (R) 1,670 (F)	R290	6	240-50-1	226	1260	803	1910
ERF150-2	Dual	2	736 (R) 736(F)	1/4+ (R) 1/2 (F)	1,926 (R) 1,670 (F)	R290	6	240-50-1	239	1500	803	1910
ERF150-3	Dual	2 (H) 1 (FD)	1104 (R) 368 (F)	1/4+ (R) 1/3 (F)	1,926 (R) 1,119 (F)	R290	5	240-50-1	237	1500	803	1910
ERF190-3	Dual	3	1302 (R) 622 (F)	1/4+ (R) 1/2 (F)	1,926 (R) 1,670 (F)	R290	9	240-50-1	296	1900	803	1910

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

[^]: Contact factory for R290 information.

Dual = Ref & Frz Combo | (FD) = Full Door | (H) = Half Door
(R) = Refrigerator | (F) = Freezer

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Austune Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for more information
<http://www.austunecommercial.com/>