

STRAVA SPLINT BATH

ADDENDUM - CLEANING

Rev 6 Strava User Manual

Cleaning the Secondary Inline Filter

A secondary inline filter located on the backside of the bath will catch any remaining debris that the basin stainless steel filter may not have caught. It is recommended to check this filter at least 2x per year while doing routine cleaning and maintenance, or more frequently based on usage, sanitation protocols, and type of thermoplastic materials used.

 **Complete the cleaning steps found on page 13 of the User Manual FIRST**


A REMOVE BACK PANEL

While the unit is off, drained of water, remove the four screws the back panel where the serial decal is located exposing the secondary inline filter. (#1 Phillips head screwdriver)




B LOOSEN THE CAP

Loosen the cap by turning counter clockwise to the left by hand.

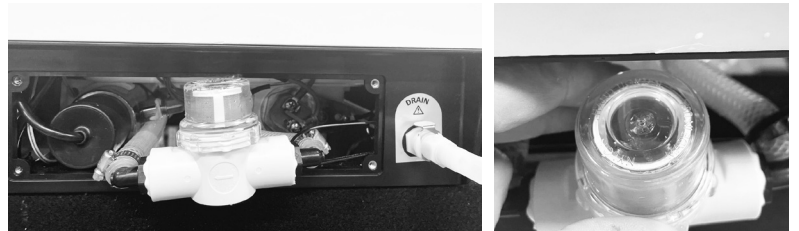

C CLEAN THE MESH STRAINER

Pull the mesh strainer out to check for any debris collection. Clean mesh strainer by rinsing it under water. Use a toothbrush if needed to remove any additional stuck-on matter. (Note: Replacement mesh strainers may be purchased from Strava)

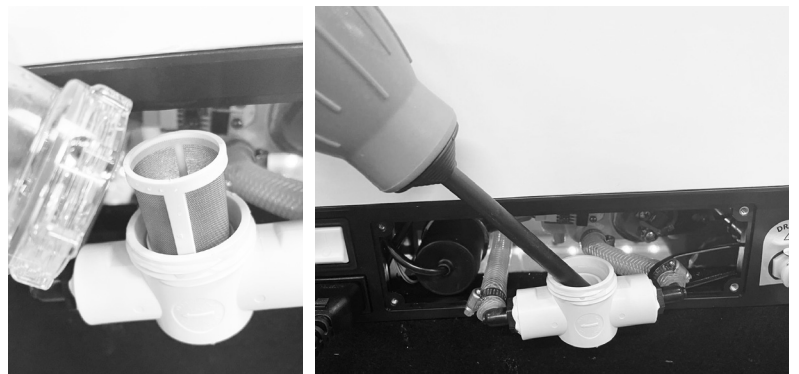

D REMOVE RESIDUAL WATER

Using the provided priming bulb, suck out any residual water/debris pooled at the bottom of the filter bowl. This may take several squeezes of the priming bulb.



E REPLACE PARTS

Replace the mesh strainer into the reservoir. Tighten cap back on by turning clockwise to the right. Screw the back panel into place.