


LED STRIP
LS GEN 2 SERIES

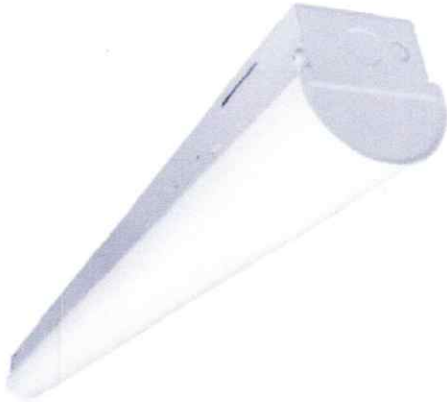

PRODUCT DESCRIPTION:

The new 8' LED linear strip offering with its dome lens can be the illumination solution in commercial, industrial, retail and residential applications. Fixtures can be used in coves, parking facilities, shops, task and general area lighting where 8' solution is required.

FEATURES:

- 0-10V dimming standard
- Power factor >0.9
- CRI>80
- Universal voltage 120-277V
- Operating Temperature: -4°F to 104°F
- Suitable for Damp locations
- Operating humidity 10% to 80% RH non-condensing
- Sensor and Emergency option
- Both 65W & 90W are low bay listed and 90W is also high bay listed

CONSTRUCTION:

- Sheet metal housing
- Powder Coated
- One piece (PC) Polycarbonate lens
- Stainless steel mounting kits

WARRANTY:

10-year standard warranty with labor allowance* (further details available at www.maxlite.com/warranties)
*Warranty Limitations: Product must be rated for the application per the Product Data Sheet (PDS); operated < 16 hrs; in ambient of -4°F to 104°F.
*Up to \$25/unit; labor allowances of up to \$500/unit available for purchase – contact MaxLite representative for details.

DIMENSION:

94.2"



3.55"

3.57"



3.3"

FAMILY	SIZE	WATTAGE (NOMINAL)	VOLTAGE	CCT	BATTERY BACKUP	MOTION SENSOR
LS2= Linear Strip Gen 2	96= 8ft	65= 65W 90= 90W	U= 120-277V	40= 4000K 50= 5000K	(OMIT)= None EM= Battery Backup Unit	MS= Bi-Level Motion Sensor with Daylight Harvesting and Remote Control Capability

NOTES:

1. EM and EMMS are not DLC listed.