




Before Getting Started:

- Park your car in a safe location
- Open all the doors and the hatch
- Move the front seats as far forward as possible
- Fold the rear seats down


Step 1 - Layout the hammock in the rear of the vehicle. The wider edge goes in the front.

Wider edge goes in front

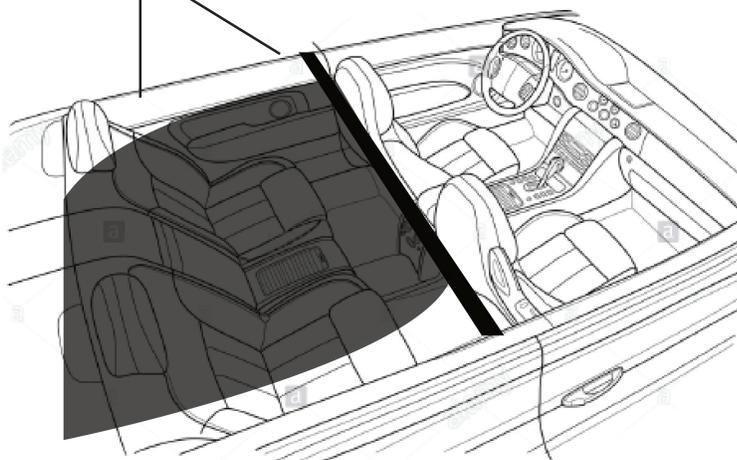

Step 2 - Run the front strap out the passenger side door, over the car, and connect it to the buckle on the other side. Adjust strap till taught.


Adjust strap till taught

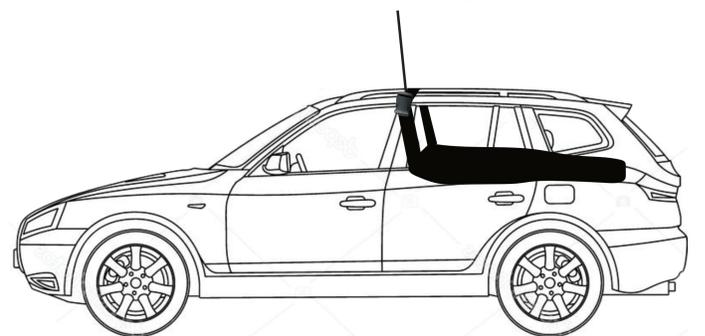

Step 3 - Throw the roof strap over the top of the vehicle and attach to the other side, similar to Step 2. This strap will need to be adjusted for comfort later.

Front strap

Roof strap

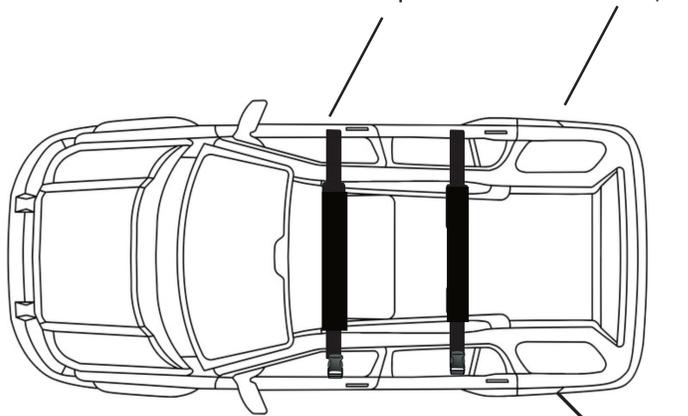

Adjust strap from side


Step 4 - Attach the carabiner pieces to the rear straps.

Secured end


Lift Tab to Loosen

Pull loose end to tighten

Thread the loose end through the buckle as shown

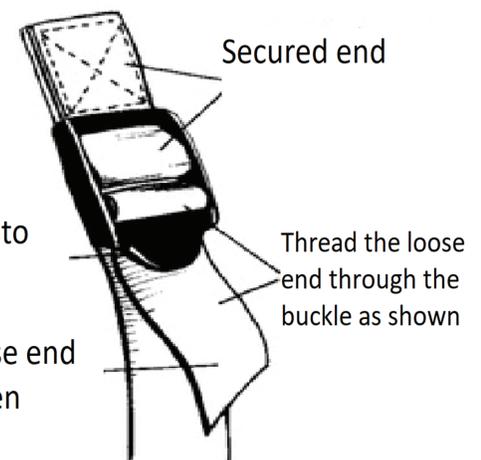

Step 5 - Run the carabiner pieces (now attached to the rear straps) out the back being sure to run under any hydraulic arm, and through the roof rack. If the roof rack gap is very small, it may be necessary to do step 4 after step 5.

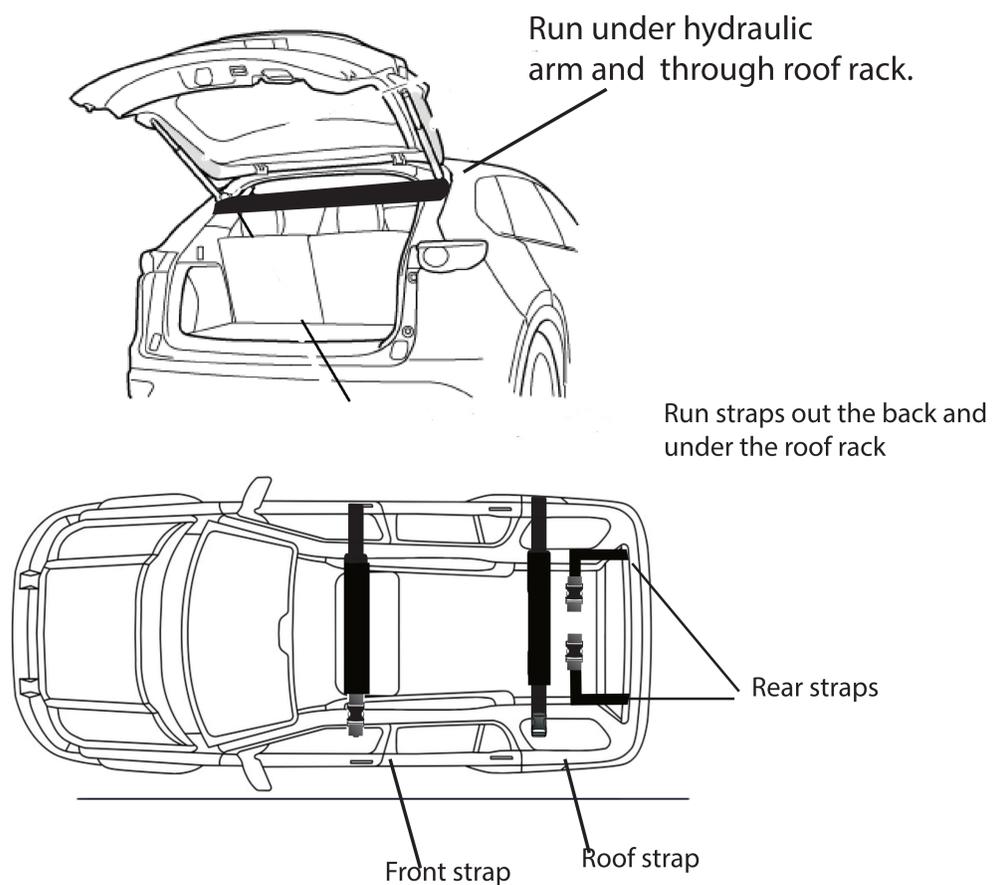

Step 6 - Connect the two carabiners on top of the vehicle and adjust the straps.

Connect Carabiners on top behind roof rack
Adjust straps accordingly

