Truck Crane AK 35/3000



_			
Tac	hnica	νг	12+2
100	111111111111111111111111111111111111111	11 1 1	ואו

Permissible gross vehicle weight (t)	8,6	
Max. payload (kg)	1.500 (optional 3.000)	
Max. extension length (m)	35,0	
Vorking height up to boom (m)	23,7	
oom extendable (m)	5,2 / 8,3 / 11,3	
oom payload (kg)	1.500 / 1.000 / 700	
Main mast angle (degrees)	85	
doom angle (degrees)	160	
ivoting range (degrees)	+/- 310	
look speed (m/min)	60	
lange for crane operation at 250 kg (m)	26,6	
Range for crane operation at 500 kg (m)	20,0 (22,7 / 450 kg)	
lange for crane operation at 1 t (m)	13,4	
lange for crane operation at 2 t (m)	6,5	
Range for crane operation at 4 t (m)	-	
Range for crane operation at 6 t (m)	-	
Range for crane operation at 12 t (m)	-	
Range for platform operation with rotatable basket (m)	- 21,1 at 250 kg 24,1 at 100 kg	
lange for platform operation with hooped basket (m)	22,0 at 250 kg 24,5 at 100 kg	
/orking height with rotatable basket max. (m)	32,8	
orking height with hooped basket max. (m)	33,0	



NATIONWIDE LIFTING SOLUTIONS LTD


Speed and efficiency - these are the main characteristics of smallest Böcker truck-mounted crane. Despite its compact and extremely light design, the AK 35/3000 still impresses by strong performance. With an extension length of 35 m and a working range up to 26.6 m, this crane reaches impressive working radiuses. The fly jib us mechanically extendible up to 11.2 m so that the working area can be optimally used.


Using the AK 35/3000 you also benefit from the well-proven advantages of Böcker crane technology, e.g. the sensitive telescopic functions when working with flat boom angle and the minimum slew radius.

Web: www.nationwidelifting.co.uk email: info@nationwidelifting.co.uk


Phone: 01702 840035

Working range crane operation




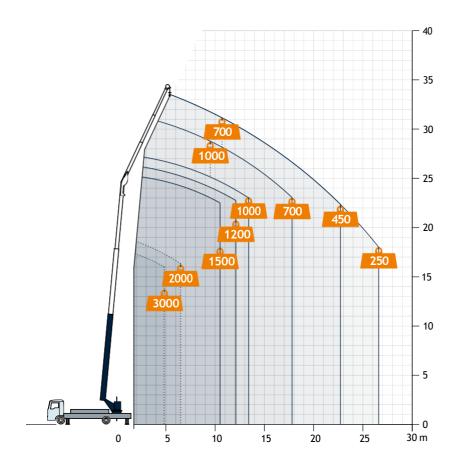


Working range platform operation

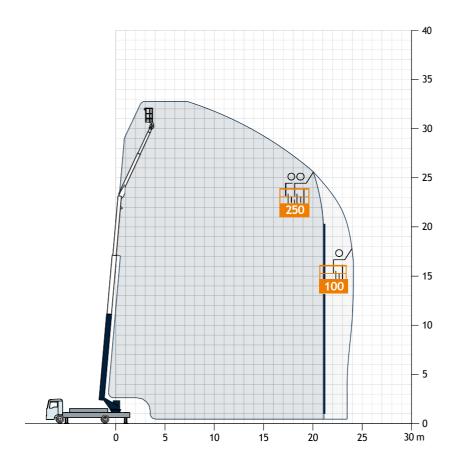

Dimensions

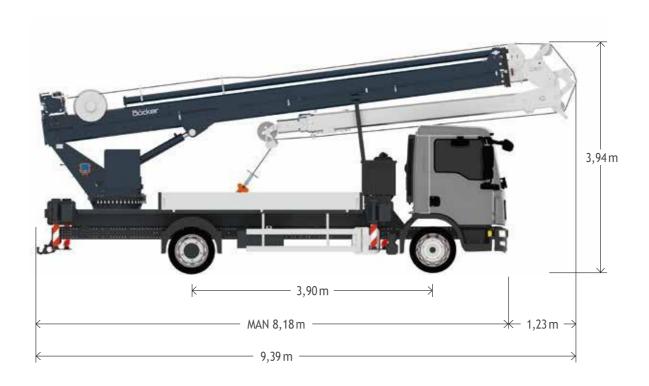

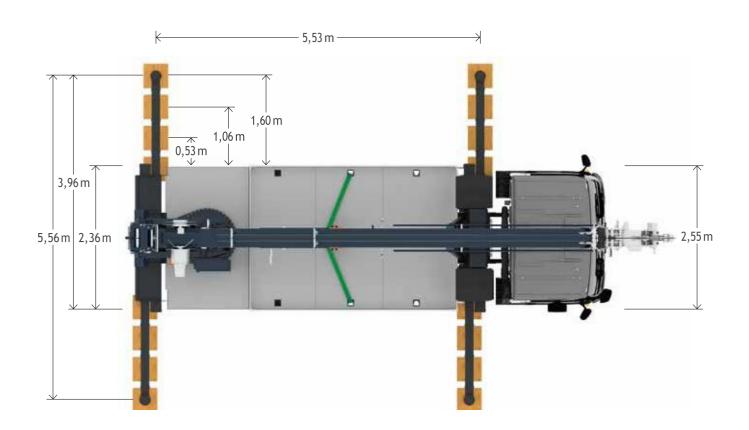

All weights are in kg. Measurements can fluctuate slightly.



Fon +44 (0)1384 476580 info@boecker.co.uk