

1700, Setlakwe Street
Thefford Mines (QC) G6G 8B2
CANADA
www.technometalpost.com

CONFIDENTIAL

THE INFORMATIONS CONTAINED
IN THIS DRAWING IS THE SOLE
PROPERTY OF TECHNO PIEUX INC.
ANY REPRODUCTION IN PART OR
AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF TECHNO METAL POST INC.
IS PROHIBITED

REVISIONS

DATE	DESCRIPTION	REV.

Client :

Client adress :


Project :

Drawing :
**General plan workshop
Techno Metal Post
Model P3 to P6
(Deep foundation)**

Approved by :

Date : 2011-10-26
Scale : N/A

Drawing no: P1-TO-P6-R0-A-USA
Page number : SHEET 1 OF 1

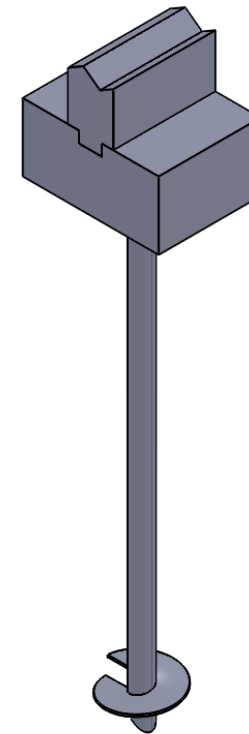

Concrete foundation
(See sketch of rebar
before construction)

Supporting plate
Standard : ASTM A36 - Steel
(see note #6)

Steel shaft
Standard : ASTM A500 grade C - Circular steel section
(see note #6)

1/2" [12.7mm] thick factory-welded helix
for models P3, P4, P5 and P6
Standard : ASTM A36 - Steel
(see note #6)

Under depth frost
penetration.
Actual pile length to be
determined by field
conditions and desired
loading capacity.
(see note #5)

8" to 24"
[203 to 610mm]
Helix diameter varies
according to soil
conditions and desired
loading capacity.

Model	Diameter				Load Capacity		
	in		mm		Maximum compressive bearing capacity ^{1,3} (allowable load)	Lateral bearing capacity ^{2,4} (allowable load)	Factored bending resistance (ultimate load)
	in	mm	in	mm			
P3	3.5	88.9	0.216	5.5	33,750	2,250	6,454
P3 HD	3.5	88.9	0.300	7.6	50,625	2,250	9,057
P4	4.0	101.6	0.226	5.7	45,000	2,700	9,411
P4 HD	4.0	101.6	0.313	8.0	50,625	2,700	13,394
P5	5.563	141.3	0.258	6.6	50,625	4,500	21,316
P6	6.625	168.3	0.280	7.1	50,625	6,750	33,876

NOTES:

- The maximum tensile load capacity can be obtained, conservatively, by halving the values of the bearing capacity in compression shown in the selection table.
- The lateral capacity depends on the density of soil (to validate consult technical department of Techno Metal Post.)
- When the pile is laterally unsupported (soil very loose / soft, liquefiable soils, water and air), the structural strength of the pile must be approved by the technical department of Techno Metal Post.
- The values of lateral capacity are average values and can be modified, more or less, depending on the characteristics of the existing soil.
- If required, piles may be field welded with extensions to achieve greater loading capacities in poor soil conditions.
- If required, the helical pile and the supporting plate can be galvanized in compliance with standard ASTM A123