



Transform Your Space With Reino Paints

RUSTIC TEXTURE FINISHES




Transform your walls into masterpieces of depth and dimension with the **Reino Paints Rustic Texture** collection. Engineered for both exceptional durability and striking visual appeal, this premium texture coating is designed to suit any architectural style. Whether you are looking for a sleek, contemporary aesthetic or a bold, dramatic statement, Rustic Texture delivers flawlessly. It is available in five exquisite finishes to bring your design vision to life:

- Smooth:** For a refined, subtle elegance with a soft-touch feel.
- 2 mm & 3 mm:** Ideal for creating classic, deeply grooved rustic patterns.
- Parlina:** A unique, fine-grained luxury finish that plays beautifully with light.
- Roller Finish:** Perfect for achieving consistent, sophisticated raised textures with ease.

With outstanding weather resistance and excellent flexible coverage, Reino Paints Rustic Texture doesn't just cover your walls, it redefines them.





TEXTURE 2mm/3mm

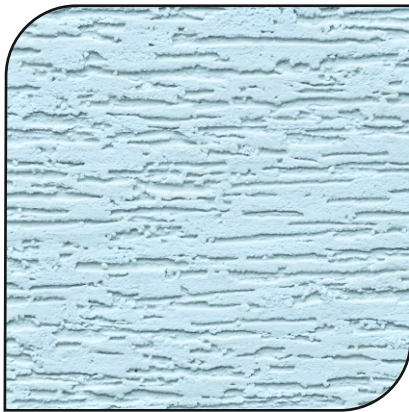

RUSTIC TEXTURE FINISHES


ROLLER FINE / COARS

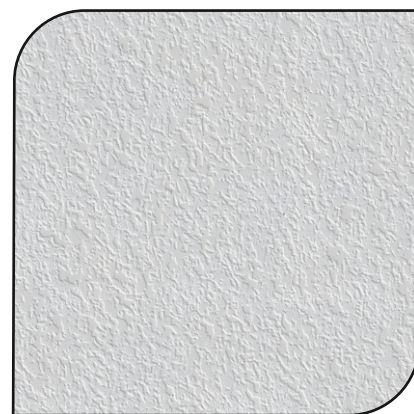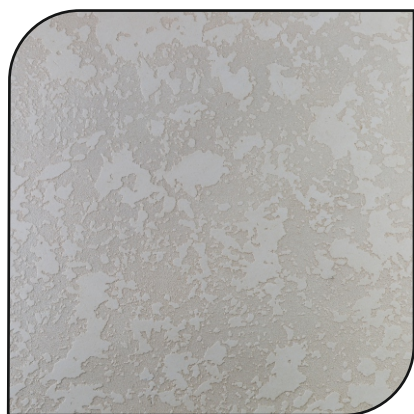

RUSTIC SMOOTH / DHOLPUR



PARLINA

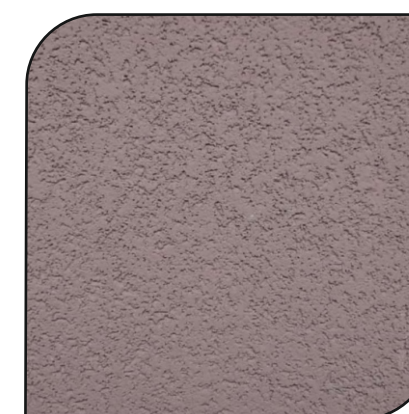

Application Instructions for Rustic Texture

For the best results and a flawless, long-lasting finish, follow this step-by-step application guide:

1. Surface Preparation

- Ensure the substrate is completely clean, dry, and free from dust, grease, loose paint, or fungus.
- Repair any major cracks or surface imperfections using a suitable wall putty before application.
- Apply a single coat of exterior/interior primer and allow it to dry completely.

2. Dilution & Mixing

- Rustic Texture is typically supplied ready-to-use.
- Stir the material thoroughly before application to ensure a homogeneous mix and uniform consistency. If slight dilution is required for specific tools, add clean water minimally as per technical specifications.

3. Application Process by Finish

- **Smooth & Parlina Finish:** Apply evenly using a stainless steel trowel or a putty blade. For Parlina work the fine grains into a uniform, luxury layer while still wet.
- **2 mm & 3 mm Finish:** Apply the material with a steel trowel to the thickness of the grains. While the coating is still wet, use a plastic trowel to scratch or roll the surface in a linear, vertical, or circular motion to create the desired grooved patterns.
- **Roller Finish:** Apply the material using a standard texture roller. Move the roller in a consistent direction (up and down) to lift the material into an even, raised texture pattern.


4. Drying & Curing

- **Touch Dry:** 1 to 2 hours (depending on weather conditions).
- **Hard Dry:** 24 hours.
- **Topcoat:** Once the texture is fully cured, apply 2 coats of your choice of Reino Paints premium exterior or interior emulsion to achieve the final color and added protection.

Pro Tip: Avoid application in direct, harsh sunlight or if rain is expected within 24 hours. Always ensure a continuous application from corner to corner on a single wall to prevent visible joints.

Important : The Finished effect depends entirely on existing conditions, sound surface preparation, through mixing and the applicator's skill and neatness.

Our Presence: Rajasthan, Jammu, Jharkhand, Telangana



Scan and Follow us

AARYAN SURFACE COATING PVT. LTD.

Plot No. G1-50 & 57, RIICO Industrial Area, Phase-VI,
Kishangarh-305801 (Raj.)

E-mail: care@ascpl.in, Website: www.reinopaints.com

Customer Care: +91-9983311167

