

VINYL FACED CEILING TILES

FEATURES & BENEFITS

- Fully Demountable
- Durable, tough, long lasting.
- Fully sealed gypsum core
- All four edges taped & sealed
- Foil backing
- Directional arrows
- Economical
- Fully wipeable vinyl face
- Suitable for hygienic areas

APPLICATION

- Sports Rooms
- Gyms
- Toilet Areas
- Kitchens
- Commercial or residential
- Restaurants
- Cafeterias
- Bars
- Warehouses
- Retail

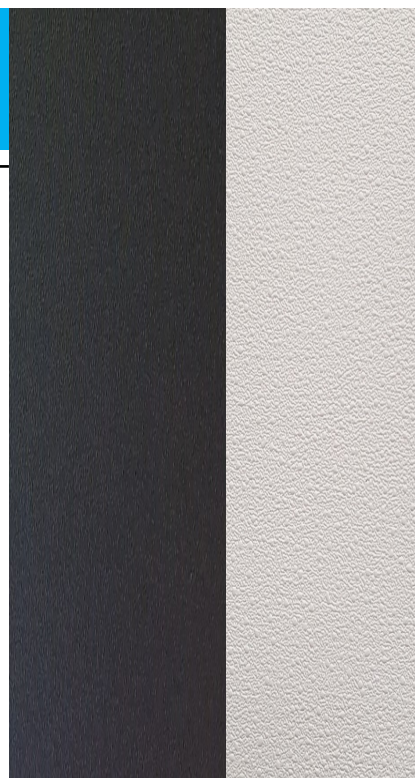


TABLE OF PERFORMANCE



| Edge Detail | Item | Size (mm) | Grid Type | Tiles / Box | Area / Box | Surface Colour | Thermal Conductivity | NRC | Max RH |
|-------------|------------|------------|-----------|-------------|--------------------|----------------|---------------------------|---------|--------|
| SQUARE EDGE | CDSCVW595 | 595*595*7 | 24mm | 8 | 2.88m ² | WHITE | 0.033 W(m ² K) | 0.1-0.3 | 90% |
| SQUARE EDGE | CDSCVW1195 | 1195*595*7 | 24mm | 6 | 4.32m ² | WHITE | 0.033 W(m ² K) | 0.1-0.3 | 90% |
| SQUARE EDGE | CDSCVB595 | 595*595*7 | 24mm | 8 | 2.88m ² | BLACK | 0.033 W(m ² K) | 0.1-0.3 | 90% |

SPECIFICATION DETAILS

- CE Marking
- BS EN 13950:2014
- BS EN 14246:2006+AC:2007
- Square Edge
- Surface Colour : White or Black Finish
- Edge :
White Tile Edge taped to all sides with WHITE tape
Black Tile Edge taped to all sides with BLACK tape
- Foil backed, white tiles have directional arrows on the rear.
- Thickness 7mm Deep
- Grained Surface Finish
- Weight: Per Tile: 1.65kg - 595x595mm
- Made in China

Ingredients : PVC Film, Gypsum Board, Gypsum Paper, No Asbestos

Health & Safety : Additional health and safety guidance when handling tiles. Dust may cause irritation to eyes, skin and mouth. Cut tiles with a utility knife or drywall saw to minimize dust. Wear eye, skin and respiratory protection if necessary. Do not swallow. If irritation persists, seek medical advice.

Note : Tiles are wiped cleaned before packaging however due to the nature of the product some tiles may need a light clean before installation to remove gypsum dust.

Waste Materials : Waste materials are to be disposed of in accordance with the UK Environmental waste guidelines for disposal of Gypsum Materials.

CE / UKCA : CE / UKCA Marked

Fire : Reaction to fire classification B-s1,d0

TEST REPORTS : Test reports are provided by our manufacturers, if you need to ensure that the product or the certification on test results meet your requirements and building regulations then we can provide copies for you to submit for approval. These data sheets are to be used as a guide only, all testing and data sheets are provided by the manufacturer and no testing is carried out by ourselves.