

Project Name: Part Numbers: Date:

## **Features**

- Modern Styling
- LED Status Indication
- Interchangeable keypads
- 2-Wire Dialog for Data and Power
- BT Programmable iOS App (free)
- Touchless Control via iOS Tap-to-Control App (free)
- Available in multiple Colours (White, Grey, Black, Ivory, Light Almond, Red)
- Custom Laser Etching (optional)



ASHRAE 90.1 Compliant

Dialog® switches are designed to give you flexibility to fit any design. The button can be programmed for ON only, OFF only, toggle, timer, and preset activation. Other stations in the series have additional functions such as Raise and Lower. These Dialog data line switches also come in multiple colors to match the room design (white, grey, black, ivory, light almond and red).

Typical Applications: Dialog switches connect to the network bus via the 2-wire Dialog Dataline connection for transmission of data and power. Once powered they can be configured via the iOS configuration App to set the target and function of the buttons.

PART NUMBER	DESCRIPTION
WSW-4516	6-Button Wall Station (ON/OFF/Toggle/PRESET/Raise/Lower)
KPA-4516C	6-Button Keypad, Custom Engraving

## **Ordering Info**

WSW-4516 Model Color  $\bigcirc$  W White G Grey B Black Ivory O LA Light Almond R Red




Example:

WSW-4516-W

6-Button Dialog Wall Station, White



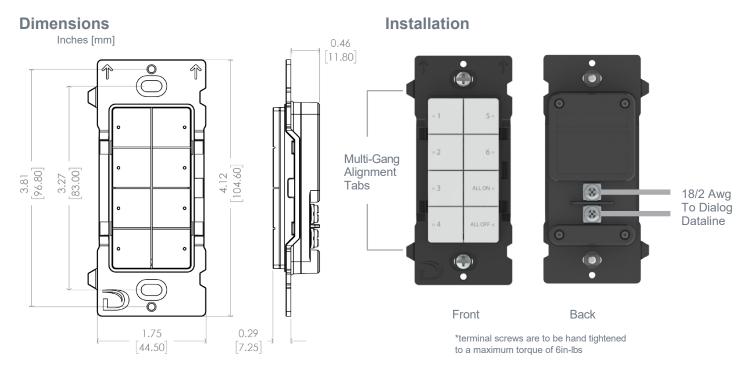

## IOS DEVICE CONFIGURATION APP

The 4000 Series switch stations allow for programming via any iOS. Using the app and NFC, simply "Tap" the face of the wall station to bring up its programming to adjust any of it's settings. Alternatively, the app will search the local area and list the connectable devices. Each station and button allow for custom labeling to be used in the Tap-to-Control app. With a network key, all settings are secured from tampering.

If an end user is setup with the network key, they will be able to use the "Tap-to-Control" to create a connection to the switch for touchless control.













## **Technical Details**

FUNCTIONALITY	6-Button Programmable Dialog Dimmer Switch     Toggle, ON, OFF, Preset Activation, Raise, Lower, Timer     Target: Individual, Groups, Presets (Output, Mode Trigger, Behaviour Trigger)     2-Wire Dialog     LED Status indication
DIMENSIONS	4.12" x 1.75" x 0.75" (H x W x D) - Installs in standard gang wall boxes
INPUT VOLTAGE	Dialog Dataline (24VAC)
INDICATORS	Status, Standby Locator, Timer Expiration, Error
ENVIRONMENT	<ul> <li>Indoor, stationary, non-vibrating, non-corrosive atmosphere and non-condensing humidity</li> <li>Operating temperature: 14°F to 140°F (-10°C to 60°C)</li> <li>Storage temperature: -14°F to 140°F (-25°C to 60°C)</li> </ul>
APPROVALS	ASHRAE 90.1 Compliant     California Energy Commission Title 24 & NYLL 48 Compliant     FCC Compliant
WARRANTY	Standard 5-years

Rev 8/25/2022 **Douglas Lighting Controls**