

www.millenniumconcours.com

# Official Handbook





## Contents

3-13
14-21
22-29
30-36
37-47
48-55

This handbook could not have been completed in such a thorough fashion without the invaluable assistance of Leif Montin, former National Parts Manager for the original DeLorean Motor Cars of America, and James Espey of DeLorean Motor Company (Texas) in compiling the initial handbook.

Thanks to the Millennium Concours Team Members: Knut Grimsrud, Marty Maier, Cecil Longwisch, Cheryl Wester, and Ron Wester for their careful review of the handbook.

#### Special thanks to:

Stephen Wynne DeLorean Motor Company, Texas Rob Grady P.J. Grady, New York Don Steger DeLorean Motor Company, California Tony Ierardi DeLorean Motor Company, Florida Dave Swingle **DeLorean Motor Company Midwest** DeLorean Motor Company Northwest

**Toby Peterson** 

All text and images © Copyright 2005, 2006, 2007 DeLorean Millennium Concours All rights reserved. No part of this document may be used or reproduced in any manner whatsoever without written permission. For information, contact DeLorean Millennium Concours, info@millenniumconcours.com Revision 4.0 – May 10, 2007

#### **GENERAL GUIDELINES**

Great effort and care were taken in the creation of this handbook including research into original company documents in the DMC archives and interview/review by knowledgeable experts and original employees. In some cases a lack of thorough company documentation of production line changes may make "originality"-based judged competition open to some subjectiveness. Any instance in which a VIN start/end point is specified is documented by one or more factory publications or memorandums.

In the case of some original items, like door struts, which are a wear item and no more factory original stock are available, some compromises have to be made and are noted in the handbook. Other items, which are replaced for the sake of driveability, as in the case of clutch lines and tires, have modest point deductions.

Except where otherwise noted, substitution of original components with non-original replacements are handled as the absence of the proper factory component in addition to the presence of a non-original item. For instance, the presence of a non-original stereo is handled as the complete absence of the factory radio in addition to the presence of the non-original radio. On the other hand, the presence of an alarm system is handled as the presence of a non-original item only. Remanufactured components consistent with the original components and not visually distinguishable from their original counterparts are judged as if they were original.

The presence of excess cleaner/polish that leaves an item visibly wet is handled the same as the presence of foreign matter such as dirt.

Optional dealer accessories (such as a luggage rack) do not accrue extra bonus point credits. Installed dealer accessories that impact the appearance or condition of items that are included in the judging criteria may adversely impact such items, and accessories in poor condition which detract for the condition and appearance of the car may similarly accrue deductions on judged areas. For instance, a poorly-installed luggage rack with poorly-trimmed or improperly-cut rubber side bumpers for the rear louver may accrue deductions for the rubber louver bumper being in poor condition.

Original undercoating is permitted on '83 model cars, however, the undercoating may compromise the ability to accurately judge some undercarriage components. For original undercoated cars, overspray that compromises the function of other components or adversely affects their performance is not acceptable and treated as foreign matter. For example, overspray is not acceptable on the fan shroud labels, inside of the wheels, or on any engine component (including the oil pan).

In cases where a question arises about the validity of an item on a car, or the wording/interpretation of the judging handbook, the decision of the Head Judge will be final.

## **INTERIOR**

**Deductible Point** <u>Value</u> Per Item

## 1. Non-original Add-on, Replacement, or Accessory Item(s)

must receive one full point deduction for the presence of each non-original item, and non-original items are not judged unless otherwise noted on unavailable items.

2. <u>D</u>	oor Panels (textured vinyl, in gray or black)
m m	river-side ust fit properly with the panel pushed down to meet the armrest, ust be in original condition without damage, cracks, tears, or signs of wear, ust be clean with no dust/dirt, or debris,
m m	assenger-side ust fit properly with the panel pushed down to meet the armrest, ust be in original condition without damage, cracks, tears, or signs of wear, ust be clean with no dust/dirt, or debris.
3. <u>In</u>	terior Door
Es	scutcheons (black trim on armrest around door release handle)
m	river-side (black) ust be in original condition without damage, and must fit properly, ust be clean with no dust/dirt, or debris (especially in corners),
m	emote Mirror Switch (black) ust be in original condition without damage, and must fit properly, ust be clean with no dust/dirt, or debris,
m	assenger-side (black) ust be in original condition without damage, and must fit properly, ust be clean with no dust/dirt, or debris (especially in corners),
Pı	ull Straps
m up fro m	river-side (correct color for interior)  ust be attached correctly for VIN,  to to VIN 05992—at grab handle with chrome "D" ring,  om VIN 05993—at door panel itself  ust be in original condition without damage, cracks, or signs of wear,  ust be clean with no dust/dirt, or debris,
m up fro m	assenger-side (correct color for interior) ust be attached correctly for VIN, to to VIN 05992—at grab handle with chrome "D" ring, om VIN 05993—at door panel itself ust be in original condition without damage, cracks, or signs of wear, ust be clean with no dust/dirt, or debris.
= 4. <u>A</u> -	-Pillar Trim (correct color for interior)
m	river-side ust be in original condition without damage, deformation, or discolorations, ust be clean with no dirt, or debris,
	assenger-side

-.25

must be clean with no dirt, or debris.

must be in original condition without damage, deformation, or discolorations,

#### 5. Rear Side Panels

Driver-side (correct color for interior)

must be correct for VIN

up to VIN 06092—two-piece construction (Figure 1),

from VIN 06093—one-piece molded construction (Figure 2),

must have one screw in upper rear corner near window and headliner,

must be in original condition without damage, cracks, or scratches (including armrest extension cap if present on appropriate VIN with correct 2-piece panel),

must be clean with no dust/dirt, debris, or scuff marks (including armrest extension cap if present on appropriate VIN with correct 2-piece panel),

Armrest Extension Cap (correct color for interior) (Figure 3) (acceptable on appropriate VIN with two-piece construction panel only)

must visibly be securely affixed,

#### Passenger-side (correct color for interior)

must be correct for VIN

up to VIN 06092—two-piece construction,

from VIN 06093—one-piece molded construction,

must have one screw in upper rear corner near window and headliner. must be in original condition without damage, cracks, or scratches (including armrest extension cap if present on appropriate VIN with correct 2-piece panel),

must be clean with no dust/dirt, debris, or scuff marks (including armrest extension cap if present on appropriate VIN with correct 2-piece panel),

Armrest Extension Cap (correct color for interior) (Figure 3)

(acceptable on appropriate VIN with two-piece construction panel only) must visibly be securely affixed.

6. Rearview Mirror (black frame) (Figure 4) must be original manufacturer brand "MAGNATEX",

must be in original condition without damage, or discoloration (including frame), must be clean with no dirt, debris, water spots, or cleaning streaks (including frame).

7. Seats (correct color for interior, correct grain of vinyl-sample on side panel and rear screw-on side panel, proper "ripple" appearance on center) (Figure 5) must both have correct color, grain, and ripples,

#### **Driver-side**

must be in original condition without damage, cracks, cuts, scratches, or other blemishes anywhere on seat (including rear panel, tracks, and hinge area), must be clean with no dust/dirt, or debris (incl. rear panel, tracks, & hinge area),

#### Passenger-side

must be in original condition without damage, cracks, cuts, scratches, or other blemishes anywhere on seat (including rear panel, tracks, and hinge area), must be clean with no dust/dirt, or debris (incl. rear panel, tracks, & hinge area).

8. Seat Belts (black original equipment as identified by "Klippan" label) (Figure 6)

#### **Driver-side**

must be correct equipment,

must have black plastic sliding adjuster.

must have black plastic washer & black plastic cover at B-pillar mounting point, must have operable latching mechanism,

must be in original condition without damage, or stains (belt, adjuster, washer, cover, label, and latching mechanism),

must be clean with no dirt, or debris (belt, adjuster, washer, cover, label, and latching mechanism),



-or-

-.25

-.25

-.25

-1

- 25

-.25

-.25

Figure 1: Rear Side Panel up to VIN 6092



Figure 2: Rear Side Panel from VIN 6093



Figure 3: Armrest Extension Cap



-1.25-or-

-.25 -.25

-.25

-.25 -.25



Figure 4: MAGNATEX Rearview Mirror

#### Passenger-side

must be correct equipment,

must have black plastic sliding adjuster,

must have black plastic washer & black plastic cover at B-pillar mounting point, must have operable latching mechanism,

must be in original condition without damage, or stains (belt, adjuster, washer, cover, label, and latching mechanism),

must be clean with no dirt, or debris (belt, adjuster, washer, cover, label, and latching mechanism).

#### 9. Door Sill Plates

#### Driver-side (black)

must have no aftermarket add-on DMC letters of any kind, must have no attaching screws visible, must be in original condition without damage, nicks, or scratches, must be clean with no dirt, or debris (including in all grooves),

#### Passenger-side (black)

must have no aftermarket DMC letters of any kind, must have no attaching screws visible, must be in original condition without damage, nicks, or scratches, must be clean with no dirt, or debris (including in all grooves),

#### 10. Rear Cargo Net (black)

must be properly latched at all four upper attaching points, must be taut—not excessively loose or stretched out, must be in original condition without damage, stains, or frays in fibers, must be clean with no dust/dirt, or debris.

11. <u>Carpets</u> firewall, wheel arches<sup>x2</sup>, parcel shelf/relay compartment cover, bulkhead—including behind driver seat on locking storage compartment lid and interior, floorboard<sup>x2</sup>, parking brake cover, door sills<sup>x2</sup>, lower door portions<sup>x2</sup> (matching throughout interior, molded only—not stitched) must all have correct color match & molding, and must all be correct for VIN, gray interior cars up to VIN 10578—must have light-gray colored carpet, black interior cars up to VIN 10578—must have dark-gray colored carpet, all cars from VIN 10579—must have a medium-gray colored carpet with a noticeably different texture,

#### **Firewall**

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### **Wheel Arches**

#### **Driver-side**

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### Passenger-side

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt. debris. or stains.

#### **Parcel Shelf/Relay Compartment Cover**

must be in original condition without damage, discoloration, fading, or wear (including carpet backing),

must be clean with no dirt, debris, or stains (including carpet backing),

**Bulkhead** (including behind driver's seat on storage compartment\*) must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,



Figure 5: "Ripple" effect on Seats

-.25 -.25

-.25

-.25

-7

-or-

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25



Figure 6: "Klippan" Seat Belt Label

#### Storage Compartment (behind driver's seat)

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### B. Interior (\*contents and Lock covered at #14),

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### **Floorboard**

Driver-side (with black plastic molded foot pad and toe pad) (Figure 7) must be correct with proper pads,

must be in original condition without damage, discoloration, fading, or wear (including foot pad, and toe pad),

must be clean with no dirt, debris, or stains (including foot pad, and toe pad),

#### Passenger-side

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### **Parking Brake Cover**

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### **Door Sills**

#### **Driver-side**

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### Passenger-side

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### **Lower Door Portion**

#### **Driver-side**

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### Passenger-side

must be in original condition without damage, discoloration, fading, or wear, must be clean with no dirt, debris, or stains,

#### 12. Sun Visors

(up to VIN 01791—have early-style visors identified by vinyl side facing in when in stowed position (Figure 8),


from VIN 01792 to 04200—should have later-style visors identified by vinyl side facing out when in stowed position, but it's acceptable to have the early-style visors (Figure 9),

from VIN 04201—have later-style visors identified by vinyl side facing out when in stowed position)

must both be correct sun-visor style for VIN.

**Passenger-side** (fabric portion is covered in the next section at #13) must be in original condition without damage, or signs of wear, must be clean with no dirt, debris, or stains,

**Driver-side** (fabric portion is covered in the next section at #13) must be in original condition without damage, or signs of wear, must be clean with no dirt, debris, or stains,



-.25

-.25

-.25

-.25

-.50 -or-

-.25

-.25

- 25

-.25

-.25

-.25

-.25

-.25 -.25

-.25

-.25

-.25

-.25

-or-

-.50

-.50

-.50

Figure 7: Correct Pads for Carpets



Figure 8: Sun Visor up to VIN 1791



Figure 9: Sun Visor from VIN 1792

	MANUAL TRANSMISSION (COLD & HOT ENGINE)  1. Place the gear selector lever in neutral 2. Depress the clutch pedal 3. Press down accelerator about ¼ of total stroke 4. Turn key to starting position. When engine starts, release key and accelerator.  abel "TO START ENGINE/TO OPEN DOOR" (	AUTOMATIC TRANSMISSION.(COLD of the color of	l or Park if total n engine
n	nust be present, nust be in original condition without damage, or nust be clean with no dirt, debris, or stains.	r yellowing,	50 -or- 25 25
	nust be clean with no dirt, depris, or stains.		25
n	Headliner Doors <sup>x2</sup> , T-Panel, Rear Panel, and fanust all have matching fabric color, matching gooticeable grain), and correct color appropriate to	grain, consistent grain direction (if	-4
	car, light gray—gray interior car, either color is a		-or-
	nust all have well-attached fabric with no saggion must all have no evident bowing of the headline		50 50
"	must all have no evident bowing of the headline	r backer,	.00
	Oriver-side Door must be in original condition without damage, dis	poplaration, evenes also, or evenes	25
	overlap of fabric around door weatherstripping i		20
	must be clean with no dirt, debris, or water stair	. •	25
	December olde Dece		
n	Passenger-side Door must be in original condition without damage, dis overlap of fabric around door weatherstripping i		25
n	nust be clean with no dirt, debris, or water stair	IS,	25
т	-Panel		
	must be in original condition without damage, di	iscoloration, or excess glue,	25
	must be clean with no dirt, debris, or water stair		25
	Rear		
	nust be in original condition without damage, d	iscoloration, or excess alue.	25
	must be clean with no dirt, debris, or water stair		25
F	Fabric Portion of Visor		
_	Driver-side		
_	must be in original condition without damage, di	iscoloration, or excess glue,	25
	must be clean with no dirt, debris, or water stair		25
_	Dagangar aida		
	Passenger-side must be in original condition without damage, di	iscoloration or excess glue	25
	nust be clean with no dirt, debris, or water stain		25
=			
	Storage Compartment (behind driver's seat)  must be empty,		50
	nace so empty,		.00
	ock (with black metal centering bezel around k		
	door/ignition -or- door key for 2-key system up to must be original as identified by correct operation		<b>5</b> 0
11	nust be original as identified by correct operation	iii wiiii door key,	50 -or-
n	nust be in original condition without damage,		25
n	nust be clean with no dirt, or debris.		25
15. <u>Ir</u>	nterior Lighting		
F	Front Dome Light (with black bezel)		
	must be original with black bezel,		-1
	•		-or-
	nust be in original condition without damage, o	r signs of wear, and lens must be	50
	clear without discoloration, must be clean with no dust/dirt, or debris,		50
"	made 20 diodit with no additality of addition,		.00

TO START ENGINE

#### **TO OPEN DOOR**

FROM INSIDE: Unlock by pressing front of lock button in door armrest. Lift door handle. FROM OUTSIDE: Unlock with key by turning counterclockwise (RHS) or clockwise (LHS) and raise handle.

Do not operate lock when doors are open.

108715

Figure 10: Engine Start/Door Label

	Rear Dome Light (with black bezel) must be original with black bezel,	-1	NAME OF TAXABLE PARTY.
		-or-	
	must be in original condition without damage, or signs of wear, and lens must be clear without discoloration,	50	CANADA SECURIO
	must be clean with no dust/dirt, or debris.	50	
16.	Instrument Cluster (only DD17XXX-series VINs may have metric instrumentation,		
	only 85 mph speedometers are acceptable)  must be original,	-1	
		-or-	
	must have trip reset shaft intact, must be in original condition without damage, scratches, or cracks on lens,	50 25	DE LOREAN
	must be clean with no dirt, or debris on lens (including the area between lens and	25	
	instrumentation—no insects).		Figure 11: 1981 Valet and Manual
17.	<u>Binnacle</u> (correct color for interior)  must be in original condition without damage, cracks, or discolorations,	25	= me
	must be clean with no dirt, or debris.	25 25	200G 3mc
18	Dash Pad (correct color for interior)		Since
	must be in original condition without damage, cracks, or discolorations (particularly	25	- mag
	around speaker grilles), must be clean with no dirt, or debris.	25	0-0-
40	<u> </u>		
19.	Glove Box must contain correct year Owner's Manual with valet	50	
	<b>1981 Owners Manual</b> identified by wire "O"-binding at top edge in black vinyl pouch with silver lettering (Figure 11),	-or-	
	1982 and 1983 Owners Manual is staple-bound at left edge in black vinyl side-	-01-	
	opening valet (Figure 12),  Owners Manual must be in original condition without damage, marks, or wear,	25	=IME
	Owners Manual must be clean with no dirt, or debris,	25	Figure 12: '82 and '83 Valet and Manual
	Lid (correct color for interior that matches that of the dash pad)		VEHICLE CAPACITY WEIGHT: 400 LBS. DESIGNATED SEATING CAPACITY: 2.
	must be in original condition without damage, marks, or wear, must be clean with no dirt, or debris,	25 25	RECOMMENDED COLD TIRE FRONT 23 P.S.I.
	must be clean with no dirt, or depris,	25	INFLATION PRESSURE: REAR 30 P.S.I. SPARE 60 P.S.I.
	<b>Label</b> —tire pressures (on inside of lid), no other labels allowed (Figure 13), must have correct label present,	50	PRESSURES APPLY TO ALL VEHICLE LOADING CONDITIONS UP TO VEHICLE
		-or-	RECOMMENDED TIRE SIZES:
	must be in original condition without damage, or yellowing, must be clean with no dirt, or debris,	25 25	FRONT: 195/60HR - 14 REAR: 235/60HR - 15
			SPARE: T125/70D - 15 105198
	Liner must be in original condition without damage,	25	Figure 13: Tire Pressure Label
	must be clean with no dirt, or debris.	25	
20.	Knee Pads (correct color for interior that matches that of the dash pad, correct		
	textured vinyl)		
	Driver-side (two short)	05	
	must both be in original condition without damage, must both be clean with no dirt, or debris,	25 25	
	Passenger-side (one long) must be in original condition without damage,	25	

-8-

Figure 14: Steering Wheel

-.25

-2 -or-

-.75

-.75

-.50

Figure 15: Steering Wheel correct stitching

must be clean with no dirt, or debris (including center pad).

must be in original condition without damage (including center pad),

must be clean with no dirt, or debris.

must be the original leather-wrapped wheel,

must have the correct stitching (Figure 15),

21. Steering Wheel (black) (Figure 14)

#### 22. Pedals

Cars up to VIN 07199 (all 1981 models)—acceptable either with or without a foot rest/"dead" pedal in the left side driver's footwell,

#### All cars from VIN 10001 (all 1982 and 1983 models)

must have a foot rest/"dead" pedal in the left side driver's footwell (Figure 16),

must all have pads (including foot rest/"dead" pedal on applicable VIN and pad must match that of the other pedals),

must all be in original condition without damage (including foot rest/"dead" pedal on applicable VIN),

must all be clean with no dirt, or debris (including foot rest/"dead" pedal on applicable VIN).



#### must be correct system for VIN

up through VIN 04187—double-key system with an ignition key and separate door key with integrated illumination,

VIN 04188 and later—single-key system (Figure 17),

Single-key System (for appropriate VIN only)

A. Door/Ignition Key (black molded rubber head with embossed DMC logo and "NSP" stamped near base)

must be in original condition without damage, or wear (including rubber head), must be clean with no dirt, or debris (including grooves, and rubber head), -OR-

**Double-key System** (for appropriate VIN only)

#### A. **Door Key** (black molded plastic head)

must be in original condition without damage, or wear (including plastic head), must be clean with no dirt, or debris (including grooves, and plastic head),

B. Ignition Key (black molded rubber head with embossed DMC logo and "NSP" stamped near base)

must be in original condition without damage, or wear (including rubber head), must be clean with no dirt, or debris (including grooves, and rubber head).

#### 24. Console (correct color for interior, correct textured vinyl)

must be in original condition without damage, blemishes, nicks, or scuffs, must be clean with no dirt, or debris,

Ashtray (black plastic)—either style is acceptable

must be installed correctly with cover sliding towards rear of car, must be in original condition without damage, must be clean with no dust/dirt, debris, or ashes,

Rear Plastic Tray (velvet finish to interior is acceptable for early VINs) must be in original condition without damage, blemishes, or nicks, must be clean with no dust/dirt, or debris,

#### Cigar Lighter (Figure 18)

must be original-style only.

must be in original condition without cracks around green illuminated ring, must be clean with no dirt, debris, or ash particularly on element end,

Switches (black, no modifications or add-ons of any kind)

#### **Dummy Switches**

must be original with no alterations,

must both be in original condition without damage, and seated properly, must both be clean with no dust/dirt, or debris,



Figure 16: "Dead" Pedal from VIN 10001 -.25



Figure 17: Door Key and Ignition Key

-.25 -.25

-.50 -.50

-OR-

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.50 -or-

-.25 -.25

-or-

Figure 18: Cigar Lighter

-.50 -.25

© Copyright 2007 DeLorean Millennium Concours

-9-

	Window Switches (clear and sharp white control markings)		
	must both be in original condition without damage, and seated properly,	25	
	must both be clean with no dust/dirt, or debris,	25	
	Rear Window Defogger Switch (clear and sharp white control markings)		
	must be in original condition without damage, and seated properly,	25	
	must be clean with no dust/dirt, or debris,	25	
	Shifter	- 1	000
	Automatic-transmission cars—up to VIN 04836—plain shift handle (Figure 19),		
	from VIN 04837—"DMC" logo medallion inserted into handle, not molded into handle		
	(Figure 20)		1
	must have correct shift handle for VIN,	-1 or	
	must be in original condition without damage (or warping of medallion),	-or 50	
	must be clean with no dust/dirt, or debris,	50	
	-OR-	-0R-	
	Manual-transmission cars—black shift knob, black leather boot	-OIX-	
	must have original black shift knob,	-1	
	That have original black orint wies,	-or-	
	must have the boot snug up to gear shift knob,	25	
	must have the gear shift knob aligned properly and tightened,	25	1 - 1 1 1
	must be in original condition without damage (including boot),	25	Figure 19: Automatic up to 04836
	must be clean with no dust/dirt, or debris (including boot),	25	
	<b>3</b> · · · · · · · · · · · · · · · · · · ·		
	Center Air Vents		
	must both be in original condition without damage, or cracks,	25	
	must both be clean with no dust/dirt, or debris,	25	
	A/C & Ventilation Controls		
	must be in original condition without damage,	25	
	must be clean with no dust/dirt, or debris,	25	
			THE RESERVE OF THE PERSON NAMED IN
	A/C Fascia Decal (either style is acceptable)		
	must be in original condition without damage,	25	
	must be clean with no dust/dirt, or debris,	25	
	Clock		Figure 20: Automatic from 04837
	must be present up to VIN 06158,	50	9
	must be present up to viiv ou roo,	50 -or-	
	must be in original condition without damage, and lens is clear without scratches.	25	
	must be clean with no dirt, or debris.	25	
25.	Radio		
	up to VIN 10304—Craig W460 (Figure 21), from VIN 10305—ASI (Figure 22)		
	must be correct for VIN,	-2	
		-or-	
	must be in original condition without damage (including no cracks on display),	-1	
	must be clean with no dust/dirt, or debris,	-1	Figure 21: Craig Radio up to 10304
	D.W.		THE RESERVE THE PERSON NAMED IN COLUMN TWO
26.	Battery	50	Date   Date
	must be original manufacturer brand—Delco maintenance-free battery of size group	50	
	78 (now called group 34) with side terminals only,	-or-	
	must be in original condition without damage, must be clean with no dust/dirt, or debris,	25 25	m
	Thust be clean with no dustraint, or debris,	20	Figure 22: ASI Radio from 10305
	Battery Strap		-
	must be correctly threaded into buckle,	25	
	must be in original condition without damage (including buckle),	25	
	must be clean with no dust/dirt, or debris (including buckle),	25	
	, , , , , , , , , , , , , , , , , , , ,	-	
	Battery Compartment		
	must have bottom retainer in place on bulkhead for access cover,	25	
	must be in original condition without damage,	25	
	must be clean with no dust/dirt, or debris,	25	

B-#		
Battery Compartment Access Cover must be in original condition without damage,	25	ODTA NIT
must be clean with no dust/dirt, or debris,	25	IMPORTANT
Labels		THIS VEHICLE IS
		THIS VEHICLE TO
A. Negative Earth/Ground (Figure 23)  must all be in original condition without damage, or yellowing,	25	NEGATIVE EARTH
must all be clean with no dust/dirt, or debris,	25	
B. Battery Gasses (Figure 24)		Figure 23: Negative Earth Label
must all be in original condition without damage, or yellowing,	25	WARNING
must all be clean with no dust/dirt, or debris,	25	BATTERIES PRODUCE EXPLOSIVE GASSES
C. Battery Access (Figure 25)		KEEP SPARKS, FLAME, CIGARETTES
must all be in original condition without damage, or yellowing,	25	AWAY
must all be clean with no dust/dirt, or debris,	25	Figure 24: Battery Gasses Label
27. Relay Compartment/Fuse Box		
Relay Compartment		BATTERY
must have all original relays in place including fan fail module (relay-update kit,	50	
fused link, or other wire link is not allowed,  must be in original condition without damage, fire damage, or smoke damage,	-or- 25	ACCESS
must be clean with no dust/dirt, or debris,	25	
Delevi Commentment Lid		
Relay Compartment Lid must be in original condition without damage, fire damage, or smoke damage,	25	Figure 25: Battery Access Label
must be clean with no dust/dirt, or debris,	25	
Fuse Box		
must have no in-line fuses (aftermarket fused link or other wire link is not allowed,	50	
	-or-	
must be in original condition without damage, melted fuses, or damage from melted fuses,	25	
must be clean with no dust/dirt, or debris,	25	
Fuse Box Cover		
must be in original condition without damage, fire damage, or smoke damage,	25	
must be clean with no dust/dirt, or debris.	25	
28. <u>Door</u>		
Hinge Area		
Driver-side		
must have area around hinges in original condition without damage,	25	
must be clean with no dirt, debris, or stains,	25	
Passenger-side		
must have area around hinges in original condition without damage, must be clean with no dirt, debris, or stains,	25 25	
Struts	.20	
Driver-side must be original manufacturer brand—"LIFT-O-MAT" by STABILUS,	25	
must be correct style—black with silver shaft,	25 25	
(If strut is not by the correct manufacturer and also not the correct style, the deduction		
is one full point for the presence of a non-original replacement in addition to the		
deductions for the absence of original item, and the rest of the item is judged), must be installed correctly—with shaft end at body,	25	
must be in original condition without damage, or scratches,	25 25	
must be clean with no dirt, or debris,	25	

25 25 25 25 25	
-1	
-or- 50 50	Figure 26: Door Latch/Striker Guides
50 50	
50 50	
25 25	
25 25	
-1 -or-	
	25 25 25 25 25 50 50 50 50 50 50 50

VEHICLE EMISSION CONTROL INFORMATION. THIS VEHICLE CONFORMS TO U.S.E.P.A. REGULATIONS APPLICABLE TO 1981 MODEL YEAR NEW MOTOR VEHICLES.

-.50

-.50

## **CATALYST**

105197

VEHICLE EMISSION CONTROL INFORMATION. THIS VEHICLE CONFORMS TO U.S.E.P.A. REGULATIONS APPLICABLE TO 1982 MODEL YEAR NEW MOTOR VEHICLES.

## **CATALYST**

110571

VEHICLE EMISSION CONTROL INFORMATION. THIS VEHICLE CONFORMS TO U.S.E.P.A. REGULATIONS APPLICABLE TO 1983 MODEL YEAR NEW MOTOR VEHICLES.

## **CATALYST**

113331

Figure 27: 1981, 1982, and 1983 Catalyst Labels

must be in original condition without damage, or yellowing,

must be clean with no dirt, or debris,

### Weatherstripping (original design)—either style is acceptable

Driver-side (installed with holes not visible)
must be in original condition without damage, or cracks, must be clean with no dirt, or debris,
Passenger-side (installed with holes not visible) must be in original condition without damage, or cracks, must be clean with no dirt, or debris.
29. Repainted Item(s) (or items that may have been repainted) can only receive deduction(s) if wrong color paint/finish was applied, or if paint was applied in drastically different quality from factory appearance (must all be approved by Head Judge and initialed)
30. Miscellaneous Item(s) for anything not already specifically covered that is blatantl incorrect (must all be approved by Head Judge and initialed)
Optional Dealer Accessories DO NOT accrue extra bonus points, but if they are present, they are subject to deductions in the point amounts listed below:
31. Acceptable Dealer Accessories
DMC Plush Floor Mats (part #A1000020) -MATS MUST BE READILY REMOVABLE FOR CARPET AND PAD JUDGING- Driver-side
must be black original mat as identified by the carpeted "DMC" letters only—no embroidered, must be in original condition without damage, or stains, must be clean with no dirt, or debris,
Passenger-side must be black original mat as identified by the carpeted "DMC" letters only—no embroidered, must be in original condition without damage, or stains, must be clean with no dirt, or debris,
DMC Sheepskin Seat Covers (part #A1000100) -SEAT COVERS MUST BE READILY REMOVABLE FOR SEAT JUDGING-
<b>Driver side</b> must be silver-gray original seat cover as identified by the "DMC" logo embosse on plastic buckle, must be in original condition without damage, or stains, must be clean with no dirt, or debris,
Passenger side must be silver-gray original seat cover as identified by the "DMC" logo embosse on plastic buckle, must be in original condition without damage, or stains,

-.25

must be clean with no dirt, or debris.



Deductible
Point
Value
Per Item

#### 1. Non-original Add-on, Replacement, or Accessory Item(s)

must receive one full point deduction for the presence of each non-original item, and non-original items are not judged unless otherwise noted on unavailable items.

#### 2. Hood Release

	Handle (black) must be in original condition without damage or signs of wear,	50
	must be clean with no dirt/dust, or debris,	25
	Cable (no back-up cable allowed), must be in original condition without damage or signs of wear, must be clean with no dirt/dust, or debris,	50 25
	must be clean with no unroust, or debris,	20
	Catch Assembly must be in good condition without damage or signs of wear, must be clean with no dirt/dust, or debris.	50 25
3.	Hood Latch Cover (black)	_
	must have four hex-head bolts,	-1
	must be in original condition without damage, or warping around bolts, must be clean with no dirt/dust, or debris (including bolts).	50 50
	must be dealt with no director, or debits (including botts).	= .50
4.	Cowl Screen (below windshield)	50
	must be a uniform black color, must be in original condition without damage, cracks, or missing pieces,	50 50
	must be clean with no dirt/dust, or debris (including screws—no rust),	50
	Area Behind Cowl Screen	
	must be clean with no dirt/dust, or debris.	50
_		=
5.	Hood Bump Stop Assembly	
	Driver-side	
	(Rubber Cap)	
	must be in original condition without damage, or cracks,	25
	must be clean with no dirt/dust, or debris,	25
	/A	
	(Metal Adulating Screw)	
	(Metal Adjusting Screw) must be in original condition without damage,	25
		25 25
	must be in original condition without damage,	
	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap)	
	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap) must be in original condition without damage, or cracks,	25 25
	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap)	25
	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap) must be in original condition without damage, or cracks,	25 25
	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap) must be in original condition without damage, or cracks, must be clean with no dirt/dust, or debris,  (Metal Adjusting Screw) must be in original condition without damage,	25 25 25
	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap) must be in original condition without damage, or cracks, must be clean with no dirt/dust, or debris,  (Metal Adjusting Screw)	25 25 25
6.	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap) must be in original condition without damage, or cracks, must be clean with no dirt/dust, or debris,  (Metal Adjusting Screw) must be in original condition without damage, must be clean with no dirt/dust, debris, or rust.  Fuel Fill Area	25 25 25
6.	must be in original condition without damage, must be clean with no dirt/dust, debris, or rust,  Passenger-side  (Rubber Cap) must be in original condition without damage, or cracks, must be clean with no dirt/dust, or debris,  (Metal Adjusting Screw) must be in original condition without damage, must be clean with no dirt/dust, debris, or rust.	25 25 25

#### **Fuel Filler Cap**

locking cap for hood with flap (Figure 28), non-locking cap for hood without flap (Figure 29) must be correct cap for hood type,

A. Locking Cap (keyed with same key as door key) must have original lock as identified by correct operation with door key,

must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris,

-OR-

#### B. Non-locking Cap

must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris,

Access Plugs (black) (Figure 29)

#### **Small Plug**

must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris,

#### Clutch Master Cylinder Access (Large Plug)

must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris,

#### Labels

#### "Unleaded Gasoline Only"

("Essence Sans Plomb Seulement" must be French for DD17XXX VINs) must have correct label for VIN (Figure 30),

must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris,

"DOT 4" (must not be present on all automatic cars),

must be present on all manual cars (Figure 31),

must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris.

("DOT 4" Label for all cars is included at #23)

#### 7. Washer Bottle Cap

may be either white plastic or black metal for early VINs (Figure 32) must be in original condition without damage, must be clean with no dirt/dust, or debris,

#### "Windshield Washer Reservoir" Label (Figure 33)

must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris.



-2 -or-

-1

-OR-

-.75

-.75

-.75

- 75

-.50 -or-

-.25

-.25

-.25

-.50

-.50

-.25

Figure 28: Locking Gas Cap for flap hood



Figure 29: Access Plugs/Non-locking Cap



UNLEADED
GASOLINE ONLY

Figure 30: Unleaded Gasoline Only Labels



Figure 31: DOT 4 Label



Figure 32: Washer Cap/Label

-.25

## WINDSHIELD WASHER RESERVOIR

USE WATER OR DILUTED METHANOL

DO NOT FILL WITH OIL, GASOLINE, OR ANY OTHER OIL BASE MATERIAL

## 8. Visible Contents above Carpeted Mat

Ski Adapter Accessories Bag (only if adapter is installed)	50
Luggage Rack (if not installed, it's acceptable to stow here)	50
Luggage Rack Accessories Bag (only if rack is present)	50
Mounting Bolt, Retaining Bracket, and Nut (only if rack is present) must all be installed.	50 25
must all be in original condition without damage,	25 25
must all be clean with no dirt/dust, or debris,	25
made an bo down with no ambaddi, of downe,	.20
Tool Kit with Vinyl Pouch (black)	
must be present,	-3.25
	-or-
must be displayed unrolled and laying flat,	25
must be in original condition without damage (vinyl pouch only),	25
must be clean with no dirt/dust, or debris (vinyl pouch only),	25
Pliers	
must be properly stored in tool pouch,	50
	-or-
must be in original condition without damage,	25
must be clean with no dirt/dust, or debris,	25
16/17mm Wrench	50
must be properly stored in Tool Pouch,	50 -or-
must be in original condition without damage,	25
must be the original condition without damage, must be clean with no dirt/dust, or debris,	25
made so dican with no and dact, or deshie,	.20
12/13mm Wrench	
must be properly stored in Tool Pouch,	50
	-or-
must be in original condition without damage,	25
must be clean with no dirt/dust, or debris,	25
10/11mm Wrench	
must be properly stored in Tool Pouch,	50
	-or-
must be in original condition without damage,	25
must be clean with no dirt/dust, or debris,	25
Reversible Screwdriver	<b>E</b> 0
must be properly stored in Tool Pouch,	50 -or-
must be in original condition without damage,	25
must be clean with no dirt/dust, or debris.	25
9. Fender Finishing Strips (black)	
Driver-side	
must visibly be securely affixed,	25
must be in original condition without damage,	50
must be clean with no dirt/dust, or debris,	25
Passenger-side ### Passenger-side	_
must visibly be securely affixed,	25
must be in original condition without damage,	50
must be clean with no dirt/dust, or debris.	25

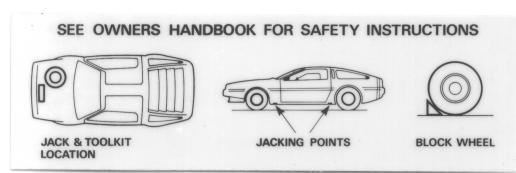


Figure 34: Jacking Instructions Label

10. Jack Stowage	e Area		•
	y except for Jack Accessories Tool Bag,	50	40
	ginal condition without damage,	25	
must be clean	with no dust/dirt, or debris,	25	
Jack Stowage	e Cover (front and back)		0
	ginal condition without damage,	25	
	with no dust/dirt, or debris,	25	
Jacking Instru	uctions Label (on front) (Figure 34 & 35)		Figure 35: Jacking Label in position
must be in orig	ginal condition without damage,	25	rigule 33. Jacking Label in position
must be clean	with no dust/dirt, or debris,	25	
Stud Rings (o	on front)		
must both be i	in original condition without damage,	25	
must both be o	clean with no dust/dirt, or debris,	25	
Studs (on bac			
	in original condition without damage,	25	
must both be o	clean with no dust/dirt, or debris,	25	
	ackets (on back)		
	in original condition without damage,	25	
must both be o	clean with no dust/dirt, or debris,	25	
	ories Bag with Jacking Tools (black)—either is acceptable		
must be prope	erly stowed in Jack Stowage Area (Figure 36),	-2.50 -or-	
must be in orio	ginal condition without damage, or stains (vinyl tool bag or	ıly),25	
	with no dust/dirt, or debris (vinyl tool bag only),	25	
Jack Assemb	lv (black)		
	erly stored in Accessories Tool Bag,	50	
	,	-or-	
must be in orio	ginal condition without damage,	25	Figure 36: Properly stowed Jack
	with no dust/dirt, or debris,	25	rigure so. Troperty stowed dack
Jack Lug Wre	ench (19mm)		
	erly stored in Accessories Tool Bag,	50	
	•	-or-	
must be in orio	ginal condition without damage,	25	
	with no dust/dirt, or debris,	25	
Jack Handle \$	Sleeve (black)		
must be prope	erly stored in Accessories Tool Bag,	50	
•	-	-or-	
must be in orig	ginal condition without damage,	25	
	with no dust/dirt, or debris,	25	
Jack Handle (	(black)		
must be prope	erly stored in Jack Handle Sleeve,	50	

-.25

-.25

must be in original condition without damage,

must be clean with no dust/dirt, or debris.

11.	<u>Light Switch</u> (white)	
	must be in original condition without damage,	25
	must clean with no dust/dirt, or debris.	25
12.	<u>Fascia Fasteners</u> must all be panhead Phillips style ('83 VINs may have hex-head style),	-1
		-or-
	must all be in original condition without damage, corrosion, or marring, must all be clean with no dirt or debris.	50 50
13.	Hood	
	Hinges (black)	
	Driver-side must be in original condition without damage, or corrosion,	25
	must be clean with no dirt/dust, or debris,	25
	Passenger-side	
	must be in original condition without damage, or corrosion, must be clean with no dirt/dust, or debris,	25 25
	Fasteners (hex-head bolt up to VIN 1301, hex-head Nyloc nuts from VIN 1302),	
	Driver-side must all be correct for VIN,	50
	must all be in original condition without damage, corrosion, or marring,	-or- 25
	must all be clean with no dirt/dust, or debris,	25
	Passenger-side must all be correct for VIN,	50
	must all be in original condition without damage, corrosion, or marring,	-or- 25
	must all be clean with no dirt/dust, or debris.	25
14.	Courtesy Light	
	must be in original condition without damage, and must visibly be securely in place, must be clean with no dirt/dust, or debris.	50 50
15.	Weatherstripping (on underside of hood)—either style is acceptable (black)	
	must visibly be securely attached, and must be well-fitted,	50/50
	must be in original condition without damage, or cracks, must be clean with no dirt/dust, or debris.	50 50
16.	Struts	
	Driver-side must be original brand and manufacturer—"LIFT-O-MAT" by STABILUS,	25
	must be original brand and mandiacture!— Ell 1-0-MAT by STABLEGS, must be correct style—black with silver shaft,	25
	(If strut is not by the correct manufacturer and also not the correct style, the deduction	
	is one full point for the presence of a non-original replacement in addition to the deductions for the absence of original item, and the rest of the item is judged),	
	must be installed correctly—with shaft end at body,	25
	must be in original condition without damage, or scratches, must be clean with no dirt/dust, or debris,	25 25
	Passenger-side must be original brand and manufacturer—"LIFT-O-MAT" by STABILUS,	25
	must be original brand and mandracture!—Ell 1-0-MAT by STABLEOS, must be correct style—black with silver shaft,	25
	(If strut is not by the correct manufacturer and also not the correct style, the deduction	
	is one full point for the presence of a non-original replacement in addition to the deductions for the absence of original item, and the rest of the item is judged),	
	must be installed correctly—with shaft end at body,	25
	must be in original condition without damage, or scratches,	25 25
	must be clean with no dirt/dust, or debris.	25

## 17. <u>Carpeted Sections</u> on underside of hood (black)

Driver-side must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Passenger-side must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Front must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be in original condition without damage, must b
must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Passenger-side must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Front must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, must be a uniform black color without stains, must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris.  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be in origina
Passenger-side must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Front must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Rear must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be object of the firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  2.55  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  2.51  9. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris,  5.50  Phod Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  5.50  Passenger-side must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris,  5.50  Passenger-side must be in original condition without damage, must be in original condition without damage, must be in original condition without damage, must be in original con
Passenger-side must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Front must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be firmly in place, must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be firmly in place, must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be be in original condition without damage, must be a uniform black color without stains, must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.0  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris.
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be lean with no diri/dust, or debris,  Filler Door must be firmly in place, must be lean with no diri/dust, or debris,  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no diri/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no diri/dust, or debris,  -50  Passenger-side must be in original condition without damage, must be clean with no diri/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no diri/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no diri/dust, or debris.  50  Filler Door (if applicable hood with flap) must be clean with no diri/dust, or debris.  51  520. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no diri/dust, or debris.  52  Passenger-side must be in original condition without damage, must be clean with no diri/dust, or debris.  52  75  76  77  78  78  78  78  78  79  79  79  70  70  70  70  70  70  70
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be lean with no diri/dust, or debris,  Filler Door must be firmly in place, must be lean with no diri/dust, or debris,  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no diri/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no diri/dust, or debris,  -50  Passenger-side must be in original condition without damage, must be clean with no diri/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no diri/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no diri/dust, or debris.  50  Filler Door (if applicable hood with flap) must be clean with no diri/dust, or debris.  51  520. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no diri/dust, or debris.  52  Passenger-side must be in original condition without damage, must be clean with no diri/dust, or debris.  52  75  76  77  78  78  78  78  78  79  79  79  70  70  70  70  70  70  70
Front must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be firmly in place, must be firmly in place, must be to elan with no dirt/dust, or debris,  -25  Filler Door must be firmly in place, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  5.50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be in o
Front must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Rear must be limily in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Passenger-side must be in or
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Rear must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  50  51  52  53  54  55  55  56  56  57  58  58  58  59  59  50  50  50  50  50  50  50  50
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Rear must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  50  51  52  53  54  55  55  56  56  57  58  58  58  59  59  50  50  50  50  50  50  50  50
must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Rear must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris50  Phod Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris50  Passenger-side must be in original condition without damage, must be in original condition without dama
Rear must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be in original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  -50  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  -50  Phassenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  -50  Passenger-side must be in original condition without damage, m
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be lim original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be in original condition without damag
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be lim original condition without damage, stains, or signs of wear, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  5.00  Priver-side must be in original condition without damage, must be in original condition without damag
must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris,  Filler Door must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  -50  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  -50  -50  -50  -50  -50  -50  -50  -5
Filler Door must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without stains, must be in original condition without stains, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris50  10. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be in original condition
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  5.00  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  10. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, must be in original condition without damage, must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  -50  -50  -50  -50  -50  -50  -50
must be firmly in place, must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  5.00  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  10. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, must be in original condition without damage, must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  -50  -50  -50  -50  -50  -50  -50
must be in original condition without damage, stains, or signs of wear, must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be clean with no dirt/dust, or debris.  5.00  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be in o
must be clean with no dirt/dust, or debris.  18. "X" Brace Portion (on underside of hood) must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be clean with no dirt/dust, or debris,50  Passenger-side must be clean with no dirt/dust, or debris,55  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,55  Passenger-side must be in original condition without damage,55  Passenger-side must be in original condition without damage,50
must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  -50  Passenger-side must be in original condition without damage, -50 must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  -50
must be a uniform black color without stains, must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  -50  Passenger-side must be in original condition without damage, -50 must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  -50
must be in original condition without damage, must be clean with no dirt/dust, or debris.  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Rear must be clean with no dirt/dust, or debris, 50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  10. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,50  Passenger-side must be in original condition without damage,50 must be in original condition without damage,50 must be clean with no dirt/dust, or debris,50
must be clean with no dirt/dust, or debris.  -25  19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side  must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Passenger-side  must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Rear  must be in original condition without damage, must be clean with no dirt/dust, or debris,  -50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  -50  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  Passenger-side must be in original condition without damage, -50 must be in original condition without damage, -50 must be clean with no dirt/dust, or debris, -50  -50
19. Edging Strips on all hood edges except front near fascia (black)—either style is acceptable  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,50  Passenger-side must be in original condition without damage,50  Passenger-side must be in original condition without damage,50 50
Driver-side  must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage,50 Passenger-side must be in original condition without damage,5050
must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Piller Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,25  Passenger-side must be in original condition without damage,50 50
must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Piller Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,25  Passenger-side must be in original condition without damage,50 50
must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage,50 must be clean with no dirt/dust, or debris,55
Passenger-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Poriver-side must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Priver-side must be clean with no dirt/dust, or debris,50  Passenger-side must be in original condition without damage, must be in original condition without damage,50  Passenger-side must be in original condition without damage,50
must be in original condition without damage, must be clean with no dirt/dust, or debris,  Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris. 50  Priver-side must be in original condition without damage, must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage, must be in original condition without damage,50  Passenger-side must be in original condition without damage,50
Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,50  Passenger-side must be in original condition without damage,5050
Rear must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,50  Passenger-side must be in original condition without damage,5050
must be in original condition without damage, must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,50  Passenger-side must be in original condition without damage,5050
must be clean with no dirt/dust, or debris,  Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage,50 50
Filler Door (if applicable hood with flap) must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,  Passenger-side must be in original condition without damage,50  Passenger-side must be in original condition without damage,50
must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage,50 50
must be in original condition without damage, must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage,50 50
must be clean with no dirt/dust, or debris.  20. Hood Bump Stop Brackets on underside of hood (black)  Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris, 50  Passenger-side must be in original condition without damage,50
Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,25  Passenger-side must be in original condition without damage,50
Driver-side must be in original condition without damage, must be clean with no dirt/dust, or debris,25  Passenger-side must be in original condition without damage,50
must be in original condition without damage, must be clean with no dirt/dust, or debris, 25  Passenger-side must be in original condition without damage,50
must be clean with no dirt/dust, or debris,25  Passenger-side must be in original condition without damage,50
Passenger-side must be in original condition without damage,50
must be in original condition without damage,50
rriust be clean with no dirt/dust, or debris25
21. Latch Striker (on underside of hood)
must have four hex-head bolts,
the state of the s
must be in original condition without damage (including bolts),50 must be clean with no dirt/dust, or debris (including bolts)50

22.	<u>Carpeted Mat</u> acceptable either with or without fiberboard under-mat		
	(black with vinyl-trimmed edging)		
	must be in original condition without damage, or signs of wear (including back),	50	
	must be clean with no dirt/dust, debris, or stains (including back),	50	
	Edging		
	must be in original condition without damage, or signs of wear,	50	
	must be clean with no dirt/dust, debris, or stains.	50	
23.	<u>Spare Tire Area</u> (Figure 37)		<b>6</b>
	Space-saver Spare Tire	75	
	must be original (T125/70 D 15),	75	
	must be inflated to 60 psi ± 5 psi,	-or- 25	
	must be in original condition without damage, cracks, dry rot, or signs of wear,	25 25	
	must be clean with no dust/dirt, or debris,	25	
	must be dieum with no dustrum, or debris,	.20	
	Spare Tire Straps	6	
	must both be latched together,	25	
	must both be in original condition without damage,	25	
	must both be clean with no dust/dirt, or debris,	25	
		Localities	Figure 27: Chara stowers
	Wheel		Figure 37: Spare stowage
	must be original,	-1.50	
		-or-	
	must be in original condition without damage, signs of wear, or corrosion,	25	
	must be clean with no dust/dirt, or debris,	25	
	Valve Stem (black rubber)		
	must be correct,	50	
	That so contock	-or-	
	must be in original condition without damage,	25	
	must be clean with no dirt/dust, or debris,	25	
	Valve Stem Cap (black plastic)		
	must be correct,	50	
		-or-	
	must be in original condition without damage,	25	
	must be clean with no dirt/dust, or debris,	25	
	Storage Area		
	must be in original condition without damage,	25	
	must be clean with no dust/dirt, or debris.	25	
24.	Access Covers		
	Ford Borrow Occord (and dear on one Gree)		
	Fuel Pump Cover (under spare tire)	25	
	must visibly be securely attached,	25	
	must be in original condition without damage, must be clean with no dust/dirt, or debris,	25 25	
	must be dealt with no dustalit, of debits,	20	
	Gasket		
	or RTV sealant acceptable but must not be excessive or messy	9005330	WHEN THE RESERVE OF THE PARTY O
	must be well-fitted,	25	
	must be in original condition without damage, cracks, or excessive RTV,	25	
	must be clean with no dust/dirt, or debris,	25	STATE OF THE STATE



Figure 38: Pozidrive Screw head

Fasteners (black, Pozidrive-style heads) (Figure 38)

must all be clean with no dust/dirt, debris, or rust,

must all be in original condition without damage, or marring,

must be original,

Brake Master Cylinder Cover (next to spare tire)		
must visibly be securely attached,	25	
must be in original condition without damage, or cracks,	25	
must be clean with no dust/dirt, or debris,	25	
Gasket		
or RTV sealant acceptable but must not be excessive or messy		
must be well-fitted,	25	
must be in original condition without damage, cracks, or excessive RTV,	25	
must be clean with no dust/dirt, or debris,	25	
Plug (black)		
must be in original condition without damage, or cracks,	25	
must be clean with no dust/dirt, or debris,	25	
"DOT 4" Label (Figure 39)	_	
must be present on all cars,	50	WARNING. Clean filler
That so process on all outs,	-or-	cap before removing.
must be in original condition without damage,	25	Use only 'DOT 4' fluid
must be clean with no dust/dirt, or debris,	25	from a sealed container.
made be clear war no dadwant, or debrie,	.20	
Fasteners (black, Pozidrive-style heads) (Figure 40)		Figure 39: DOT 4 Label
must be original,	50	
	-or-	
must all be in original condition without damage, or marring,	25	
must all be clean with no dust/dirt, debris, or rust,	25	
Fuel Fill Closing Cover (black)	8	
must visibly be securely attached,	25	
must be in original condition without damage,	25	
must be clean with no dust/dirt, or debris,	25	
Gasket	融	
or RTV sealant acceptable but must not be excessive or messy	3	
must be well-fitted,	25	Figure 40: Pozidrive Screw head
must be in original condition without damage, cracks, or excessive RTV,	25	rigule 40. Fozialive Sciew lieau
must be clean with no dust/dirt, or debris,	25	
Fasteners (black, Pozidrive-style heads) (Figure 40)		
must be original,	50	
	-or-	
must all be in original condition without damage, or marring,	25	
must all be clean with no dust/dirt, debris, or rust.	25	
	=	
25. Fiberglass Tub must be uniform black color,	75	
must be uniform black color, must be in original condition without damage,	75 75	
must be in original condition without damage, must be clean with no dust/dirt, or debris.	75 50	
must be dealt with no dustaint, or deblis.	50	
26. Repainted Item(s) (or items that may have been repainted) can only receive	ve	

**Head Judge and initialed)** 

deduction(s) if wrong color paint/finish was applied, or if paint was applied in a drastically different quality from factory appearance (must all be approved by

27. <u>Miscellaneous Item(s)</u> for anything not already specifically covered that is blatantly incorrect (must all be approved by Head Judge and initialed)

# **ENGINE COMPARTMENT**

Deductible
Point
Value
Per Item

#### 1. Non-original Add-on, Replacement, or Accessory Item(s)

must receive one full point deduction for the presence of each non-original item, and do not judge non-original items unless otherwise noted on unavailable items.

2.	Cover top surface (uniform black color) must be in original condition without damage or discoloration, must be clean with no dirt/dust, or debris,	25 25
	Release Lever (black plastic) must be original as identified by embossed cover-release symbol,	75 -or-
	must be aligned in proper orientation and tightened, must be in original condition without damage or signs of wear, must be clean with no dirt/dust, or debris,	25 25 25
	Striker Latch for louver (metal) must be in original condition without damage or signs of wear, must be clean with no dirt/dust, or debris,	25 25
	Hinges (black-painted metal) must be in original condition without damage, rust, or chips in paint (L/R), must be clean with no dirt/dust, or debris (L/R),	50/50 50/50
	Vents upper surface	
	Front (black-painted metal) Left-side	
	must be in original condition without damage, rust, discoloration, or paint chips, must be clean with no dirt/dust, or debris,	25 25
	Front (black-painted metal) Right-side must be in original condition without damage, rust, discoloration, or paint chips,	25
	must be clean with no dirt/dust, or debris,	25
	Rear (black-painted metal) Left-side must be in original condition without damage, rust, discoloration, or paint chips, must be clean with no dirt/dust, or debris,	25 25
	Rear (black-painted metal)	
	Right-side must be in original condition without damage, rust, discoloration, or paint chips, must be clean with no dirt/dust, or debris,	25 25
3.	Underside of Cover bottom surface (uniform black color) must be in original condition without damage, or discoloration, must be clean with no dirt/dust, or debris,	25 25
	Vents lower surface	
	Front (black-painted metal) Left-side must be in original condition without damage, rust, discoloration, or paint chips, must be clean with no dirt/dust, or debris,	25 25
	Front (black-painted metal) Right-side must be in original condition without damage, rust, discoloration, or paint chips, must be clean with no dirt/dust, or debris,	25 25

Rear (black-painted metal)

Left-side

must be in original condition without damage, rust, discoloration, or paint chips, must be clean with no dirt/dust, or debris,

Rear (black-painted metal)

Right-side

must be in original condition without damage, rust, discoloration, or paint chips, must be clean with no dirt/dust, or debris,

#### Retaining Strips all 19 (black metal)

must all visibly be securely in place,

must all be in original condition without damage, discoloration, or rust, must all be clean with no dirt/dust, or debris,

#### VEHICLE EMISSION CONTROL INFORMATION

Figure,

Figure 44

105199

108662

Figure

Figure 45

Figure 47

MANUFACTURER: DELOREAN MOTOR CARS LTD ENGINE DISPLACEMENT: 174 CU IN ENGINE FAMILY: BDL174V6FB3 EXHAUST EMISSION CONTROL SYSTEM: F1, EGR, TWC ENGINE CODE: 1

TUNE UP SPECIFICATION	TUNE UP SPECIFICATIONS WITH NO ACCESSORIES IN OPERATION AND TRANSMISSION IN NEUTRAL			
ITEM	CONDITIONS	SPECIFICATIONS		
IGNITION TIMING	IDLE R.P.M. 775 VACUUM HOSE DISCONNECTED	13°±2° B.T.D.C.		
IDLE AIR-FUEL MIXTURE	OXYGEN SENSOR DISCONNECTED. IDLE R.P.M. ADJUSTED TO 950. CO SAMPLED FROM TAPS UPSTREAM OF CATALYST. VACUUM HOSES CONNECTED.	IDLE CO 1 · 0 ±0·3% (FOR EACH BANK)		
IDLE R.P.M.	OXYGEN SENSOR CONNECTED.	775±50 R.P.M.		
VALVE LASH	COLD ENGINE	INLET 0 004-0 006 INCHES. EXHAUST 0 010-0 012 INCHES.		

THIS VEHICLE CONFORMS TO US E.P.A. AND CALIFORNIA ARB REGULATIONS APPLICABLE TO 1981 MODEL YEAR NEW LIGHT DUTY VEHICLES.
COMPLIANCE DEMONSTRATED BELOW 4000 FEET

VEHICLE EMISSION CONTROL INFORMATION

MANUFACTURER: DELOREAN MOTOR CARS LTD. ENGINE DISPLACEMENT: 174 CU IN

EVAPORATIVE FAMILY: E1

EXHAUST EMISSION CONTROL SYSTEM: F1, EGS, TWC ENGINE FAMILY: BDL174V6FB3 ENGINE CODE: 2

ITEM	CONDITIONS	SPECIFICATIONS
IGNITION TIMING	IDLE R.P.M. 775 VACUUM HOSE DISCONNECTED	15°±2° B.T.D.C.
IDLE AIR-FUEL MIXTURE	OXYGEN SENSOR DISCONNECTED. IDLE R.P.M. ADJUSTED TO 950. CO SAMPLED FROM TAPS UPSTREAM OF CATALYST. VACUUM HOSES CONNECTED.	IDLE CO 1-2 ± 0-3% (FOR EACH BANK)
IDLE R.P.M.	OXYGEN SENSOR CONNECTED.	775±50 R.P.M.
VALVE LASH	COLD ENGINE	INLET 0 004-0 006 INCHES EXHAUST 0 010-0 012 INCHES

THIS VEHICLE CONFORMS TO US E.P.A. AND CALIFORNIA ARB REGULATIONS APPLICABLE TO 1981 MODEL YEAR NEW LIGHT DUTY VEHICLES.
COMPLIANCE DEMONSTRATED BELOW 4000 FEET.

VEHICLE EMISSION CONTROL INFORMATION

MANUFACTURER: DELORI EVAPORATIVE FAMILY: ET ECHALIST EMISSION CON		ENGINE DISPLACEMENT: 174 CU. INS. ENGINE HAMBLY: COL. 1747AFBB4		
TUNE UP SPECIFICATIONS IN NEUTRAL	(ALL ALTITUDES) WITH NO ACCESSO	RES IN OPERATION AND TRANSMISSION		
ITEM	CONDITIONS	SPECIFICATIONS		
IGNITION TIMING	IDLE RPM 775 VACUUM HOSE DISCONNECTED	TF±F BTDC		
IBLE AIR-FUEL MIXTURE	IDLE MERTURE ADJUSTMENT IS PRESET AND SEALED AT FACTORY. PROVISION FOR ADJUSTMENT DURING TUNE UP IS NOT PROVIDED.			
DLE RPM	COYGEN SENSOR CONNECTED	775±50 RPM		
WALVE LASH	COLD ENGINE	INUET 0.004-0.000 INCHES DOMAIST 0.010-0.012 INCHES		

LIGHT DUTY VEHICLES. Labels (all white) (Figure 41)

Emissions upper right—exact placement may vary

must be correct for VIN (and match transmission type if applicable on BD VIN) **BD VIN:** 

must show "1981" on lower left and part no. "105199" on lower right with "A" for automatic (Figure 42) or no letter in upper right corner (Figure 43) -ormust show "1981" on lower left and part no. "108662" on lower right with "M" for manual (Figure 44) or no letter in upper right corner (Figure 45)

CD VIN: must show "1982" on lower left and part no. "110570" on lower right (Figure 46) DD VIN: must show "1983" on lower left and part no. "113330" on lower right (Figure 47) ('83 VIN may have label applied over top of '82 label),

must be in original condition without damage, bubbling, peeling, or yellowing, must be clean with no dirt/dust, or debris,

-.25 -.25

Figure 41: Engine Cover & Labels

-.50

-.25

-.25

-.25 -.25

#### VEHICLE EMISSION CONTROL INFORMATION

MANUFACTURER: DELOREAN MOTOR CARS LTD **EVAPORATIVE FAMILY: E1** 

ENGINE DISPLACEMENT: 174 CU IN ENGINE FAMILY: BDL174V6FB3

EXHAUST EMISSION CONTROL SYSTEM: F1, EGS, TWC

TUNE UP SPECIFICATIONS WITH NO ACCESSORIES IN OPERATION AND TRANSMISSION IN NEUTRAL ITEM CONDITIONS SPECIFICATIONS IGNITION TIMING IDLE R.P.M. 775 VACUUM HOSE DISCONNECTED OXYGEN SENSOR DISCONNECTED. IDLE R.P.M. ADJUSTED TO 950. CO SAMPLED FROM TAPS UPSTREAM OF CATALYST. VACUUM HOSES CONNECTED. IDLE AIR-FUEL MIXTURE IDLE CO 1.0 ±0.3% (FOR EACH BANK) IDLE R.P.M. OXYGEN SENSOR CONNECTED 775+50 R.P.M. VALVE LASH COLD ENGINE INLET 0 004-0 006 INCHES. EXHAUST 0 010-0 012 INCHES

THIS VEHICLE CONFORMS TO US E.P.A. AND CALIFORNIA ARB REGULATIONS APPLICABLE TO 1981 MODEL YEAR NEW LIGHT DUTY VEHICLES. COMPLIANCE DEMONSTRATED BELOW 4000 FEET.

105199

108662

#### VEHICLE EMISSION CONTROL INFORMATION

MANUFACTURER: DELOREAN MOTOR CARS LTD EVAPORATIVE FAMILY: E1

FNGINF DISPLACEMENT: 174 CU IN ENGINE FAMILY: BDL174V6FB3

EXHAUST EMISSION CONTROL SYSTEM: F1, EGS, TWO

TUNE UP SPECIFICATIO	NS WITH NO ACCESSORIES IN OPERATION A	ND TRANSMISSION IN NEUTRAL
ITEM	CONDITIONS	SPECIFICATIONS
IGNITION TIMING	IDLE R.P.M. 775 VACUUM HOSE DISCONNECTED	13°±2° B.T.D.C.
IDLE AIR-FUEL MIXTURE	OXYGEN SENSOR DISCONNECTED. IDLE R.P.M. ADJUSTED TO 950. CO SAMPLED FROM TAPS UPSTREAM OF CATALYST. VACUUM HOSES CONNECTED.	IDLE CO 1 0 ±0·3% (FOR EACH BANK)
DLE R.P.M.	OXYGEN SENSOR CONNECTED.	775±50 R.P.M.
VALVE LASH	COLD ENGINE	INLET 0 004-0 006 INCHES. EXHAUST 0 010-0 012 INCHES.

THIS VEHICLE CONFORMS TO US E.P.A. AND CALIFORNIA ARB REGULATIONS APPLICABLE TO 1981 MODEL YEAR NEW LIGHT DUTY VEHICLES.
COMPLIANCE DEMONSTRATED BELOW 4000 FEET.

#### VEHICLE EMISSION CONTROL INFORMATION

EVAPORATIVE FAMILY: E1 EXHAUST EMISSION CONTROL SYSTEM: P1, EGS, TWC

TUNE UP SPECIFICATIONS (ALL ALTITUDES) WITH NO ACCESSORIES IN OPERATION AND TRANSMISSION IN REUTRAL. SPECIFICATIONS IELE RPM 775 VACUUM HOSE DISCONNECTED IDLE MICTURE ADJUSTMENT IS PRESET AND SEALED AT FACTORY, PROVISION FOR ADJUSTMENT DURING TUNE UP IS NOT PROVIDED. 775±50 RPM **IDLE RPS** 

THIS VEHICLE COMPORMS TO U.S. E.P.A. AND CALIFORNIA AND REGULATI FAR NEW LIGHT DUTY VEHICLES. TO FINSURE EMESSION CONTROL COMP SEE SERVICE PUBLICATION FOR FURTHER INFORMATION.

-or-

-.50

-.25

-.25

-23-

© Copyright 2007 DeLorean Millennium Concours

**Vacuum Hose Routing** upper left (exact placement may vary) (Figure 48) must be in place,

must be in original condition without damage, bubbling, peeling, or yellowing, must be clean with no dirt/dust, or debris,

**Negative Earth/Ground** lower right position of upper quadrant (exact placement may vary) (Figure 49) must be in place,

must be in original condition without damage, bubbling, peeling, or yellowing, must be clean with no dirt/dust, or debris,

**High Altitude** (if present) middle right position of upper quadrant directly beneath the Emission Control Label (exact placement may vary) (Figures 49 & 50) must be in original condition without damage, bubbling, peeling, or yellowing, must be clean with no dirt/dust, or debris,

#### VEHICLE EMISSION CONTROL INFORMATION UPDATE



**DELOREAN MOTOR CO. LTD.** 

THIS VEHICLE HAS BEEN MODIFIED TO IMPROVE EMISSION CONTROL PERFORMANCE WHEN OPERATED AT HIGH ALTITUDE. FOR FURTHER INFORMATION SEE SERVICE INSTRUCTIONS.

110741

-.50 -or-

-.25

-.25

-.50 -or-

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.50

-.50

-.25

-.25

-.25

-.25

Figure 49: High Altitude Label

**Bumper Stops** at rear corners (black rubber)

#### Left-side

must be in original condition without damage (including no rust on screw or nut), must be clean with no dirt/dust, or debris (including screw and nut),

#### Right-side

must be in original condition without damage (including no rust on screw or nut), must be clean with no dirt/dust, or debris (including screw and nut),

Stay Assembly (Figure 51)

#### Sliding Block (black plastic)

must be in original condition without damage (including screws), must be clean with no dirt/dust, or debris (including screws),

#### Stay Hook (yellow Cadmium-plated steel)

must be in original condition without damage, must be clean with no dirt/dust, or debris,

#### Spring

must be in original condition without damage (including 4 washers), must be clean with no dirt/dust, or debris (including 4 washers),

#### Mounting Bracket (black plastic)

must be in original condition without damage (including screws), must be clean with no dirt/dust, or debris (including screws).

#### 4. <u>Courtesy Light</u> (Figure 52)

Lens (clear plastic)

must be in original condition without damage, must be clean with no dirt/dust, debris, or inside moisture,

#### Frame (white plastic)

must be in original <u>bright white</u> condition without damage, or discoloration, must be clean with no dirt/dust, or debris.

© Copyright 2007 DeLorean Millennium Concours




Figure 48: Vacuum Hose Routing Label

THIS VEHICLE IS

NEGATIVE GROUND

Figure 49: Negative Earth/Ground Label



Figure 50: High Altitude Label in position



Figure 51: Engine Cover Stay Assembly



Figure 52: Engine Compt. Courtesy Light

- 25

-.25 -.25

-.2

-24-

Coolant Bottle (milky-white plastic)

must be original (metal substitution is not allowed),

must be in original milky-white condition without damage, signs of fatigue/stress, crackling, yellowing, or discoloration, must be clean with no dirt/dust, or debris,

Label "Coolant Filler Tank" (white) actual placement may vary (Figure 53) must be in original condition without damage, stains, yellowing, or discoloration, must be clean with no dirt/dust, or debris,

Cap (metal and of original design) (Figure 54) must be of original design,

must be in original condition without damage, signs of oxidation, or discoloration, must be clean with no dirt/dust, or debris.

#### 6. Coil Cover Area

Coil Cover (black plastic) (Figure 55) must be original (no aftermarket fiberglass reproduction allowed).

must fit as well as possible with the edge compressing the gasket on all sides, must have retaining strap around front for VIN from 11673. must be in original condition without damage (including latch), must be clean with no dirt/dust, or debris (including latch),

#### Label "Jump Lead Starting" (white) (Figure 56)

must be in original condition without damage, stains, yellowing, or discoloration, must be clean with no dirt/dust, or debris,

#### Protector Boot (black rubber)

must be installed correctly over jump lead post, must be in original condition without damage, must be clean with no dirt/dust, or debris.

7. **Zip-on Tubing** around wire bundle at rear firewall (black plastic) must be in original condition without damage, must be clean with no dirt/dust, or debris.

#### 8. Light Switch Mounting Bracket (and Attachments) far left corner must be in original condition without damage,

must be clean with no dirt/dust, or debris,

#### Light Switch (black)

must be in original condition without damage, must be clean with no dirt/dust, or debris,

#### **Ignition Resistors** (bright white)

must be in original condition without damage or yellowing, must be clean with no dirt/dust, or debris,

#### **Electrical Connections**

must all be in original condition without damage, must all be clean with no dirt/dust, or debris.

#### 9. Oil Filler Cap (black plastic)

must be in original condition without damage, must be clean with no dirt/dust, debris, or oil (including oil spills around base).

#### 10. <u>Stove Pipe</u> (unpainted aluminum) (Figure 57)

must be in original bright like-new condition without damage, corrosion, dents, or holes (especially near air cleaner clips), must be clean with no dirt/dust, or debris (especially in grooves).



-or-

-.25

-.25

-.25

- 75 -or-

-.50

-.25

-2 -or-

-.50

-.25

-.50

-.25

-.25

-.25

-.25

-.50

-.25

-.50

-.50

-.25

-.25

-.25

-.25

Figure 53: Coolant Filler Tank Label



Figure 54: Coolant Bottle/Cap



Figure 55: Coil Cover



Figure 56: Jump Lead Starting Label



Figure 57: Stove Pipe

must be in original condition without damage, must be clean with no dirt/dust, or debris,	50 50	
Label (black with "DMC" logo—early VINs may have smaller version, late VINs may have Renault label) (Figure 59) must be in original condition without damage, must be clean with no dirt/dust, or debris.	50 50	Figure 58: Air Cleaner Cover & Label
Engine Wiring Harness		
Main Loom Wrap (black) must be in original condition without damage, must be clean with no dirt/dust, debris, or cleaning products (especially in crevices),	25 25	DE LOREAN MOTOR COMPANY
Clips (metal)		IMPORTANT: Change element at intervals specified in maintenance schedule chart
must all be correct for VIN up to VIN 1200—may have uncoated yellow-cadmium clips or black vinyl-coated clips,	50	Figure 59: Air Cleaner Cover Label
from VIN 1201—must have black vinyl-coated clips,	-or-	
must all be in original condition without damage,	25	
must all be clean with no dirt/dust, or debris,	25	
Protector Boots (black rubber)		
must all be in original condition without damage,	50	
must all be clean with no dirt/dust, or debris.	50	
Spark Plug Wiring		
must all be in original condition without damage,	25	
must all be clean with no dirt/dust, or debris,	25	
Protector Boots (black rubber)		
must all be in original condition without damage,	25	
must all be clean with no dirt/dust, or debris.	25	
Fuel Lines (black rubber)		
must all be in original condition without damage,	50	
must all be clean with no dirt/dust, or debris,	50	

15. <u>Vacuum Lines</u> (black rubber—no silicone) must all be original-style black rubber,

attached loop wire.

11. Air Cleaner Cover (black) (Figure 58)

12.

13.

14.

must all be in original condition without damage, must all be clean with no dirt/dust, or debris.

16. Throttle Cable Shield All VINs (black metal) (Figure 61) must be in original condition without damage, must be clean with no dirt/dust, or debris.

Mixture Adjustment Tamper-proof Plug (factory-sealed, not visible) (Figure 60) must not have aftermarket stopper of any kind such as airflow-meter plug with

**17.** Coolant Hoses (black rubber—no silicone) must all be original-style black rubber,

must all be in original condition without damage, must all be clean with no dirt/dust, or debris,

Clamps (original-style metal) (Figure 62) must all be original-style metal,

must all be in original condition without damage, must all be clean with no dirt/dust, or debris.



-.50

-.50 -or-

-.25

-.25

-.50

-.50

-1 -or-

-.50

-.50

-1 -or-

-.50

Figure 61: Throttle Cable Shield



Figure 62: Original-style Hose Clamp

18.	Water Pump		
	must be in original condition without damage, must be clean with no dirt/dust, or debris,	25 25	
	Pulley (yellow cadmium)		
	must be in original condition without damage, must be clean with no dirt/dust, or debris.	25 25	
19.	A/C Compressor Sankyo SD-5 (Figure 63)		
	must be original,	-2	
	must be in original condition without damage,	-or- -1	
	must be clean with no dirt/dust, or debris,	-1	
	Sankyo Identification Label (gold)	0.5	Sec. Marie Chicago
	must be in original condition without damage, or stains, must be clean with no dirt/dust, or debris,	25 25	The office of the
	Warning Label (white) (Figure 64)		
	must be in original condition without damage, stains, or yellowing,	25	
	must be clean with no dirt/dust, or debris,	25	
	Clutch		10, 10,
	must be in original condition without damage, or leaks,	25	Figure 63: Sankyo A/C Compresso
	must be clean with no dirt/dust, debris, or oil,	25	
	Wire (red)		IMPORTANT. Use only FREON 12' or ARCTON 12' mixed with
	must be in original <u>curled</u> condition without damage,	25	'SUNISO 5GS'or'TEXACO CAPELLA'
	must be clean with no dirt/dust, or debris,	25	as a refrigerant.
	Belt Goodyear 105505		Recommended operating charge: 2.75lbs of 'FREON 12' or
	must be original,	-1	'ARCTON 12' mixed with 1-8 cu ins
		-or-	of 'SUNISO 5GS' or 'TEXACO
	must be in <u>excellent</u> condition without damage, must be clean with no dirt/dust, or debris.	50 50	CAPELLA' Compressor manufactured by:
20	Alternator		Sankyo, Isesaki, Japan.
20.	must be correct for VIN	-2	Figure 64: Sankyo Warning Label
	up to VIN 04538—must be Ducellier 80 amp,	-or-	
	from VIN 04539—must be Motorola 90 amp,		
	must be in original condition without damage, must be clean with no dirt/dust, debris, or undercoating overspray,	-1 -1	
	Thust be clean with no dirivdust, debris, or undercoating overspray,	-1	
	Belt cogged, with Renault and Dayco identification markings		
	must be original,	-2	
	must be in excellent condition without damage,	-or- -1	
	must be clean with no dirt/dust, or debris.	-1	
21.	Exhaust System		
	Manifold (bare iron)		
	<b>Driver-side</b> must be in original condition without damage—surface rust okay, no pits, no polish,	25	
	must be clean with no dirt/dust, debris, or undercoating overspray,	25	
	Passenger-side		
	must be in original condition without damage—surface rust okay, no pits, no polish,	25	
	must be clean with no dirt/dust, debris, or undercoating overspray,	25	
	Catalytic Converter	05	
	must be in original condition without damage (including clamp), must be clean with no dirt/dust, debris, or undercoating overspray (including clamp),	25 25	
	, and 2, and 2 and 3 and 4 and 5 and 19 and		

	Muffler		
	must be in original condition without damage (including clamp), must be clean with no dirt, debris, or undercoating overspray (including clamp),	25 25	
	Brackets (yellow/gold Zinc-plated) (Figure 65)		-
	must be original,	50	G=
	must all be in original condition without damage,	-or- 25	
	must all be clean with no dirt/dust, debris, or undercoating overspray.	25	
22	<u>Heat Shields</u> (original style)		
	Muffler Heat Shield		
	must all be in original condition without damage or stains,	50	
	must all be clean with no dirt/dust, debris, or undercoating overspray,	50	Figure 65: Incorrect Bracket (bottom)
	Catalytic Converter Heat Shield		
	must all be in original condition without damage or stains,	50	
	must all be clean with no dirt/dust, debris, or undercoating overspray.	50	
23	Otterstat Switch		
	must be in original condition without damage, must be clean with no dirt/dust, debris, or undercoating overspray.	25 25	
	must be clean with no dirivdust, debris, or undercoating overspray.	20	
	Clamp must be in original condition without damage,	25	
	must be clean with no dirt/dust, or debris.	25 25	
		.20	
24	<u>Oil Filter</u> (Blue Purflux LS 410A—Figure 66)  must be original,	-1	
	must be original,	-or-	
	must be in original condition without damage,	50	2 2
	must be clean with no dirt/dust, debris, oil, or undercoating overspray.	50	The second second
25	Underside of Engine (visible part of Block and Heads)		
	must be in original condition without damage, or aluminum oxidation,	25	
	must be clean with no dirt/dust, debris, or undercoating overspray,	25	
	Oil Pan aluminum (silver)		Figure 66: Correct Blue Purflux Oil Filter
	must have no evidence of oil leaks, must be in original condition without damage,	25 25	
	must be clean with no dirt/dust, debris, or undercoating overspray,	25 25	
	Fasteners (bolts and washers) must all be in original condition without damage, or rust,	25	
	must all be clean with no dirt/dust, debris, or undercoating overspray,	25 25	
	Drain Plug (metal) must have no evidence of oil leaks,	25	
	must be in original condition without damage, or rust,	25 25	
	must be clean with no dirt/dust, debris, or undercoating overspray,	25	
	Motor Mounts (metal)		
	Driver-side		
	must be in original condition without damage, or rust, and no cracks in rubber,	25	
	must be clean with no dirt/dust, or debris,	25	
	Passenger-side		
	must be in original condition without damage, or rust, and no cracks in rubber,	25	

-.25

must be clean with no dirt/dust, or debris,

#### **Engine Mount Studs**

(Driver-side)		
must be in original condition without damage, or rust including visible washers &	25	
nuts,	05	
must be clean with no dirt/dust, or debris,	25	
Passenger-side)		
must be in original condition without damage, or rust including visible washers &	25	
nuts,		
must be clean with no dirt/dust, or debris,	25	
Ground Strap (Passenger-side)		
must be in original condition without damage, rust, corrosion, or oxidation,	25	
must be clean with no dirt/dust, or debris,	25	
Starter "Paris Rhone" (passenger-side)		
must be original,	50	
	-or-	
must be in original condition without damage,	25	
must be clean with no dirt/dust, debris, or undercoating overspray,	25	
Heat Shield		
must be in original condition without damage,	25	
must be clean with no dirt/dust, debris, or undercoating overspray,	25	
Nira Poet (rad)		
Nire Boot (red) must be in original condition without damage,	25	
nust be in original condition without damage, nust be clean with no dirt/dust, debris, or undercoating overspray,	25	
and the state of t	0	
Dil Pressure Sender (oil filter side of engine)		SAFETY CAMPAIGNS
must have no evidence of oil leaks,	25	SAFELL CAMPAIGNS
must be in original condition without damage,	25	SC-01-11/81
must be clean with no dirt/dust, debris, or undercoating overspray,	25	Safety Campaign No. RA-0001 (Recall)
Oil Pressure Sensor (opposite side of engine)		Ball Joints - Stabilizer Bar Mountings -
must have no evidence of oil leaks,	25	VIN 560-6650
must be in original condition without damage,	25	00.00.44/04
must be clean with no dirt/dust, debris, or undercoating overspray,	25	SC-02-11/81
Oil Looks		Safety Campaign No. RA-0001 (Recall) Ball Joints - Stabilizer Bar Mountings
Oil Leaks		· ·
Crankshaft Seal		SC-03-11/81
must have no evidence of oil leaks,	25	Safety Campaign RA-0001 - Serv BulletinSC-01-11/81
Dana Main Carl		Red Paint Markings - VIN 2333 to 5600
Rear Main Seal	OF.	
must have no evidence of oil leaks,	25	SC-04-11/81
/alve Covers		1/22/82
must both have no evidence of oil leaks.	25	Recall Action RA-0001 (Reissued 12/1/
		Nuts for Ball Joints/Ball Joints Alternate
<u>Underside of Transmission</u>		Repair Procedures
must be in original condition without damage,	50	SC-01-1/82
must be clean with no dirt/dust, or debris.	50	Safety Campaign RA-0002
Panaintad Itamia) (or itama that may have been remainted) and sub-		Throttle Cable - Freezing
Repainted Item(s) (or items that may have been repainted) can only receive deduction(s) if wrong color paint/finish was applied, or if paint was applied in a		g
drastically different quality from factory appearance (must all be approved by		SC-03-1/82
Head Judge and initialed)		Safety Recall Notice Supplement
		Ball Joints - Stabilizer Bar Mountings. E
Miscellaneous Item(s) for anything not already specifically covered that is blatantly		Paint
incorrect (must all be approved by Head Judge and initialed)		SC 06 7/93
		SC-06-7/82

-29-

Inertia Switch


1981 - VIN 560 - 7199 1982 - VIN 10001 - 11127

Safety Campaign No. RA-0003 (Recall)

## **UNDERCARRIAGE**

Deductible
Point
Value
Per Item

	<u>Value</u> <u>Per Item</u>	
1. Non-original Add-on, Replacement, or Accessory Item(s) must receive one full point deduction for the presence of each non-original and do not judge non-original items unless otherwise noted on unavailable		
<ol> <li>Wheels     must all be correct for VIN,     up to VIN 1883—must have gray wheels with gray wheel caps (Figure 67 from VIN 1884—must have silver wheels with black wheel caps (Figure 6</li> </ol>		Ties.
Driver-side (Front)	-or-	
must be in original condition without damage (including inside),	50	
must be clean with no dirt, debris, or stains (including inside—no underco	pating),50	
Driver-side (Rear)		
must be in original condition without damage (including inside), must be clean with no dirt, debris, or stains (including inside—no underco	50 pating),50	17.2
Passenger-side (Front)	A Part of the Part	<b>不是这些是</b>
must be in original condition without damage (including inside), must be clean with no dirt, debris, or stains (including inside—no underco	pating),50 Figure 67: Wheel/Cap u	p to VIN 1883
Passenger-side (Rear)	A STATE OF THE PARTY OF THE PAR	
must be in original condition without damage (including inside),	50	1/2/2
must be clean with no dirt, debris, or stains (including inside—no underco	pating),50	
Wheel Caps		
Driver-side (Front)	05	
must be in original condition without damage, must be clean with no dirt, debris, or stains,	25 25	of the same
Driver-side (Rear)	2000	
must be in original condition without damage,	25 <b>(1)</b>	The second second
must be clean with no dirt, debris, or stains,	25 Figure 68: Wheel/Cap f	rom VIN 1884
Passenger-side (Front)		
must be in original condition without damage,	25	
must be clean with no dirt, debris, or stains,	25	
Passenger-side (Rear)		
must be in original condition without damage,	25	
must be clean with no dirt, debris, or stains,	25	
Valve Stems (Aluminum)		
must all be correct (Figure 69),	-2	
Driver-side (Front)	-or-	-
must be in original condition without damage,	25	
must be clean with no dirt/dust, or debris,	25	1112
Driver-side (Rear)		1111
must be in original condition without damage,	25	3000
must be clean with no dirt/dust, or debris.	25	



-.25

-.25

-.25 -.25

Passenger-side (Front)

must be in original	condition	without a	lamage
must be clean with	no dirt/di.	ist, or del	oris.

must be in original condition without damage,

must be clean with no dirt/dust, or debris,

	Valve Stem Caps (silver-finish and knurled with raised dimple)  must all be correct (Figure 70),	-2
	Driver side (Frent)	_
	Driver-side (Front) must be in original condition without damage,	-or- 25
	must be clean with no dirt/dust, or debris,	25 25
		0
	Driver-side (Rear)	
	must be in original condition without damage, must be clean with no dirt/dust, or debris,	25
	must be clean with no aireadst, or debris,	25
	Passenger-side (Front)	
	must be in original condition without damage,	25
	must be clean with no dirt/dust, or debris,	25
	Passenger-side (Rear)	
	must be in original condition without damage,	25
	must be clean with no dirt/dust, or debris.	25
3.	Wheel wells (undercoating overspray acceptable for '83 cars only)	
	Driver-side (Front)	
	must be in original condition without damage, must be clean with no dirt/dust, or debris,	25
	must be clean with no aireadst, or debris,	25
	Driver-side (Rear)	
	must be in original condition without damage,	25
	must be clean with no dirt/dust, or debris,	25
	Passenger-side (Front)	
	must be in original condition without damage,	25
	must be clean with no dirt/dust, or debris,	25
	Passenger-side (Rear)	
	must be in original condition without damage,	25
	must be clean with no dirt/dust,or debris,	25
	Lip Moldings (black)	
	Driver-side (Front)	
	must be in excellent original condition without damage,	25
	must be clean with no dirt/dust, or debris,	25
	Driver-side (Rear)	
	must be in excellent original condition without damage,	25
	must be clean with no dirt/dust, or debris,	25
	Passenger-side (Front)	
	must be in excellent original condition without damage,	25
	must be clean with no dirt/dust, or debris,	25
	Passenger-side (Rear)	
	must be in excellent original condition without damage,	25
	must be clean with no dirt/dust, or debris.	25
4	Tires (Goodyear NCT—235/60HR15 rear, 195/60HR14 front)	
7.	must all be correct manufacturer and brand—Goodyear NCT,	50
	must all be correct type, size, and style—radial tires with proper ratings of correct	50
	sizes with no white lettering visible,	
	(If all tires are not the correct manufacturer and brand and also not the correct type, size, and style, the deduction is four full points for the presence of non-original	
	replacements in addition to the deductions for the absence of original items, and	
	the rest of the items are judged),	

Figure 70: Valve Stem Cap closeup

Driver-side (Front)		
must be inflated to 23 psi $\pm$ 2 psi,	25	
must be in original condition without damage, cracking/dry rot, or excessive wear, must be clean with no dirt/dust, debris, stains, or undercoating overspray,	25 25	
must be clean with no univuust, debris, stains, or undercoating overspray,	25	
Driver-side (Rear)		
must be inflated to 30 psi $\pm$ 2 psi,	25	
must be in original condition without damage, cracking/dry rot, or excessive wear,	25	
must be clean with no dirt/dust, debris, stains, or undercoating overspray,	25	
Passenger-side (Front)		
must be inflated to 23 psi $\pm$ 2 psi,	25	
must be in original condition without damage, cracking/dry rot, or excessive wear,	25	
must be clean with no dirt/dust, debris, stains, or undercoating overspray,	25	
Passenger-side (Rear)		
must be inflated to 30 psi ± 2 psi,	25	
must be in original condition without damage, cracking/dry rot, or excessive wear,	25	
must be clean with no dirt/dust, debris, stains, or undercoating overspray.	25	
5. Suspension Components		
Shocks (Girling: front=black, rear=gray—Figure 71)		
must all be correct,	-2	FRONT REAR
'	-	_
Driver-side (Front)	-or-	
must be in original condition without damage, or rust,	25	
must be clean with no dirt/dust, or debris,	25	
	- 10	
Driver-side (Rear)		
must be in original condition without damage, or rust,	25	
must be clean with no dirt/dust, or debris,	25	
December of the (Forms)	- 8	
Passenger-side (Front)	25	
must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25	
must be clean with no unvoust, or debris,	25	
Passenger-side (Rear)	- 8	
must be in original condition without damage, or rust,	25	F: 74 0: I' 01 1
must be clean with no dirt/dust, or debris,	25	Figure 71: Girling Shocks
Shock Towers (on frame)		
Driver-side (Front)		
must be in original condition without damage, or rust,	25	
must be clean with no dirt/dust, or debris,	25	
Driver-side (Rear)		
must be in original condition without damage, or rust,	25	
must be clean with no dirt/dust, or debris,	25	
Passenger-side (Front)		
must be in original condition without damage, or rust,	25	
must be clean with no dirt/dust, or debris,	25	
Passenger-side (Rear)		
must be in original condition without damage, or rust,	25	
must be clean with no dirt/dust, or debris,	25	

<b>Coil Springs</b> (black) must not have any modifications of any kind including altering the proper ride height or changing the correct paint color,	-2
Driver-side (Front) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	-or- 25 25
Driver-side (Rear) must be in original condition without damage, or rust, must be clean with no dirt/dust, debris,	25 25
Passenger-side (Front) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25
Passenger-side (Rear) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25
Front	
Driver-side Upper Control Arm (black) must be in original condition without damage, or rust, must have Ball Joint Boot in original condition, must both be clean with no dirt/dust, or debris,	25 25 25
Driver-side Lower Link (black) must be in original condition without damage including not bent, dented, or rusty, must have Ball Joint Boot in original condition, must both be clean with no dirt/dust, or debris,	25 25 25
Passenger-side Upper Control Arm (black) must be in original condition without damage, or rust, must have Ball Joint Boot in original condition, must both be clean with no dirt/dust, or debris,	25 25 25
Passenger-side Lower Link (black) must be in original condition without damage including not bent, dented, or rusty, must have Ball Joint Boot in original condition, must both be clean with no dirt/dust, or debris,	25 25 25
Stabilizer Bar (black) must be in original condition without damage, or rust (including metal mounts), must be clean with no dirt/dust, or debris,	50 50
Rear	
Driver-side Upper Link (black) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25
Driver-side Lower Link (black) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25
Passenger-side Upper Link (black) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25
Passenger-side Lower Link (black) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25

#### Drive Axles (black)

	(Driver-side)	
	must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25
	(Passenger-side) must be in original condition without damage, or rust, must be clean with no dirt/dust, or debris,	25 25
	CV Axle Boots (black)	
	(Driver-side Inner) must be in original condition without damage or rips, must be clean with no dirt/dust, or debris,	25 25
	(Driver-side Outer) must be in original condition without damage or rips, must be clean with no dirt/dust, or debris,	25 25
	(Passenger-side Inner) must be in original condition without damage or rips, must be clean with no dirt/dust, or debris,	25 25
	(Passenger-side Outer) must be in original condition without damage or rips, must be clean with no dirt/dust, or debris.	25 25
6	. Cooling Fans Assembly	
	Motor (black) "Smith" brand must be in original condition without damage or wiring alterations, must be clean with no dirt/dust, or debris,	25 25
	Fan Blades (black) must both be in original condition without damage, cracks, chips, or yellowing, must both be clean with no dirt/dust, debris, or undercoating overspray,	25 25
	Fan Cowl (black) must be in original condition without damage, must be clean with no dirt/dust, or debris,	25 25
	<b>Label</b> "WARNING Radiator Fans May Start At Any Time" (Figure 72) must be in place (Figure 73),	50
	must be in original condition without damage, must be clean with no dirt, debris, or undercoating overspray.	-or- 25 25
7	Radiator (black) must be in original condition without damage or apparent leaks, must be clean with no dirt, debris, or undercoating overspray,	50 50
	Duct (black) must be in original condition without damage, must be clean with no dirt, or debris,	-1 -1
	Piping—visible two only (silver) must both be in original condition without damage, must both be clean with no dirt, or debris,	-1 -1
	Hoses—only visible (black) must all be in original condition without damage, must all be clean with no dirt, or debris,	50 50



Figure 72: Fans Warning Label



Figure 73: Fans Label in place on Cowl

	Clamps—only visible (silver metal)  must all be original style,	-1 -or-
	must all be in original condition without damage, must all be clean with no dirt, or debris.	50 50
8	• Frame  must be in original condition without damage, rust, dents, or buckles (including no chipping, or cracking of epoxy coating),  must be clean with no dirt, stains, or debris,	-1 -1
	Tie-down Hooks	
	<b>Driver-side</b> (Front)  must be in original condition without damage, rust, dents, or buckles (including no chipping, or cracking of epoxy coating), must be clean with no dirt, stains, or debris,	25 25
	<b>Driver-side</b> (Rear)  must be in original condition without damage, rust, dents, or buckles (including no chipping, or cracking of epoxy coating),  must be clean with no dirt, stains, or debris,	25 25
	Passenger-side (Front) must be in original condition without damage, rust, dents, or buckles (including no chipping, or cracking of epoxy coating), must be clean with no dirt, stains, or debris,	25 25
	Passenger-side (Rear) must be in original condition without damage, rust, dents, or buckles (including no chipping, or cracking of epoxy coating), must be clean with no dirt, stains, or debris.	25 25
9	. Corrosion Treatment/Undercoating—permitted on '83 cars only must not be present on '81 or '82 cars.	-2
10	. Horns (black plastic) must both be original MIXO brand,	-2
	must both be in original condition without damage, must both be clean with no dirt, debris, or internal undercoating overspray.	-or- -1 -1
11	. <u>Tie-Rod Ends, Boots, and Steering Rack Boot</u>	
	Driver-side (including Boot) must be in original condition without damage, must be clean with no dirt/dust, or debris,	25 25
	Steering Rack Boot (including Clamp) must be in original condition without damage, must be clean with no dirt/dust, or debris,	25 25
	Passenger-side (including Boot) must be in original condition without damage, must be clean with no dirt/dust, or debris,	25 25
	Steering Rack Boot (including Clamp) must be in original condition without damage, must be clean with no dirt/dust, or debris.	25 25

12. <u>Seat Belt Anchor Bolt Seal Caps</u> on lower sills (black) must both be in place (Figure 74),	-2
Driver-side	-or-
must be in original condition without damage,	50
must be clean with no dirt/dust, or debris,	50
Passenger-side	
must be in original condition without damage,	50
must be clean with no dirt/dust, or debris.	50
13. Air Deflector Plates	
Driver-side	
must visibly be securely affixed,	25
must be in original condition without damage,	50
must be clean with no dirt/dust, or debris,	25
Passenger-side	
must visibly be securely affixed,	25
must be in original condition without damage,	50
must be clean with no dirt/dust, or debris,	25
Attaching Hardware	
Driver-side (Washers x 3)	
must all be in original condition without damage,	25
must all be clean with no dirt/dust, or debris,	25
Driver-side (Nuts x 3)	
must all be in original condition without damage,	25
must all be clean with no dirt/dust, or debris,	25
Passenger-side (Washers x 3)	
must all be in original condition without damage,	25
must all be clean with no dirt/dust, or debris,	25
Passenger-side (Nuts x 3)	
must all be in original condition without damage,	25
must all be clean with no dirt/dust, or debris.	25
14. Clutch Line (manual transmission cars only)	

Figure 74: Seat Belt Anchor Bolt Cap

- 14. Clutch Line (manual transmission cars only)

  must not be braided stainless steel.
  15. Repainted Item(s) (or items that may have been repainted) can only receive deduction(s) if wrong color paint/finish was applied, or if paint was applied in a drastically different quality from factory appearance (must all be approved by
- 16. <u>Miscellaneous Item(s)</u> for anything not already specifically covered that is blatantly incorrect (must all be approved by Head Judge and initialed)

Head Judge and initialed)

## **EXTERIOR**

Deductible
Point
Value
Per Item

## 1. Non-original Add-on, Replacement, or Accessory Item(s)

must receive one full point deduction for the presence of each non-original item, and non-original items are not judged unless otherwise noted on unavailable items.

## 2. Stainless Steel Panels (except hood)

Driver elde Deer	
Driver-side Door must be properly aligned with adjacent panels,	25
must have a horizontally straight grain appearance to the brushed stainless-steel finish and no obvious swirls,	25
must be in original condition without damage, scratches (including the area surrounding the door lock), dents, or blemishes (including no overly-polished shiny	25
spots such as those caused by rub marks particularly in the area above the door	
handle), must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots,	25
Passenger-side Door	
must be properly aligned with adjacent panels,	25
must have a horizontally straight grain appearance to the brushed stainless-steel finish and no obvious swirls,	25
must be in original condition without damage, scratches (including the area	25
surrounding the door lock), <i>dents</i> , <i>or blemishes</i> (including no overly-polished shiny spots such as those caused by rub marks particularly in the area above the door	
handle), must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots,	25
Driver-side Front Fender	
must be properly aligned with adjacent panels,	25
must have a horizontally straight grain appearance to the brushed stainless-steel finish and no obvious swirls,	25
must be in original condition without damage, scratches, dents, or blemishes (including those particularly in the area near fuel filler),	25
must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots,	25
Passenger-side Front Fender	
must be properly aligned with adjacent panels,	25
must have a horizontally straight grain appearance to the brushed stainless-steel finish and no obvious swirls,	25
must be in original condition without damage, scratches, dents, or blemishes,	25
must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots,	25
Driver-side Quarter Panel	
must be properly aligned with adjacent panels,	25
must have a horizontally straight grain appearance to the brushed stainless-steel finish and no obvious swirls,	25
must be in original condition without damage, scratches, dents, or blemishes,	25
must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots,	25
Passenger-side Quarter Panel	
must be properly aligned with adjacent panels,	25
must have a horizontally straight grain appearance to the brushed stainless-steel finish and no obvious swirls,	25
must be in original condition without damage, scratches, dents, or blemishes,	25
must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots,	25

#### **Roof T-Panel** must be properly aligned with adjacent panels, -.25 must have a straight grain appearance in the correct direction to the brushed -.25 stainless-steel finish and no obvious swirls, must be in original condition without damage, scratches, dents, or blemishes -.25 (including no overly-polished shiny spots such as those caused by rub marks particularly on the rear edge at louvre and edges at doors), must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots. -.25 3. Hood up to VIN 03200 must have accent grooves and fuel filler flap, from VIN 03201 - 07199 must have accent grooves but no fuel filler flap, all CD and DD VINs must have neither the accent grooves nor a fuel filler flap, and "DeLorean" hood emblem is acceptable, (Figure 75) must be correct for VIN, -2 -ormust be properly aligned with adjacent panels, -.50 must have a straight grain appearance in the correct direction to the brushed -.50 stainless-steel finish and no obvious swirls, Figure 75: "DeLorean" Emblem must be in original condition without obvious "X" pattern showing through from the -.50 other side, damage, scratches, dents, or blemishes (including the hood emblem for CD and DD VINs; letters must be brushed finish, black background, and all edges must be a uniform color free of signs of wear or damage), must be clean with no dirt, debris, fingerprints, cleaning streaks, or water spots. -.50 4. Glass and Trim (driver-side window, passenger-side window, driver-side quarter-panel window, passenger-side quarter-panel window, and rear window) Aftermarket sticker(s) or tinting of any kind—not acceptable, **Driver-side Window** must be original as identified by the "SEKURIT" logo, -.75 -ormust be in original condition without damage, scratches, chips, or nicks (including -.25 both sides of glass), must be clean with no dirt/dust, debris, fingerprints, cleaning streaks, smears, -.25 smudges, or water spots (including both sides of glass), "DMC Quality Assured" label (Figure 76) affixed to fixed portion of window glass is QUALITY ASSURED acceptable for all CD and DD VINs as well as late '81 VINs, and if presentmust be in original condition without damage and must be clean, -.25 Figure 76: "DMC Quality Assured" Label Trim Rubber Finisher (exterior) must visibly be securely attached, -.25 must be well-fitted. -.25 must be in original condition without damage, or cracks, -.25 must be clean with no dirt, or debris, -.25 **Trim** (power tollbooth portion only) Felt Finisher (interior) must visibly be securely attached. -.25

Rubber Wipe Seal (exterior) must visibly be securely attached,

must be well-fitted.

must be in original condition without damage, or cracks, must be clean with no dirt, or debris,

must be in original condition without damage,

must be clean with no dirt, or debris.

-.25

-.25

-.25

-.25

-.25

-.25

Channel and Guide Assembly	
must visibly be securely attached and RTV (if present) must be neatly applied,	25
must be well-fitted,	25
must have flat-black painted finish,	25
must be in original condition without damage, scratches, or chips in paint,	25
must be clean with no dirt, or debris,	25
Channel Rubber Insert	
must visibly be securely attached,	25
must be well-fitted,	25
must be in original condition without damage, or cracks,	25
must be clean with no dirt, or debris,	25
Passenger-side Window	
must be original as identified by the "SEKURIT" logo,	50
	-or-
must be in original condition without damage, scratches, chips, or nicks (including	25
both sides of glass),	
must be clean with no dirt/dust, debris, fingerprints, cleaning streaks, smears,	25
smudges, or water spots (including both sides of glass),	
Trim	
Rubber Finisher (exterior)	
must visibly be securely attached,	25
must be well-fitted,	25
must be in original condition without damage, or cracks,	25
must be clean with no dirt, or debris,	25
must be clean with no dirt, or debris,	20
Trim (power tollbooth portion only)	
Felt Finisher (interior)	
must visibly be securely attached,	25
must be well-fitted,	25
must be in original condition without damage,	25
must be clean with no dirt, or debris,	25
Rubber Wipe Seal (exterior)	
must visibly be securely attached,	25
must be well-fitted,	25
must be in original condition without damage, or cracks,	25
must be clean with no dirt, or debris,	25
Channel and Guide Assembly	
must visibly be securely attached and RTV (if present) must be neatly applied,	25
must be well-fitted,	25
must have uniform flat-black painted finish,	25
must be in original condition without damage, scratches, or chips in paint,	25
must be clean with no dirt, or debris,	25
Channel Rubber Insert	
must visibly be securely attached,	25
must be well-fitted,	25
must be in original condition without damage, or cracks,	25
must be clean with no dirt, or debris,	25
Driver-side Quarter-panel Window	
must be original as identified by the "SEKURIT" logo,	50
	-or-
must be in original condition without damage, scratches, chips, or nicks (including	25
both sides of glass),	
must be clean with no dirt/dust, debris, fingerprints, cleaning streaks, smears,	25
smudges, or water spots (including both sides of glass),	

#### Trim

Rubber Finisher (exterior) must visibly be securely attached, must be well-fitted, must be in original condition without damage, or cracks, must be clean with no dirt, or debris,	
Passenger-side Quarter-panel Window must be original as identified by the "SEKURIT" logo,	
must be in original condition without damage, scratches, chips, or nicks (included both sides of glass), must be clean with no dirt/dust, debris, fingerprints, cleaning streaks, sm smudges, or water spots (including both sides of glass),	·
Trim	
Rubber Finisher (exterior) must visibly be securely attached, must be well-fitted, must be in original condition without damage, or cracks, must be clean with no dirt, or debris,	
Rear Window must be original as identified by the "SEKURIT" logo,	
must be in original condition without damage, scratches, chips, or nicks (included both sides of glass), must be clean with no dirt/dust, debris, fingerprints, cleaning streaks, sm smudges, or water spots (including both sides of glass).	
5. Windshield and Trim Aftermarket sticker(s) or tinting of any kind—not accep	table,
must be original as identified by the "SEKURIT" logo,	
must be correct for VIN	

up to VIN 02710—must have radio antenna embedded in the glass, from VIN 02711—must not have radio antenna embedded in the glass, must be in original condition without damage (including both sides of glass), must be clean with no dirt, debris, or fingerprints (including both sides of glass),

### Trim

## Metal (exterior)

must visibly be securely attached, must be well-fitted, must have flat-black painted finish, must be in original condition without damage, scratches, or chips in paint, must be clean with no dirt, or debris.

#### 6. Exterior Mirrors (Figures 77 and 78)

#### **Driver-side**

(Aftermarket stick-on with wide-angle modification is not acceptable), must be original—no aftermarket replacement with wide-angle modification,

must be correct for VIN (up to VIN 05929—mirror is not edge finished around glass, or from VIN 05930—mirror is edge finished around Sundym<sup>TM</sup> glass), must be in original condition without damage, scratches, or chips, must be clean with no dirt, or debris,

#### Housing (driver-side)

must be correct for VIN (up to VIN 05929—housing has a smooth finish, or from VIN 05930—housing has a textured finish), must be in original condition without damage, scratches, or chips, must be clean with no dirt, or debris,

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.50 -or-

-.50

-.25

-.25

-.25

-.25

Figure 77: Exterior Mirror up to VIN 5929



Figure 78: Exterior mirror from VIN 5930

© Copyright 2007 DeLorean Millennium Concours

	Passenger-side		
	(Aftermarket stick-on with wide-angle modification is not acceptable),		
	must be original—no aftermarket replacement with wide-angle modification,	50	
	must be original—no aftermarket replacement with wide-angle modification,	50 -or-	
	must be correct for V/M (up to V/M 05020, mirror does not have bozel ground	50	
	must be correct for VIN (up to VIN 05929—mirror does not have bezel around	50	
	glass, or from VIN 05930—mirror does have bezel around glass,	0.5	
	must be in original condition without damage, scratches, or chips,	25	
	must be clean with no dirt, or debris,	25	
	Housing (passenger-side)		
	must be correct for VIN (up to VIN 05929—housing has a smooth finish, or from	25	
	VIN 05930—housing has a textured finish),		
	must be in original condition without damage, scratches, or chips,	25	
	must be clean with no dirt, or debris.	25	
		.20	
7	. Wipers		
'	. Wipers		
	Auma (Plack)		
	Arms (Black)		
	B. C. and D.		
	Driver-side		
	must have bolt caps in place,	25	
	must be in original condition without damage, scratches, chips in paint, or rust,	25	
	must be clean with no dirt, debris, or water spots,	25	
	Thurst so disally man no and, downey or mater specie,	0	
	Passenger-side		
	must have bolt caps in place,	25	
	must have washer nozzle visibly securely-affixed to passenger-side arm,	50	
	must be in original condition without damage, scratches, chips in paint, or rust	25	
	(including washer nozzle),		
	must be clean with no dirt, debris, or water spots (including washer nozzle),	25	
	Blades (Figure 80)		
	(g c.,		
	Driver-side		
	must be factory original <u>Bosch</u> —rectangular holes, or factory replacement <u>Anco</u> —	50	
	round holes,	-or-	AND DESCRIPTION OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN COLUM
	must be in original condition without damage, obvious wear, or dry rot,	25	
	must be clean with no dirt, debris, or water spots,	25	The second secon
	Passenger-side Passenger-side		Figure 80: Wiper Blade types
	must be factory original <u>Bosch</u> —rectangular holes, or factory replacement <u>Anco</u> —	50	
	round holes,	-or-	
	must be in original condition without damage, obvious wear, or dry rot,	25	
	must be clean with no dirt, debris, or water spots.	25	
	must be clean with no unt, debns, or water spots.	20	
	Deales Develo		
Ö	. Rocker Panels		
	Driver-side		
	must be in original condition without damage,	25	
	must be clean inside and out with no dirt, stains, or debris (including screws),	25	
	must have all 12 attaching screws,	25	
	all screws must be a uniform black color, in original condition without damage or	25	
	rust, and clean with no dirt/dust or debris,		
	Tast, and older with no alleadst of adolis,		
	Passenger-side		
		05	
	must be in original condition without damage,	25	
	must be clean inside and out with no dirt, stains, or debris (including screws),	25	
	must have all 12 attaching screws,	25	
	all screws must be a uniform black color, in original condition without damage or	25	
	rust, and clean with no dirt/dust or debris,		
	Panel Extensions (behind rear wheels)		
	and Enterior (Commit roof mirror)		
	Driver-side		
		25	
	must be in original condition without damage,		
	must be clean inside and out with no dirt, stains, or debris,	25	

	Passenger-side	
	must be in original condition without damage, must be clean inside and out with no dirt, stains, or debris.	
9.	Front Fascia must have correct paint finish for VIN (glossy finish up to VIN 03599, matte finish from VIN 03600), must be the same uniform correct color, must be properly aligned with adjacent panels, must be in original condition without damage, warps, or "raised eyebrows", must be clean with no dirt, debris, or water spots.	
10.	Grille must be a uniform black color, must be in original condition without damage, scratches, cracks, chips, or stains, must be clean with no dirt, debris, excessive cleaning products, or water spots,	
	Emblem (all cars except 500-series VIN)  must be in place,	
	must have a uniform black background, "DMC" letters must be brushed finish, and all edges must be a uniform color, must be in original condition without damage, scratches, cracks, or chips, must be clean with no dirt, debris, or water spots.	
11.	Air Dam must fit properly, must be in original condition without damage, scratches, cracks, chips, or stains, must be clean with no dirt, debris, or water spots.	
12.	Rock Screen must fit properly, must be in original condition without damage, scratches, chips, stains, or rust, must be clean with no dirt, debris, or insects.	
13.		
	<u>Lighting</u> (checking for LEDs are covered by "Operating Controls" judges)	
	Lighting (checking for LEDs are covered by "Operating Controls" judges)  Headlights	
	Headlights High-Beam (inner)	
	Headlights  High-Beam (inner) must both be Sylvania Sealed-Beam Halogen,  must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be	
	Headlights  High-Beam (inner) must both be Sylvania Sealed-Beam Halogen,  must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,  Low-Beam (outer)	
	High-Beam (inner) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,  Low-Beam (outer) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be	
	High-Beam (inner) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,  Low-Beam (outer) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,	
	High-Beam (inner) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,  Low-Beam (outer) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,  Retainers (silver)  Driver-side must both be in original condition without damage, scratches, or dents (including screws—no damage or rust), must both be clean with no dirt, debris, or water spots (including screws), Passenger-side	
	High-Beam (inner) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,  Low-Beam (outer) must both be Sylvania Sealed-Beam Halogen, must both be in original condition without damage, scratches, or cracks, must both be clean with no dirt, debris, or water spots, and both lenses must be free of inside moisture,  Retainers (silver)  Driver-side must both be in original condition without damage, scratches, or dents (including screws—no damage or rust), must both be clean with no dirt, debris, or water spots (including screws),	

#### Gap Fillers (black) (Figure 80)

#### **Driver-side**

must be in original condition without damage, or cracks (including screws—no damage or rust),

must be clean with no dirt, or debris (including screws),

#### Passenger-side

must be in original condition without damage, or cracks (including screws—no damage or rust),

must be clean with no dirt, or debris (including screws),

Figure 80: Headlights with Gap Filler

#### **Amber Running Lights**

#### (Front)

#### **Driver-side**

must be in original condition without damage, or scratches (including screws—no damage or rust),

must be clean with no dirt, debris, or water spots (including screws), and lens must be free of inside moisture.

#### Passenger-side

must be in original condition without damage, or scratches (including screws—no damage or rust),

must be clean with no dirt, debris, or water spots (including screws), and lens must be free of inside moisture,

#### (Sides) (Figure 81)

#### **Driver-side**

must be in original condition without damage, or scratches,

must be clean with no dirt, debris, or water spots and lens must be free of inside moisture,

must have rubber gasket with no missing pieces or cracks,

must have two screws, and both screws must be a uniform black color in original condition without damage or rust, and must be clean,

#### Passenger-side

must be in original condition without damage, or scratches,

must be clean with no dirt, debris, or water spots and lens must be free of inside moisture.

must have rubber gasket with no missing pieces or cracks,

must have two screws, and both screws must be a uniform black color in original condition without damage or rust, and must be clean,

#### Taillights (Figure 82)

#### **Driver-side**

must be in original condition without damage, scratches, or cracks, must be clean with no dirt, debris, or water spots and all lenses must be free of inside moisture.

must have amber directional indicator the same color as passenger side.

must have all six screws, and all screws must be a uniform black color in original condition without damage or rust, and must be clean,

#### Passenger-side

must be in original condition without damage, scratches, or cracks, must be clean with no dirt, debris, or water spots and all lenses must be free of inside moisture,

must have amber directional indicator the same color as passenger side, must have all six screws, and all screws must be a uniform black color in original condition without damage or rust, and must be clean,



Figure 81: Amber Marker with Gasket

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-.25 -.25

-.25

-.25

Figure 82: Taillight Assembly

-.25 -.25

-.25

-.25

-43-

#### Red Running Lights (sides) (Figure 83)

#### **Driver-side**

must be in original condition without damage, or scratches, must be clean with no dirt, debris, or water spots and lens must be free of inside

must have rubber gasket with no missing pieces or cracks,

must have two screws, and both screws must be a uniform black color in original condition without damage or rust, and must be clean,

#### Passenger-side

must be in original condition without damage, or scratches,

must be clean with no dirt, debris, or water spots and lens must be free of inside

must have rubber gasket with no missing pieces or cracks,

must have two screws, and both screws must be a uniform black color in original condition without damage or rust, and must be clean.

#### 14. Rear Fascia

must have correct paint finish for VIN (glossy finish up to VIN 03599, matte finish from VIN 03600),

must be the same uniform correct color throughout (including visible area behind license plate bezel),

must be properly aligned with adjacent panels,

must be in good condition with no damage, scratches, chips, or flaws,

must be clean with no dirt, debris, or water spots.

#### 15. License Plate must not be present,

#### Bezel

must be a uniform black color,

must be in original condition without damage, scratches, chipping, or fractures, must be clean with no dirt, or debris,

must have all four screws, and all screws must be a uniform black color in original condition without damage or rust, and must be clean,

#### **Light Covers with Lenses** (Figure 84)

must both be in original condition without damage, cracks, or chips,

must both be clean with no dirt/dust, or debris, and both lenses must be free of inside moisture,

must both have two screws each, and all screws must be a uniform black color in original condition without damage or rust, and must be clean.

16. Exhaust (straight-cut pipes on BD VINs, flared-tip extensions on CD and DD VINs except some early CD and late DD VINs)

must both be correct for VIN,

must be brushed finish,

must be in original condition without damage, scratches, dents, or blemishes, must be clean with no dirt, debris, grease, road grime, or tar.

#### 17. Side Molding Rub Strips

#### **Driver-side**

must all fit flush against body,

must all have excellent alignment from fender to door and door to guarter panel,

must all have excellent alignment on each side of running lights,

must all have evenly textured finish,

must all be a uniform black color,

must all be in original condition without damage, scratches, or chips,

must all be clean with no dirt, or debris,



Figure 83: Red Marker with Gasket

Ξ.	25
----	----

-.25

-.25

-.25

-.25

-.25

-.25

- 25

-.25

-.25

-.25

-.25

-.25

-.25

-.25 -.25

-.50

-.25 -.25

-.25



Figure 84: License Plate Lights

-2 -or-

-.50

-.75

-.75

-.25

-.25

-.25

-.25

-.25

-.25

-.25

-44-

Pá	as	se	n	a	er	-s	ic	le

must all fit flush against body, must all have excellent alignm

must all have excellent alignment from fender to door and door to quarter panel,

must all have excellent alignment on each side of running lights,

must all have evenly textured finish,

must all be a uniform black color,

must all be in original condition without damage, scratches, or chips,

must all be clean with no dirt, or debris.

#### 18. Door Locks

up to VIN BD04199 must have an all black lock (Figure 85), from VIN BD04200 must have a black ring and a silver insert (Figure 86)

#### **Driver-side**

must be correct for VIN,

must be in original condition without damage, or scratches, must be clean with no dirt, or debris,

#### Passenger-side

must be correct for VIN,

must be in original condition without damage, or scratches, must be clean with no dirt, or debris.

#### 19. Induction Grilles (at rear of quarter-panel windows)

#### **Driver-side**

must be a uniform black color, must be in original condition without damage, scratches, or chips, must be clean with no dirt, or debris,

#### Passenger-side

must be a uniform black color, must be in original condition without damage, scratches, or chips, must be clean with no dirt, or debris,

#### Ring Seals (on underside of each grille at pontoon) (Figure 87)

#### **Driver-side**

must cover the grille and hole in the pontoon fully, must be in original condition without damage, or cracks, must be clean with no dirt, or debris,

#### Passenger-side

must cover the grille and hole in the pontoon fully, must be in original condition without damage, or cracks, must be clean with no dirt, or debris,

Automatic Antenna (on driver's side—if fitted) (Figure 88)

must be black,

hole must be smooth with no rough edges, must be in original condition without damage,

must be clean with no dirt, or debris.

#### 20. Quarter-Panel Louvers

#### **Driver-side**

must fit properly with uniform margin around edges, must be a uniform black color, must be in original condition without damage, must be clean with no dirt, debris, or adhesive around outside edges,



Figure 85: Door Locks up to VIN 4199

0

Figure 86: Door Locks from VIN 4200

-.25 -.25 -.25

-.25

-.25

-.25

-.25 -.25

-.25

-.25

-.25

-.25

-.25

-.25 -.25

-.25

-.25

-.50 -or-

-.25

-.25

-.50 -or-

-.25

-.25

-.25

-.25

Figure 87: Ring Seal



Figure 88: Power Antenna/Induction Grille

#### Passenger-side must fit properly with uniform margin around edges, -.25 -.25 must be a uniform black color, must be in original condition without damage, -.25 must be clean with no dirt, debris, or adhesive around outside edges. -.25 21. Louver (either louver type is acceptable—narrow or wide center support) Must not have reinforcing strip of any kind on underside, must be aligned correctly and fit properly, -.25 must be a uniform black color, -.25 must be in original condition without damage, scratches, cracks, or chips, -.25 must be clean with no dirt, debris, or stains, -.25 **Struts Driver-side** -.25

must be	original manufacturer brand—"LIFT-O-MAT" by STABIL	US,
must be	correct style—black with silver shaft.	

must be original manufacturer brand—"LIFT-O-MAT" by STABILUS,

(If strut is not by the correct manufacturer and also not the correct style, the deduction is one full point for the presence of a non-original replacement in addition to the deductions for the absence of original item, and the rest of the item is judged), must be installed correctly—with shaft end at body, must be in original condition without damage, or scratches, must be clean with no dirt, or debris,

#### Passenger-side

must be correct style—black with silver shaft,
(If strut is not by the correct manufacturer and also not the correct style, the deduction
is one full point for the presence of a non-original replacement in addition to the
deductions for the absence of original item, and the rest of the item is judged),
must be installed correctly—with shaft end at body,
must be in original condition without damage, or scratches,
must be clean with no dirt, or debris,

#### **Plastic Strut Mounting Covers (Figure 89)**

#### **Driver-side**

must be in place on quarter panels (CD and DD VINs only), must be in original condition without damage, or scratches, must be clean with no dirt, or debris,

## Passenger-side

must be in place on quarter panels (CD and DD VINs only), must be in original condition without damage, or scratches, must be clean with no dirt, or debris,

**Date Label** (if present on louver) (Figure 90) must be the SAME or PRIOR to that of build month on VIN plate.

- 22. Repainted Item(s) (or items that may have been repainted) can only receive deduction(s) if wrong color paint/finish was applied, or if paint was applied in a drastically different quality from factory appearance (must all be approved by Head Judge and initialed)
- 23. <u>Miscellaneous Item(s)</u> for anything not already specifically covered that is blatantly incorrect (must all be approved by Head Judge and initialed)



-.25

-.25

-.25

-.25

-.25 -.25

-.25 -.25 -.25

-.25

-.25

-.25

-.25

-.25

-.25

Figure 89: Strut Mounting Cover



Figure 90: Louver Date Label

Optional dealer accessories DO NOT accrue extra bonus points, but if they are present, they are subject to deductions in the point amounts listed below:

## 24. Acceptable Dealer-installed Accessories

DMC Custom Luggage Rack and Accessories Bag	
(part #A3000010)	
must have rack mounts installed on louver,	25
must have rack properly stowed in luggage compartment held in place with retaining	25
bracket assembly,	25
must have original vinyl accessories bag with heat-stamped DMC logo neatly stowed	25
in luggage compartment, accessories bag must contain luggage straps with proper plastic clips,	25
must both be in original condition without damage, scratches, or signs of wear,	50
must both be clean with no dirt, debris, or stains,	50
That sour so court marrie and, doubte, or claime,	.00
-RACK AND ACCESSORIES BAG MUST BE READILY REMOVABLE FOR	
JUDGING EACH ITEM AND JUDGING OF LUGGAGE COMPARTMENT-	
DMC Lockable Ski Adapter with Key and Accessory Bag	
(part #A3000011)	0.5
must be original,	25
must have keys,	25 25
must have accessory bag neatly stowed in luggage compartment, must all be in original condition without damage, scratches, or signs of wear,	25 25
must all be clean with no dirt, debris, or stains,	25
must all be clean with no airt, debne, or stains,	.20
-ACCESSORY BAG MUST BE READILY REMOVABLE FOR JUDGING AND	
JUDGING OF LUGGAGE COMPARTMENT-	
DMC Accent Side Stripes	
(part #A2000010)	
Driver-side	
must be black only,	25
must be wide,	25
must be textured.	25
must be in original condition without damage, scratches, or missing segments,	25
must be clean with no dirt, debris, or stains,	25
Passenger-side Passenger-side	
must be black only,	25
must be wide,	25
must be textured, must be in original condition without damage, scratches, or missing segments,	25 25
must be in original condition without damage, scratches, or missing segments, must be clean with no dirt, debris, or stains,	25
must be clean with no unt, debns, or stains,	20
-OR-	-or-
(part #A2000020)	
Driver-side	
must be gray only,	25
must be thin line,	25 25
must not be textured, must be in original condition without damage, scratches, or missing segments,	25 25
must be in original condition without damage, scratches, or missing segments, must be clean with no dirt, debris, or stains,	25
That so deal marrie and about of change,	.20
Passenger-side	
must be gray only,	25
must be thin line,	25
must not be textured,	25
must be in original condition without damage, scratches, or missing segments,	25
must be clean with no dirt, debris, or stains.	25

# **OPERATING CONTROLS**

Deductible
Point
Value
Per Item

1. Non-original Replacement Bulb(s) Only (to be checked by Operating Controls Judges while checking working condition of lighting—Aftermarket bulb substitutes such as colored bulbs, or LED replacement bulbs are not allowed and are visually distinguishable from original because of the incorrect type of illumination they emit) must receive one full point deduction for the presence of each non-original item.

2.	Engine must start easily, must idle 775 RPM + or - 50 smoothly and quietly (some oscillation is normal for first few minutes after cold start).	50 50
3.	. <u>Gauges</u>	
	Battery must work with engine running,	50
	Fuel must work with engine running,	50
	Oil Pressure must work with engine running,	50
	Tachometer must work with engine running,	50
	Temperature must work with engine running.	50
4.	. A/C and Heater Ventilation and Controls must work properly when engine is running.	
	Mode Control Knob  must work (rotate mode control knob from OFF to DEFROST and back to MAX verifying that damper works),	25
	Temperature Control Knob must work when control knob is set on far left—WARM (heater must blow), must work when control knob is set on far right—COLD (a/c must blow noticeably cold after reasonable a/c charge time),	25 25
	Fan Speeds must work with noticeable difference in air volume at all four speeds,	25
	Engine Cooling Fans must cycle with A/C compressor as indicated by flickering Fan Fail Light on center console and/or listening for the fans to come on,	25
	Air Vents (all four)  Driver-side door must open and close with thumbwheel, and directional vents	25
	operate, Passenger-side door must open and close with thumbwheel, and directional vents	25
	operate,  Driver-side console must open and close with thumbwheel, and directional vents	25
	operate, Passenger-side console must open and close with thumbwheel, and directional	25

vents operate.

## 5.Steering Wheel

Lock must work,	50
Logic Box must buzz when key is in the ignition and the driver's door is open.	50
6.Gauge Cluster	
Backlighting	
must work with rheostat when exterior lights are on,	75
Ventilation Panel Backlighting must work with exterior lights off and key in accessory position,	75
Gear Selector Display (if automatic transmission) must be fully illuminated (no deduction for manual),	25
Indicator Lights	7.5
must work for the "driver's seat belt", must work for "door ajar" (driver door),	75 75
must work for "door ajar" (passenger door).	75
7.Cigar Lighter	
must be operable,	-1
Illuminated Ring	
must work when exterior lights are on.	-1
8.Rear Window Defogger Switch must be operable as indicated by light on center console.	-1
9.Clock (on console or integrated in radio)	
must display correct time, must have all LED segments illuminating appropriately.	50 50
10. <u>Interior Courtesy Lights</u>	
Front Dome Light	
must work properly in all three positions (which includes the delayed shutoff when	75
both doors are closed),  must have original-type bulb,	25
Rear Dome Light	
must work properly in all three positions (which includes the delayed shutoff when	75
both doors are closed),  must have original-type bulb.	25
11.Radio, Cassette Player, and Power Antenna	
Radio	
must work on both AM & FM,	25
Cassette Tape Player	
must work properly,	25
tape door opens and ejects properly,	25
Speakers (all four) must have sound that is not scratchy,	50
LED Display	
must work,	25
Volume Control	
must have no static present when operated,	25

Power Antenna (if fitted)  must operate automatically (no deduction for fixed antenna or built-in windshield type).	25
12. Windshield Wipers must work on low speed, high speed, and intermittent delay,	-1
Washer must spray evenly.	-1
13. Horns must both work correctly (high note and low note must sound together).	-2
14. Electric Windows	
<b>Driver-side</b> must operate smoothly and properly (including verifying that top of window remain horizontal when going up and down),	ns -1
Passenger-side must operate smoothly and properly (including verifying that top of window remain horizontal when going up and down).	ns -1
15. Electric Mirrors	
<b>Driver-side</b> must operate correctly and smoothly in all four directions when using remote mirr switch,	or75
Passenger-side must operate correctly and smoothly in all four directions when using remote mirr switch.	or75
16. Electric Door Locks and Door Key	
Electric Door Locks must both work properly, (With doors closed—check for simultaneous operation door locks from both the driver-side interior lock switch and the passenger-side interior lock switch. Each door's interior lock switch must be able to simultaneous lock both doors and simultaneously unlock both doors.	de
Verify both doors are locked by trying to open them from both the interior are exterior release handles. Verify both doors are unlocked by opening them fro interior release handle first, redo the lock and unlock operation sequence, are then verify both doors are unlocked by opening them from the exterior release handles),	m nd
Door Key must work properly, (With doors closed—check for simultaneous operation of do locks with key from both the driver-side exterior lock and the passenger-side exteri lock. Each door's exterior locking mechanism must be able to simultaneously lock both doors and simultaneously unlock both doors when using the key.	or
Verify both doors are locked by trying to open them from both the interior are exterior release handles. Verify both doors are unlocked by opening them fro interior release handle first, redo the lock and unlock operation sequence, are then verify both doors are unlocked by opening them from the exterior release handles),	m nd
"Lock Doors" Indicator (on center control panel) must illuminate with doors unlocked and ignition on,	50
<b>Door Key Illumination</b> (for VINs up to and including 04187) must be operational (no deduction for single-key VINs after 04187).	50

## 17. Headlights

## High Beam

Driver-side	
must work,	25
Passenger-side must work,	25
Low Beam	
Driver-side must work,	25
Passenger-side must work,	25
Switch (on console) must illuminate.	25
18. <u>Parking Lights</u>	
Front (amber colored)	
<b>Driver-side</b> must work with headlight switch on and in "running light" position, must have original-type bulb,	25 25
Passenger-side must work with headlight switch on and in "running light" position, must have original-type bulb,	25 25
Side (amber colored)	
<b>Driver-side</b> must work with headlight switch on and in "running light" position, must have original-type bulb,	25 25
Passenger-side must work with headlight switch on and in "running light" position, must have original-type bulb,	25 25
Side (red colored)	
<b>Driver-side</b> must work with headlight switch on and in "running light" position, must have original-type bulb,	25 25
Passenger-side must work with headlight switch on and in "running light" position, must have original-type bulb,	25 25
Rear (red colored in the taillight assembly)	
<b>Driver-side</b> must work with headlight switch on and in "running light" position, must have original-type bulb,	25 25
Passenger-side must work with headlight switch on and in "running light" position, must have original-type bulb.	25 25

## 19. Turn Signal Lights

## **Front**

	Oriver-side nust operate,	25
	Passenger-side nust operate,	25
R	Rear	
D	Priver-side	
	nust operate, nust have original-type bulb,	25 25
	Passenger-side	0.5
	nust operate, nust have original-type bulb,	25 25
G	Sauge Cluster Indicators	
_	eft-turn	50
	nust work,	50
	Right-turn nust work.	50
20. <u>B</u>	Brake Lights	
_	Priver-side	
	nust work, nust have original-type bulb,	50 50
	Passenger-side	
	nust work, nust have original-type bulb.	50 50
21. <u>E</u>	mergency (Hazard) Flashers	
	ront	
m	nust both work together at the same time as intended,	50
	Rear nust both work together at the same time as intended,	50
	Gauge Cluster Indicators	
m	nust both work together at the same time as intended,	75
	switch (on console) nust illuminate.	25
22. <u>B</u>	Back-up (Reverse) Lights	
_	Priver-side	
	nust work, nust have original-type bulb,	50 50
	Passenger-side	
	nust work, nust have original-type bulb.	50 50

## 23. Rear License Plate Lights

	Left-side must operate with running lights and/or headlights turned on,	50
	must have original-type bulb,	50
	Right-side	
	must operate with running lights and/or headlights turned on,	50
	must have original-type bulb.	50
24.	Door Marker Lights	
	<b>Driver-side</b>	
	Front Position (amber colored)	
	must work when door is opened,	25
	must have original-type bulb,	25
	Middle Position (amber colored)	
	must work when door is opened,	25
	must have original-type bulb,	25
	Rear Position (red colored)	
	must work when door is opened, must have original-type bulb,	25 25
		.20
	Passenger-side	
	Front Position (amber colored)	
	must work when door is opened,	25
	must have original-type bulb,	25
	Middle Position (amber colored)	
	must work when door is opened,	25
	must have original-type bulb,	25
	Rear Position (red colored)	
	must work when door is opened,	25
	must have original-type bulb.	25
24.	Door Marker Lights	
	Driver-side	
	Front Position (amber colored)	
	must work when door is opened,	25
	must have original-type bulb,	25
	Middle Position (amber colored)	
	must work when door is opened, must have original-type bulb,	25 25
	must nave original-type bulb,	20
	Rear Position (red colored)	
	must work when door is opened, must have original-type bulb,	25 25
	must have original-type build,	25
	Passenger-side	
	Front Position (amber colored)	
	must work when door is opened,	25
	must have original-type bulb,	25
	Middle Position (amber colored)	
	must work when door is opened,	25
	must have original-type bulb,	25

	Rear Position (red colored)	0.5
	must work when door is opened,	25
	must have original-type bulb.	25
25.	. <u>Engine Compartment</u>	
	Cover	
	must pop up when release lever is operated,	50
	Light	
	must come on when cover is raised,	25
	must have original-type bulb,	25
	Stay Assembly	
	must work automatically when cover is raised and hold cover in open position.	-1
26.	. <u>Luggage Compartment</u>	
	Lid	
	must pop up when release lever is operated,	50
	Courtesy Light	
	must come on when cover is raised,	50
	must have original-type bulb,	25
	Struts	
	must both hold lid in full upright position,	50
	Fuel Cap Lock (for applicable cars with gas-flap hood)	
	must work correctly with door key.	50
27.	Storage Compartment Lock	
	must operate correctly with door/ignition key, or door key for 2-key system up to	50
	VIN 04187.	
28.	. <u>Rearview Mirror Day/Night Lever</u>	
	must be operational.	50
29.	. Glove Box	
	Glove Box Light	
	must work when lid is opened,	50
	must have original-type bulb,	25
	Glove Box Spring	
	must pop door up,	25
	Glove Box Latch	
	must work.	25
30.	. <u>Seats</u> (check operation of all seat adjusters)	
	Driver-side	
	must slide forward and back smoothly and quietly,	25
	must recline smoothly and quietly,	50
	must fold forward,	25
	Passenger-side	25
	must slide forward and back smoothly and quietly, must recline smoothly and quietly,	25 50
	must fold forward.	25

31. Handbrake must hold the vehicle securely,	50
Instrument Indicator Light must operate correctly.	50
32. <u>Doors</u>	
Driver-side must open smoothly with no excess effort required, must close smoothly with no excess effort required,	25 25
Passenger-side must open smoothly with no excess effort required, must close and latch smoothly with no excess effort required,	25 25
Strut	
<b>Driver-side</b> must raise door gently and completely and must hold door in fully-opened position (must go up and stay up when opened),	50
Passenger-side must raise door gently and completely and must hold door in fully-opened position (must go up and stay up when opened).	50
33. <u>Louver</u>	
Latch must engage top of engine cover and must hold louver in closed position when pulling up on louver,	50
Struts must both hold louver in full upright position,	50
Alignment must not allow louver to rub T-panel when opening or closing.	50
34. <u>Miscellaneous Item(s)</u> for anything not already specifically covered that is blatantly incorrect (must all be approved by Head Judge and initialed)	