

The Kong Range

Powerful Pumps. Strong Stations.

Stormwater. Greywater. Sewage. Sorted.



GORILLA PUMP STATIONS
Further and Faster

www.gorillapumpstations.co.nz

021 745 335



GORILLA PUMP STATIONS
Further and Faster

Kong Chopper Sewerage Stations


The 'Fighter' is a powerful chopper pump designed for heavy-duty wastewater applications. Its brushless DC motor works like an electric car, providing instant torque. It also features lock rotor protection and constant speed under load.

The 'Fighter' features a two-year warranty.

| Code | Description |
|---|--|
| 280-FG | 280L Pump Station. 900mmx650mmx800mm. Pedestrian-rated lid. |
| 320-FG | 320L Pump Station. Conical tank, 840mm max diameter X 980mm high. Fixed, non-pedestrian-rated lid. Risers in assorted sizes available. |
| <i>All of the above come complete with 40mm pipework, mac union, non-return valves, inlet/ outlet seals and non-drilled entry and exits. Other tank sizes available on request.</i> | |
| 228-LSKIT | High-level alarm with alert buzzer and light. With float and power lead. Highly recommended |

'Fighter' Chopper Pump

- 600w, 230v chopper motor
- AS/NZS 60335.1:2020 & AS/NZS 60335.2.41:2013+A1 approved
- Lock-rotor protection
- Brushless DC motor for greater torque.
- For 'pee, poo and toilet paper' only

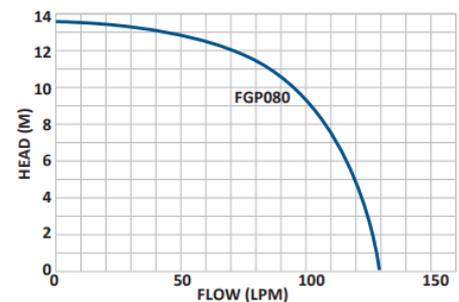

280L



280L (Top View)



320L



228-LSKIT Alarm

Pump Supplied By



GORILLA PUMP STATIONS
Further and Faster

www.gorillapumpstations.co.nz



GORILLA PUMP STATIONS
Further and Faster

Kong Certified Sewerage Stations

The Kong certified sewerage station matches the 'Fighter' heavy-duty grinder pump with a certified 1300L pump station, making this the ideal solution for consented jobs.

| Code | Description |
|-----------|---|
| 1300-FG | 2070mmx1020mm , 75kg, 1300L pump station with 'Fighter' chopper pump. |
| 228-LSKIT | High-level alarm with alert buzzer and light. With float and power lead. Highly recommended |



| | |
|-------------------------|---|
| 'Fighter' Chopper Pump |  |
| Power | 230V, 4.0 Amps |
| Motor | 0.8HP, 600w brushless DC 'grinder-type' motor |
| Performance | 120L/m @ 5m head |
| Certification Standards | AS/NZS 60335.1:2020 AS/NZS 60335.2.41:2013+A1 |
| Warranty Period | Two Years |

'King Koba' Features

- **Tough Construction, AS/NZ 4766, 3500 and 1546.1 Approved**
- **Ribbed Tank** for strength and anchoring, undrilled for plumber's convenience.
- **Smooth Internal Finish** for easy cleaning, with rounded base for sediment removal.
- **Plastic lid** (steel lid available upon request)
- **Total pipework package included (pictured)**
- **Hydraulic uplift anchoring drawings available**
- **10-year Warranty on Tank**



Freight Free New Zealand Wide!

Pump Supplied By 



GORILLA PUMP STATIONS
Further and Faster

www.gorillapumpstations.co.nz



GORILLA PUMP STATIONS
Further and Faster

Kong Vortex Sewerage Stations

Combines a pre-assembled pump station with a powerful 'Ultra' vortex pump featuring a two-year warranty

| Code | Description |
|---|--|
| 115-UL | 115L Pump Station 650mmx450mmx600mm. Pedestrian-rated lid. |
| 140-UL | 140L Pump Station. 650mm x 450mm x 800mm Pedestrian-rated lid. |
| 230-ULTW | 230L 'Twin' pump station 900mmx650mmx600mm |
| 280-ULTW | 280L 'Twin' Pump Station. 900mmx650mmx800mm. Pedestrian-rated lid. |
| 320-UL | 320L Pump Station. Conical tank, 840mm max diameter X 980mm high. Fixed, non-pedestrian-rated lid |
| <i>All of the above come complete with 40mm pipework, mac union, non-return valves, inlet/ outlet seals and non-drilled entry and exits. Other tank sizes available on request.</i> | |
| 228-LSKIT | High-level alarm with alert buzzer and light. With float and power lead. Highly recommended. (Not compatible with 115L volume chamber) |

'Ultra' Vortex Pump



- 250w, 230v motor
- Up to 27mm soft-solids
- 5 meter electrical lead
- Double mechanical seals and jam-resistant vortex system for dependability
- 40mm discharge piping
- For 'pee, poo and toilet paper' only.

| Discharge | Head Height |
|-----------|-------------|
| 200L/m | 1m |
| 150L/m | 4m |
| 100L/m | 5.8m |
| 50L/m | 6.5m |



140L



140L



280L



280L (Top View)



320L



228-LSKIT Alarm

Pump Supplied By **ARGON** DISTRIBUTORS LTD



GORILLA PUMP STATIONS
Further and Faster

www.gorillapumpstations.co.nz



GORILLA PUMP STATIONS
Further and Faster

Kong Stormwater Stations

A sturdy stormwater station and the Ultra vortex pump makes the 'Kong' series an ideal clean and dirty stormwater solution



115L Pit Box



140L Pit Box

| Code | Description |
|--|--|
| 115-SWV | 115L Pump Station 650mmx450mmx600mm. Pedestrian-rated slotted lid. |
| 140-SWV | 140L Pump Station. 650mm x 450mm x 800mm Pedestrian-rated lid. |
| <i>All of the above come complete with 40mm pipework, mac union and non-return valves.</i> | |

'Ultra' Vortex Pump



- 250w, 230v motor
- Up to 27mm soft-solids
- 5-meter electrical lead
- Double mechanical seals and jam-resistant vortex system for dependability
- 40mm discharge piping

| Discharge | Head Height |
|-----------|-------------|
| 200L/m | 1m |
| 150L/m | 4m |
| 100L/m | 5.8m |
| 50L/m | 6.5m |



Pump Supplied By **ARGON** DISTRIBUTORS LTD




GORILLA PUMP STATIONS
Further and Faster

www.gorillapumpstations.co.nz



GORILLA PUMP STATIONS
Further and Faster



GORILLA PUMP STATIONS


Further and Faster

Ultra Vortex Pump

A versatile vortex pump suitable for 'pee, poo and toilet paper' sewerage, as well as greywater and stormwater applications.

Features

- Automatic start/stop via float switch
- Manual override
- Automatically-resetting thermal overload
- Double mechanical seals
- *Two-year warranty*

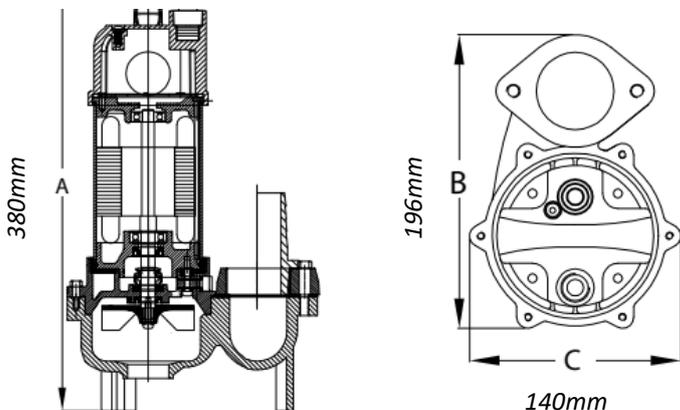

| | | |
|----------------------------------|---|--------------------|
| Power | Single-phase | |
| Motor | 230 volt, 250w vortex-type 'sucker pump'. | |
| Maximum Head | 7.5m | |
| Maximum Water Temperature | 40 degrees Celsius | |
| Outlet Size | 40mm | |
| Weight | 9kg | |
| Maximum Particle Size | 27mm soft solids | |
| Power Lead Length | Five meters | |
| Materials | Top Cover/ Impeller: GF Nylon. Motor casing: 304 Stainless Steel Pump Casing: Cast Iron | |
| Performance Table | Discharge | Head Height |
| | 200L/m | 1m |
| | 150L/m | 4m |
| | 100L/m | 5.8m |
| | 50L/m | 6.5m |

NOT to be used for drip feeds or lateral lines under any circumstances




GORILLA PUMP STATIONS
Further and Faster

www.gorillapumpstations.co.nz



GORILLA PUMP STATIONS
Further and Faster



GORILLA PUMP STATIONS

Further and Faster

Fighter Grinder Pump

A powerful grinder pump designed for heavy-duty wastewater applications, including whole-of-house systems. Its brushless DC motor provides more torque than AC units, with added benefits of lock rotor protection and constant speed under load.



| | |
|---------------------------------|---|
| Power | 230V, 4.0 Amps |
| Motor | 0.8HP, 600w brushless DC 'grinder-type' motor |
| Liquid Temperature Range | 0-40 Degrees Celsius |
| pH Range | 6-8 |
| Maximum Immersion Depth | 7m |
| Outlet Size | 32mm |
| Materials | Cast Iron (Pump Body) |
| Certification Standards | AS/NZS 60335.1:2020 AS/NZS 60335.2.41:2013+A1 |
| Automatic Operation | Via Float-Switch |
| Warranty Period | Two Years |
| Performance | 120L/m @ 5m 110L/m @ 7m 100L/m @ 9m 95L/m @ 10m 10m Shutoff |



Kitchen Cloth





Wet Wipes



T-Shirt



Nitrile Gloves

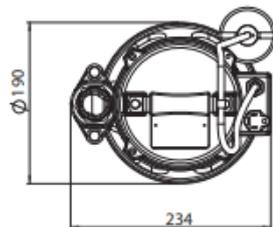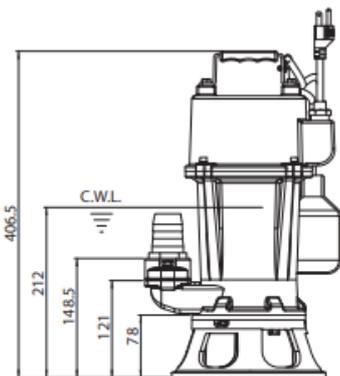


GORILLA PUMP STATIONS
Further and Faster

www.gorillapumpstations.co.nz



GORILLA PUMP STATIONS
Further and Faster



GORILLA PUMP STATIONS

Further and Faster

Areta ASJ 80 Pump

A great entry level self-priming jet pump, perfect for small to medium houses and irrigation.

Features

- 304 Stainless Steel Pump Body
- Auto On/Off Pump Controller
- Stainless Steel Union with O-Ring
- Run Dry Protection
- Jet/Venturi Suction Lift– 7m
- Run-Dry Protection
- Two-Year Warranty

| | |
|-------------------|--------------------------|
| Voltage | 230-240 |
| Frequency | 50Hz |
| Power | 0.6kW |
| Maximum Pressure | 38m |
| Start Pressure | 1.5 |
| Protection Rating | IP44 |
| Maximum Flow | 60 Litres p/m at 0.3 Bar |

Pump Performance Table

| Litres Per Minute | Bar/KPA |
|-------------------|-------------------|
| 52L/m | 1.5 Bar (150 KPA) |
| 25L/m | 2.5 Bar (250KPA) |
| 14L/m | 3.0 Bar (300KPA) |
| 8L/m | 3.5 Bar (350KPA) |
| Maximum Head | 4.2 Bar (420 KPA) |

Tested in New Zealand by Argon



GORILLA PUMP STATIONS

Further and Faster

www.gorillapumpstations.co.nz



GORILLA PUMP STATIONS

Further and Faster


HYDRONAK051 Pump

A robust all-in-one booster pump suitable for garden irrigation, wash-down applications and water transferring and circulation, as well as boosting water pressure.

Features

- Self-Priming
- Quiet-Running Motor
- Pressure-Switch
- Run-Dry Protection
- Automatic restart every hour after a run-dry failure
- Inlet Filter
- Non-Return Valve
- Suction Strainer
- Two-Year Warranty

| | |
|---------------------------|---|
| Power | 200-240v 50Hz single-phase |
| Motor | 400w 2.7A 2860RPM Turbine -type |
| Pump Q. Max | 41 IPM (rated Q.17 lpm) |
| Pump H. Max | 35m (rated H. 15m) |
| Start Pressure | 26m |
| Maximum Suction Lift | 6m |
| Water Temperature Range | 0-90 degrees Celsius |
| Port Size | 1" (25mm) |
| Weight | 15kg |
| Pump and Motor Protection | IP55 |
| Materials | Aluminium (motor frame) Cast Iron (pump casting) Ceramic-carbon- NBR (Mechanical Seals) |

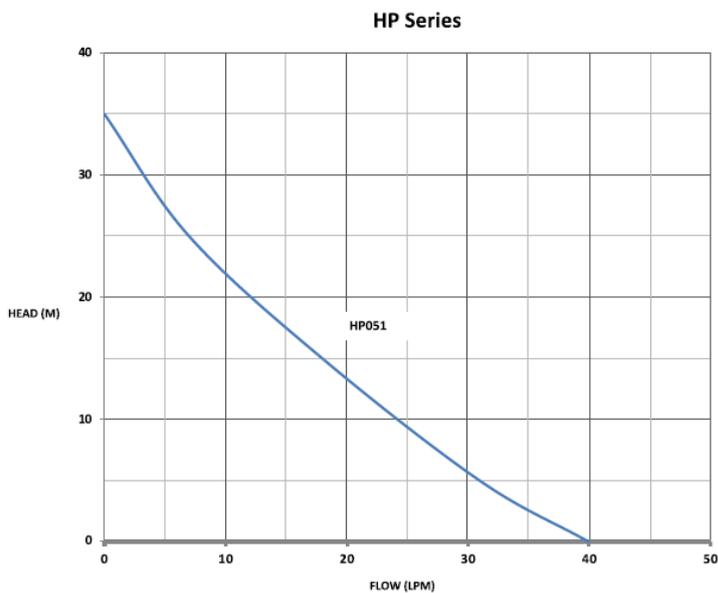

VXP Stormwater Pump

**A dependable pump for both clean and dirty stormwater.
Is also a suitable milk pump.**

Features

- Automatic start/stop via float switch
- IPX8 protection
- *One-year warranty*



| | | |
|---------------------------|---|-------------|
| Power | Single-phase | |
| Motor | 450W, 0.75HP. | |
| Maximum Head | 5.5m | |
| Maximum Water Temperature | 35 degrees Celsius | |
| Outlet Size | 32mm | |
| Maximum Particle Size | 25mm soft solids (NO sand, stones or gravel) | |
| Power Lead Length | 9.8 meters | |
| Performance Table | Discharge | Head Height |
| | 118L/m | 1m |
| | 100L/m | 2m |
| | 75L/m | 3m |
| | 58L/m | 4m |
| | 20L/m | 5m |

NOT to be used for drip feeds or lateral lines under any circumstances

