

GORILLA PUMP STATIONS


Further and Faster

Ultra Vortex Pump

A versatile vortex pump suitable for sewerage, greywater and stormwater applications.

Features

- Automatic start/stop via float switch
- Manual override
- Automatically-resetting thermal overload
- Double mechanical seals
- Side discharge
- *Two-year warranty*

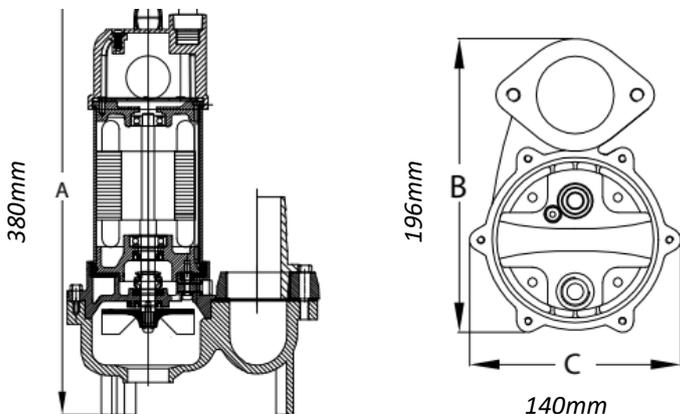

Power	Single-phase	
Motor	230 volt, 250w vortex-type 'sucker pump'.	
Maximum Head	7.5m	
Maximum Water Temperature	40 degrees Celsius	
Outlet Size	40mm	
Weight	9kg	
Maximum Particle Size	27mm soft solids (NO sand, stones or gravel)	
Power Lead Length	Five meters	
Materials	Top Cover/ Impeller: GF Nylon. Motor casing: 304 Stainless Steel Pump Casing: Cast Iron Shaft: 410 Stainless Steel	
Performance Table	Discharge	Head Height
	200L/m	1m
	150L/m	4m
	100L/m	5.8m
	50L/m	6.5m

NOT to be used for drip feeds or lateral lines under any circumstances