500L Grease Trap



FEATURES

Council Approved (Doc No: OW-44209)

100% UV Stabilised Polyethylene


Light Weight -Therefore easily handled, transported and installed.


Easy to link 2 or more together for bigger capacity.

Easy access for cleaning through 455mm (x2) screw lids.

Inlet, Outlet Diameter: 100mm and 330mm Centre high.

100mm Eductor and Inductor air vents.

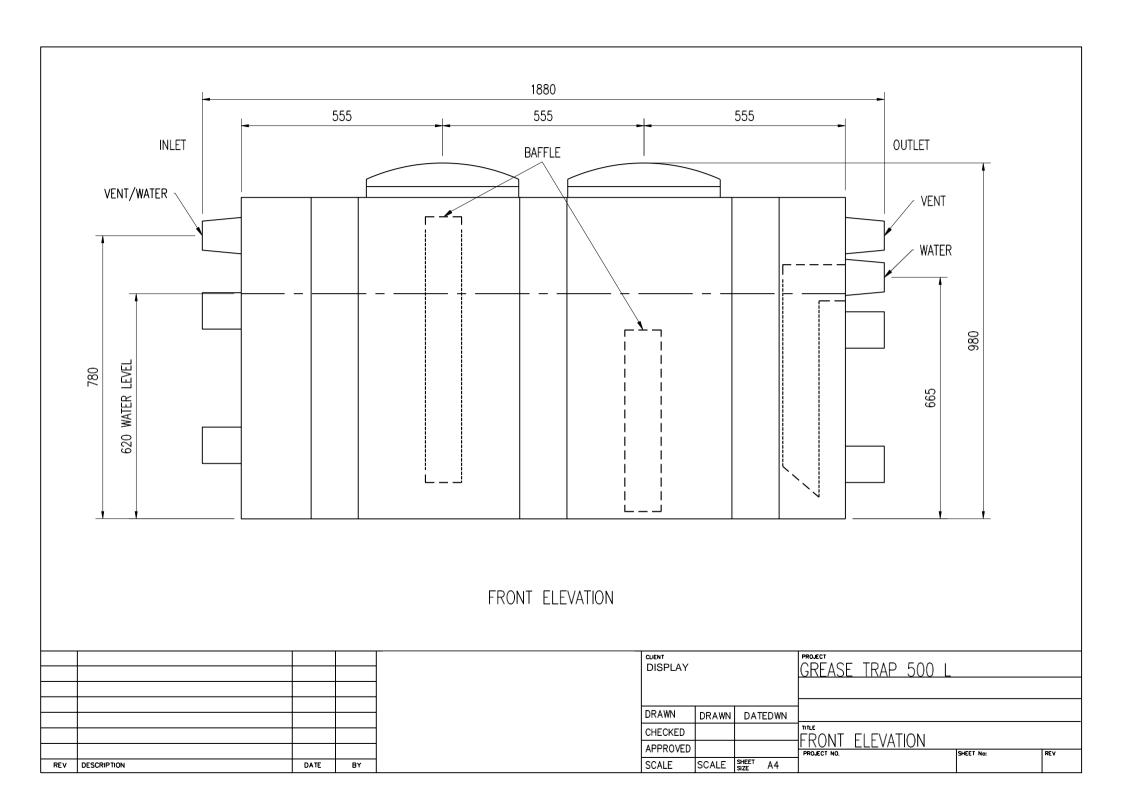

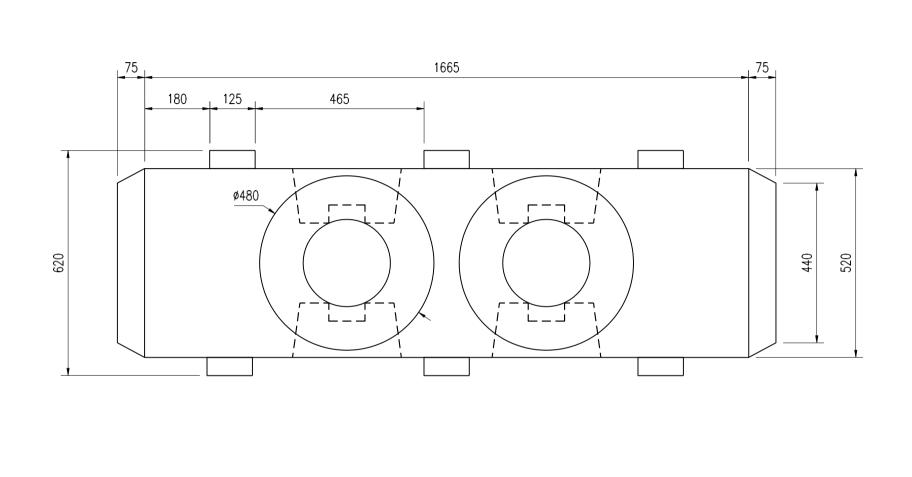

FRONT ELEVATION

REV	DESCRIPTION	DATE	BY

