


# Automatic Electronic Timed Drains

With Integral Strainer Element

| Part Number | Size         | Voltage |
|-------------|--------------|---------|
| AED-25-115  | 1/4" (F) NPT | 115 VAC |
| AED-25-240  | 1/4" (F) NPT | 240 VAC |
| AED-50-115  | 1/2" (F) NPT | 115 VAC |
| AED-50-240  | 1/2" (F) NPT | 240 VAC |

## Specifications

|                   |                              |
|-------------------|------------------------------|
| Valve:            | 2 Way W/Manual Test          |
| Seals:            | Viton                        |
| Strainer Element: | 20 Mesh Screen               |
| Max. Pressure:    | 230 PSI                      |
| Operating Temp.:  | -40° F to 140° F             |
| Voltage:          | 115 VAC<br>240 VAC           |
| Cycle Time Range: | .5 to 45 Minutes             |
| Open Time Range:  | .5 to 10 Seconds             |
| Enclosure:        | Nema 4                       |
| Output Port:      | 1/4" (F) NPT<br>1/2" (F) NPT |
| Input Port:       | 1/4" (F) & 1/2" (M) NPT      |

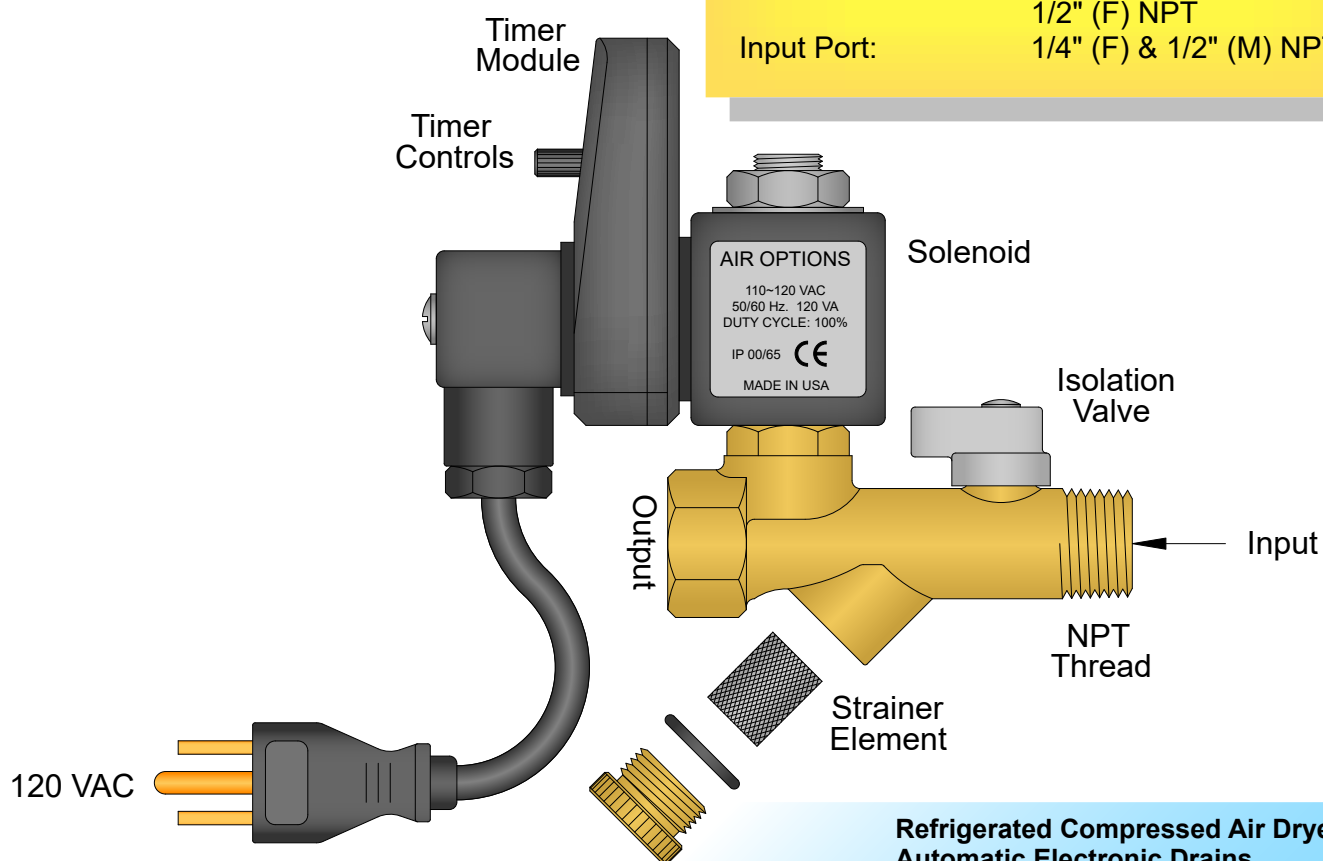

Refrigerated Compressed Air Dryers  
Automatic Electronic Drains  
Master Regulators  
Line & Work Station Traps

## AIR OPTIONS, INC.

Advanced Technologies for Compressed Air