


JT Series

Refrigerated Compressed Air Dryers

Refrigerated Compressed Air Dryers Specifically Designed for Two Stage Piston Compressors

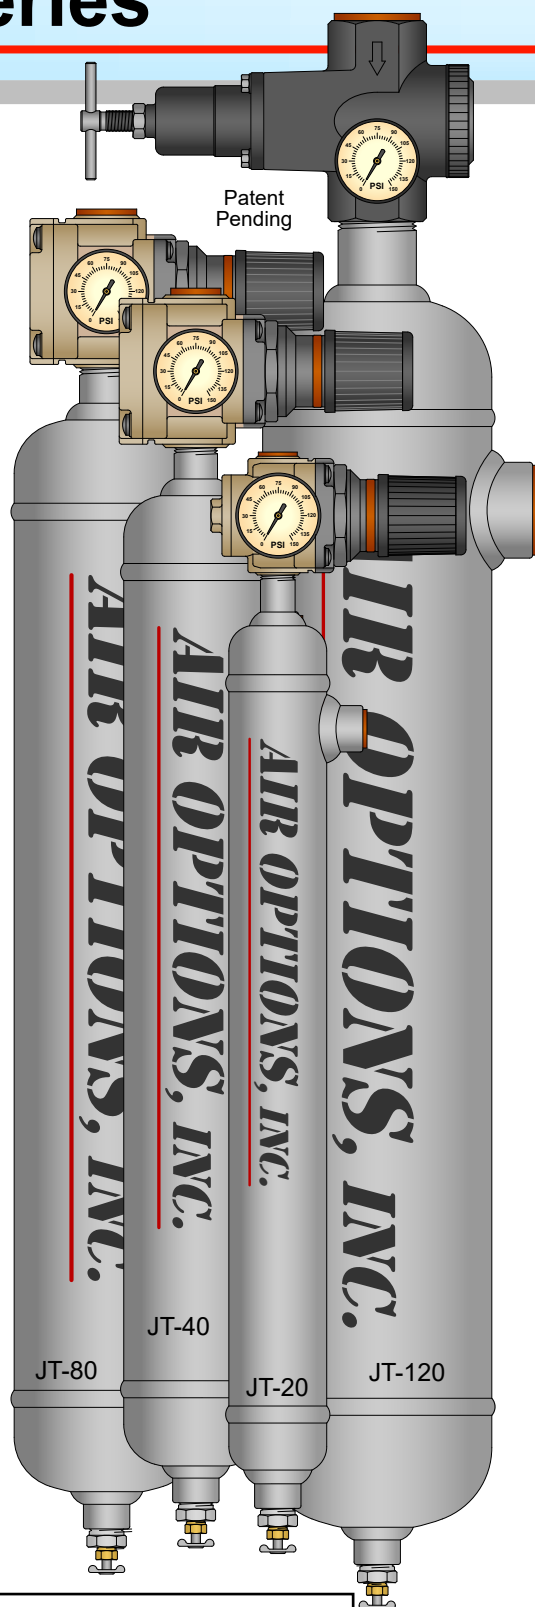

Specifications

Dew Point:	38°F
Max. Pressure:	200 PSI
Max. Temperature:	150° F
Refrigeration Type:	Joule Thompson
Mounting:	Pipe
Drain Port:	1/2" (F) NPT
Drain Type:	T-Valve
Optional Drain:	Automatic Electronic
Control:	Automatic

JT-20

SCFM Range (HP):	1 - 20 (.25 - 5)
Air Input/Output	1/2" (F) NPT
Height:	31.00"
Width:	2.50"
Depth:	3.50"
Weight:	11 Lbs.

JT-40

SCFM Range (HP):	21 - 40 (6 - 10)
Air Input/Output	3/4" (F) NPT
Height:	32.00"
Width:	3.50"
Depth:	4.00"
Weight:	23 Lbs.

JT-80

SCFM Range (HP):	41 - 80 (11 - 20)
Air Input/Output	1" (F) NPT
Height:	33.00"
Width:	4.50"
Depth:	5.50"
Weight:	32 Lbs.

JT-120


SCFM Range (HP):	81 - 120 (21 - 30)
Air Input/Output	1-1/2" (F) NPT
Height:	38.00"
Width:	5.75"
Depth:	6.50"
Weight:	46 Lbs.

5 Year Limited Warranty

AIR-OPTIONS, INC.

Advanced Technologies for Compressed Air

THE JT REFRIGERATION PROCESS

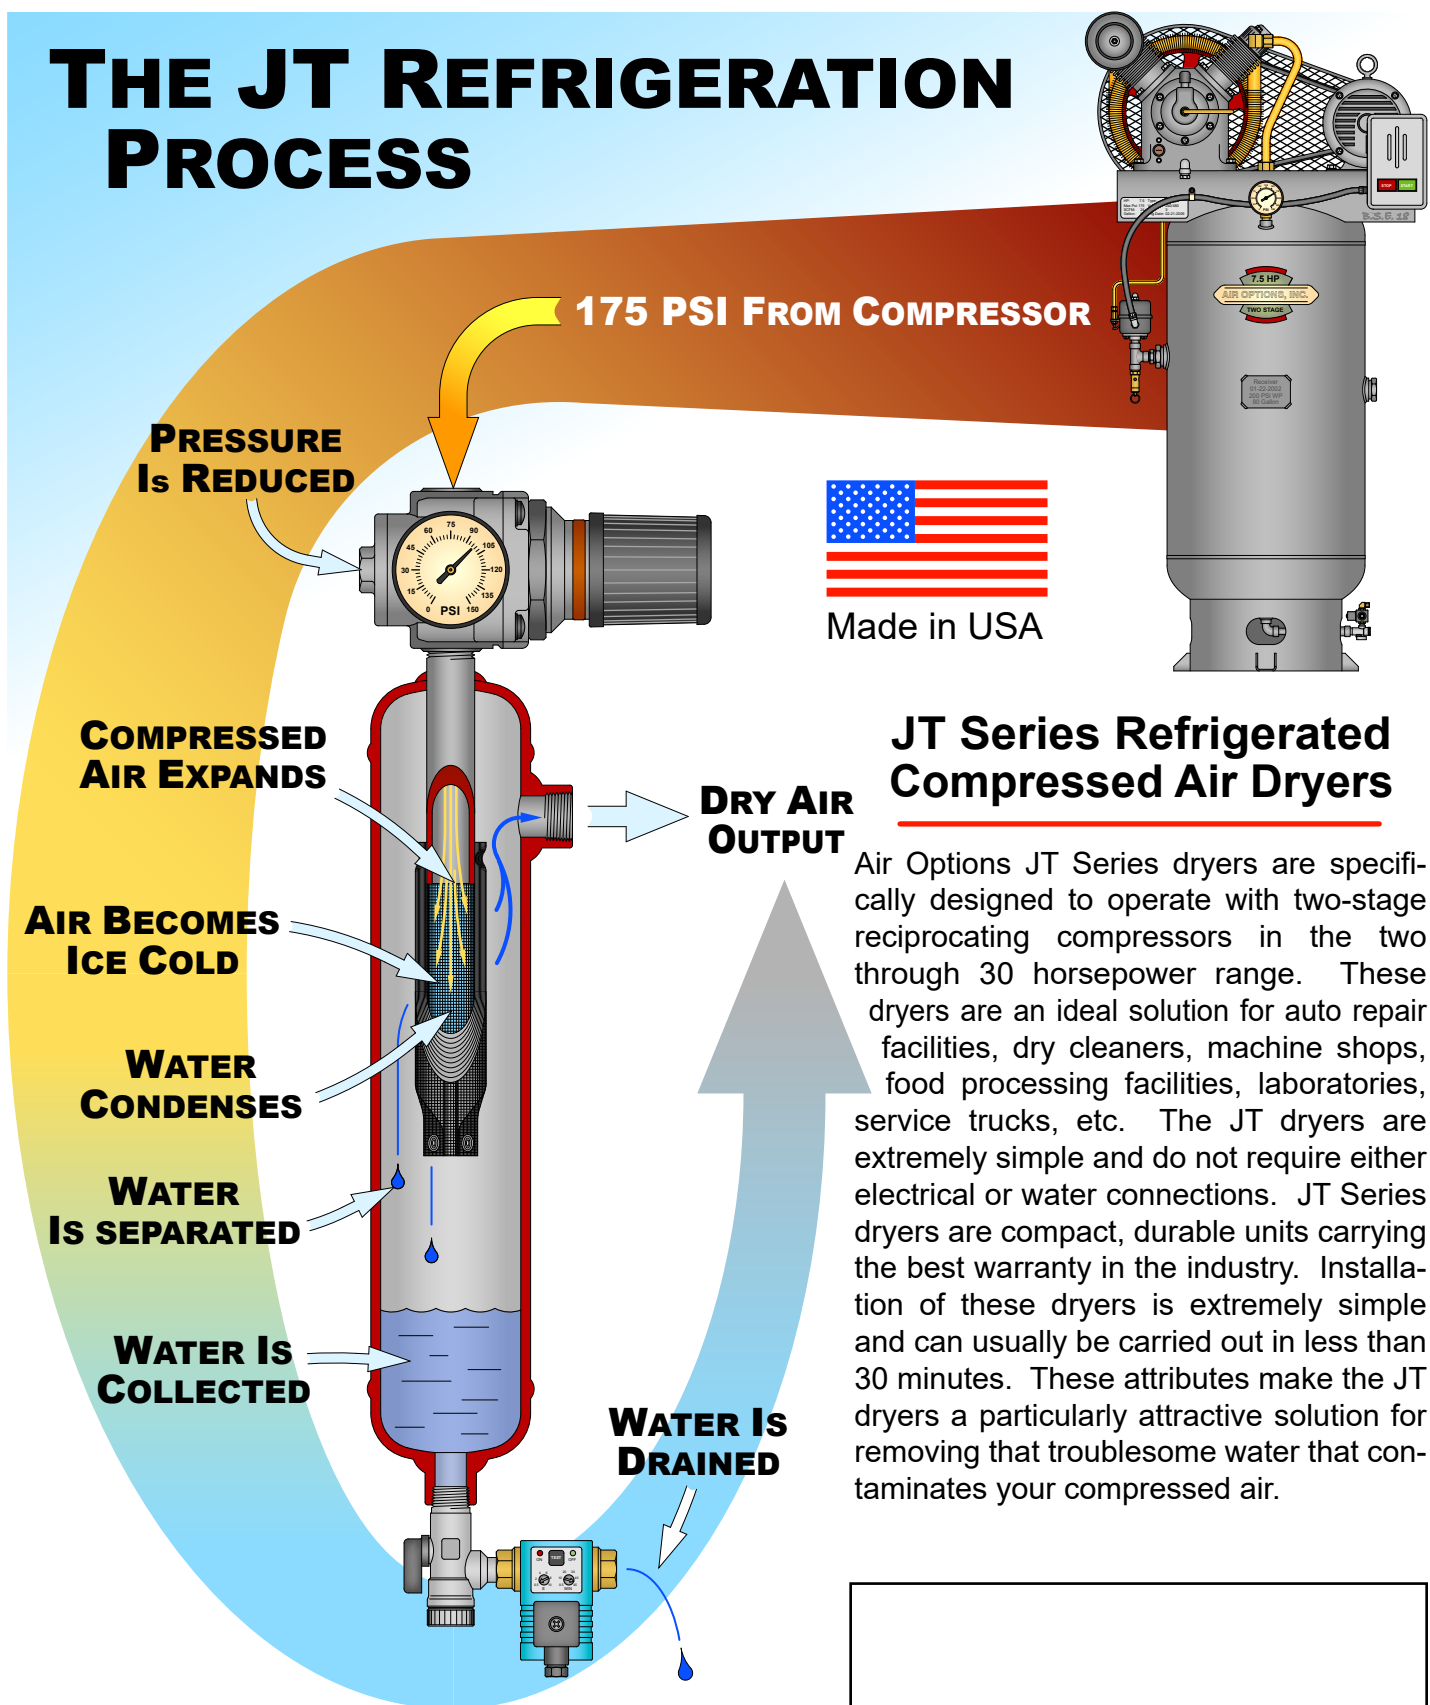


Made in USA

JT Series Refrigerated Compressed Air Dryers

Air Options JT Series dryers are specifically designed to operate with two-stage reciprocating compressors in the two through 30 horsepower range. These dryers are an ideal solution for auto repair facilities, dry cleaners, machine shops, food processing facilities, laboratories, service trucks, etc. The JT dryers are extremely simple and do not require either electrical or water connections. JT Series dryers are compact, durable units carrying the best warranty in the industry. Installation of these dryers is extremely simple and can usually be carried out in less than 30 minutes. These attributes make the JT dryers a particularly attractive solution for removing that troublesome water that contaminates your compressed air.

Refrigerated Compressed Air Dryers
Master Regulators
Line & Work Station Traps

AIR-OPTIONS, INC.

Advanced Technologies for Compressed Air