


JT Series Refrigerated Compressed Air Dryers

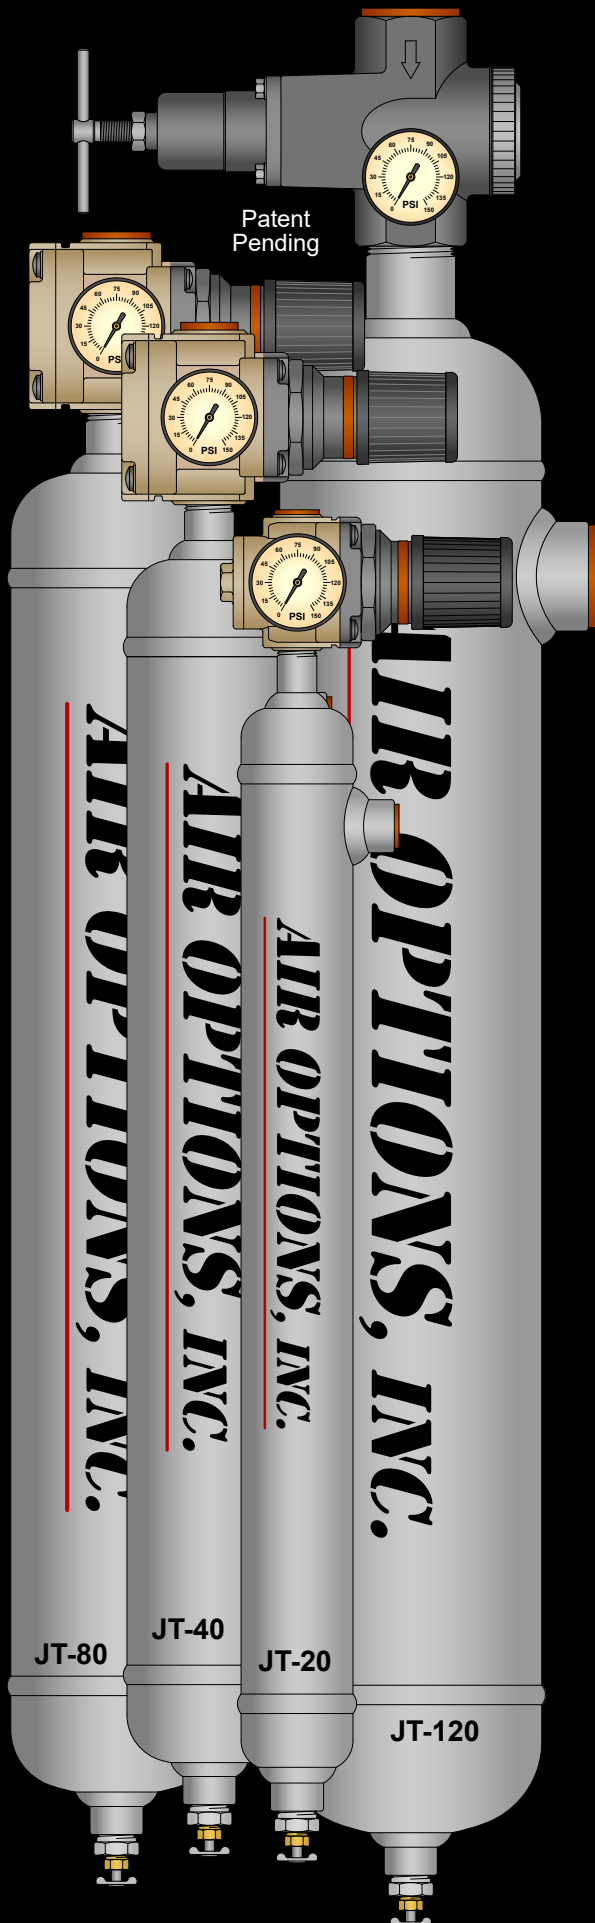

Specifications

Dew Point:	38°F
Max. Input Pressure:	200 PSI
Max. Output Pressure:	125 PSI
Max. Input Temperature:	150° F
Refrigeration Type:	Joule Thompson
Mounting:	Pipe
Drain Port:	1/2" (F) NPT
Drain Type:	T-Valve
Optional Drain:	Automatic Electronic
Control:	Automatic

JT-20

SCFM Range (HP):	1 - 20 (.25 - 5)
Air Input/Output	1/2" (F) NPT
Height:	31.00"
Width:	2.50"
Depth:	3.50"
Weight:	11 Lbs.

JT-40

SCFM Range (HP):	21 - 40 (6 - 10)
Air Input/Output	3/4" (F) NPT
Height:	32.00"
Width:	3.50"
Depth:	4.00"
Weight:	23 Lbs.

JT-80

SCFM Range (HP):	41 - 80 (11 - 20)
Air Input/Output	1" (F) NPT
Height:	33.00"
Width:	4.50"
Depth:	5.50"
Weight:	32 Lbs.

JT-120

SCFM Range (HP):	81 - 120 (21 - 30)
Air Input/Output	1-1/2" (F) NPT
Height:	38.00"
Width:	5.75"
Depth:	6.50"
Weight:	46 Lbs.

5 Year Limited Warranty