
JT Series Refrigerated Compressed Air Dryers

Refrigerated Compressed Air Dryers Specifically Designed for Two Stage Piston Compressors

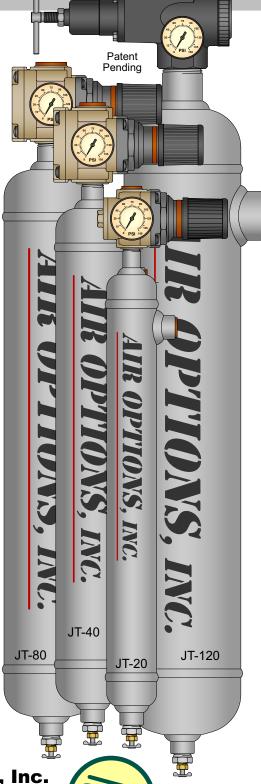

Specifications

Dew Point: 38°F
Max. Pressure: 200 PSI
Max. Temperature: 150° F
Perfrigeration Type: Joule Th

Refrigeration Type: Joule Thompson

Mounting: Pipe

Drain Port: 1/2" (F) NPT Drain Type: T-Valve

Optional Drain: Automatic Electronic

Control: Automatic

JT-20

 SCFM Range (HP):
 1 - 20 (.25 - 5)

 Air Input/Output
 1/2" (F) NPT

 Height:
 31.00"

 Width:
 2.50"

 Depth:
 3.50"

 Weight:
 11 Lbs.

JT-40

 SCFM Range (HP):
 21 - 40 (6 - 10)

 Air Input/Output
 3/4" (F) NPT

 Height:
 32.00"

 Width:
 3.50"

 Depth:
 4.00"

Weight: 23 Lbs.

JT-80

 SCFM Range (HP):
 41 - 80 (11 - 20)

 Air Input/Output
 1" (F) NPT

 Height:
 33.00"

 Width:
 4.50"

 Depth:
 5.50"

 Weight:
 32 Lbs.

JT-120

SCFM Range (HP): 81 - 120 (21 - 30) Air Input/Output 1-1/2" (F) NPT

 Height:
 38.00"

 Width:
 5.75"

 Depth:
 6.50"

 Weight:
 46 Lbs.

10 Year Limited Warranty

<u>Air Options, Inc.</u>

P.O. Box 35984 Houston, Texas 77235 Ph.: 713-721-9619

Web: www.Air-Options.com

AIR-OPTIONS, INC.

