


1/2" SONASPRAY "FC" ASTM C-423 ON SOLID BACKING

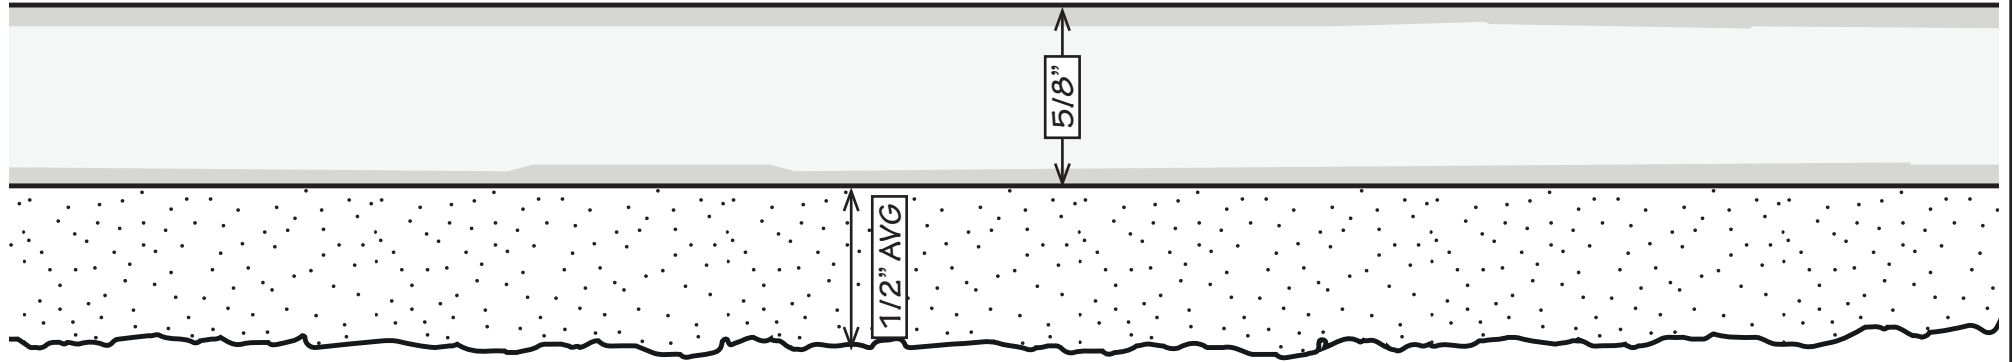

SONASPRAY "FC" ASTM C-423 ON SOLID BACKING							
INCHES	125 hZ	250 hZ	500 hZ	1,000 hZ	2,000 hZ	4,000 hZ	NRC
0.5"	0.00	0.14	0.49	0.87	1.00	0.99	0.65
0.75"	0.10	0.23	0.70	0.98	1.01	0.96	0.75
1.00"	0.05	0.40	0.94	1.04	0.97	0.99	0.85

DATE:

NOTES: