



# Product Catalog

Soil sensors

Data loggers

Connectivity / wireless

Accessories

# Table of Contents



<b>Soil Sensors</b>	<b>2</b>
GroPoint Profile	3
TDT <sup>5</sup>	5
GroPoint Lite	6
<b>Data Loggers</b>	<b>7</b>
GP-DLBT Bluetooth SDI-12 Datalogger	7
Free GP Reader APP	8
GP-DLBT Bluetooth SDI-12 Datalogger Kit	9
<b>Connectivity / Wireless</b>	<b>10</b>
GroPoint Air	10
GP-DU Handheld Sensor Reader	10
<b>Accessories</b>	<b>11</b>

This document is updated frequently. Get the latest version from our website.

## gropoint.com

- ✓ Configure products
- ✓ Place orders
- ✓ Request quotes
- ✓ Get help
- ✓ Find local dealers

# Soil Sensors

<b>Product</b>		<b>GroPoint Profile</b> 	<b>GroPoint Lite</b> 
<b>Summary</b>		Measure soil moisture at multiple depths with a single probe and cable. Installs quickly and easily without excavating.	Analog or digital soil moisture and temperature. Exceptional accuracy ( $\pm 2\%$ ) and fully-potted electronics for long-term durability.
<b>Why choose this sensor?</b>		When you want to measure soil moisture and temperature with extreme accuracy at multiple depths to analyze water penetration through the soil.	When you need an extremely accurate and durable single-point soil sensor to measure moisture content and temperature.
<b>Moisture</b>		✓	✓
<b>Temperature</b>		temp sensors: surface & every 10 cm	🌡️ *
<b>Technology</b>		<b>TDT<sup>5</sup></b> Multiples of 15cm segments	<b>TDT<sup>5</sup></b>
<b>Analog</b>	<b>0-5mA</b>		✓
	<b>4-20mA</b>		✓
<b>Digital</b>	<b>SDI-12</b>	✓	✓
	<b>RS-485 MODBUS</b>	✓	✓
<b>Range</b>	<b>Moisture</b>	0% to 100% of VMC	
	<b>Temperature</b>	-20°C to +70°C (-4°F to 158°F)	-20°C to +70°C (-4°F to 158°F)*
	<b>EC</b>	n/a	n/a
<b>Accuracy</b>	<b>Moisture</b>	$\pm 2.0\%$ **	$\pm 2.0\%$ **
	<b>Temperature</b>	$\pm 0.5^\circ\text{C}$	$\pm 0.5^\circ\text{C}$ *
	<b>EC</b>	n/a	n/a
<b>Precision</b>	<b>Moisture</b>	< 0.2%	< 0.2%
<b>Current Consumption</b>	<b>Quiescent</b>	<0.5mA	<0.1 mA *
	<b>Active</b>	15-20 mA (depending on number of segments) for 100 mS	0-5 mA: 18 mA nominal, 25mA max 4-20 mA: 30mA (nominal), 50 mA (max) SDI-12/RS-485: 15-35 mA

\* digital only \*\* 8% to 42% VMC, in controlled laboratory conditions; factory calibrated for most agricultural soils. In field applications, accuracy may slightly decrease due to the inevitable heterogeneity of soil texture, soil compaction, moisture and fluctuation in soil temperature. The accuracy may also decrease in difficult soil conditions (higher clay and salinity content). In normal conditions, GroPoint sensors will maintain their accuracy from permanent wilting through field capacity in sandy loam through clay soils with less than 60% clay particles. Under moderately saline conditions. GroPoint sensors will maintain their accuracy up to 6 ds/m.

# GroPoint Profile

## Multi-segment soil moisture and temperature profiling probe

GroPoint™ Profile provides cost-effective measurement of volumetric water content over multiple depths using a single probe, eliminating the cumbersome excavation required for multiple sensors placed at different depths. It can be deployed in irrigation-sensitive zones to enable full control of precision irrigation needs, providing an understanding of water movement through the soil.


The sleek, lightweight design installs quickly with minimal soil disruption using a pilot rod and slide hammer tool. Designed for vertical installation, the sensor takes measurements over multiple soil layers, with each measurement zone (segment) providing the average volumetric soil moisture content over a 15 cm range (approximately 6 inches).

### FEATURES

- ✓ Eliminates need for multiple sensors and cabling systems.
- ✓ Installs quickly and easily without excavating.
- ✓ One SDI-12 address is used to read all segments, providing for simplified installations. Optional RS-485 output, and modbus
- ✓ Moisture readings can be user-calibrated with 3rd-order polynomials to meet custom requirements.
- ✓ Low power requirements—suitable for remote, autonomous applications.
- ✓ Patented TDT<sup>5</sup> technology for scientific-grade accuracy and excellent long-term stability of measurements.
- ✓ Factory-calibrated for most agricultural soils, but can be custom calibrated before shipping.
- ✓ Each segment can be calibrated independently on site with 3rd order polynomials

This **single GroPoint Profile probe** installed without excavation is **equivalent to 4 separate probes**. It measures soil moisture at 4 different depths simultaneously.

The **only** sensor that measures the entire profile.



# About the Digital Soil Moisture Probe Technology

Patented TDT technology that provides accurate, repeatable soil moisture (and optionally soil temperature) measurements from the soil surface up to a depth of 120cm (4ft). The GroPoint™ Profile uses patented sensing antennas across each 15cm (6 in.) segment to provide a complete soil moisture profile. Each sensing element can be configured/calibrated individually to ensure accurate measurements across different soil types/horizons. Soil temperature sensors are located every 10cm.


Available with Modbus, SDI-12 and RS485 interfaces, in lengths of 30cm, 45cm, 60cm 75cm and 120cm; a single cable transmits all measurements. No access tubes or excavation are needed for installation in permanent and temporary installations.

## Ordering

Specify cable and connection interface at order.

**Cable Connection:** Either flying lead or M12 Connector, **Interface:** SDI-12, modbus or RS485 + SDI-12

Length	Part No. With Temperature	Number of Sensors
30 cm	2625-S-T-2	2
45 cm	2625-S-T-3	3
60 cm	2625-S-T-4	4
75 cm	2625-S-T-5	5
90 cm	2625-S-T-6	6
120 cm	2625-S-T-8	8

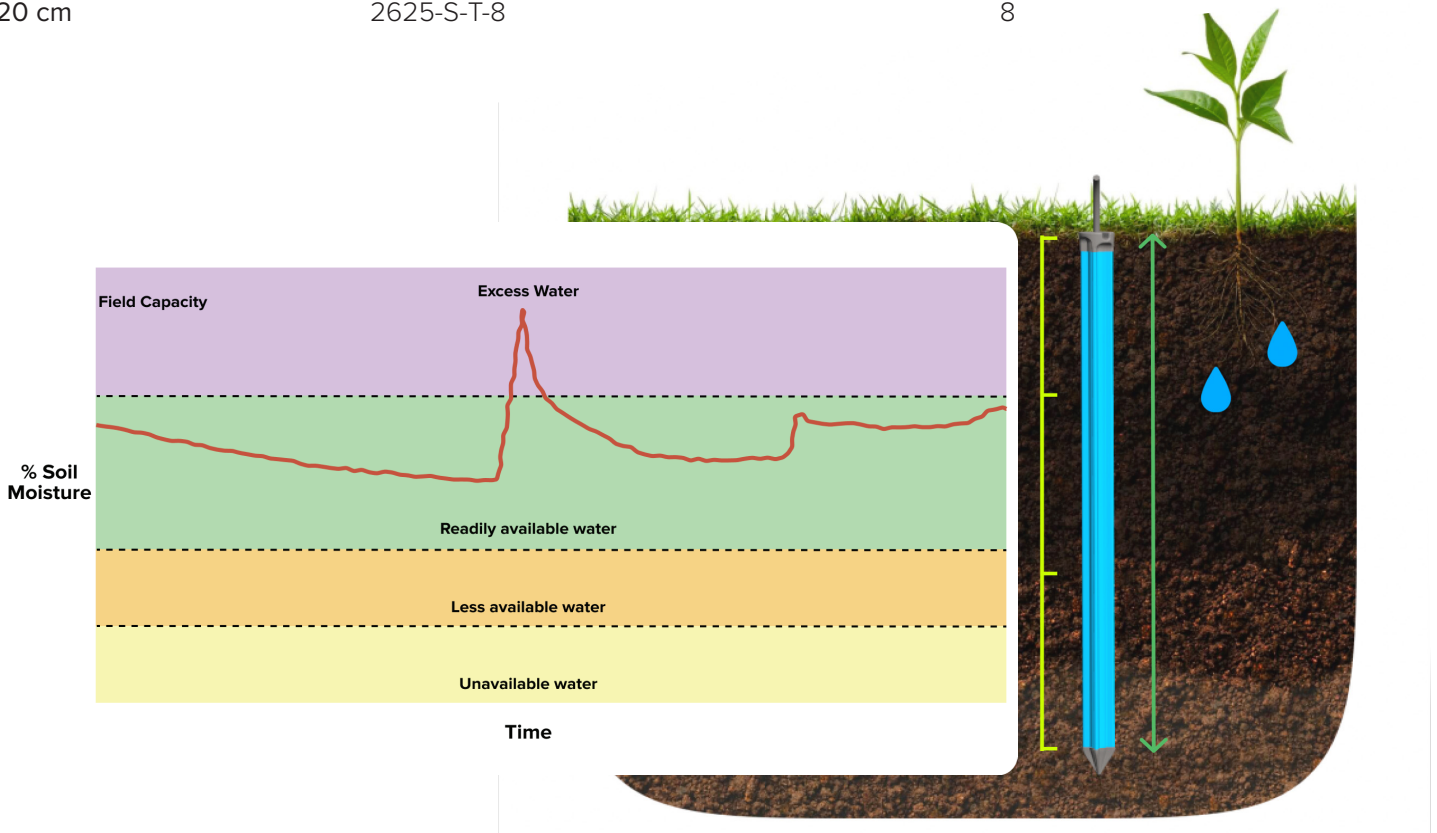




# GroPoint's patented technique for soil moisture measurement

Our proprietary TDT<sup>5</sup> technology delivers an **exceptional price:performance ratio**, with performance as good (in most cases better) as sensors costing much more.

GroPoint™ sensors are based on the field-proven Time Domain Transmission (TDT) method of reliably measuring soil moisture, which is a refined version of Time Domain Reflectometry (TDR). TDT-based sensors do not need to be calibrated to each type of soil they will be buried in. Some of the best soil sensors utilize this method. **TDT<sup>5</sup> enhances TDT in 5 key ways:**

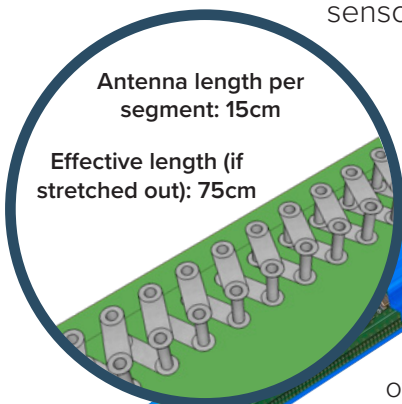


## 1: Accurate across entire length

Our patented design weaves the antenna through the circuit board 20 times per centimetre, and much like a coiled spring, the effective length of the antenna is **5 times the physical length** it consumes. It's like having a 75cm long antenna in a single 15cm sensor. A larger antenna increases the resolution of each sample, allowing more noise to be filtered out. This gives highly accurate tracking of moisture changes with no "dead spots".


## 2: Reduced manufacturing cost

Unlike other moisture probes, GroPoint sensors do not have separate components for electronics and bulky metal antennas. By integrating the antenna and all electronics into the same circuit board (possible thanks to the patented antenna design), manufacturing costs are dramatically reduced.

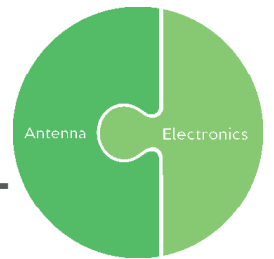

## 4: Low power consumption

Even with 400,000 pulses for each measurement, the total time to take the measurement is less than 100 ms. This means that power consumption is minimal, and that permits GroPoint sensors to be operated for many months with small 9V battery-powered data loggers.

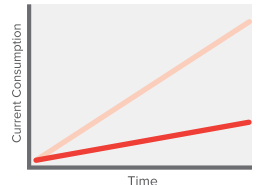


## 3: Repeatable accuracy

Each time a measurement is taken, GroPoint sends 400,000 pulses through the sensing element to generate data for the measurement, then employs advanced filtering to eliminate outlying readings (noise) before averaging the data and sending the measurement as SDI-12 output. This ensures that the same extreme accuracy ( $\pm 1\%$ ) is obtained each and every time moisture is measured.

**400,000  
pulses filtered  
per measurement**

## 5: Maximum durability


Unlike typical sensors, the antenna is not exposed to the soil, so there's nothing to bend or break. The entire sensor circuit board (including antenna) is sealed in epoxy, then encased in a sealed polycarbonate housing.

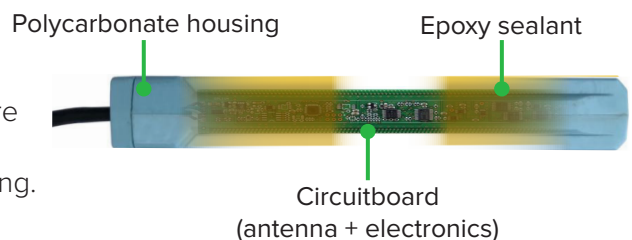

# Temperature Sensor Placement

Choose the number of 15cm segments that are right for your application. The standard configuration places temperature sensors every 10

 = temperature sensor placement

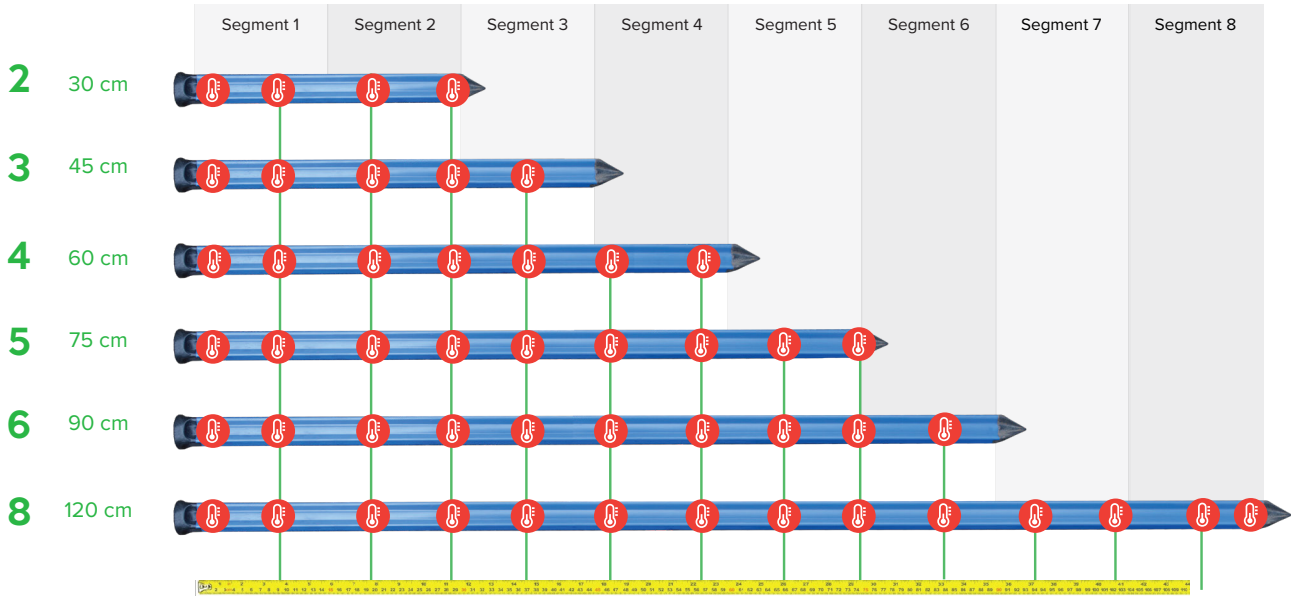


## GroPoint Lite

Accurate and reliable analog or digital soil moisture probe

The GroPoint™ Lite soil sensor is robust, reliable and highly accurate, providing cost effective soil moisture and temperature measurements. The sleek, lightweight design installs quickly with minimal soil disruption. When installed vertically, the sensor averages volumetric moisture content over a soil layer of about 6" (15cm). When installed horizontally, the sensor can be used to measure moisture at a specific soil depth.

(Part 2575  
Part 2577  
Part 2585)

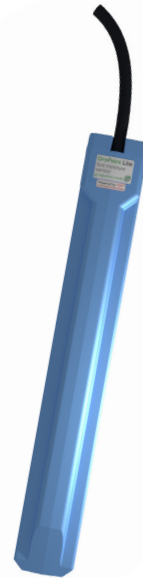

## FEATURES

- ✓ Soil moisture (and temperature with digital versions) sensor
- ✓ Flexible interface options (SDI-12, RS-485 MODBUS, 0-5mA and 4-20ma) simplify integration into a broad range of applications, ancillary equipment and data loggers.
- ✓ Moisture readings can be user-calibrated with 3rd-order polynomials to meet custom requirements.
- ✓ Low power requirements—suitable for remote, autonomous applications.
- ✓ Patented TDT<sup>5</sup> technology for scientific-grade accuracy and excellent long-term stability of measurements.
- ✓ Fully potted electronics for excellent durability.



# Data Loggers

## GP-DLBT Bluetooth SDI-12 Datalogger (Part 2992)

Simple, effective and reliable automatic recording of sensor data.

The Bluetooth SDI-12 Datalogger is both a data logger and a wireless access point to retrieve data through your smartphone. It can be left in the field connected to your sensors, allowing you to access the data when convenient.

The Bluetooth SDI-12 Datalogger connects to up to 10 SDI-12 GroPoint sensors (with the 4-Port SDI-12 Expansion Bar). Sensors must terminate in an M12 connector.

Data is stored in non-volatile memory and is retained even if the battery fails. The memory can hold up to 200,000 measurements. Works with ANY V1.3 SDI-12 Sensor.



## Specifications

<b>Wireless protocol</b>	Bluetooth 4.0 LE
<b>Maximum number of sensors</b>	10 (via multiple 4-Port SDI-12 Expansion Bars)  Depending on measurement interval and type of sensor, additional sensors may be configured. Up to 20 sensors can be configured depending on cable length and sensor power requirements
<b>Storage</b>	4 MB  This is the equivalent of: > 200K GroPoint Lite measurements > 80K moisture and temperature measurements from a GroPoint Profile 4-segment sensor
<b>Measurement interval</b>	Configurable by user Range: 1 minute to 12 hours
<b>Power</b>	Operates on a Primary C-Cell 8 Ah battery (3.6V) - (battery not included) or 2x AA alkaline batteries
<b>Battery life</b>	Up to several years, depending on measurement interval and battery selection



## FEATURES

- ✓ Retrieve sensor data wirelessly to your smartphone with a quick visit to the site.
- ✓ Stay connected up to 60m (200 ft) away.
- ✓ Operates with a Primary C-Cell battery (3.6V or 21.5 V alkaline)
- ✓ Battery life of several years is typical.
- ✓ Water-resistant, IP65-rated enclosure.
- ✓ Data is retained even with no battery.
- ✓ Free GP Reader app available for Android devices.

# Free GP Reader App

## What Products Can Use The App?


All of our dataloggers, including GP-DLBT Bluetooth SDI-12 Datalogger and the GP-DLBT Bluetooth SDI-12 Datalogger Kit can be connected to the app. The GP Reader App allows you to view and download the data collected by your dataloggers.

## How It Works

With the app open on your smartphone, simply push the button on the Bluetooth SDI-12 Datalogger to wake it up and automatically establish a wireless connection. Tap the Download button in the app to download all logged data.

## App FEATURES

- ✓ Check current conditions
- ✓ Download the logged data
- ✓ Check the current battery level of the Datalogger
- ✓ Set up the sensor sampling interval (from one minute to 12 hours)
- ✓ Transfer the data from universal CSV format, to your favorite graphing software

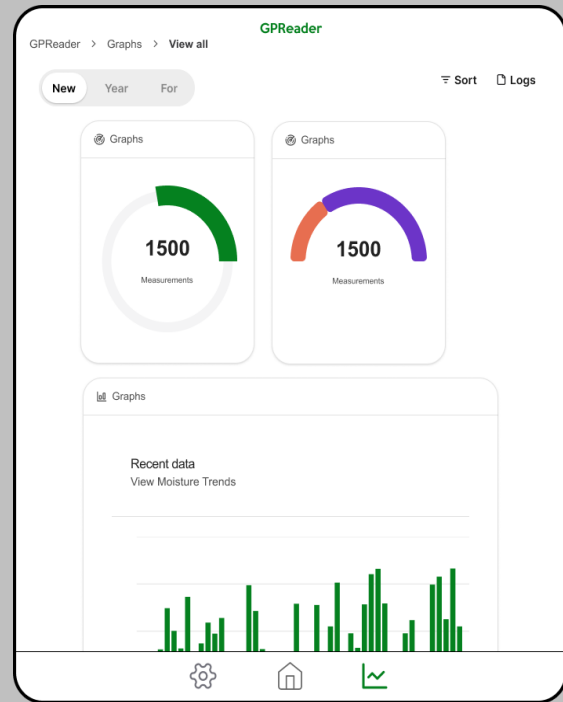

# GP-DLBT Bluetooth SDI-12 Datalogger Kit (Part 2992-KIT)

## Connect up to 10 SDI-12 Sensors

The Bluetooth SDI-12 Datalogger Kit includes the Bluetooth SDI-12 Datalogger (Part 2992), along with a 4-Port SDI-12 Expansion Bar, M12 Male to Female Cable and 3.6V C-Cell Battery.

With two expansion bars, the Bluetooth Sensor Pod can connect up to 8 SDI-12 GroPoint Sensors. When using the GroPoint expansion bar, sensors require M12 connectors.

This product uses the free GP-Reader Andriod App.

This kit will allow you to connect **four** SDI-12 Sensors. To connect **eight** sensors, you will need an additional M12 Male to Female Cable and 4-Port Expansion Bar, as well as a **2-Port Expansion Bar** (see Accessories Page 13).

## What's Included

Part Name and Quantity	Part No.
1 x GP-DLBT Bluetooth SDI-12 Datalogger	Part 2992
1 x M12 Male to Female Cable	Part 2999
1 x 4-Port Expansion Bar	Part 2998
1 x Li-SOCl <sub>2</sub> C-Cell Battery	Part 6230



# Connectivity/Wireless

## GroPoint Air (Part 2625-S-T-(2-8))

### Wireless Connectivity for GroPoint™ Profile Soil Moisture Sensors.

The GroPoint™ Air solution allows agriculture operators to easily and cost effectively build a distributed soil moisture monitoring network using the patented GroPoint™ Profile soil moisture sensor suite; increasing the spatial resolution of data capture (both vertically into the soil and horizontally across locations).



### FEATURES

- ✓ LoRaWAN 1.0.3 Class A
- ✓ Ultra-low power consumption
- ✓ Supports GroPoint™ Profile
- ✓ Bands: CN470/EU433/KR920/US915/EU868/ AS923/AU915/IN865
- ✓ AT Commands to change parameters
- ✓ Uplink on periodically
- ✓ Downlink to change configure
- ✓ IP66 Waterproof Enclosure

## GP-DU Handheld Sensor Reader

Instant readings of current conditions measured by your in-situ sensors.

(Part 2628 SDI-12  
Part 1619 ANALOG)

The GP-DU handheld reader gives immediate readings of current measurement conditions from GroPoint sensors. It also allows testing of individual sensors to troubleshoot when the sensors are part of a larger system. It features a large display window in a robust weather resistant casing with a 3 pin EN3 or M12 connector.

The GP-DU reads data from analog sensors and displays the volumetric moisture content as a percentage.

The GP-DU SDI-12 is capable of reading all GroPoint SDI-12 sensors. The GP-DU SDI-12 is capable of reading any SDI-12 V1.3 or higher sensor.



### FEATURES

- ✓ Battery operated
- ✓ Push button command
- ✓ Instant display
- ✓ Compact
- ✓ Self-calibrated
- ✓ Reads SDI-12 sensing devices
- ✓ Requires a 9V battery

# Accessories



**4-Port Expansion Bar with M12 Cable  
Part 2998 & Part 2999**

Connects to any open channel of a GroPoint data logger and provides connectors for up to four more sensors. Adds 3 additional ports (you lose 1, you gain 4).



**M12 Male to Female Cable  
Part 2999**

2 Meter Cable with 1 male and 1 female connector. Connectors are 5 Pin M12 waterproof rated.



**Additional GroPoint Sensor Cable  
Part CE (Cable Extension)**

Add to your sensor order (which includes a standard 5m cable) for a custom cable length.



**2-Port Expansion Bar Part  
Part 2998-2**

3 port M12 waterproof connector with 2 female and one male M12 connectors. Connects to GroPoint dataloggers through cable. Used to expand SDI-12 connections or divide cables to extend cables in different directions.



**Male or Female M12 Connector  
Part: Male = 3053, Female = 3070**

Field installable M12 connector, for connecting flying lead cables to datalogger. Ideal for third party sensors.



**SDI-12 Alligator Clip Adaptor  
Part 3080 M12 OR Part 3059 ENC3**

Lets you use your GP-DU Handheld SDI-12 Sensor Reader with any bare-wire SDI-12 sensor.



**Slide Hammer for GroPoint Profile  
Part SH**

Makes installing the GroPoint Profile quick and easy without excavating.



**Pilot Rod for GroPoint Profile  
Part PR-Length**

Attaches to slide hammer, makes a hole the exact size of the GroPoint Profile probe being installed.



**Li-SOCI2 C-Cell Battery  
Part 6230**

5.8 Ah -3.6 V Primary, high power, C-size spiral cell. Discharge temp range: -55C to +85C. Up to 2000 mA pulse current.



GroPoint Products are manufactured in Canada by RioT Technology Corp.

In 2016, RioT Technology Corp. acquired the GroPoint™ brand.

We also hired several longstanding employees of ESI who had manufactured and designed the original MoisturePoint and GroPoint products. As such, we have the historical expertise for all GroPoint products in-house and available to assist former clients of ESI, and new clients interested in leveraging over 25 years of soil monitoring expertise.



**RioT Technology Corp.**  
10114 McDonald Park Rd, Suite #220  
North Saanich, BC V8L 5X8  
CANADA

+1 250 412 6642

[sales@gropoint.com](mailto:sales@gropoint.com)

[gropoint.com](http://gropoint.com)



V I A T E C  
A W A R D S  
2 0 1 9  
RECIPIENT!

DISTRIBUTED BY: