



PRODUCT CATALOG

NEW ARRIVAL





Company Profile

We take pride in being a Canadian company, delivering high-quality Canadian products at the best possible prices.

Canguard is a leader in quality and craftsmanship, committed to providing top-tier products with exceptional value.

Our dedication to excellence ensures peace of mind for our valued clients. We use premium materials and expert workmanship to deliver outstanding products.

Our assembly team is proud to operate in Canada, producing high-quality Canadian-made products with precision and care.

“High quality, sincere service” is our enterprise belief. We strive to build an internationally recognized window brand. We are dedicated to fostering long-term, mutually beneficial relationships with our customers and will continue working with you to create durable, high-quality products.



Company Culture

VALUE

Honesty, Trust Worthy, Workmanship, Reliability

MISSION

Build high-quality Canadian windows and doors to create energy savings for every valued client.

VISION

Establish ourself as the leading go to window and door supplier in Canada

WNIDOWS AND DOORS THAT
ACTUALLY SAVE YOU MONEY

DOORS AND WINDOWS SYSTEM CUSTOMIZATION

CONTENTS

WINDOWS SERIES

115 ALUMINIUM CASEMENT WINDOW WITH SCREEN	10
90 ALUMINIUM TILT & TURN WINDOW	14
72 ALUMINIUM CASEMENT WINDOW	16

PATIO DOORS SERIES

138 SLIM FRAME ALUMINIUM SLIDING DOOR	24
75 ALUMINUM FOLDING DOOR	28
150 HURRICANE IMPACT LIFT AND SLIDING DOOR	32

ENTRY DOORS SERIES

120 ULTRA ALUMINUM PIVOT ENTRANCE DOOR	38
85 ALUMINUM PIVOT ENTRANCE DOOR	42
75 ALUMINUM GLASS FRENCH DOOR	43
75 ALUMINUM GLASS PIVOT DOOR	46
85 CONCEALED HINGED ALUMINUM ENTRANCE DOOR	47












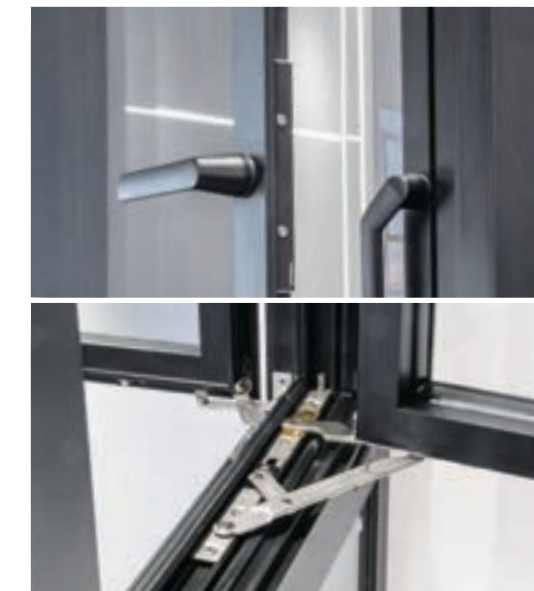
ALUMINUM
WINDOW
SERIES





115 Aluminum Casement Window specification

	U-Value	1.4 W/ m2·K Level 8 0.246 BTU/h·ft2·°F Level 8
	Air Leakage	$q_2 \leq 0.01$ Level 9
	Water Tightness	1000pa Level 8
	Wind Resistance	4500pa Level 8
	Sound Insulation	40dB Level 7
	Aluminum Profile & Thickness	6063-T5 Aluminum 2.0 mm
	Glazing	30mm Double Glazed (5+20A+5mm)
	Profile Depth	Frame:115mm Swing Glass Panle:71mm
	Sightline Width	Glass Frame:30mm Screen Frame:48mm
	Max size (Swing Panel)	90Kg H:1500mm W:900mm
	Security	Multi-point lock
	Colours	PVDF Black / White / Gray or Custom Colors





HIGH STANDARD EQUIPMENT


All our aluminium windows offer individual designs, benefitting from high performance, security, and build quality with following standard specification:

- 1** Minimalist design handle convey a polished modern presence in the space.
- 2** EPDM tape utilizes the theory of pressure balance to realize dry-type sealing with excellent performance of heat insulation, winter protection and sound insulation
- 3** Seamless transition from inside to outside is achieved by the unique oblique design.
- 4** Slimline high light transmission screen to prevent insects without blocking the view.
- 5** Multi-point lock system and fall protection system
- 6** The hinge comes with a custom holder to replace the directly screw on the frame. Hinge fixed by and screwed on holder placing inside the frame to avoid corrosion and slack of screws, therefore improving the security.

MINIMALIST HARDWARES





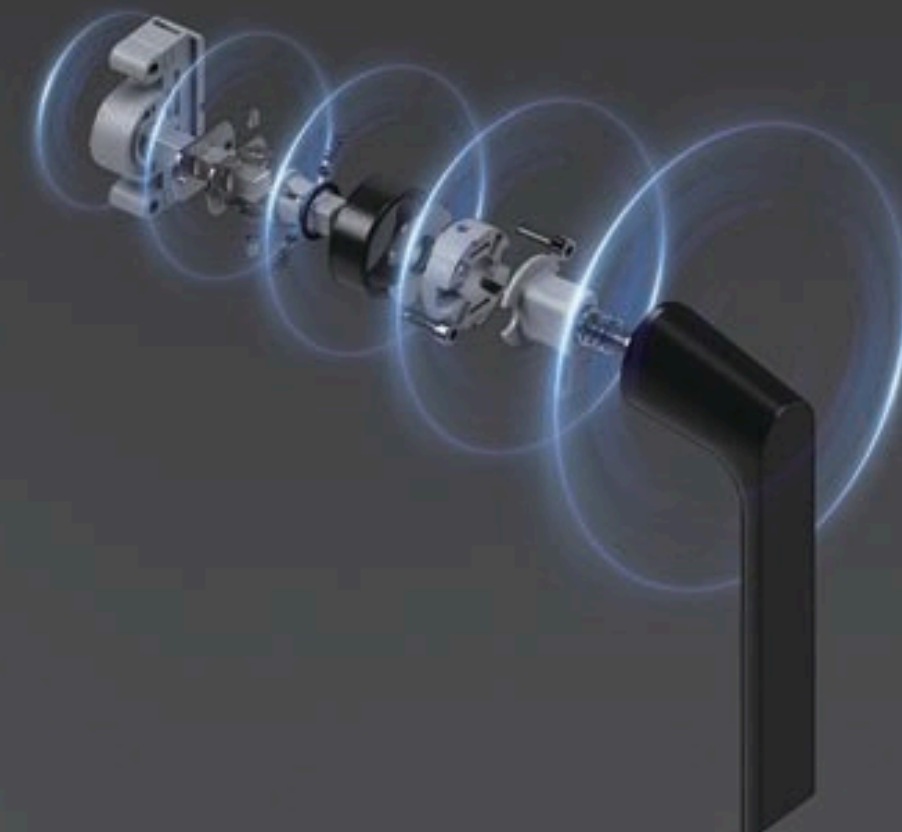







The handle has a unique surface treatment and comes with a variety of color options. With a wide range of color options, it effortlessly complements any home design, creating a cohesive and harmonious aesthetic.

The handle operates smoothly and silently, ensuring a squeak-free experience when opening and closing the door, enhancing a peaceful and comfortable living environment.

















90 Aluminum Tilt & Turn Window specification

	U-Value	1.24 W/ m ² ·K Level 8 0.218 BTU/h·ft ² ·°F Level 8
	Air Leakage	q ₂ ≤ 0.01 Level 9
	Water Tightness	1000pa Level 8
	Wind Resistance	4500pa Level 8
	Sound Insulation	40dB Level 7
	Aluminum Profile & Thickness	6063-T5 Aluminum 2.0 mm
	Glazing	30mm Double Glazed (5+20A+5mm)
	Profile Depth	Frame:90mm Swing Glass Panle:90mm
	Sightline Width	Frame:37mm Swing Frame:60mm
	Max size (Swing Panel)	100Kg H:2000mm W:900mm
	Security	Multi-point lock
	Colours	PVDF Black / Wihte / Gray or Custom Colors





72 Aluminum Casement Window specification

	U-Value	1.4 W/ m2·K Level 8 0.246 BTU/h·ft2·°F Level 8
	Air Leakage	$q_{\leq} 0.01$ Level 9
	Water Tightness	1000pa Level 8
	Wind Resistance	4500pa Level 8
	Sound Insulation	40dB Level 7
	Aluminum Profile & Thickness	6063-T5 Aluminum 2.0 mm
	Glazing	30mm Double Glazed (5+20A+5mm)
	Profile Depth	Frame:72mm Swing Glass Panle:72mm
	Sightline Width	Frame:48mm Swing Frame:30mm
	Max size (Swing Panel)	90Kg H:1500mm W:900mm
	Security	Multi-point lock
	Colours	PVDF Black / White / Gray or Custom Colors




AGON & LOW-E GLASS

Argon Gas

Argon gas is a naturally occurring, non-harmful gas. When Argon gas is inserted between the panes of glass it increases the insulating performance of your double glazing Argon gas is denser than air, so adding it to the air between the two panes improves thermal insulation efficiency. When a glazing unit features Low E glass and Argon Gas it brings the temperature of the window closer to room temperature. This combination eliminates air currents and drafts that occur when differing temperatures meet

Low Emissivity (Low-E) Glass

A Low E glass coating reduces the amount of heat transfer through a pane of glass. Low E coatings can reflect radiant heat - either from outside or inside, therefore reducing the heating and cooling costs of your home.

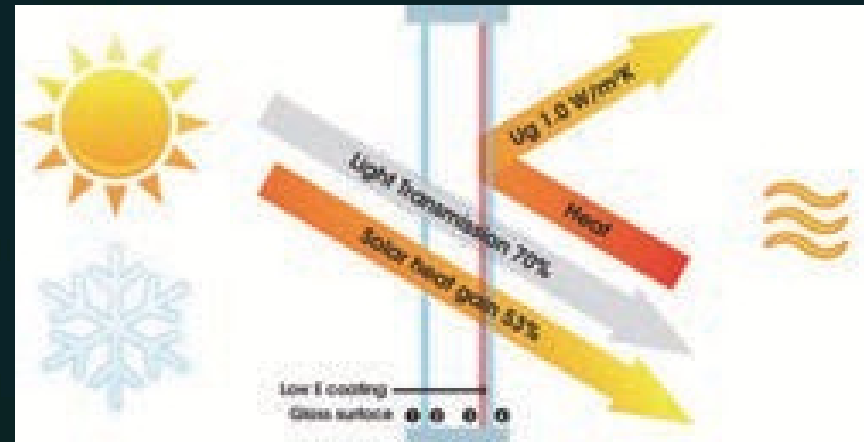

THERMALINSULATED PROFILE& SEALING STRUCTURE

Canguard thermal break window profile consist of extruded aluminum where a “channel” is cut through the aluminum and polyurethane is poured into this channel to separate the interior from exterior extrusion. This process is done to reduce thermal transfer and improve energy efficiency.

A unique profile structure design, combined with four layers of sealing strips, making a three-way sealing system in reality.



Minimalist Design

Minimal frame , Boundless vision



Open Living Concepts













For Maximum Natural Light



ALUMINUM
PATIO DOORS



138 Minimalist Sliding Aluminum Door specification

	U-Value	1.79 W/ m2·K Level 7 0.316 BTU/h·ft2·°F Level 7
	Air Leakage	$q_2 \leq 1.5$ Level 6
	Water Tightness	400pa Level 5
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Aluminum Profile & Thickness	6063-T5 Aluminum 2.0 mm
	Glazing	40mm Double Glazed (6+27A+6mm)
	Profile Depth	Frame:138mm Sliding Glass Panle:50mm
	Sightline Width	Frame:50mm Sliding Frame:30mm
	Max size (Sliding Panel)	500Kg H:5500mm W:2500mm
	Security	Multi-point lock
	Colours	PVDF Black / White / Gray or Custom Colors



MINIMALIST SLIM 35MM SIGHTLINE

Specially Designed To Reach 25mm

Our double-glazed minimal sliding door system is a virtually frameless, easy-to-operate aluminum sliding system, with a greatly-reduced 30mm leaf profile. The oversized sliding sections, up to 5.5 meters in height, are set in virtually invisible frame profiles, allowing you to enjoy unobstructed views.

Elevate your spirit with breath-taking sea views, twinkling city nightscapes, or natural landscapes and gardens.





FITTED FLUSH-TO-FLOOR

The entire outer frame can be fully recessed into walls, ceilings, and floors, creating a seamless, no-threshold transition between indoor and outdoor spaces when open.





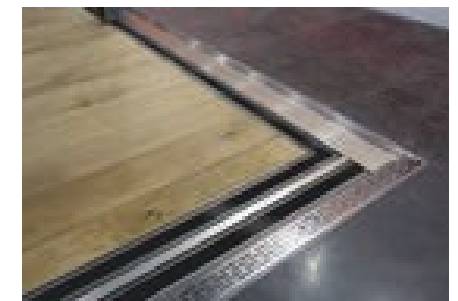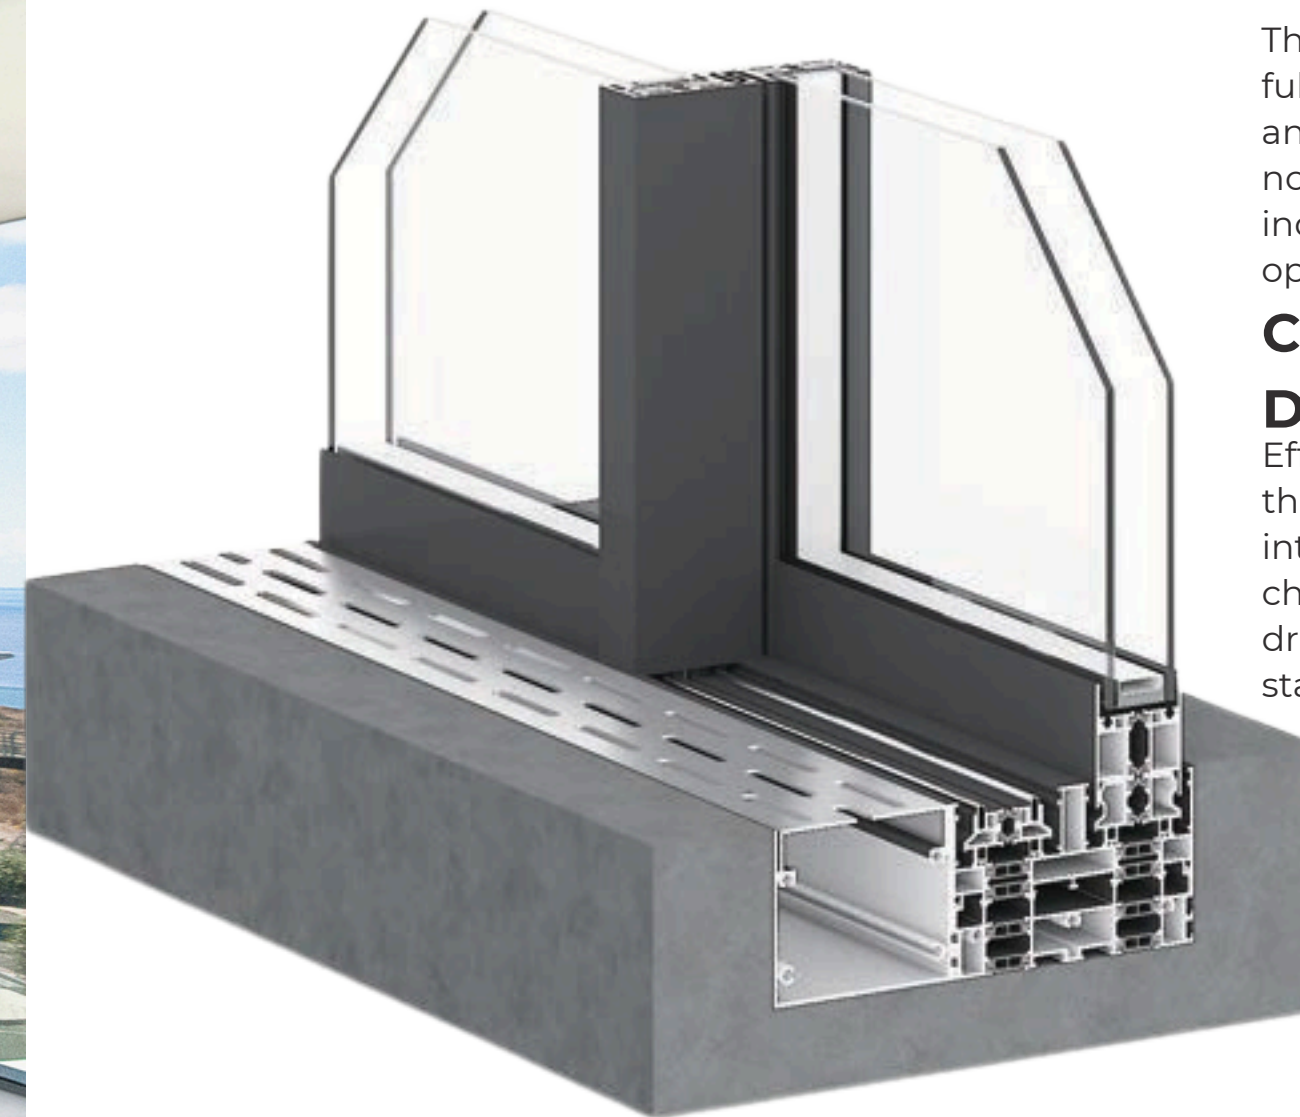







CONCEALED DRAINAGE

Effective drainage is achieved through a specially designed integrated aluminum hollow chamber and a concealed drainage gutter with stainless-steel covers.





75 Minimalist Bifold Door specification

	U-Value	1.86 W/ m2·K Level 7 0.321 BTU/h·ft2·°FL Level 7
	Air Leakage	$q_2 \leq 1.5$ Level 6
	Water Tightness	550pa Level 6
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Aluminum Profile & Thickness	6063-T5 Aluminum 2.0 mm
	Glazing	30mm Double Glazed (5+20A+5mm)
	Profile Depth	Frame:75mm Swing Glass Panle:65mm
	Sightline Width	Frame:35mm Swing Frame:45mm
	Max size (Single Panel)	140Kg H:2800mm W:900mm
	Security	Multi-point lock
	Colours	PVDF Black / Wihte / Gray or Custom Colors



AUTOMATIC REBOUND LATCH

- > The patented automatic rebound latch enables the door leaf to be effortlessly inserted into the track and automatically secured, enhancing the convenience of opening and closing operations.















EXCELLENT CAPABILITIES

- > This high performance system offers enhanced features, as well as a minimal design, high insulation and functionality with hardware that have specifically been designed for folding systems.
- > The door features a locking system and can be opened either inward or outward.
- > Possibility of even number of openings (2, 4 etc.)
- > In and outward opening using the same profiles.



150 Lift and Sliding Door specification

	U-Value	1.74 W/ m2·K Level 7 0.306 BTU/h·ft2·°F Level 7
	Air Leakage	$q_2 \leq 0.2$ Level 8
	Water Tightness	720pa Level 6
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Aluminum Profile & Thickness	6063-T5 Aluminum 2.0 mm
	Glazing	40mm Double Glazed (6+27A+6mm)
	Profile Depth	Frame:150mm Sliding Glass Panle:57mm
	Sightline Width	Threshold:33mm Sliding Frame:82mm
	Max size (Single Panel)	350Kg H:3000mm W:2500mm
	Security	Multi-point lock
	Colours	PVDF Black / White / Gray or Custom Colors






AAMA CW CLASS LIFT & SLIDING DOORS



Our 150 heavy-duty aluminum alloy patio sliding door that has passed the AAMA CW-level test, which means it has excellent water resistance of more than 720pa.

This makes it more suitable for outdoor use, as it can withstand harsh weather conditions and provide a smooth and effortless sliding experience. Our patio sliding door also features a sleek and modern design that can enhance the beauty and value of your home. Whether you want to enjoy the natural light, fresh air, or scenic views, our patio sliding door can offer you the best of both worlds. Contact us today to find out more about our product and how we can help you create your dream outdoor space.


AAMA CW CLASS SLIDING DOOR TEST

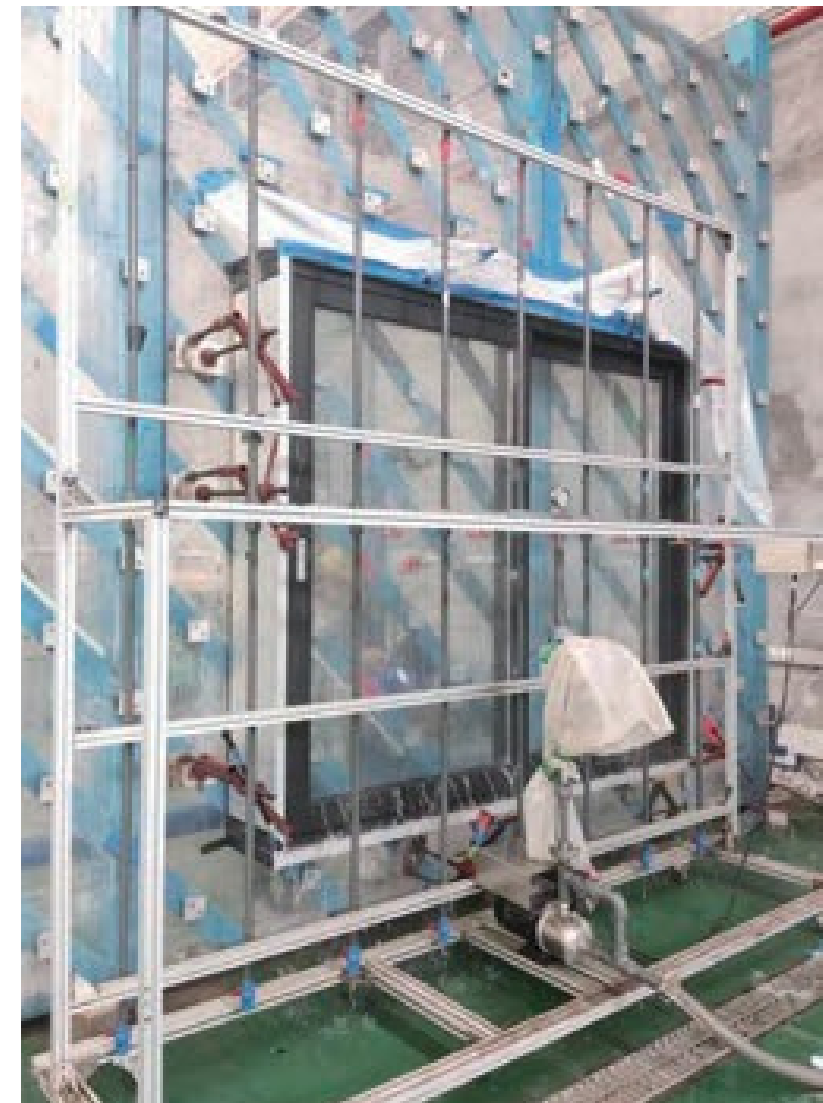



Doors to make the **best impression**

- > 10 Year Warrant
- > Fully flush profile internally and externally
- > Pivot entrance doors available in any of our door designs
- > Vast range of colours and finishes including aluminum, stone and specialist glass options
- > Laminated security glass as standard in triple and quadruple units
- > Custom design service available to create a door unique to you

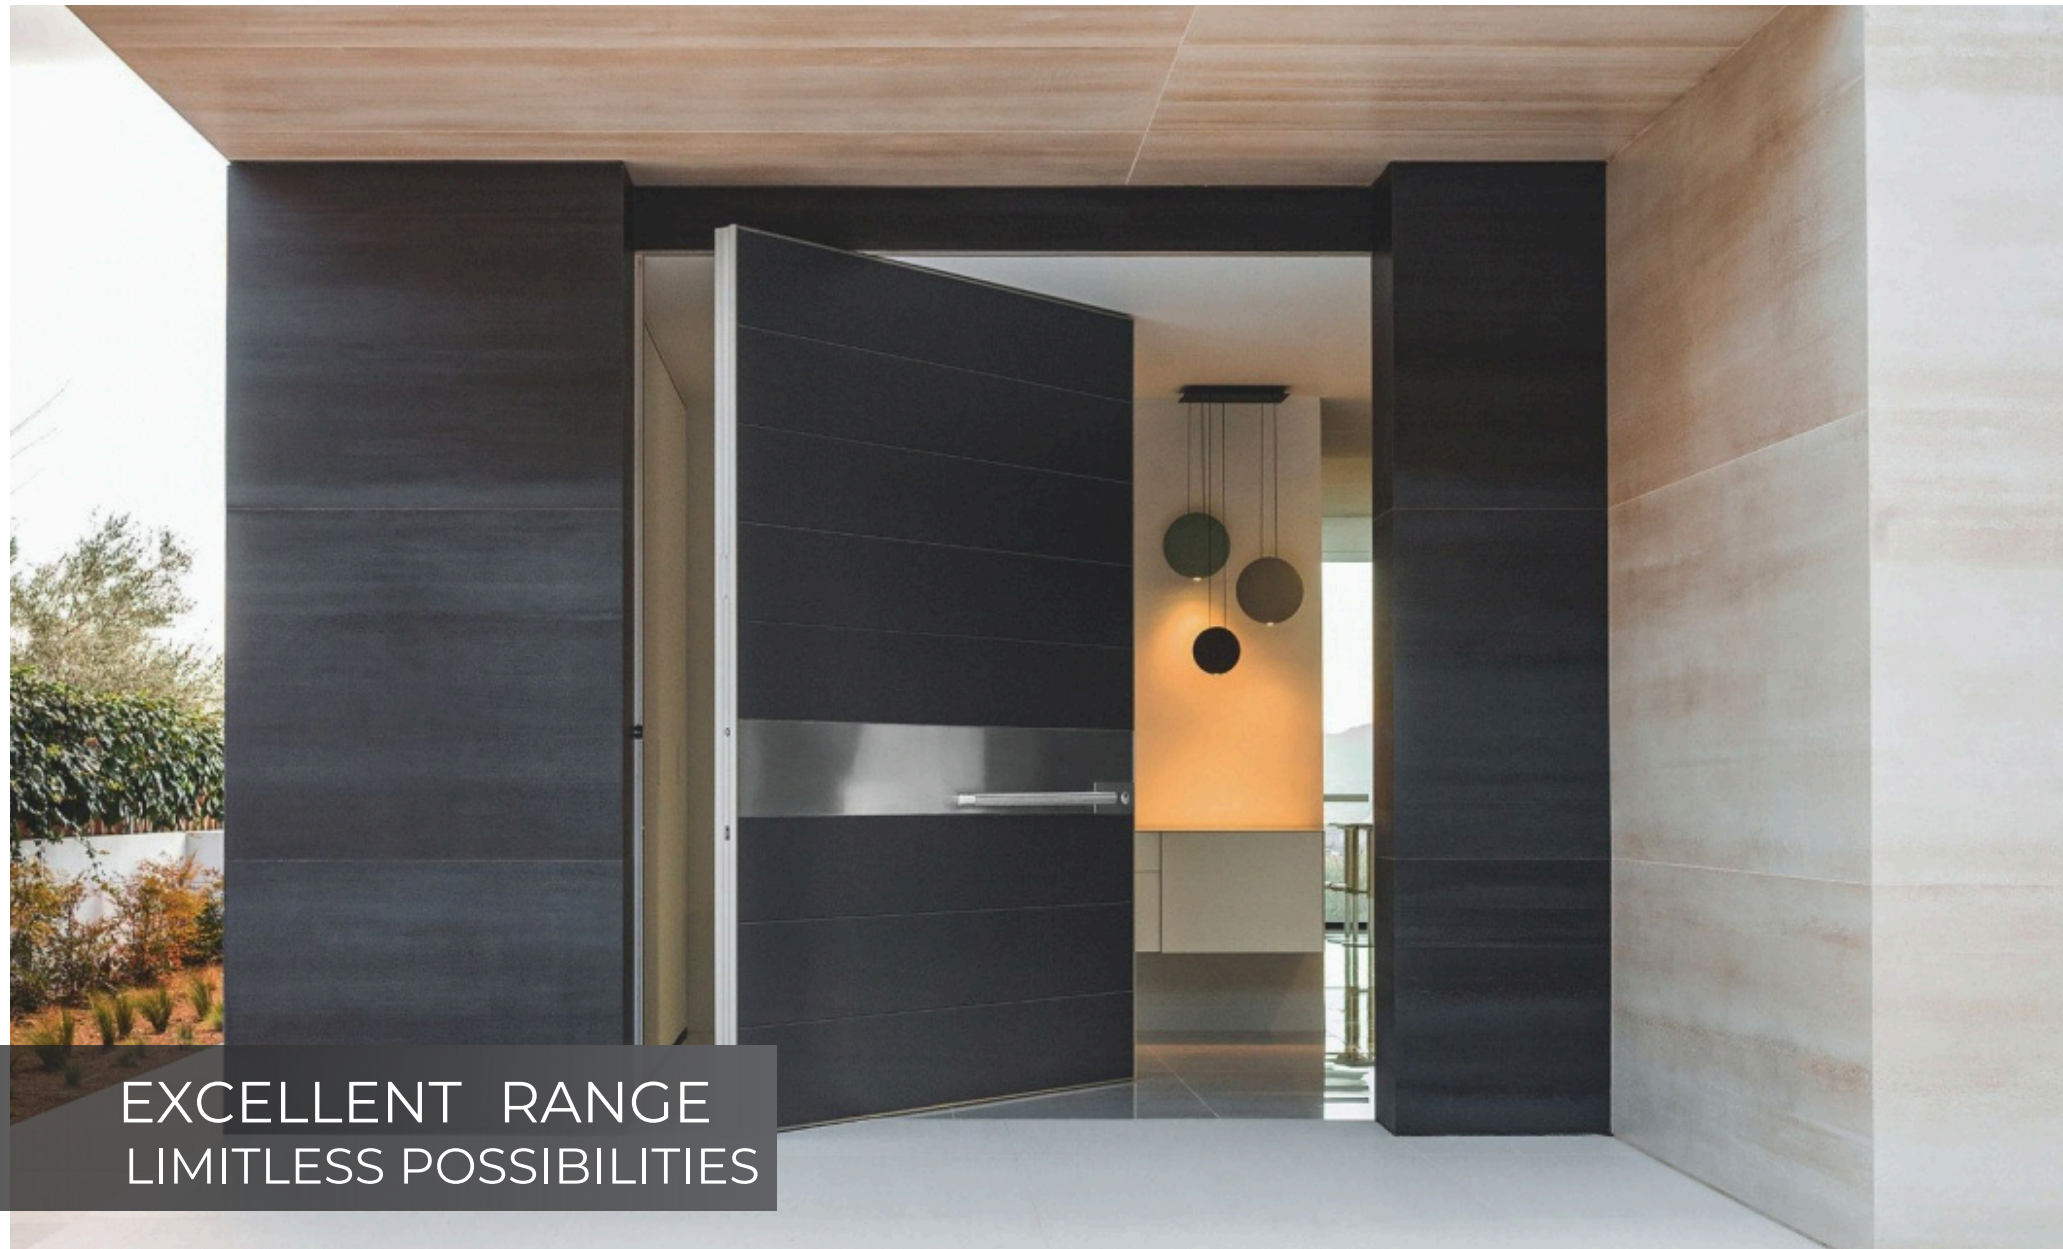

EXCELLENT RANGE
LIMITLESS POSSIBILITIES

120 Ultra Aluminum Pivot Doors specification


	U-Value	1.68 W/ m ² ·K Level 7 0.295 BTU/h·ft ² ·°F Level 7
	Water Tightness	720pa Level 7
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Max size (Single Panel)	800Kg H:8000mm W:3000mm
	Security	Multi-point lock




Pivot System



Thermal Broken
Aluminum Profile

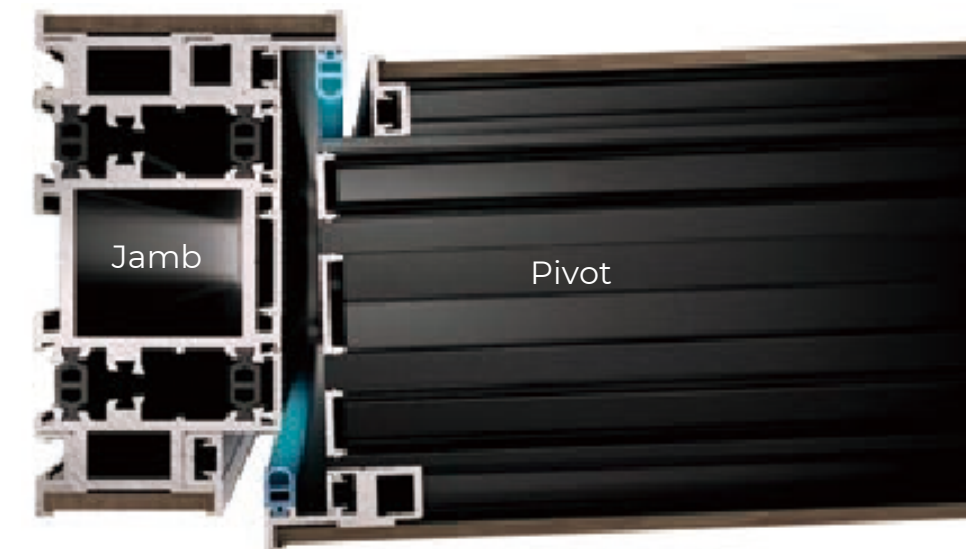

Perfect Pivot Sealing

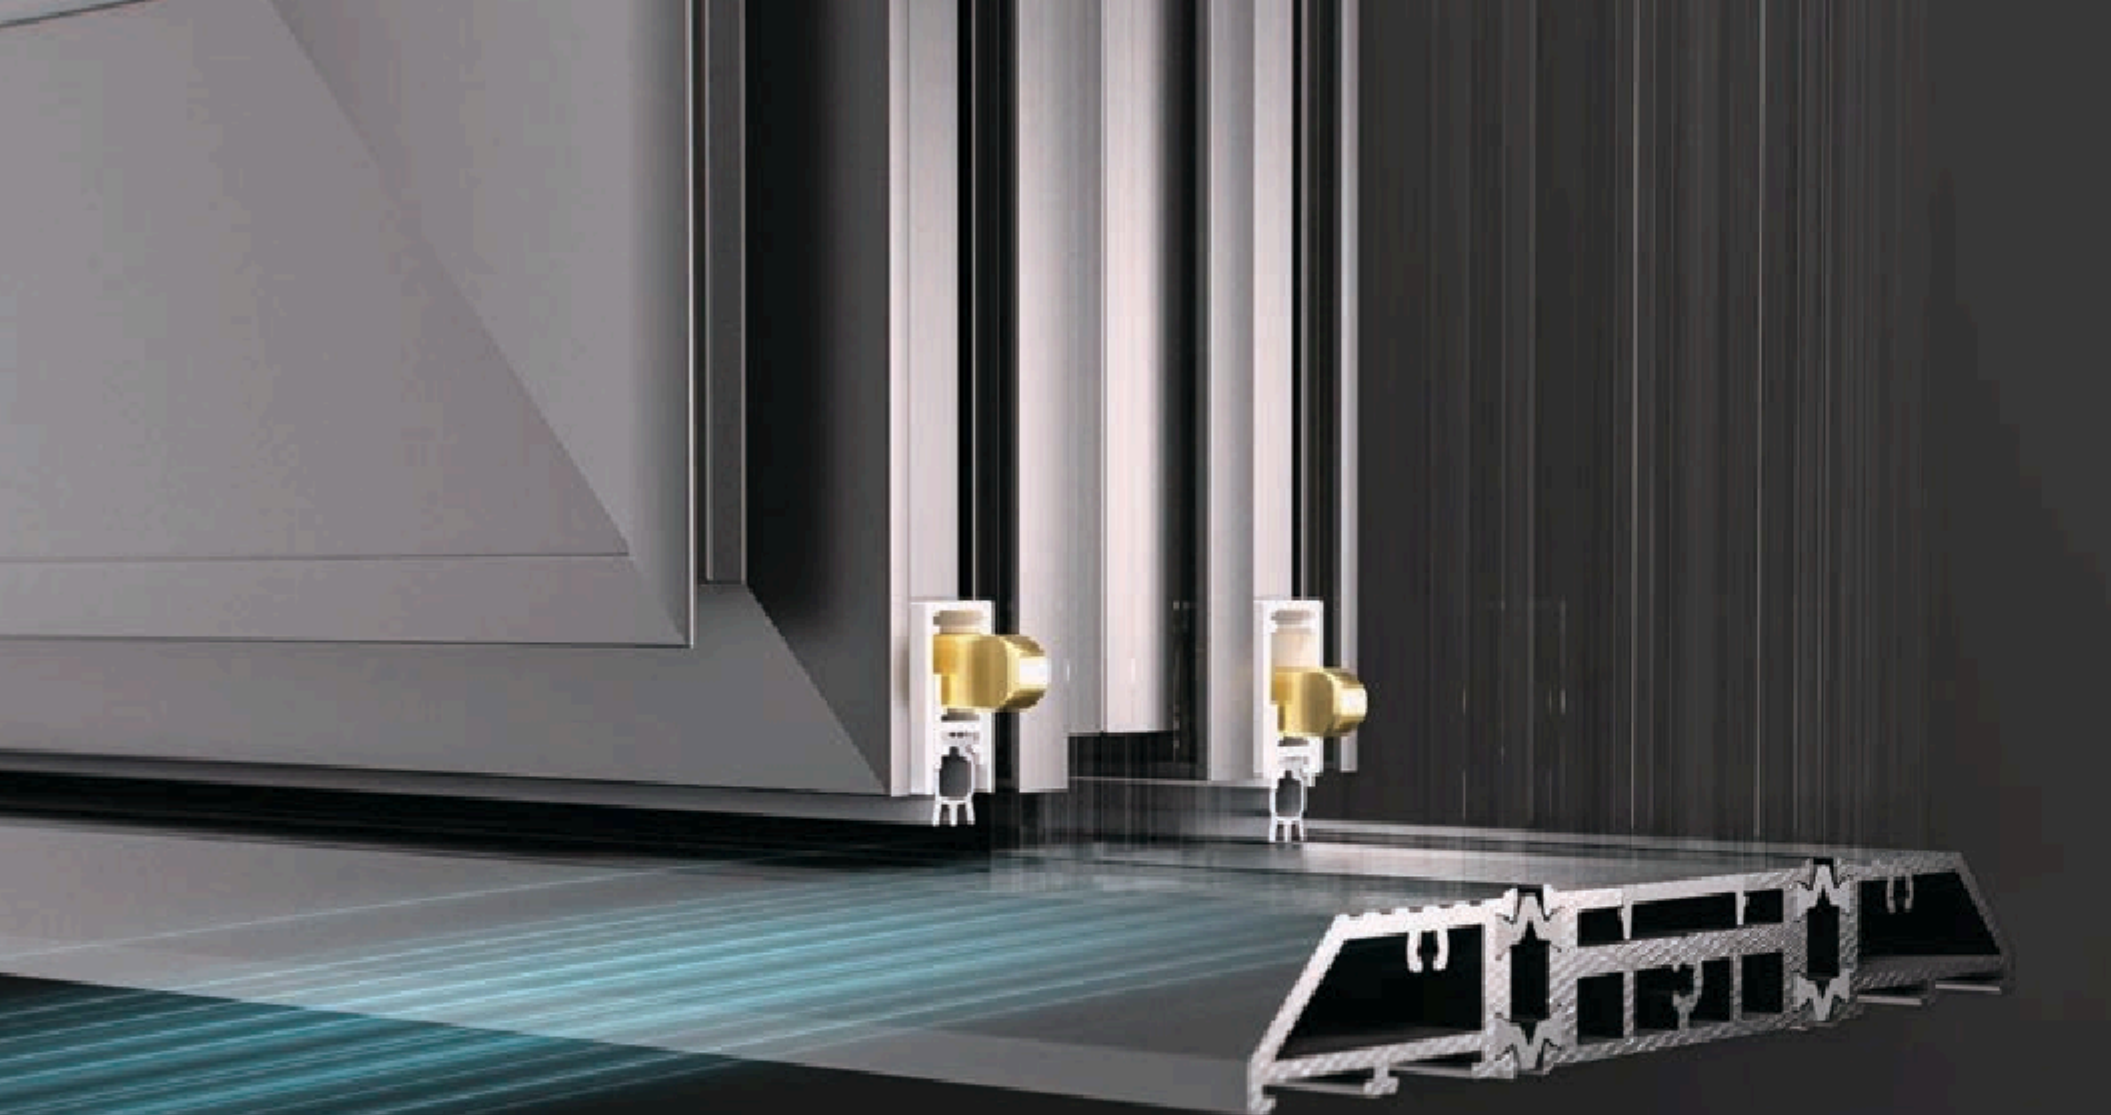

AUTOMATIC REBOUND DROP SEALING

As your door gracefully closes, our innovative sealing strip descends effortlessly, forming a dual barrier against the elements. With each opening, it ascends just as smoothly, ensuring unobstructed entry and exit while maintaining the integrity of your home's security and energy efficiency. Experience the future of home protection with our automatic sealing technology today.




THERMAL INSULATED & ENERGY SAVING

When your door closes, advanced hidden seals automatically descend, compressing against the track to create a dual cavity seal. This ingenious design effectively blocks air and water infiltration, ensuring energy efficiency and thermal insulation. Not only does it save on energy costs by keeping the warmth in and the cold out, but it also significantly reduces noise pollution, creating a peaceful sanctuary right at your doorstep. With our doors, you're not just making an entry⁴¹ – you're securing a fortress of comfort and tranquility.









75 Glass Pivot Doors specification

	U-Value	1.96 W/ m2·K Level 7 0.345 BTU/h·ft2·°FLevel 7
	Water Tightness	350pa Level 5
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Max size (Single Panel)	300Kg H:3000mm W:2000mm
	Security	Multi-point lock



85 Aluminum Entrance Pivot Doors specification

	U-Value	1.93 W/ m2·K Level 7 0.339 BTU/h·ft2·°FLevel 7
	Water Tightness	350pa Level 5
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Max size (Single Panel)	400Kg H:4200mm W:2000mm
	Security	Multi-point lock



High Standard Equipment

Entrance Hinged Doors

All our aluminum doors offer individual designs, benefitting from high performance, security, and build quality with following standard specification

- High performance insulated core with laminated safety and heat protection triple glazing
- 3 point automatic stainless steel lock with integrated and adjustable lock receiver.
- Stainless steel handrail 1200mm long with straight or angled fixings.
- Three-piece hinge (Standard, Modern)
- Security cylinder with keys included
- Standard dimensions up to 1000 x 3000mm (larger sizes available subject to surcharge)



Door handle with lock



Safety profile key cylinder




Handrail with straight fixing



Concealed Hinges



Security three-fold lock

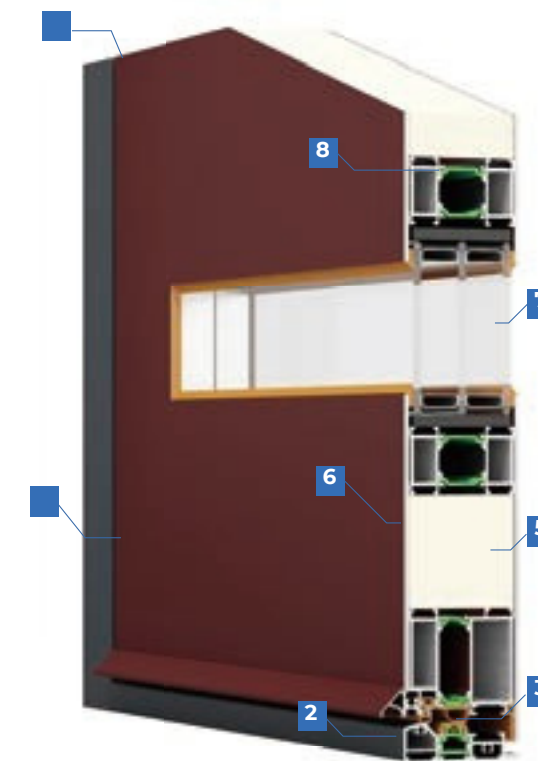



The heart of the door

All our aluminum doors offer individual designs, benefitting from high performance, security, and build quality with following standard specification

- 1 Fully flush frame and sash
- 2 Low level thermally broken access threshold
Disabled access compliant
- 3 High performance weather seal and connector
- 4 Frame edge profile designed for concealed fixing strap system
- 5 High performance insulated core
- 6 3mm thick aluminium outer face
- 7 Triple glass safety and low energy insulated glazing
- 8 High performance insulated thermal break









75 Glass French Doors specification

	U-Value	1.74 W/ m2·K Level 7 0.306 BTU/h·ft2·°F Level 7
	Water Tightness	720pa Level 7
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Max size (Single Panel)	150Kg H:3000mm W:1000mm
	Security	Multi-point lock





85 Aluminum Entry Doors specification




	U-Value	1.71W/ m2·K Level 7 0.301 BTU/h·ft2·°F Level 7
	Water Tightness	720pa Level 7
	Wind Resistance	4000pa Level 7
	Sound Insulation	36dB Level 7
	Max size (Single Panel)	200Kg H:4000mm W:1000mm
	Security	Multi-point lock



series
Glass
Entrance door

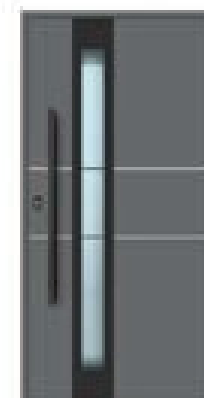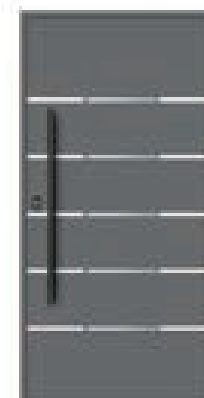


series
Aluminum
Entrance door

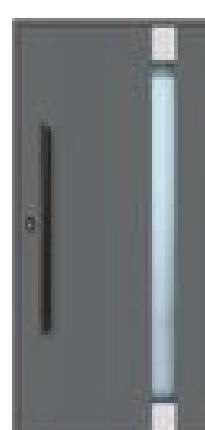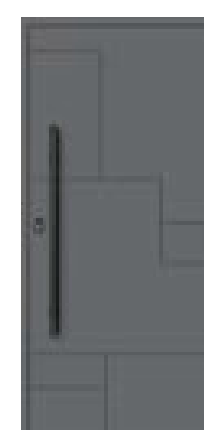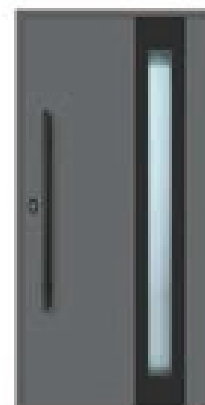

Series
WOODEN
Entrance door





Series
ART
Entrance door

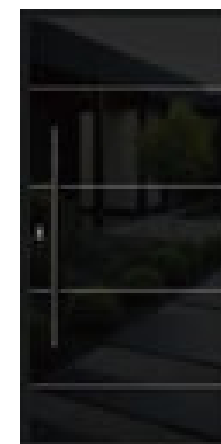

Series
STONE
Entrance door



Series
Concealed
Entrance door

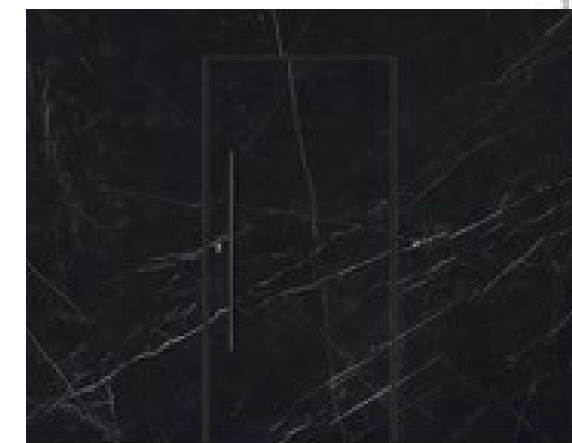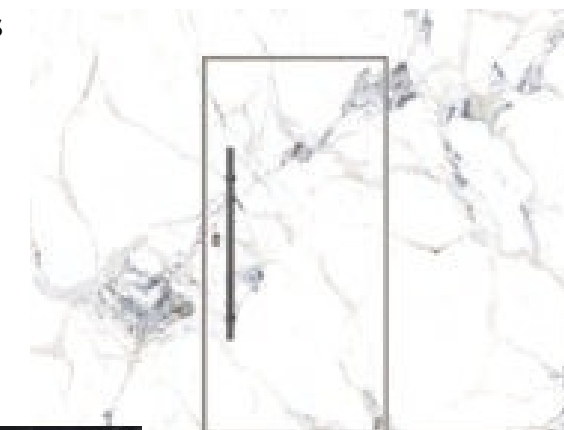

Design your door

We can customize and develop products according to customer needs requirement.

DIGITAL SMART ENTRY SYSTEM

Face recognition, password recognition, fingerprint recognition, NFC function, app control, doorbell, video call you have it all in one system.



HANDLE COMBINATION



CONCEALED SQUARE HAND



SAFETY CYLINDER



LINKAGE LOCK



COLOUR FINISHES

Nothing limits you



APPLICATIONS GROOVES



5mm stainless steel bar 10mm stainless steel bar 5mm Grooves 10mm Grooves

GLASS OPTION



Transparent glass Frosted glass Coated glass Mirror glass



The color of the products in this catalogue may be different from the real products due to the reason of printing photography, please be informed in advance.
All products in this catalogue are subject to change without prior notice.
All rights reserved



Canguard Windows & Doors



367 Concession Road 12b
Carleton Place ON
K2C 0C5



613-619-0969



<https://managepro.ca/canguard>