



We are client-focused, technology- oriented and professional leading LED commercial lighting manufacturer. We always insist on the idea of Sincerity, Rapidity and Win- win. WE has passed ISO9001:2015, all the products got approval for CE,SAA,ROHS,C-k and also available to provide the energy efficiency test, like new ERP, LM-79, ISTMT, LCP, which meets different markets qualification standard. We undertake more than 300 kinds of our products designs, development and improvement in illumination and light source.

DARK
SPACE

Indoor Lighting

OUR ADVANTAGE

up to **66%** energy savings

compared to traditional lighting

LED service life

up to 50,000h at 85% luminous flux

LESS

maintenance costs



Research and Development




Creative Design



Innovation Team



We incorporate the latest advancements in LED technology and are always pursuing our objective of designing and manufacturing high quality LED products that are available to the whole world. It is our basic working principle to have high demand towards workmanship, to have high standard of product. We try our utmost to make every thing well and to reach our ideal successfully.

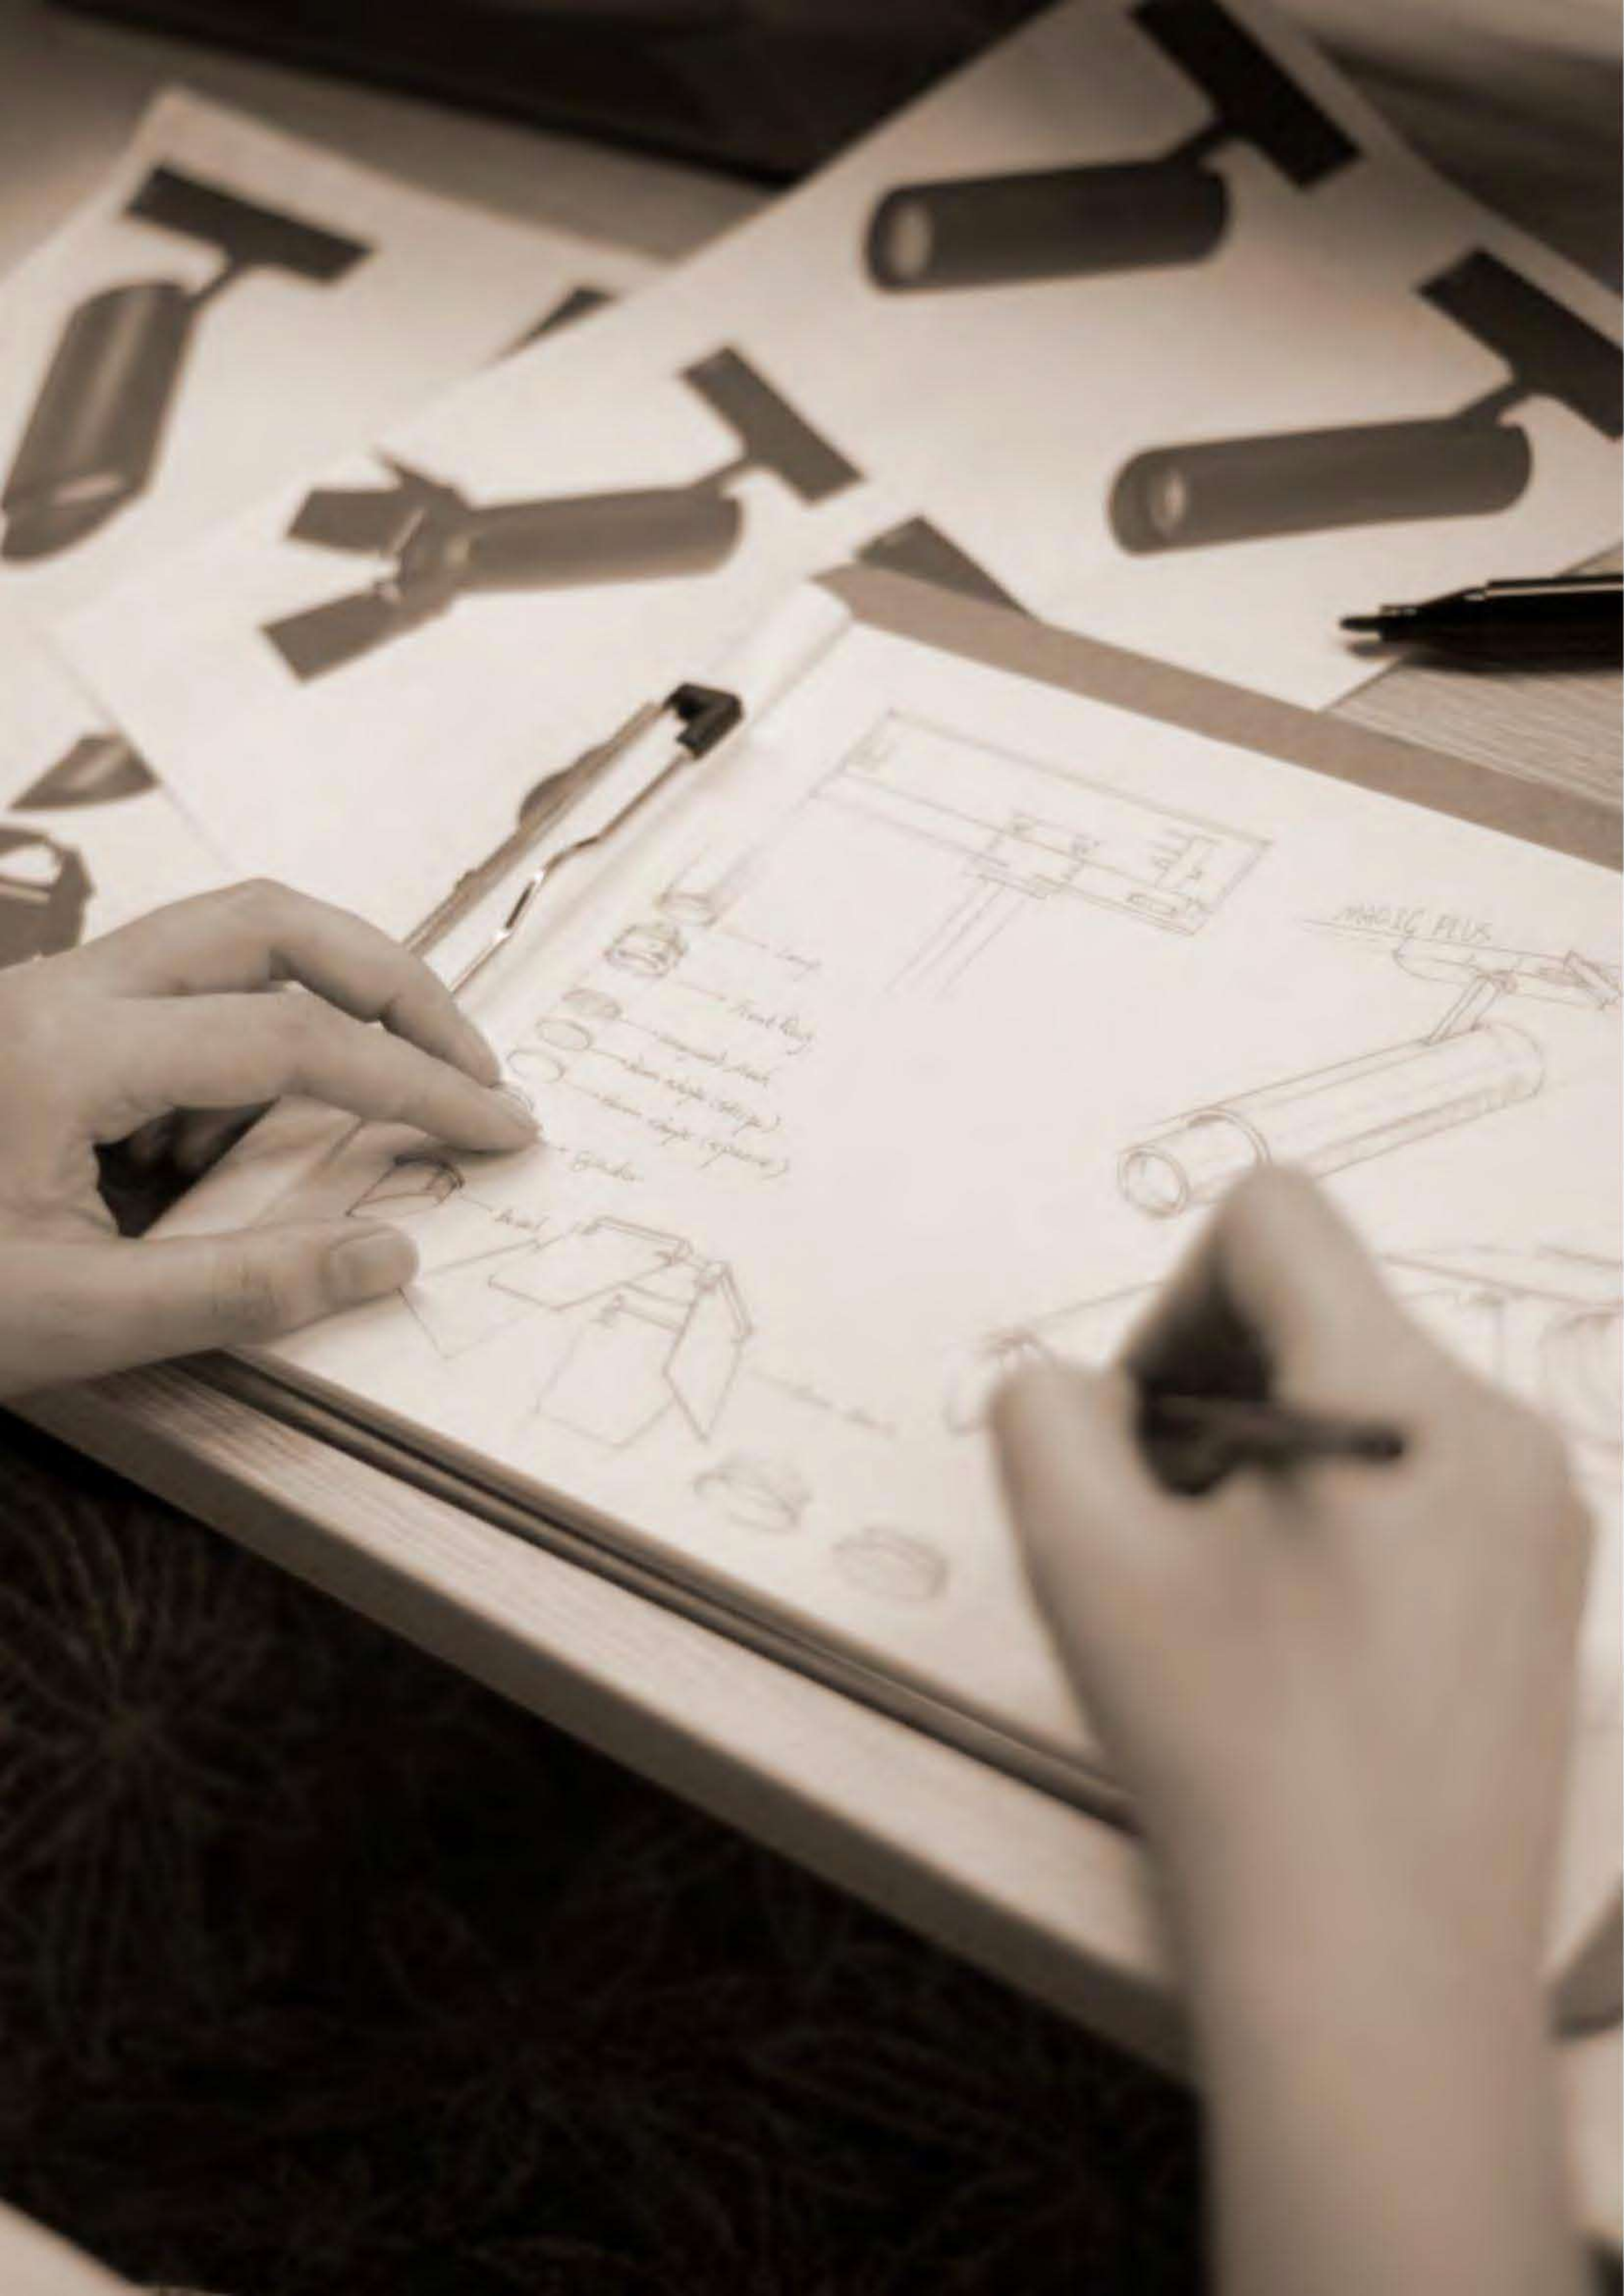

TECHNOLOGY SUPPORT

We are a differentiated good solution provider. We can provide 3D design, product datasheet, free testing, etc. Also, we can do dialux for you .



Product datasheet



Free product testing



Dialux




3D design



Enjoy exclusive rights



LED TRACK LIGHT



NEW



ZOOM PLUS
P.003-008

NEW



ZOOM III
P.009-012

NEW



FUSION
P.013-018

NEW



MAGIC PLUS
P.019-024

NEW



SUPER
P.025-026

NEW



ARES
P.027-028

NEW



ARES PLUS
P.029-032

NEW



REMEX
P.033-034

NEW



PORES



MAGIC
P.037-038



MINI
P.039-040




SIRIUS
P.043-044



EAGLE EYE
P.049-050

LED DOWN LIGHT (SMD)



IP54




DAMP



GALAXY
P.093-094

LED DOWN LIGHT (COB)





AEROLITE
P.105-110



STAR
P.111-112

NEW



CRESCENT
P.113-114



MINI
P.115-118



EAGLE EYE
P.119-120



GALAXY
P.121-122

NEW



POWER
P.123-128

NEW



MAMBA
P.129-130

NEW



RAINBOW
P.131-134





SPRING
P.137-138



LUX
P.139-142



GALAXY
P.143-144



VELA


NEW



LUX
P.161-166



VAST
P.185-186

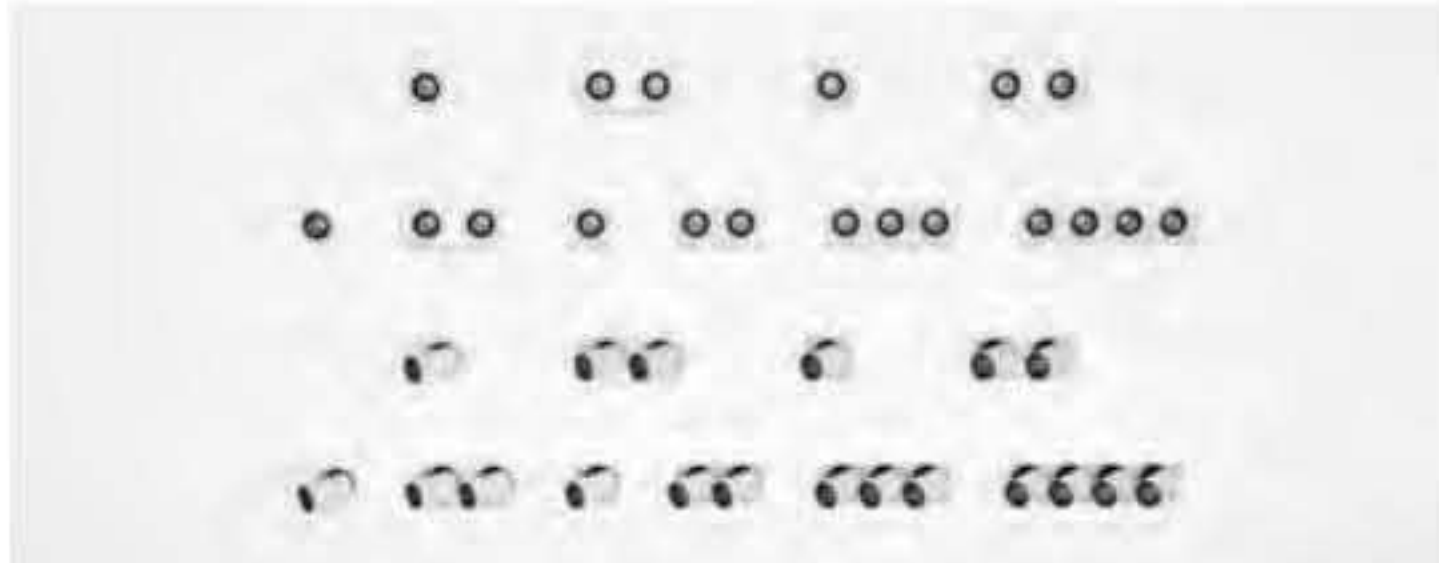


STARS B
P.203-208



STARS A
P.193-202

LED DOWN LIGHT (Surface & Pendant)



ZIGBEE
P.221-222



POWER-S
P.223-224



MINI
P.233-234



EAGLE EYE
P.235-236




ARTEMIS
P.237-238



FIREFLY
P.247-248

LED LINEAR LIGHT



LINE-A-SL1204-S
P.255-256



LINE-B-SL1204-S
P.255-256



LINE-A-EX1204-S
P.257-258



LINE-B-EX1204-S
P.257-258



LINE-TR1205-S
P.259-260





LINE-SL1205-S
P.261-262




LINE-EX1205-S
P.261-262


LED TRACK SYSTEM MAGNET

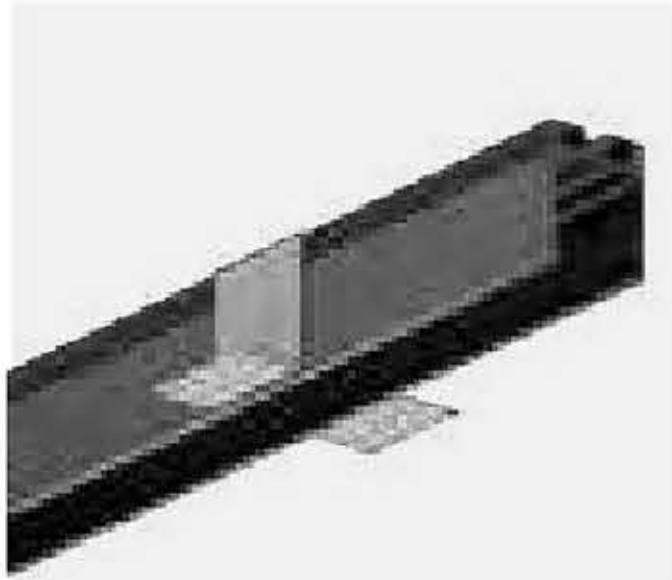

DS-601010
P.277-286

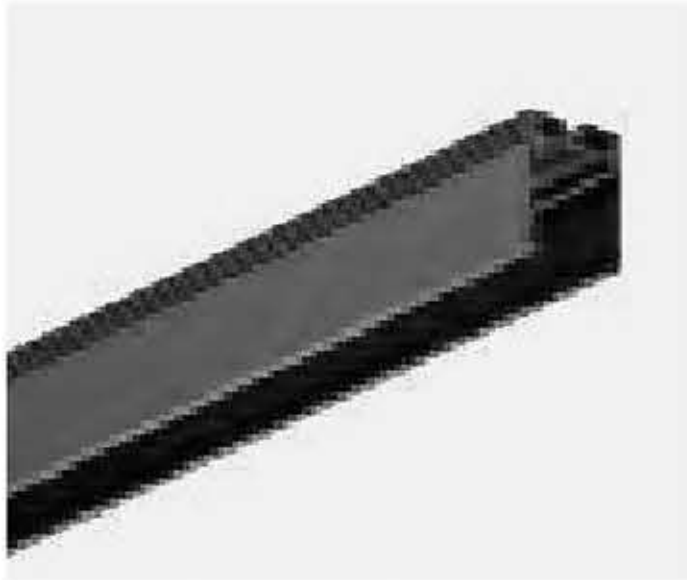

DS-601110
P.277-286

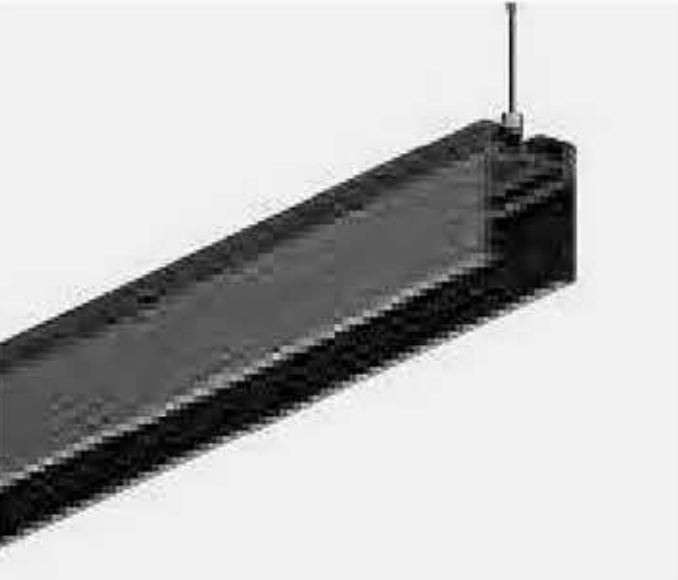

DS-601310
P.277-286



DS-601901
P.277-286



DS-601902
P.277-286



DS-601201-C
P.287-288



DS-601202-C
P.287-288



DS-601203-C
P.287-288



DS-601201-1-C
P.289-290



DS-601202-1-C
P.289-290




DS-601203-1-C
P.289-290



DS-601211-C
P.291-292



DS-601212-C
P.291-292

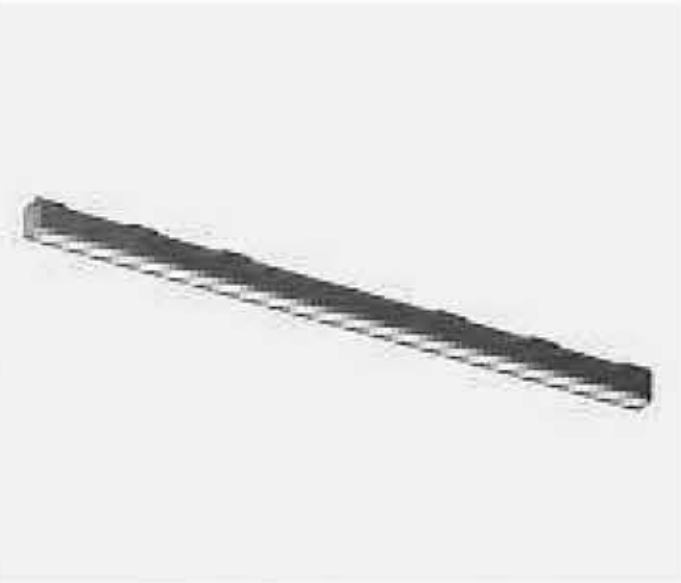

DS-601213-C
P.291-292



DS-601221-C
P.293-294



DS-601223-C
P.293-294



DS-601225-C
P.293-294



DS-601231-C
P.293-294



DS-601251-C
P.295-296



DS-601252-C
P.295-296





DS-601241-C
P.297-298




DS-601242-C
P.297-298

LED TRACK SYSTEM MAGNET

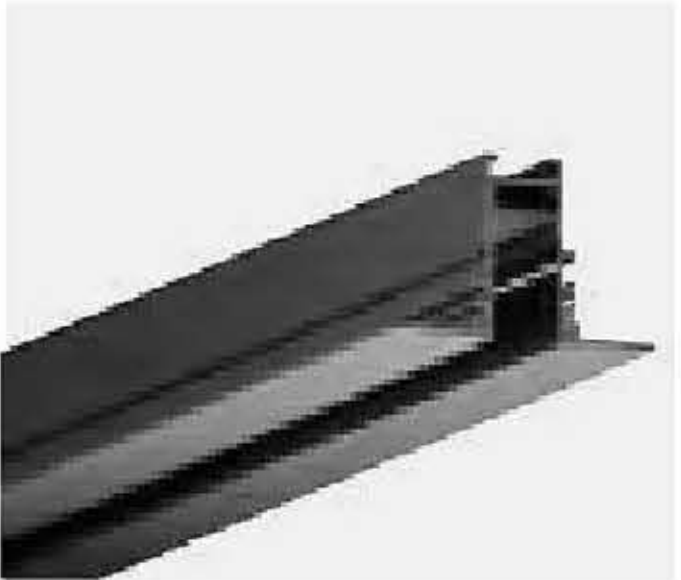

DS-603010
P.299-300

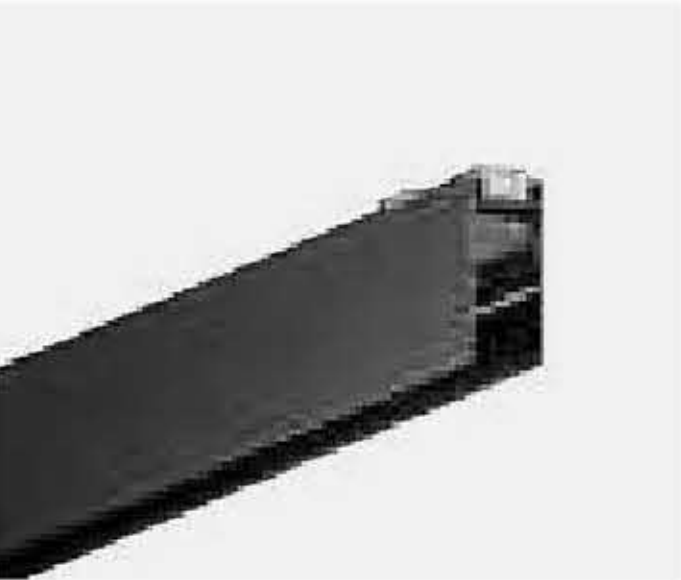

DS-603110
P.299-300



DS-603310
P.299-300



DS-603901
P.299-300



DS-603902
P.299-300



DS-603903
P.299-300



DS-603904
P.299-300



DS-603202-C
P.301-302



DS-603203-C
P.301-302



DS-603204-C
P.301-302



DS-603211-C
P.303-304



DS-603212-C
P.303-304



DS-603213-C
P.303-304



DS-603222-C
P.305-306



DS-603224-C
P.305-306



DS-603251-C
P.307-308




DS-603252-C
P.307-308



DS-603241-C
P.309-310

LED TRACK LIGHT

LED Track Light can create a partial and unique atmosphere to show the target objects, which is mainly used for accent lighting like commercial stores, museum and gallery, etc. The flexible track head can be adjusted to light the objects which are the key display. Professional optics can offer you a comfortable lighting effect.

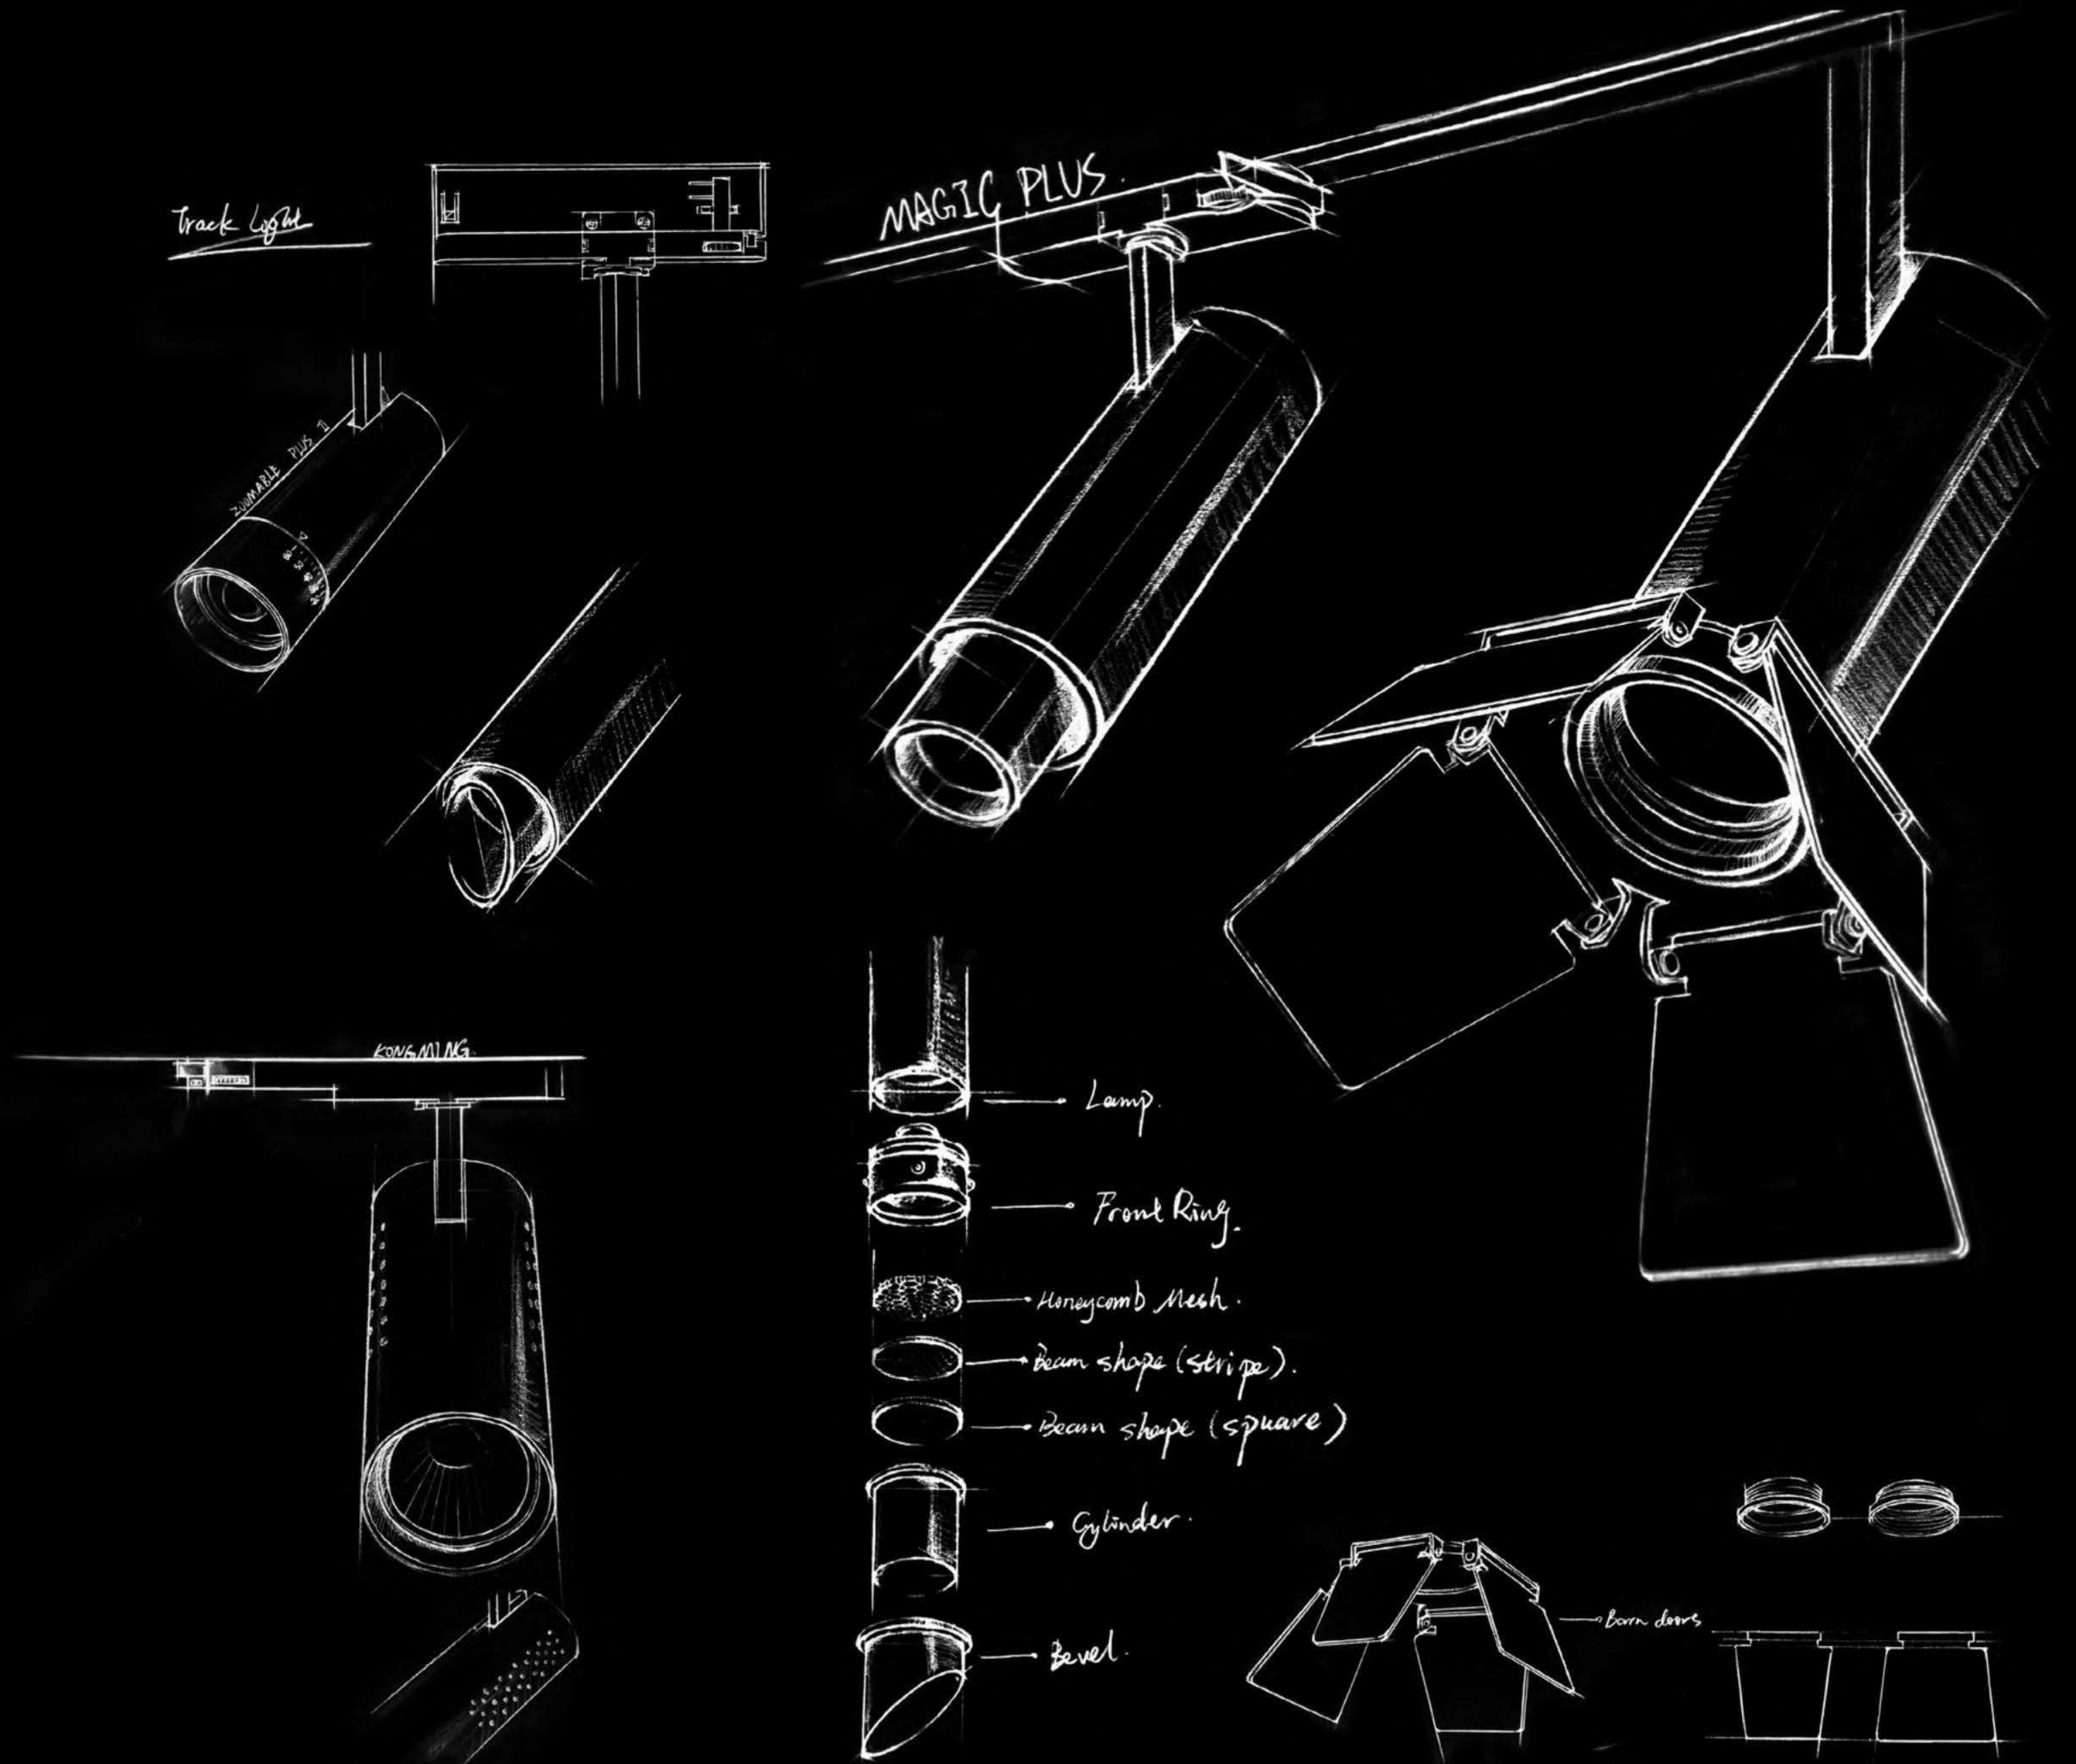



TRACK LIGHT

ZOOM PLUS

LED Track Light



3-CCT optional by switch

2700K/4000K/6000K

With simple and elegant design, supreme integrated aluminum body with great heat dissipation.



TRACK LIGHT




10%~100% dimmable (Custom made)



Switch operated brightness dimmable 10%~100%, Meet different lighting needs.



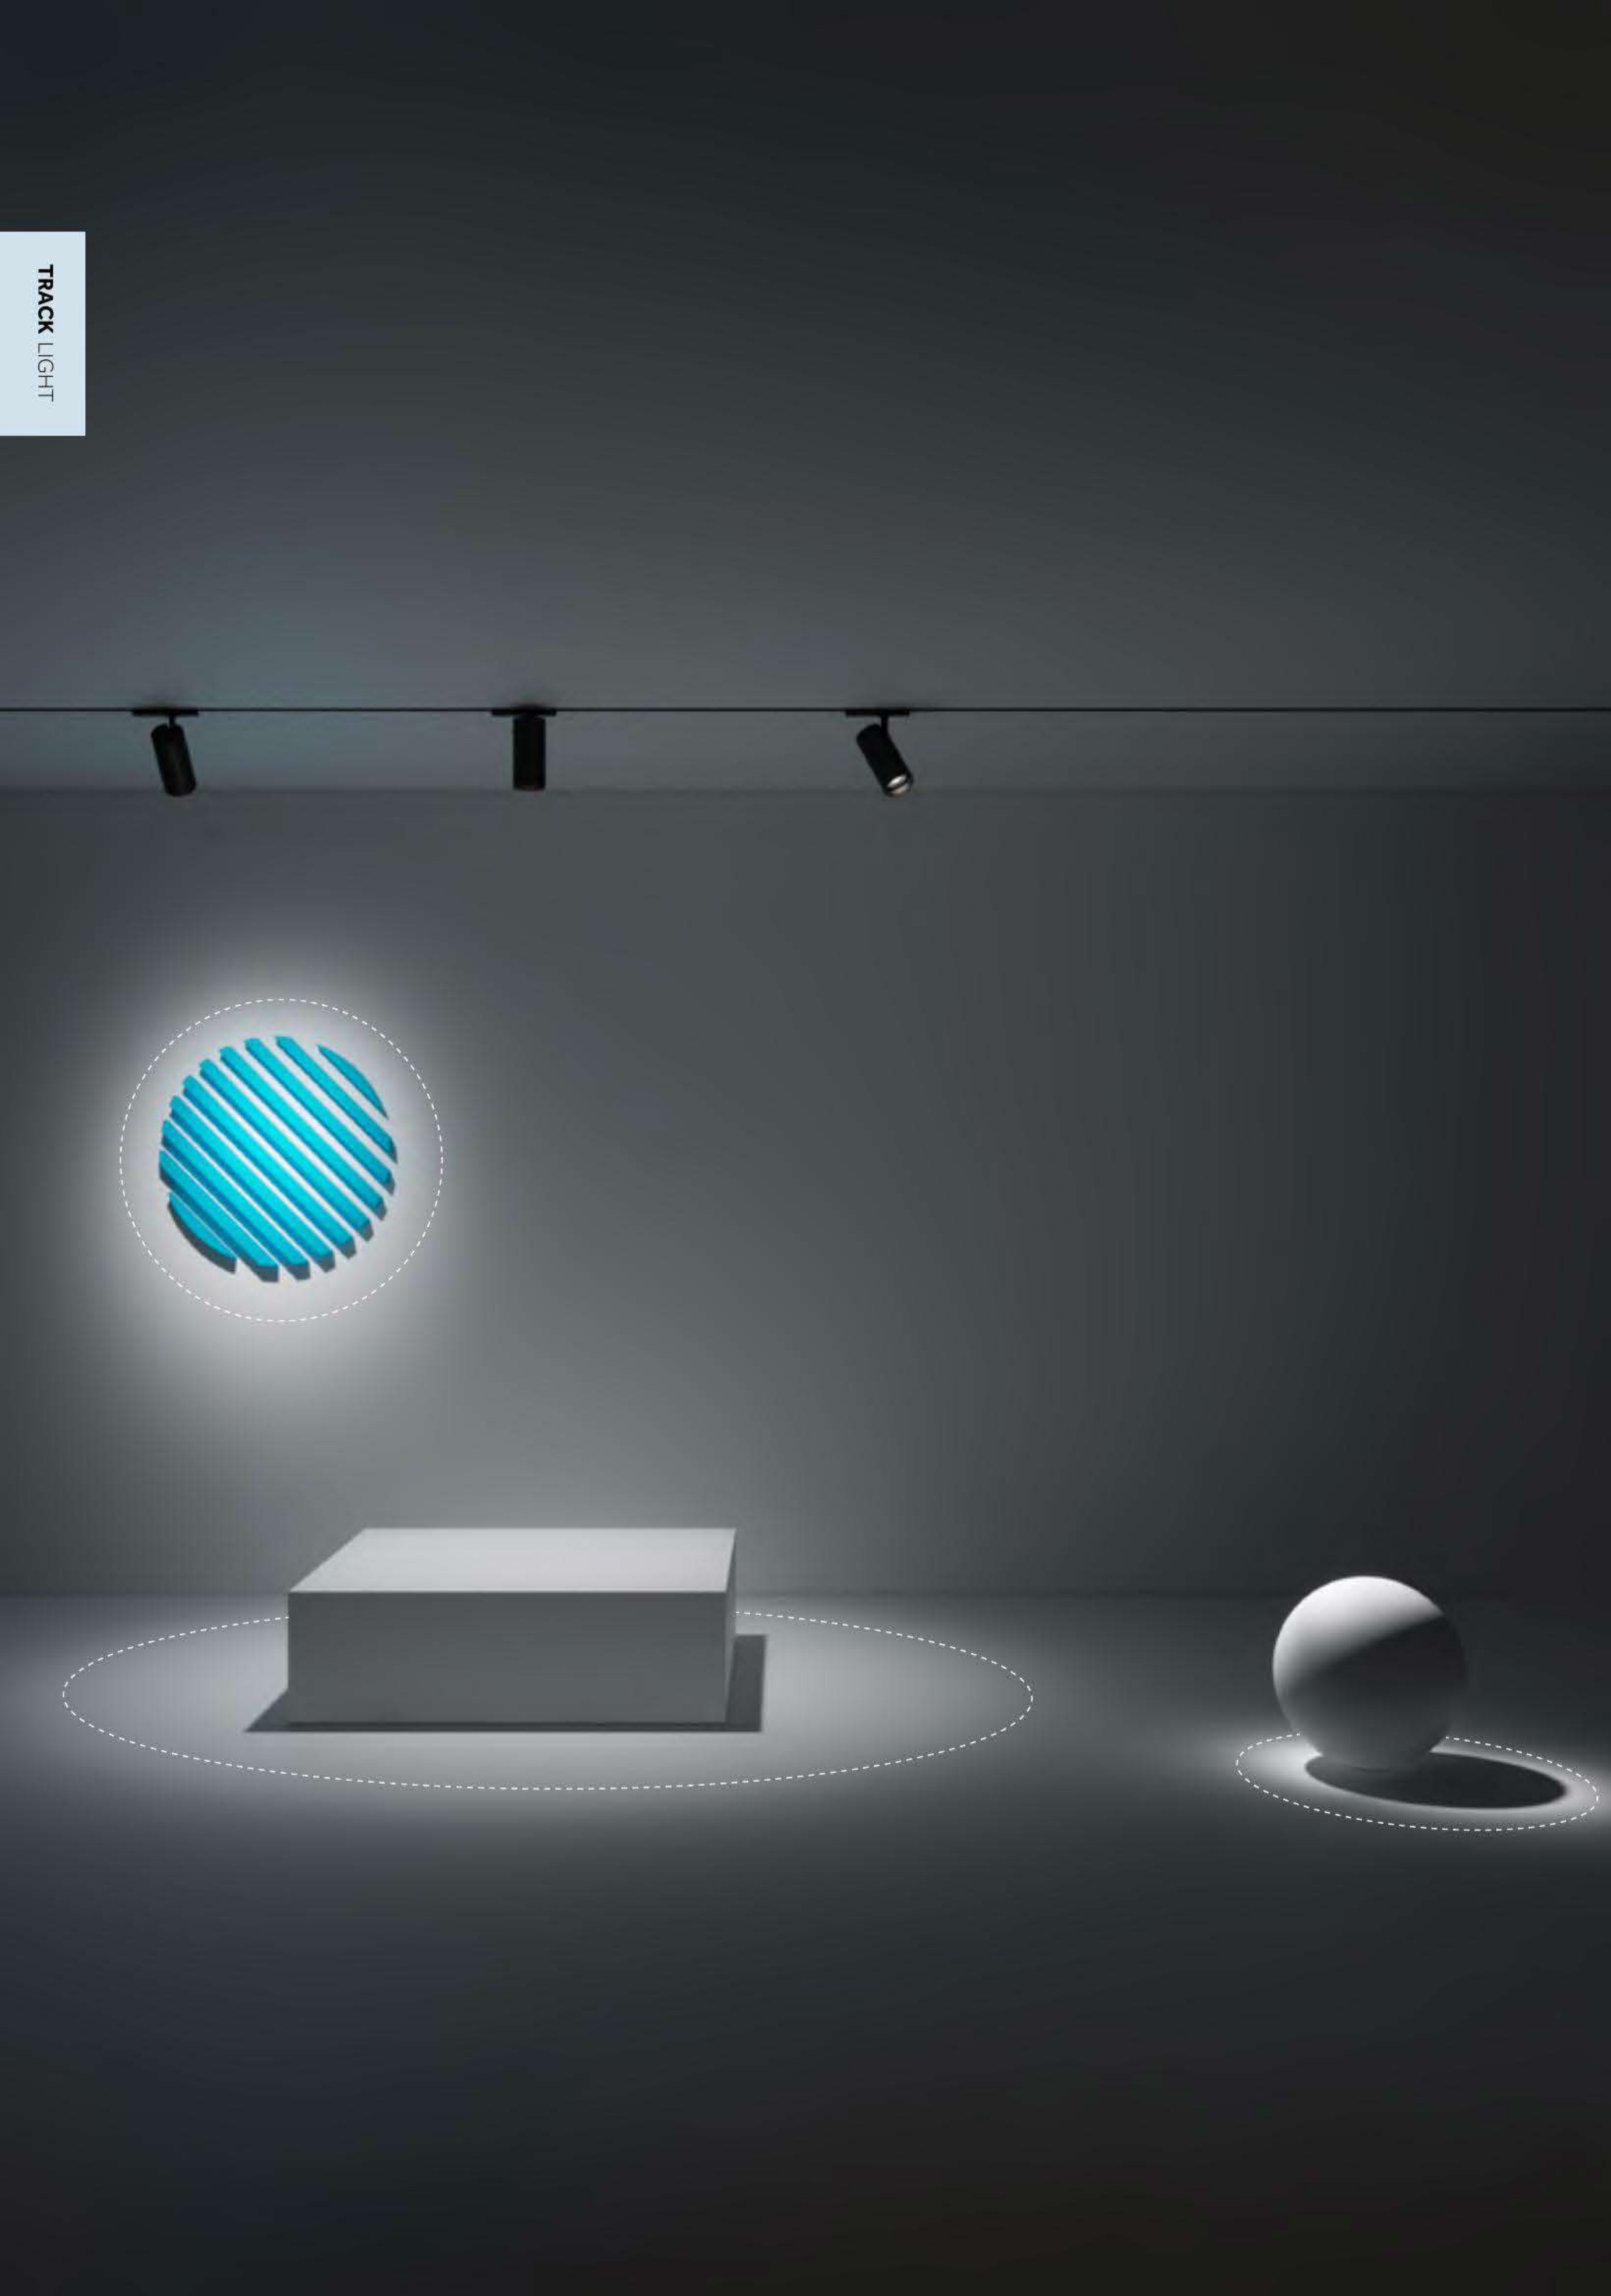

TRACK LIGHT



TRACK LIGHT

Narrow
20°

~

Wide
60°

The track light is multi-functional design: adjustable beam angle, changeable color temperature and adjustable brightness, which can greatly help you to reduce pressure of inventory and cost. Professional optical zoom lens offers a wide range adjustable beam angle. Sliding built-in switch can reach stepless dimming. It is the best choice to use in projects like museum, gallery, and so on.

ZOOM PLUSTrack Light Series




TRACK LIGHT

TRACK LIGHT



	TR-7001	TR-7002	TR-7003
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	20W/25W/30W	25W/30W/35W/40W	25W/30W/35W/40W
Beam Angle	20°-60°	20°-60°	20°-60°
Lumen (lm)	1856/2467/3011	3232/3703/4457/4894	3232/3703/4457/4894
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø72x228	Ø80x228	Ø94x230
N. W/PC (kgs)	0.81	0.82	1.25
Q' ty/CTN (pcs)	16	12	9
Driver	Track adaptor with integrated LED driver	Track adaptor with integrated LED driver Driver box Built-in driver	Track adaptor with integrated LED driver Built-in driver

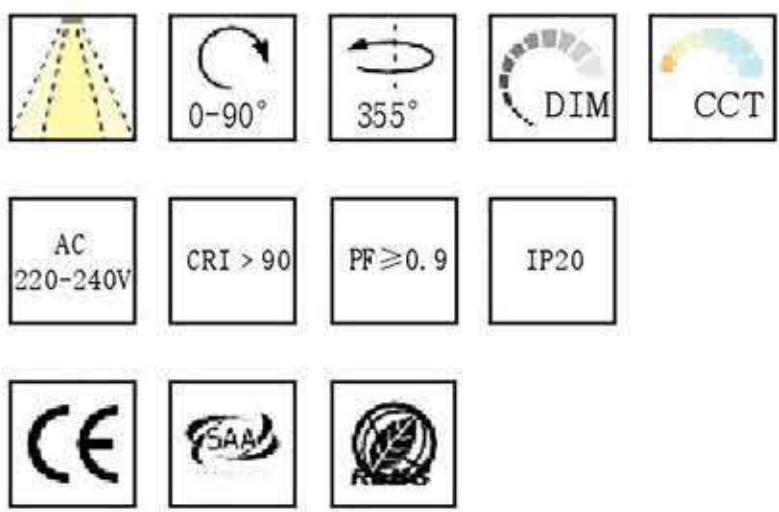


FINISH: ☐ White ☒ Black **CCT:** 2700K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

ZOOM PLUS Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. Wide-range adjustable beam angle 20°-60°. Switch operated brightness dimmable 10%-100%.

Dimension(mm)

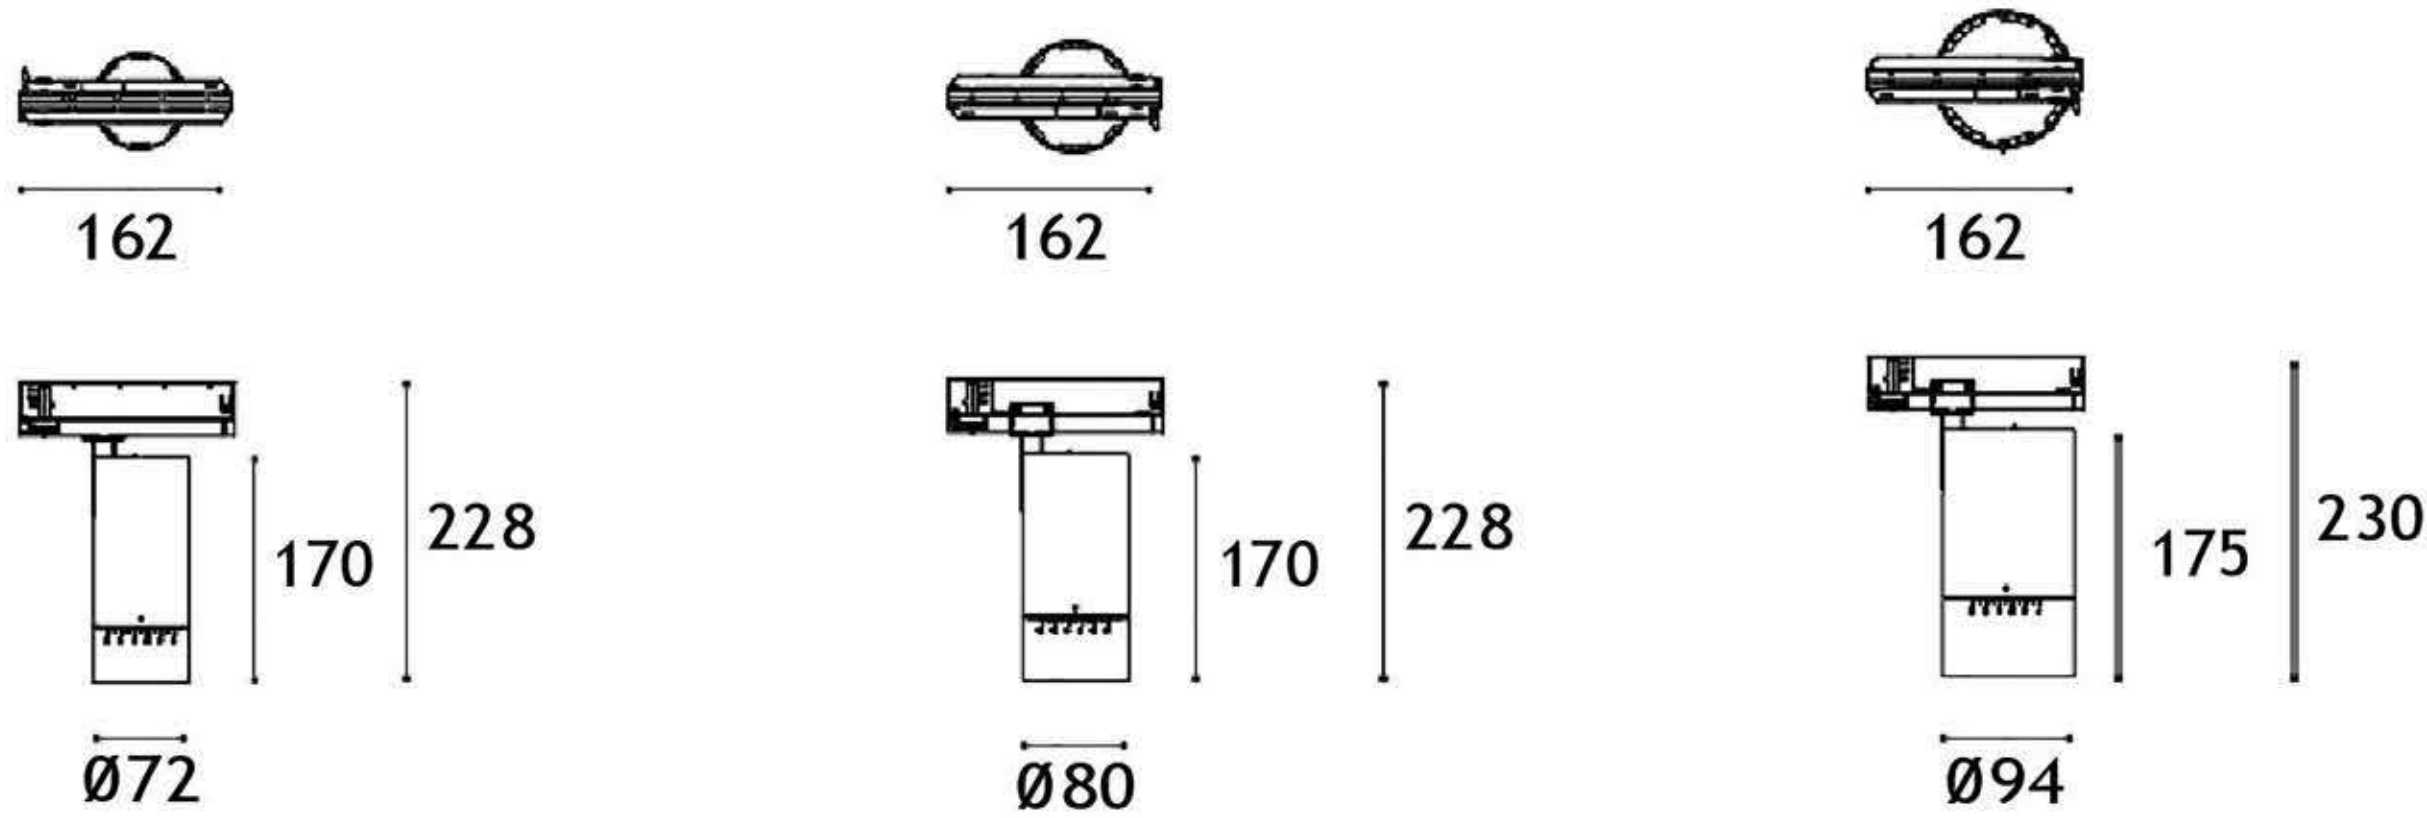



TRACK LIGHT

ZOOM III

LED Track Light



80%~100% dimmable
3-CCT changeable



3-CCT Adjustable Color Temperature
Brightness Adjustment




Adjustable Beam Angle

TRACK LIGHT



Type

	TR-7201-COB	TR7202-COB
Wattage	20W/25W	30W/35W/38W
Beam Angle	25°-55°	25°-60°
Lumen (lm)	2068/2492	3201/3808/4104
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø72x210	Ø80x250
N. W/PC (kgs)	0.58	0.8
Q' ty/CTN (pcs)	16	16


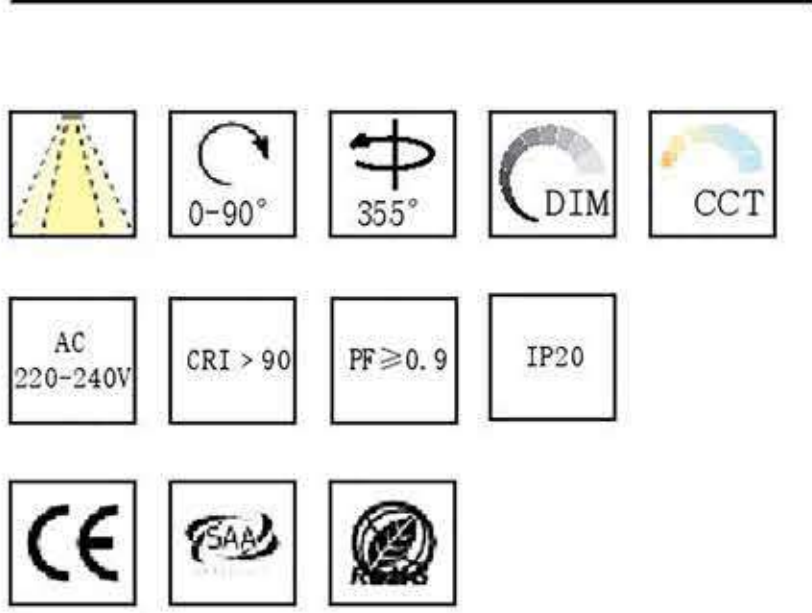


FINISH: ☐ White ☒ Black **CCT:** ☒ 2700K ☐ 4000K ☐ 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


BJ Series LED tracklight with high efficiency LED COB chip, Wide-range adjustable beam angle 20°-60°. Switch operated brightness dimmable 10%-100% and 3-CCT optional.

Dimension(mm)

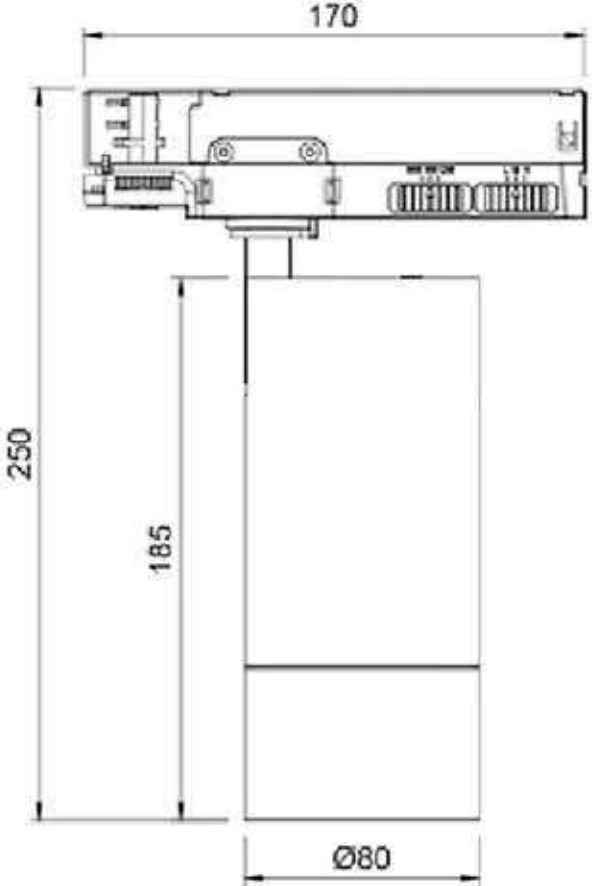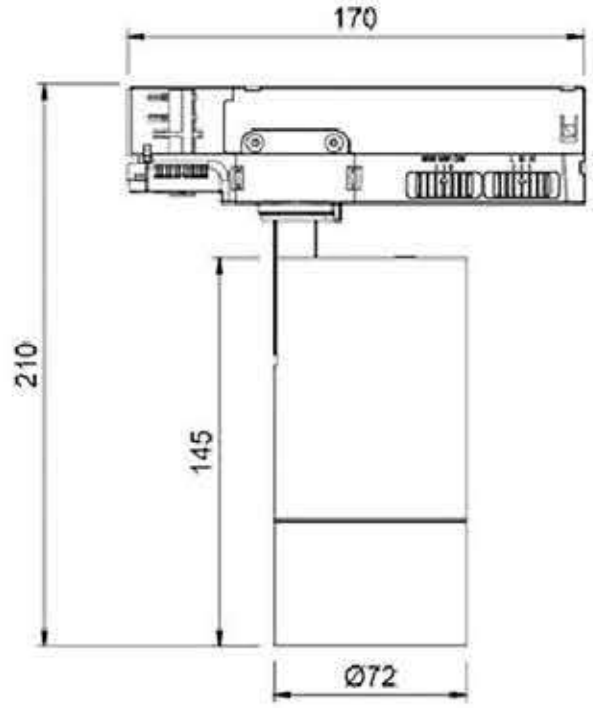



TRACK LIGHT

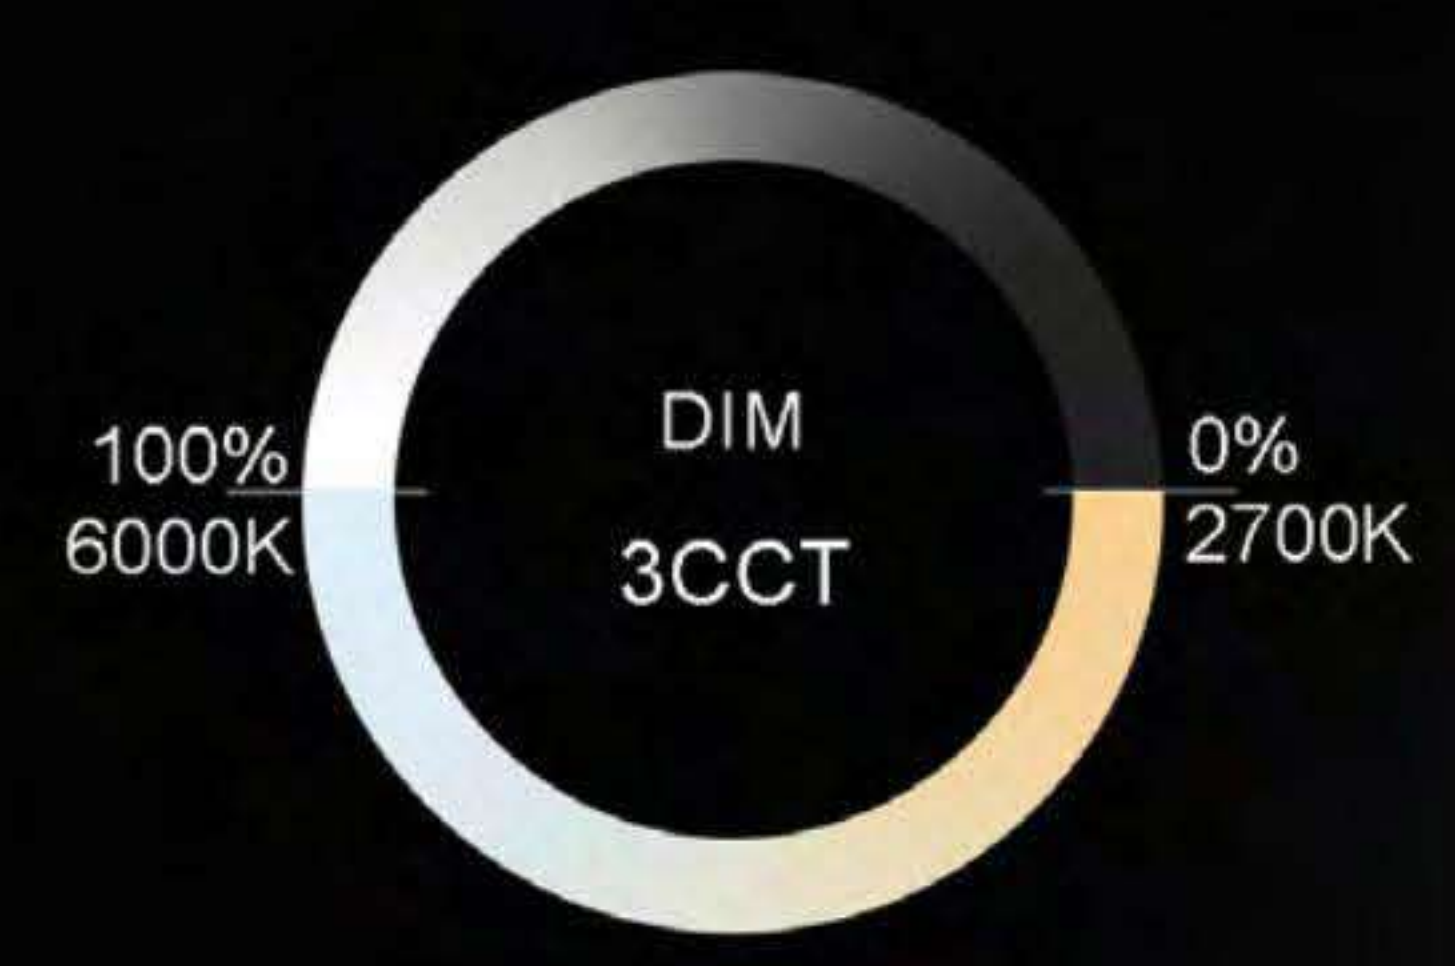

FUSION

LED Track Light



Patent driver

3-CCT optional by switch
2700K/4000K/6000K



TRACK LIGHT



APP Control

The built-in dimming switch on the integrated driver adaptor, which can adjust the brightness of 100%, 90% and 80%.





TRACK LIGHT

DIY Design

Multi-accessories for optional




TRACK LIGHT



Type

	TR-7310-COB	TR7311-COB	TR7312-COB
	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	20W	30W	40W
Beam Angle	26° /35° /55°	26° /35° /55°	26° /35° /55°
Lumen (lm)	2235	3315	4420
Cut-out (mm)	/	/	/
Size (DxHmm)	Ø65x210	Ø75x210	Ø85x210
N. W/PC (kgs)	0.725	0.57	0.43
Q' ty/CTN (pcs)	12	12	12

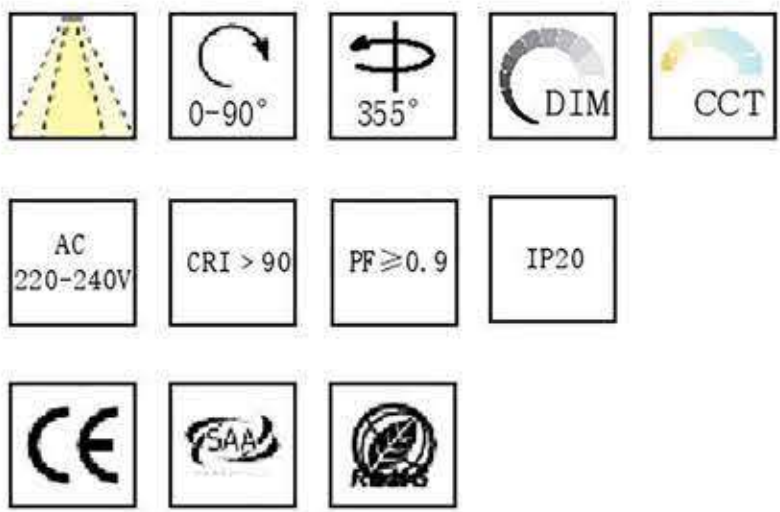


FINISH: ☐ White ☒ Black CCT: 2700K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

FM Series LED tracklight with high efficiency LED COB chip. 3 CCT and Dimming types for optional. DIY design without any tool which easy to change different accessories to meet your different requirements.

Dimension(mm)

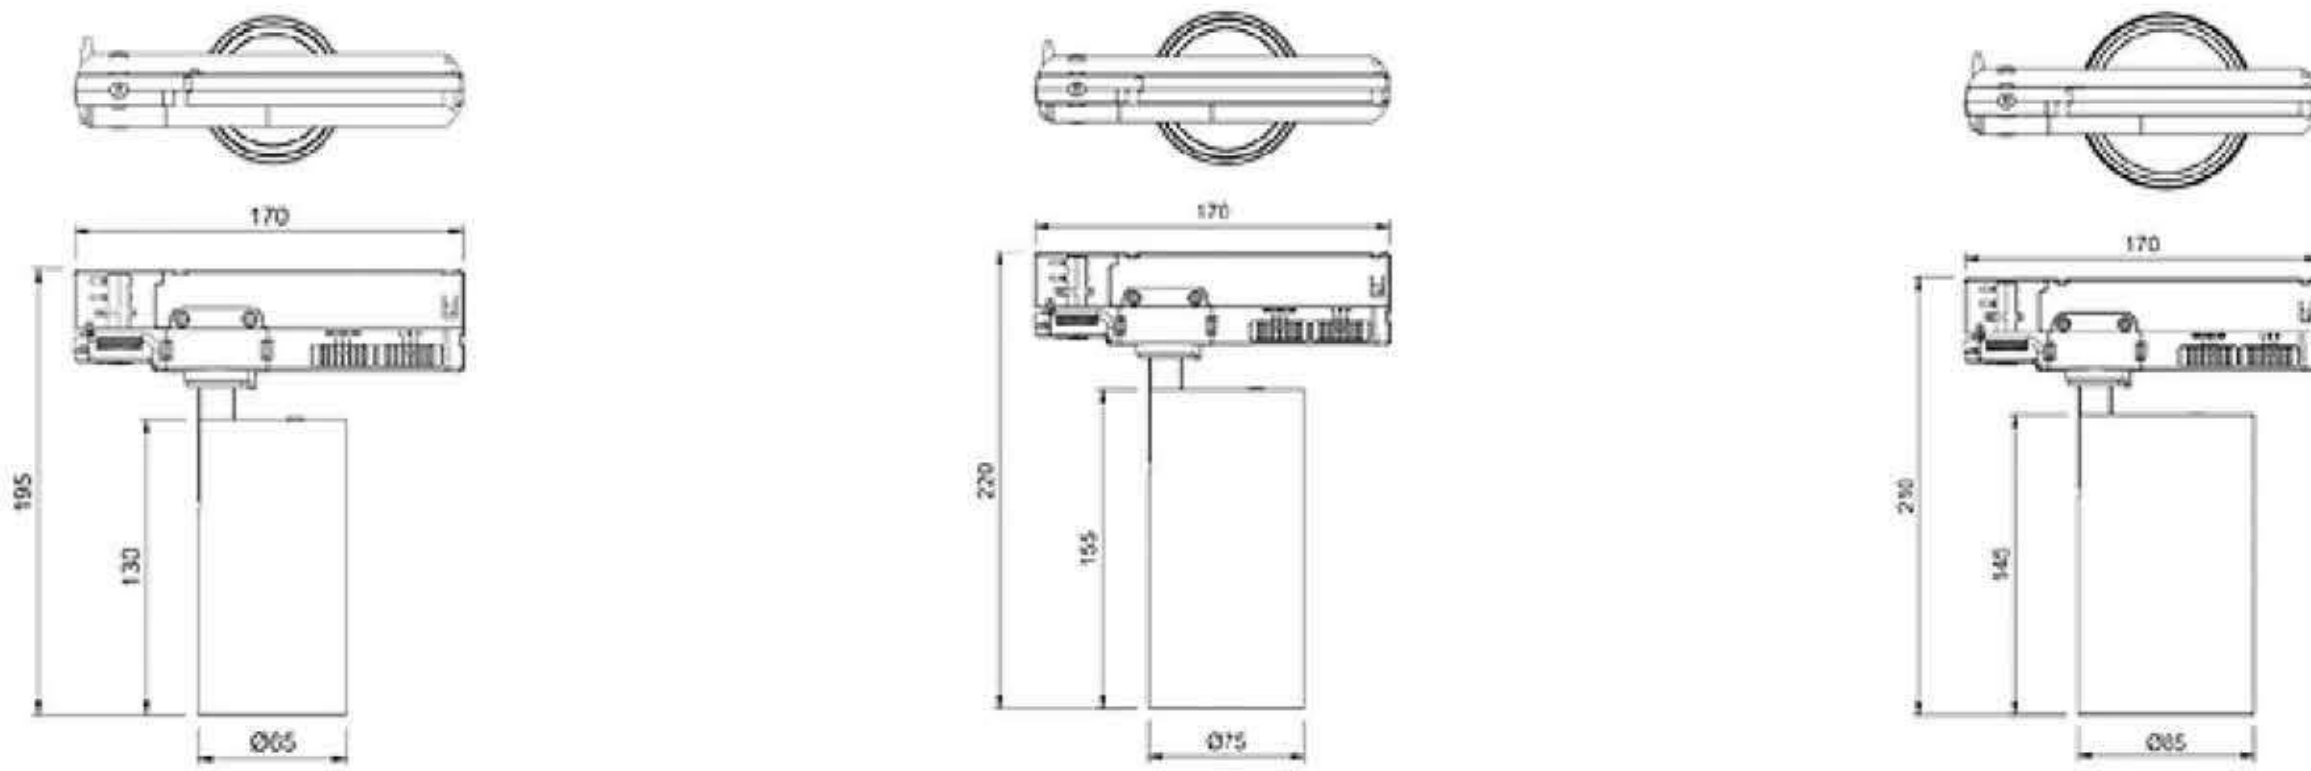



TRACK LIGHT


TRACK LIGHT

MAGIC PLUS

LED Track Light



TRACK LIGHT

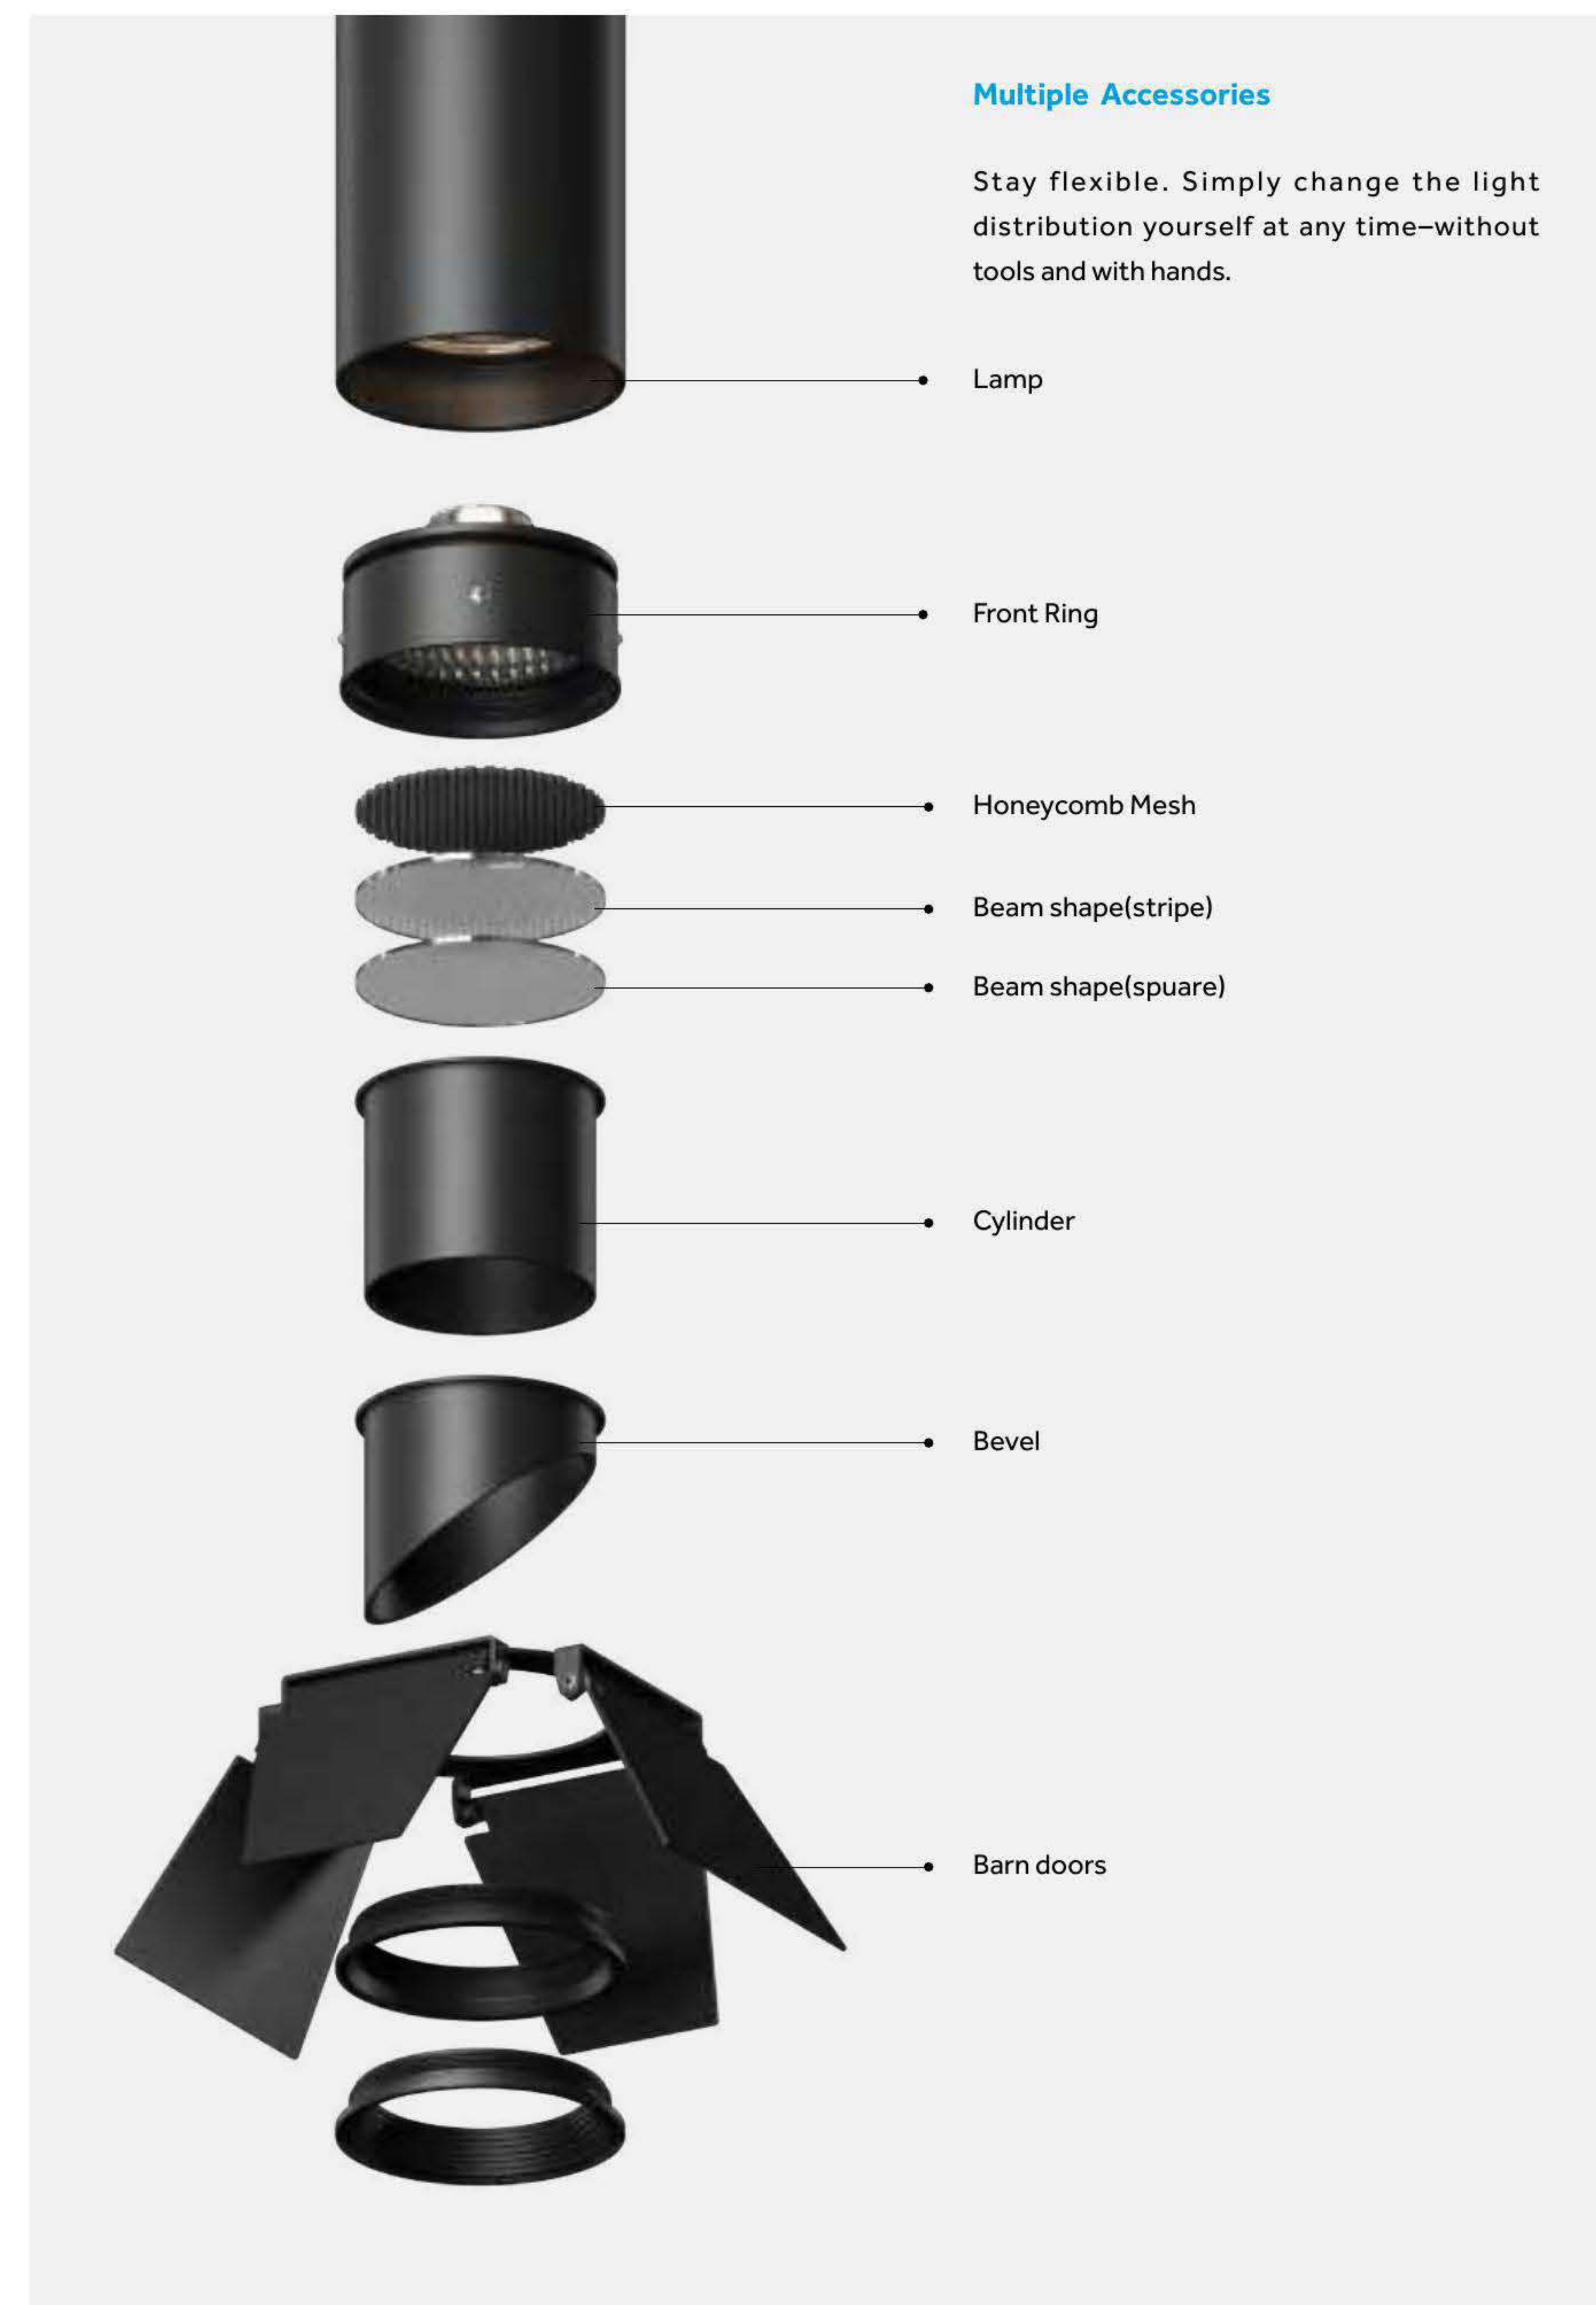

Multiple Accessories

Stay flexible. Simply change the light distribution yourself at any time—without tools and with hands.

Lamp

Front Ring

Honeycomb Mesh

Beam shape(stripe)

Beam shape(square)

Cylinder

Bevel

Barn doors

TRACK LIGHT


TRACK LIGHT



TRACK LIGHT

Type

	TR-7801	TR-7802
	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	30W/35W/40W	30W/35W/40W
Beam Angle	20° /26° /36° /45° /60°	15° /24° /36°
Lumen (lm)	3278/3824/4370	3278/3824/4370
Cut-out (mm) 	/	/
Size (DxHmm)	Ø80x243	Ø94x260
N. W/PC (kgs)	0.86	1.1
Q' ty/CTN (pcs)	8	12

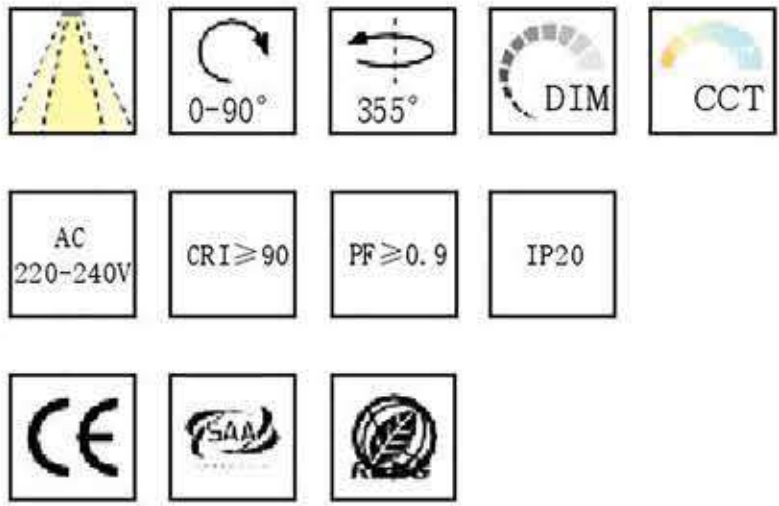

FINISH: ☐ White ☒ Black **CCT:** 2700K 4000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

MAGIC PLUS Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. Multi-optical accesories, quick assembly and replacment. 1-CCT and 3-CCT optional (2700K&4000K&6000K).


Dimension(mm)




162



Ø80



102



Ø94

TRACK LIGHT

TRACK LIGHT



Type

	TR-8001
	Adjustable 90°+355°
Wattage	40W
Beam Angle	22° /28° /38° /56°
Lumen (lm)	3524
Cut-out (mm) ⓘ	/
Size (DxHmm)	Ø85x220
N. W/PC (kgs)	0.68
Q' ty/CTN (pcs)	12

ERP

Driver on board

AC
220-240V

CRI≥90

PF≥0.9

IP20

FINISH:

☐ White

☒ Black

CCT:

2700K

6000K

DIMMING:

☒ Triac


☒ 1-10V

☒ DALI

☒ Smart lighting

SUPER Series LED track light with high efficiency LED COB chip, driver on board design with best dissipation performance. 3 CCT, high CRI, high quality optical lens, provide you different and special needs.


Dimension(mm)

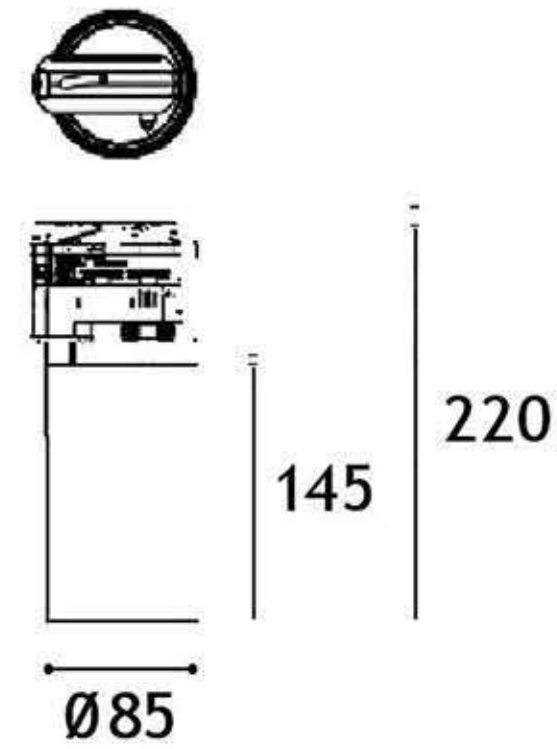



Type

	TR-6201	TR-6202
	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	15W	30W
Beam Angle	23° /38° /45° /60°	23° /38° /45° /60°
Lumen (lm)	1725	3450
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø62x240	Ø72x250
N. W/PC (kgs)	0.5	0.7
Q' ty/CTN (pcs)	20	16

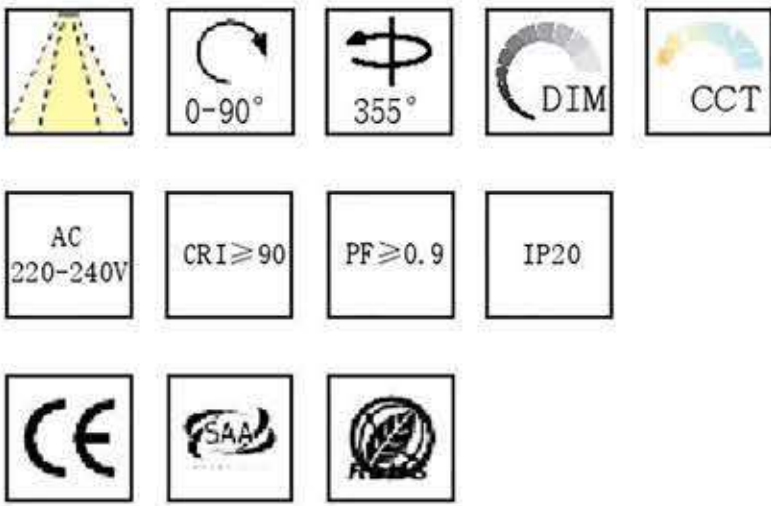

FINISH: ☐ White ☒ Black **CCT:** 2700K 4000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

ARES Series LED tracklight with high efficiency LED COB chip. 1-CCT and 3-CCT optional (2700K&4000K&6000K). Rotatable 355° & tiltable 90°.

Dimension(mm)



TRACK LIGHT




TRACK LIGHT



ARES PLUS

LED Track Light


RGB APP CONTROL

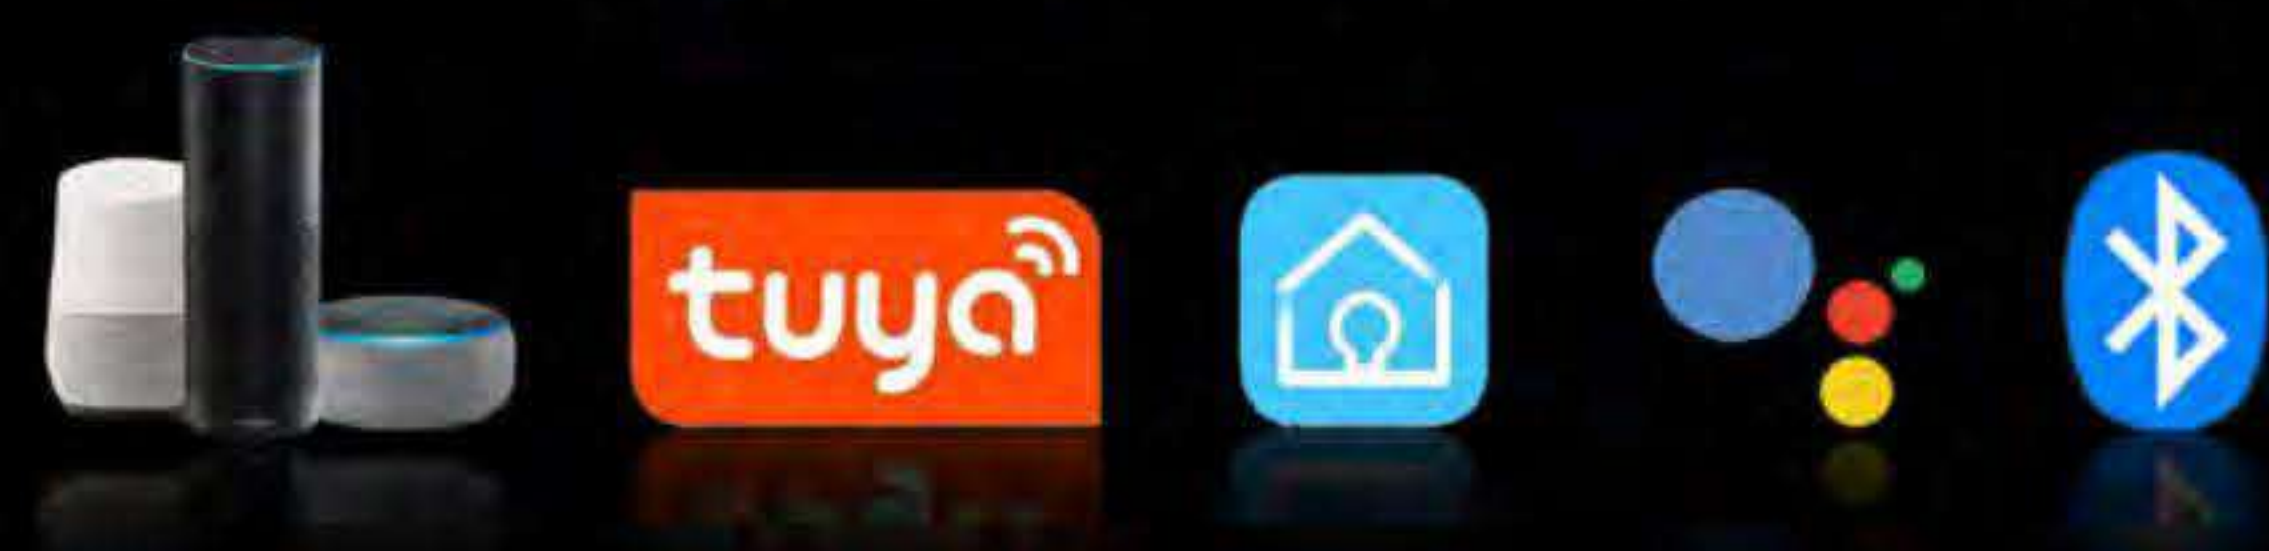



Type

	TR-6501	TR-6502
Wattage	10W/15W/20W	30W/35W/40W
Beam Angle	26°/36°/55°	26°/36°/55°
Lumen (lm)	1120/1650/2200	3323/3850/4420
Cut-out (mm)	/	/
Size (DxHmm)	Ø65x238	Ø75x268
N. W/PC (kgs)	0.5	0.7
Q' ty/CTN (pcs)	16	16


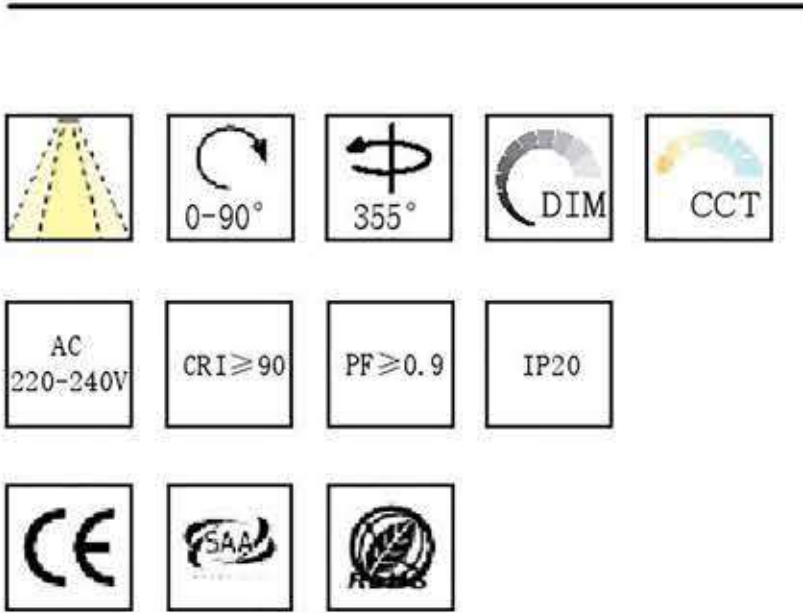


FINISH: ☐ White ☒ Black CCT: 2700K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


ARES PLUS Series LED tracklight with high efficiency LED COB chip. CRI≥90. 1-CCT and 3-CCT optional (2700K&4000K&6000K). A variety of installation options, provide you different and special needs.

Dimension(mm)

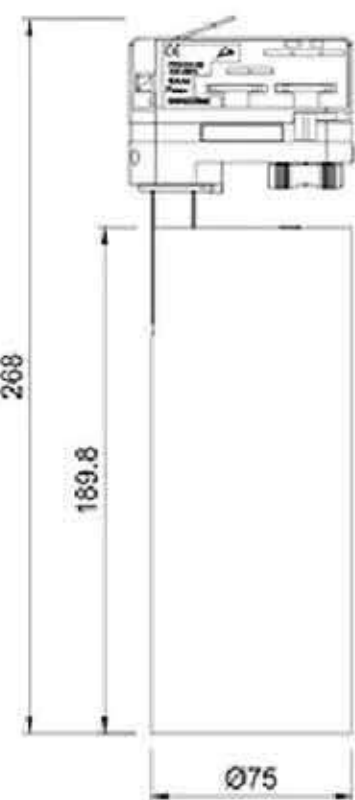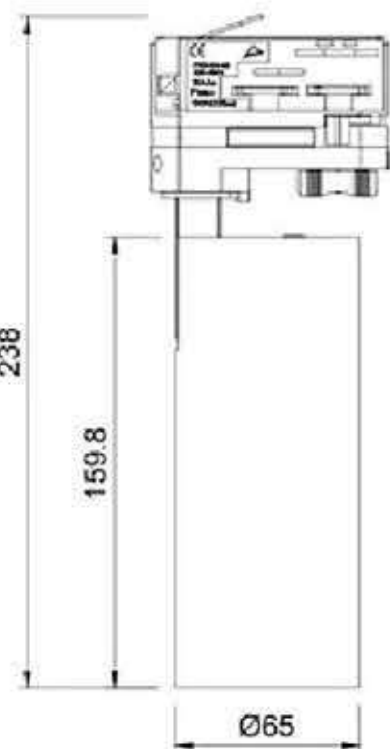



	TR-6001	TR-6002	TR-6003
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	15W/20W	25W/30W	30W/35W/40W
Beam Angle	16° /24° /32° /48° /58°	16° /24° /32° /48° /58°	16° /24° /32° /48° /58°
Lumen (lm)	1515/2020	2770/3470	3030/3535/4040
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø60x172.5	Ø70x192.5	Ø85x198.5
N. W/PC (kgs)	0.44	0.64	0.91
Q' ty/CTN (pcs)	20	16	12

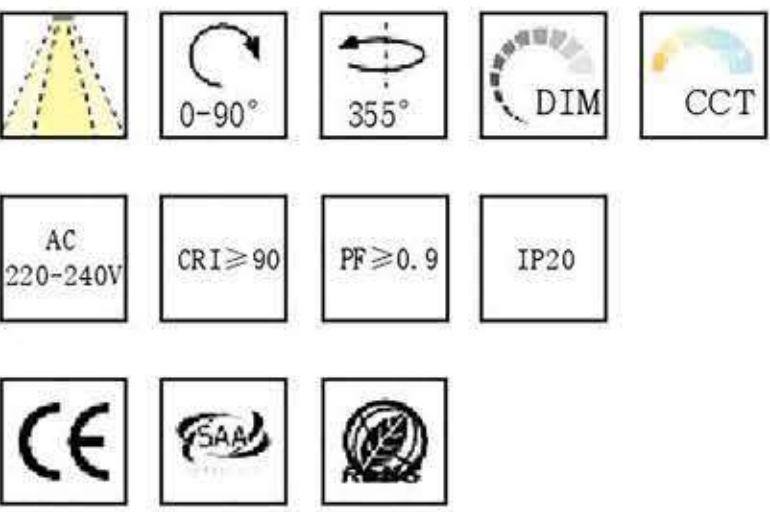


FINISH: ☐ White ☒ Black **CCT:** 2700K 4000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


REMEX Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. Soft light, multi beam angle optional. 1-CCT and 3-CCT optional (2700K&4000K&6000K).

Dimension(mm)

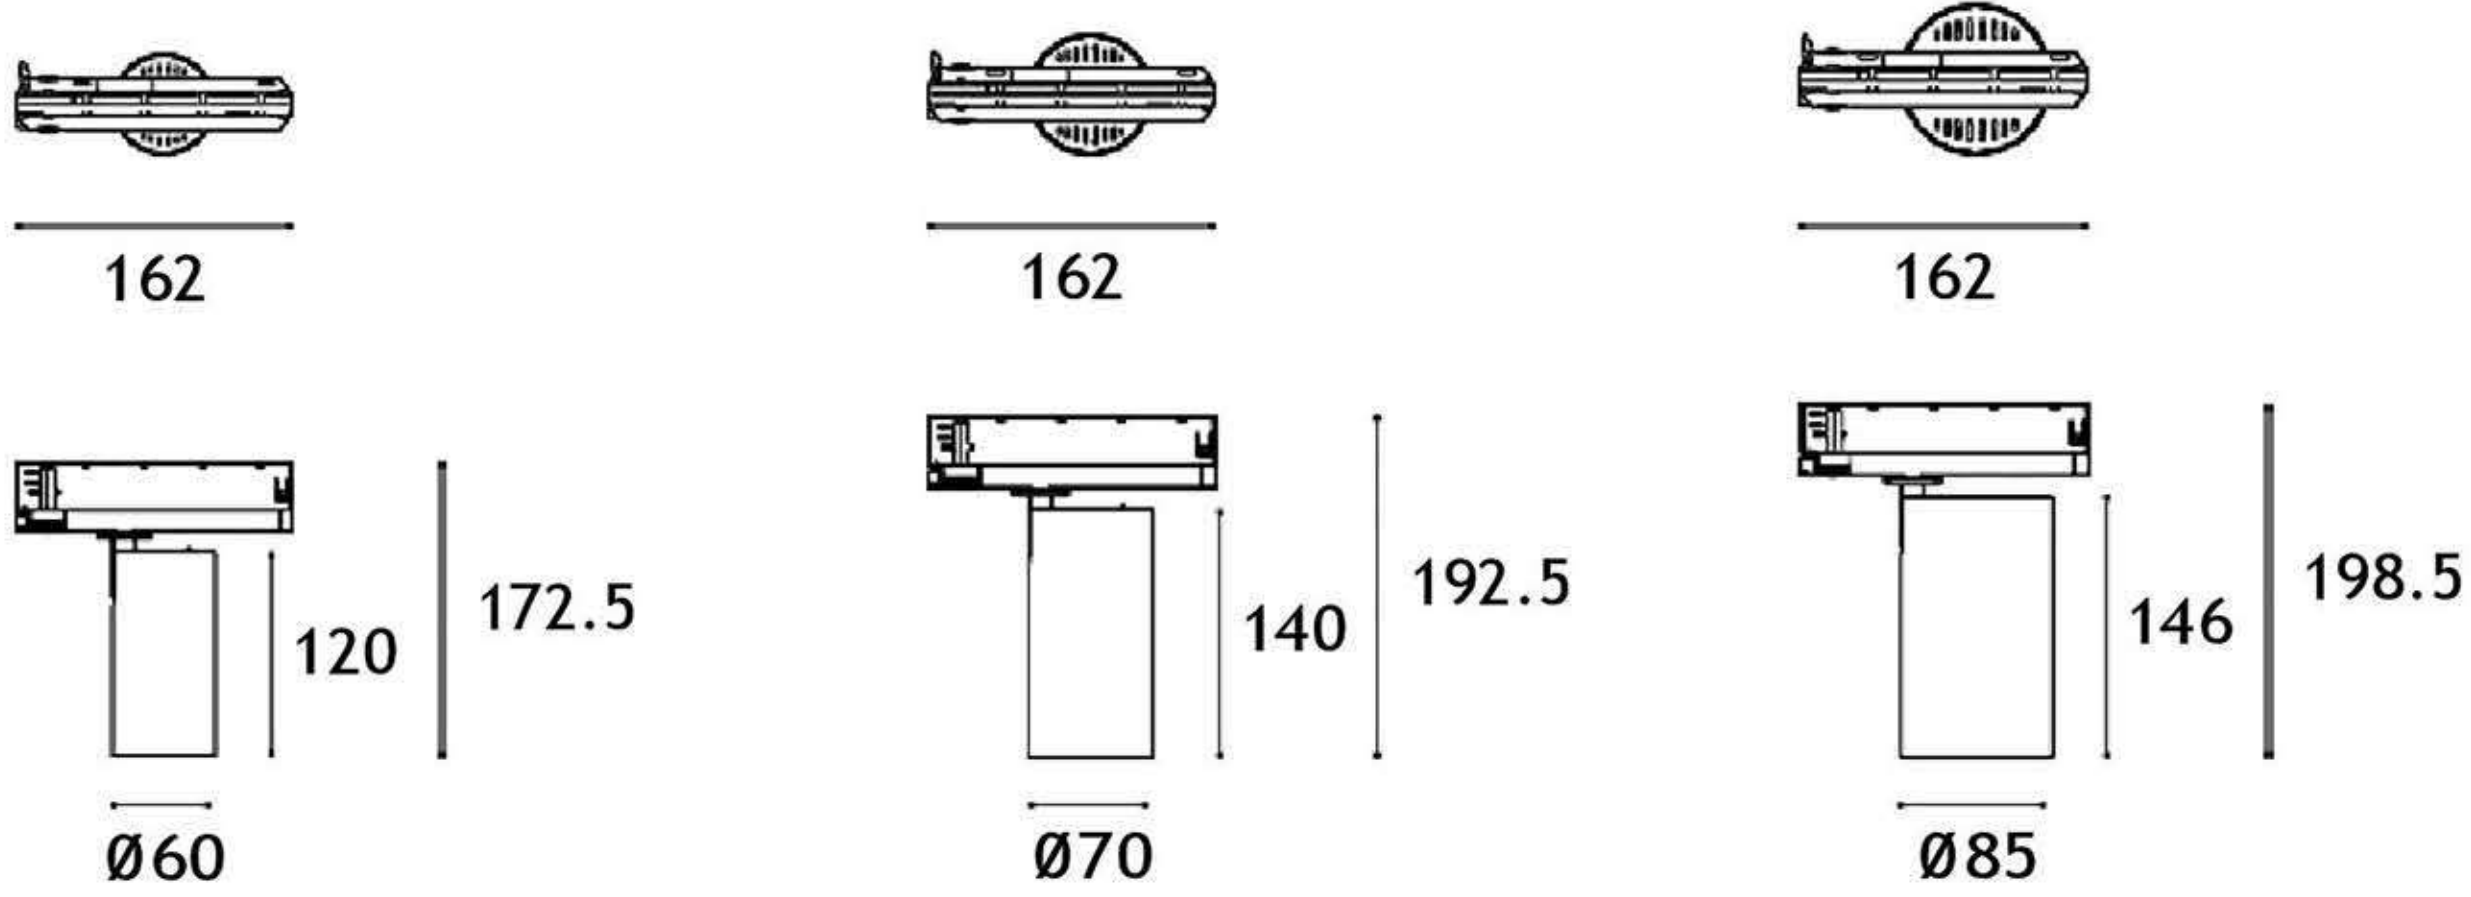



	KM-TR8026-C	KM-TR8026-C&D
Type	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	30W/35W/40W	30W/35W/40W
Beam Angle	22°/36°/48°/60°	20°/30°/40°/55°
Lumen (lm)	3030/3535/4040	3540/4250/4640
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø80x242.5	Ø80x242.5
N.W/PC (kgs)	0.6	0.6
Q'ty/CTN (pcs)	16	16


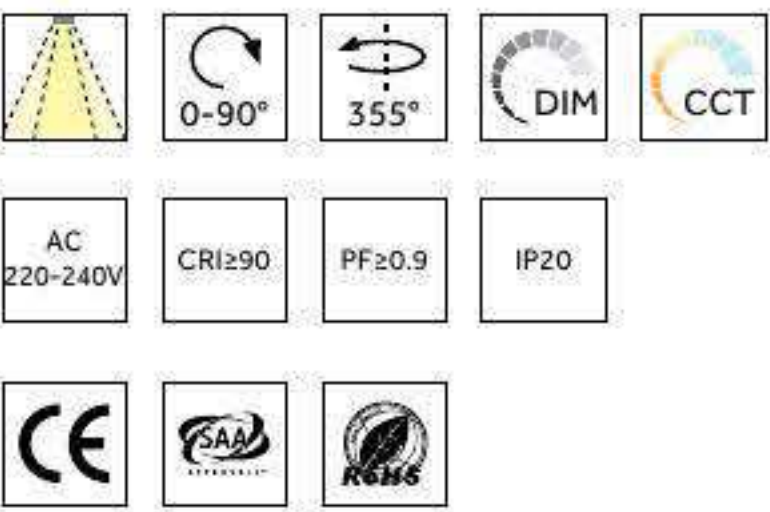


FINISH: ☐ White ☒ Black **CCT:** 2700K 4000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


KONGMING Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. 1-CCT and 3-CCT optional (2700K&4000K&6000K). Rotatable 355°& tiltable 90°.

Dimension(mm)

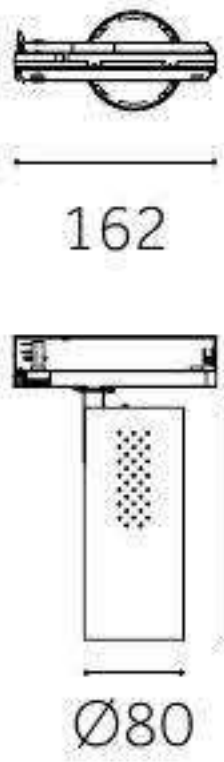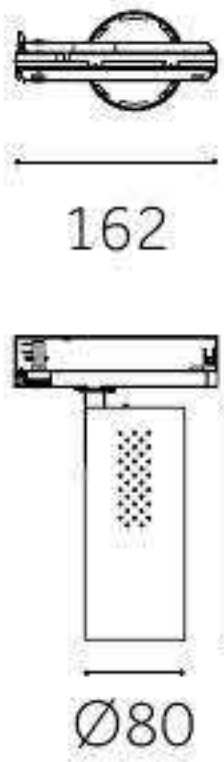



	TR-9001	TR-9002	TR-9003
Type	Adjustable 90°+350°	Adjustable 90°+350°	Adjustable 90°+350°
Wattage	30W	30W	30W
Beam Angle	15°-46°	15° /24° /36°	28°x75°
Lumen (lm)	2850	2870	2430
Cut-out (mm)	/	/	/
Size (DxHmm)	Ø93x269.5	Ø90x246	Ø90x246
N. W/PC (kgs)	1.22	1.06	1.03
Q' ty/CTN (pcs)	12	12	12

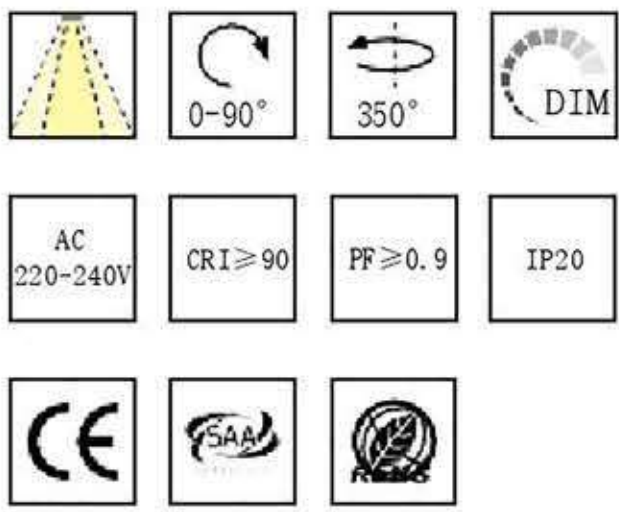


FINISH: ☐ White ☐ Silver ☒ Black **CCT:** 2700K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


MAGIC Series with high efficiency COB. Beam angle could adjusted from 15° to 46° freely, smoothly and accurately. Lens could be changed fast according to different optical color film: red/ yellow/blue/green/orange/purple/tawny.

Dimension(mm)

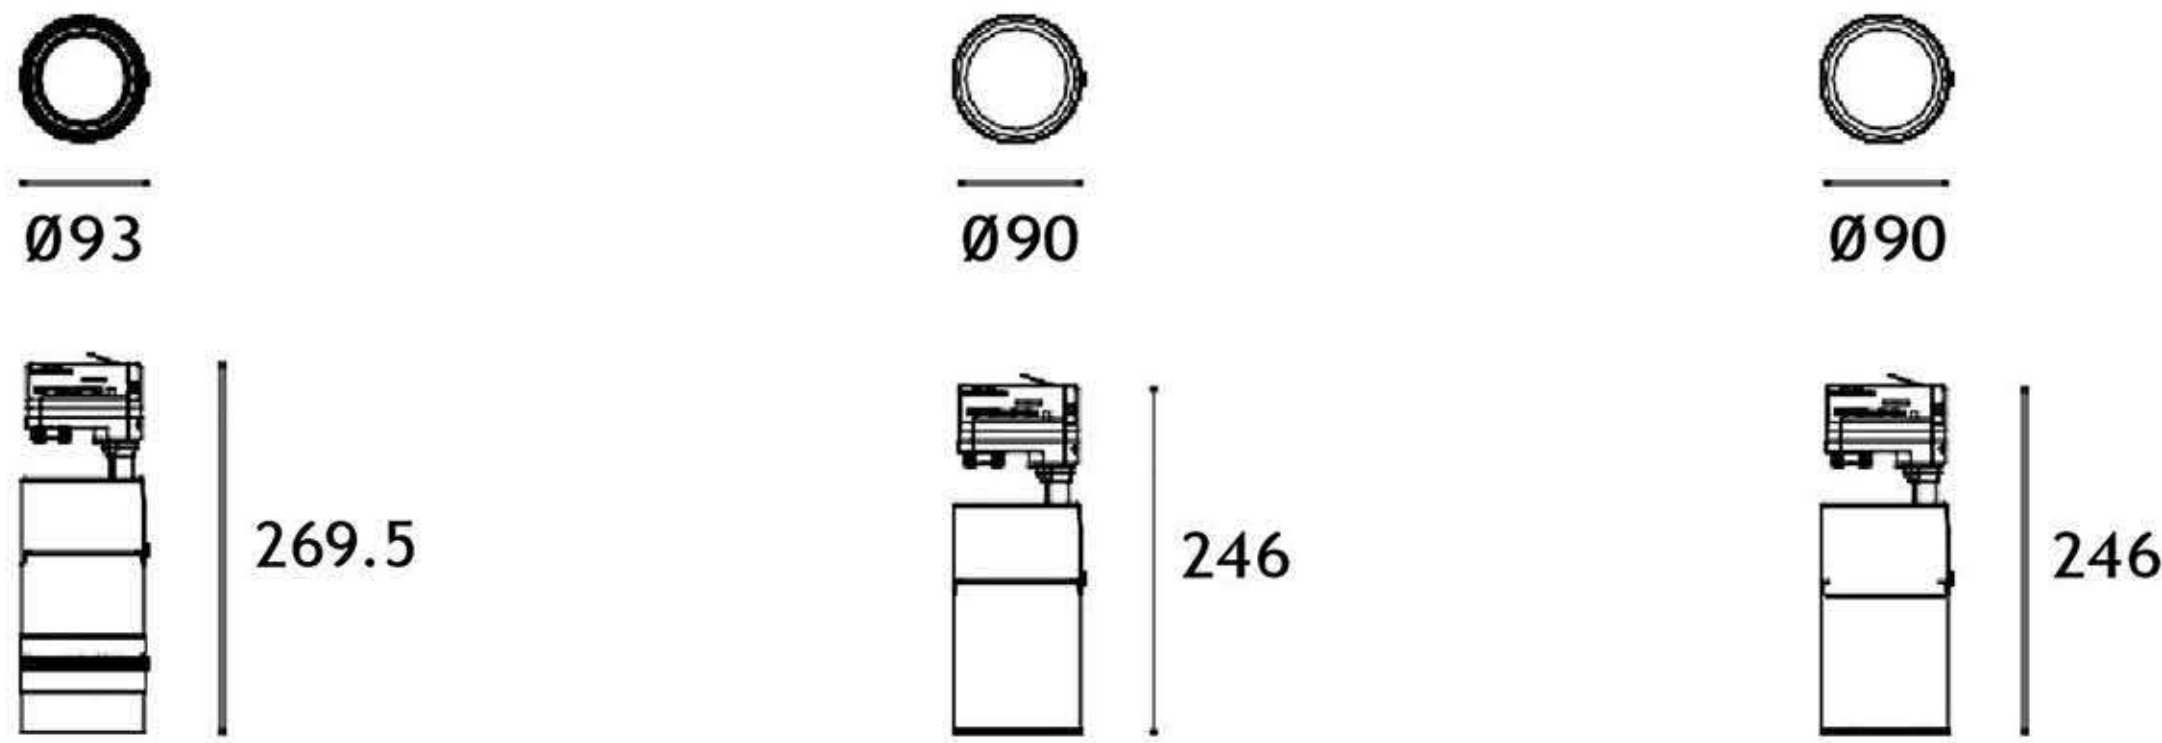



	TR-5501	TR-5502	TR-5503
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	9W	18W	30W
Beam Angle	23° /38° /45°	23° /38° /45°	23° /38° /45°
Lumen (lm)	915	1853	3046
Cut-out (mm) 	/	/	/
Size (DxLmm)	Ø55x185	Ø63x213	Ø75x233
N. W/PC (kgs)	0.34	0.56	0.77
Q' ty/CTN (pcs)	20	20	20

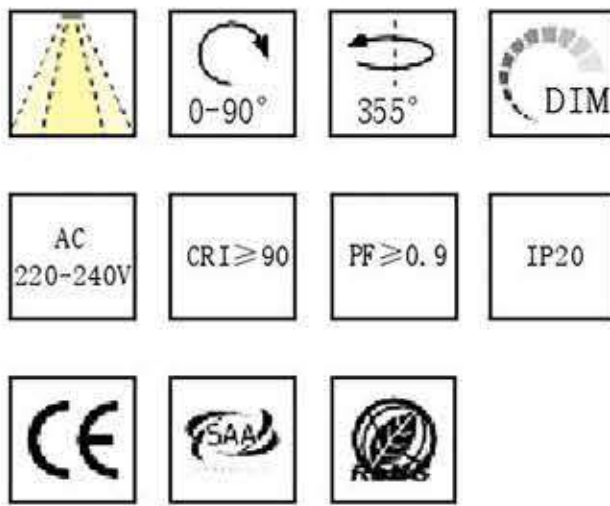


FINISH: ☐ White ☐ Silver ☒ Black CCT: 3000K 6000K

OPTIONAL: ☐ White ☒ Black ☐ Golden ☐ Sliver

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels,restaurants and other public buildings.


Dimension(mm)

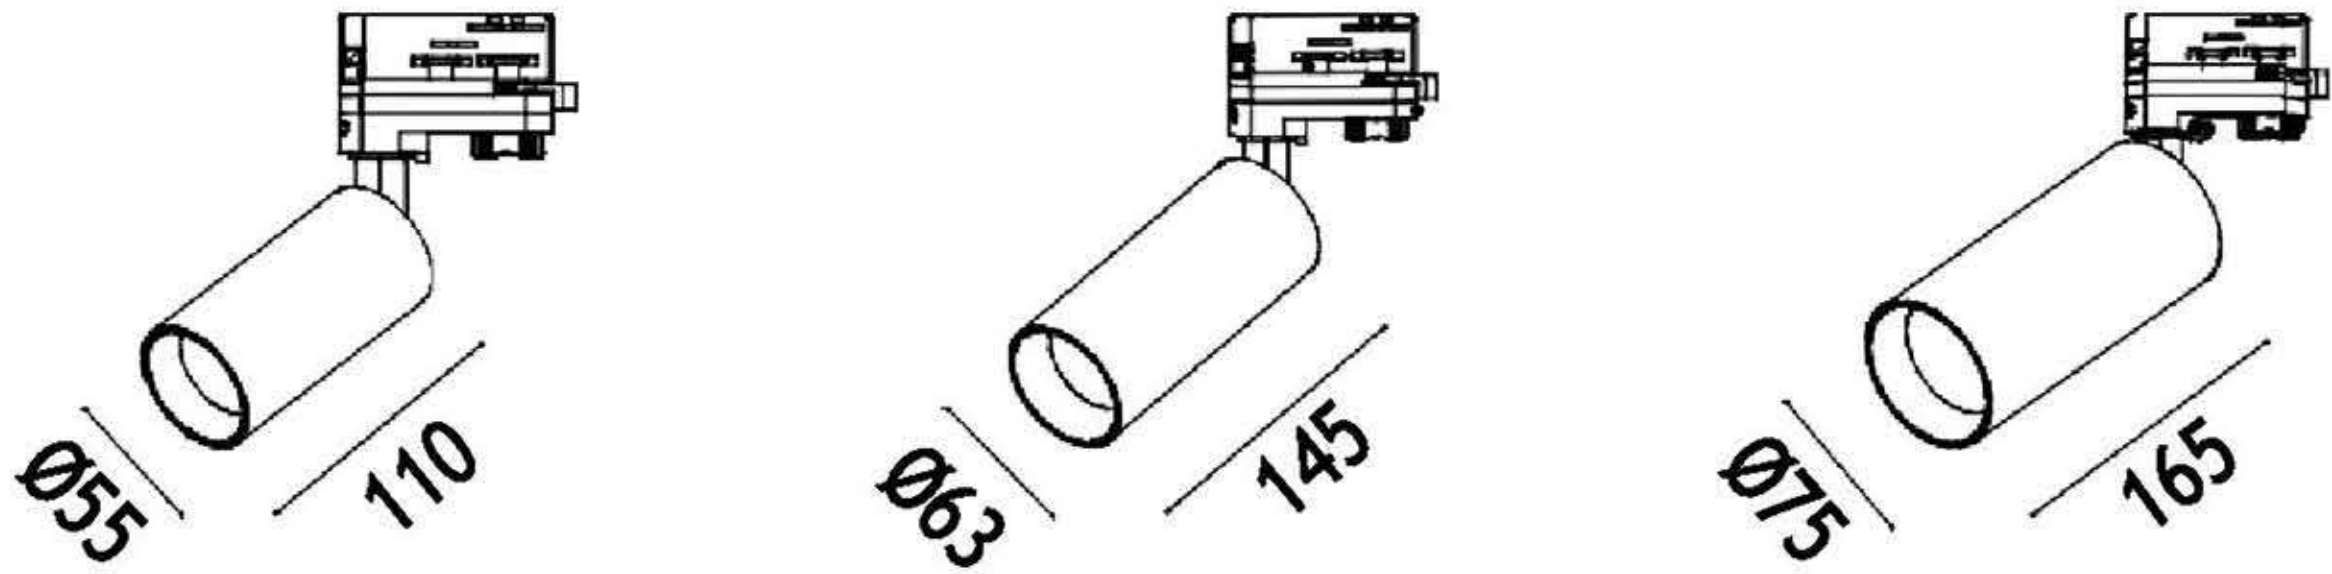



Type

	TR-2611	TR-2612
Adjustable	170°+350°	170°+350°
Wattage	15W/20W/24W/30W	15W/20W/24W/30W
Beam Angle	15°/24°/38°/45°/60°	15°/24°/38°
Lumen (lm)	2128/2875/3588/4313	2128/2875/3588/4313
Cut-out (mm) ⓘ	/	/
Size (WxLxHmm)	260xØ105x170	260xØ105x170
N. W/PC (kgs)	1.5	1.5
Q' ty/CTN (pcs)	9	9

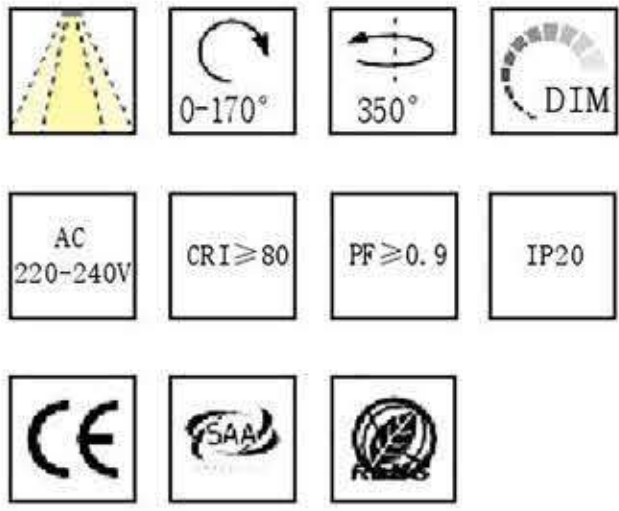

FINISH:  Black CCT: 

DIMMING:  Triac  1-10V  DALI  Smart lighting

SIRIUS Series light with COB LED chip. 15°/24°/38°/45°/60° beam angle. UGR<19.


Dimension(mm)





Type

	TR-6801	TR-6802
	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	10W/15W/20W	10W/15W/20W
Beam Angle	15° -70°	15° -70°
Lumen (lm)	1067/1725/2536	1067/1725/2536
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø60x256.6	214x100x133.5
N. W/PC (kgs)	0.9	0.8
Q' ty/CTN (pcs)	16	18

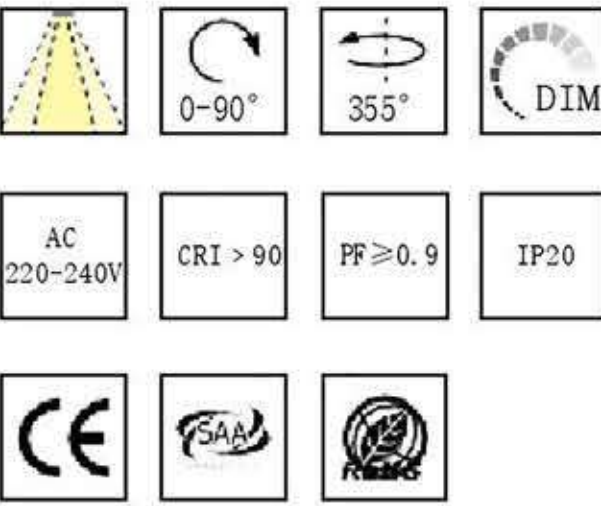


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

EAGLE EYE Series with high efficiency brand COB LED chip, build-in driver. Aluminum die-casting body and heat sink which is better air dissipation. Adjustable beam angle from 15° -70° .

Dimension(mm)

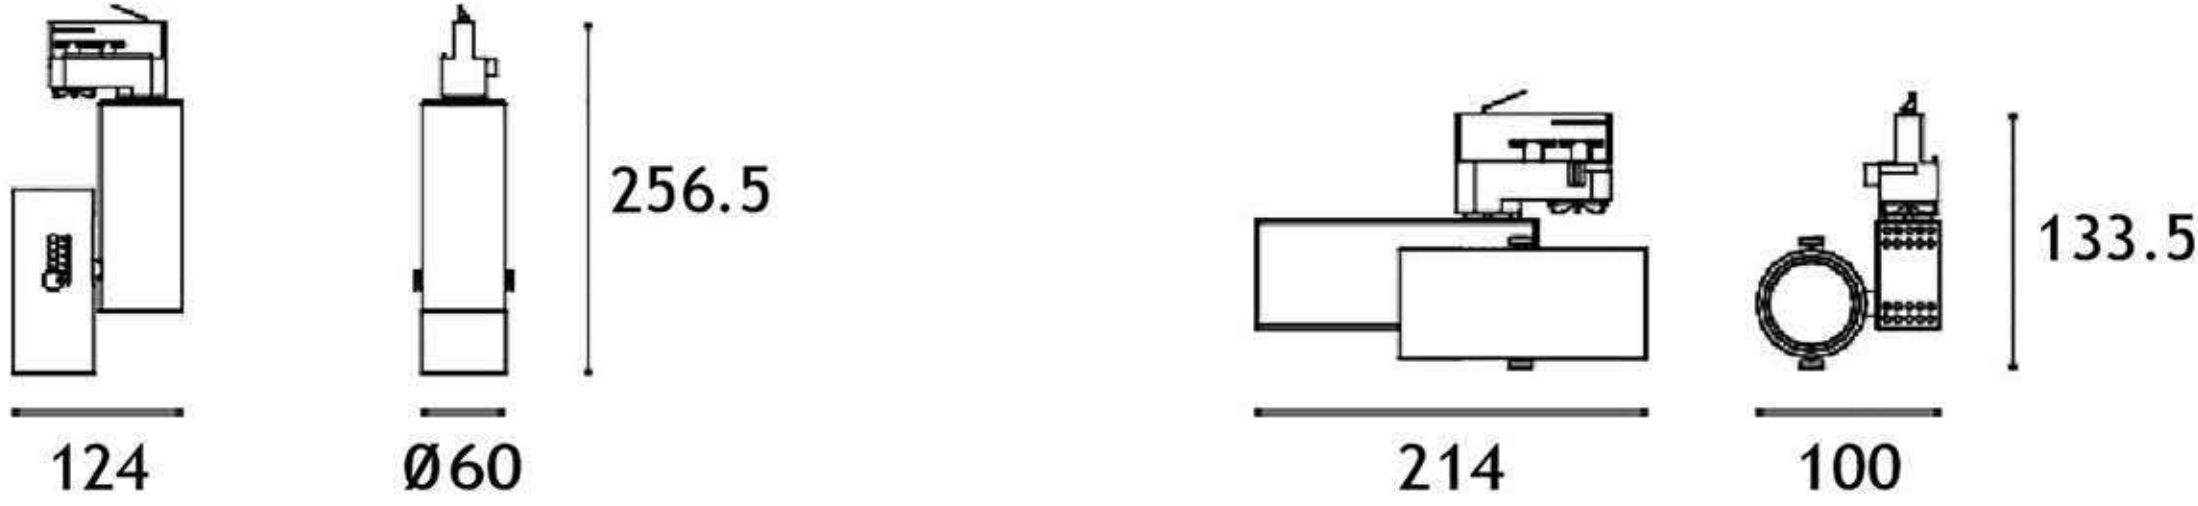




DOWN LIGHT
(SMD)

LED Downlight



DOWN LIGHT
(SMD)




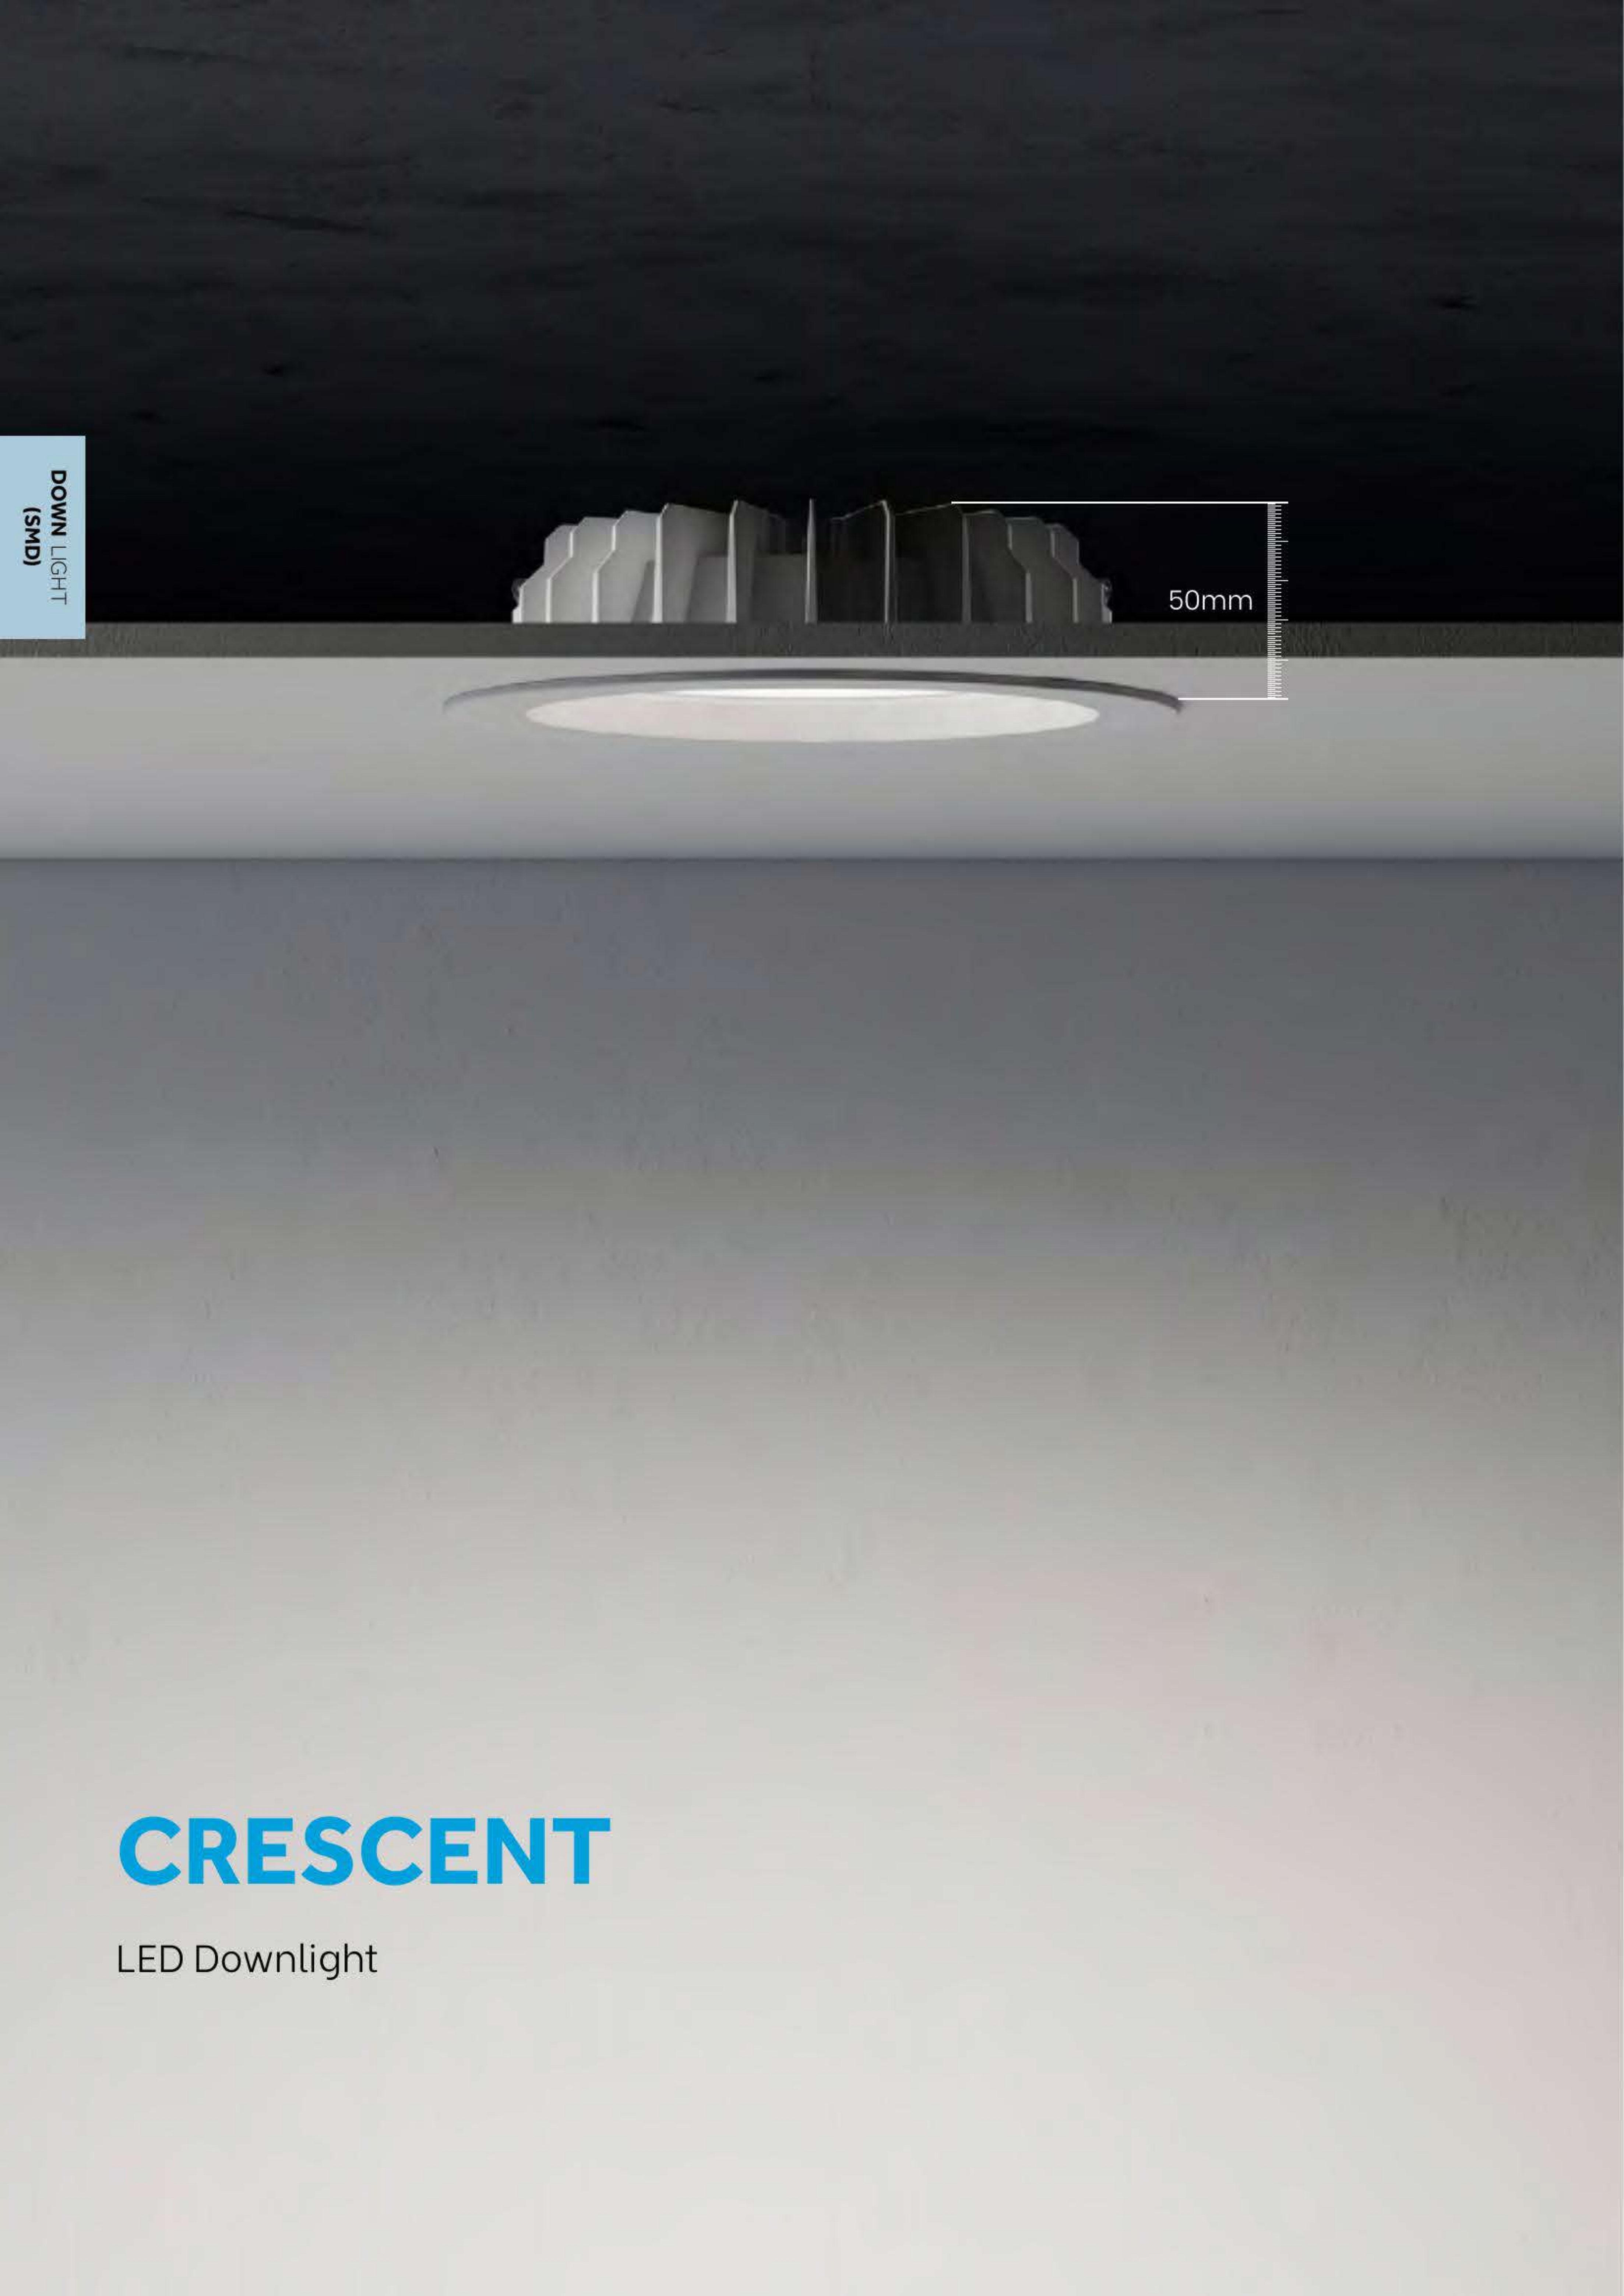


CRESCENT

LED Downlight

IP54

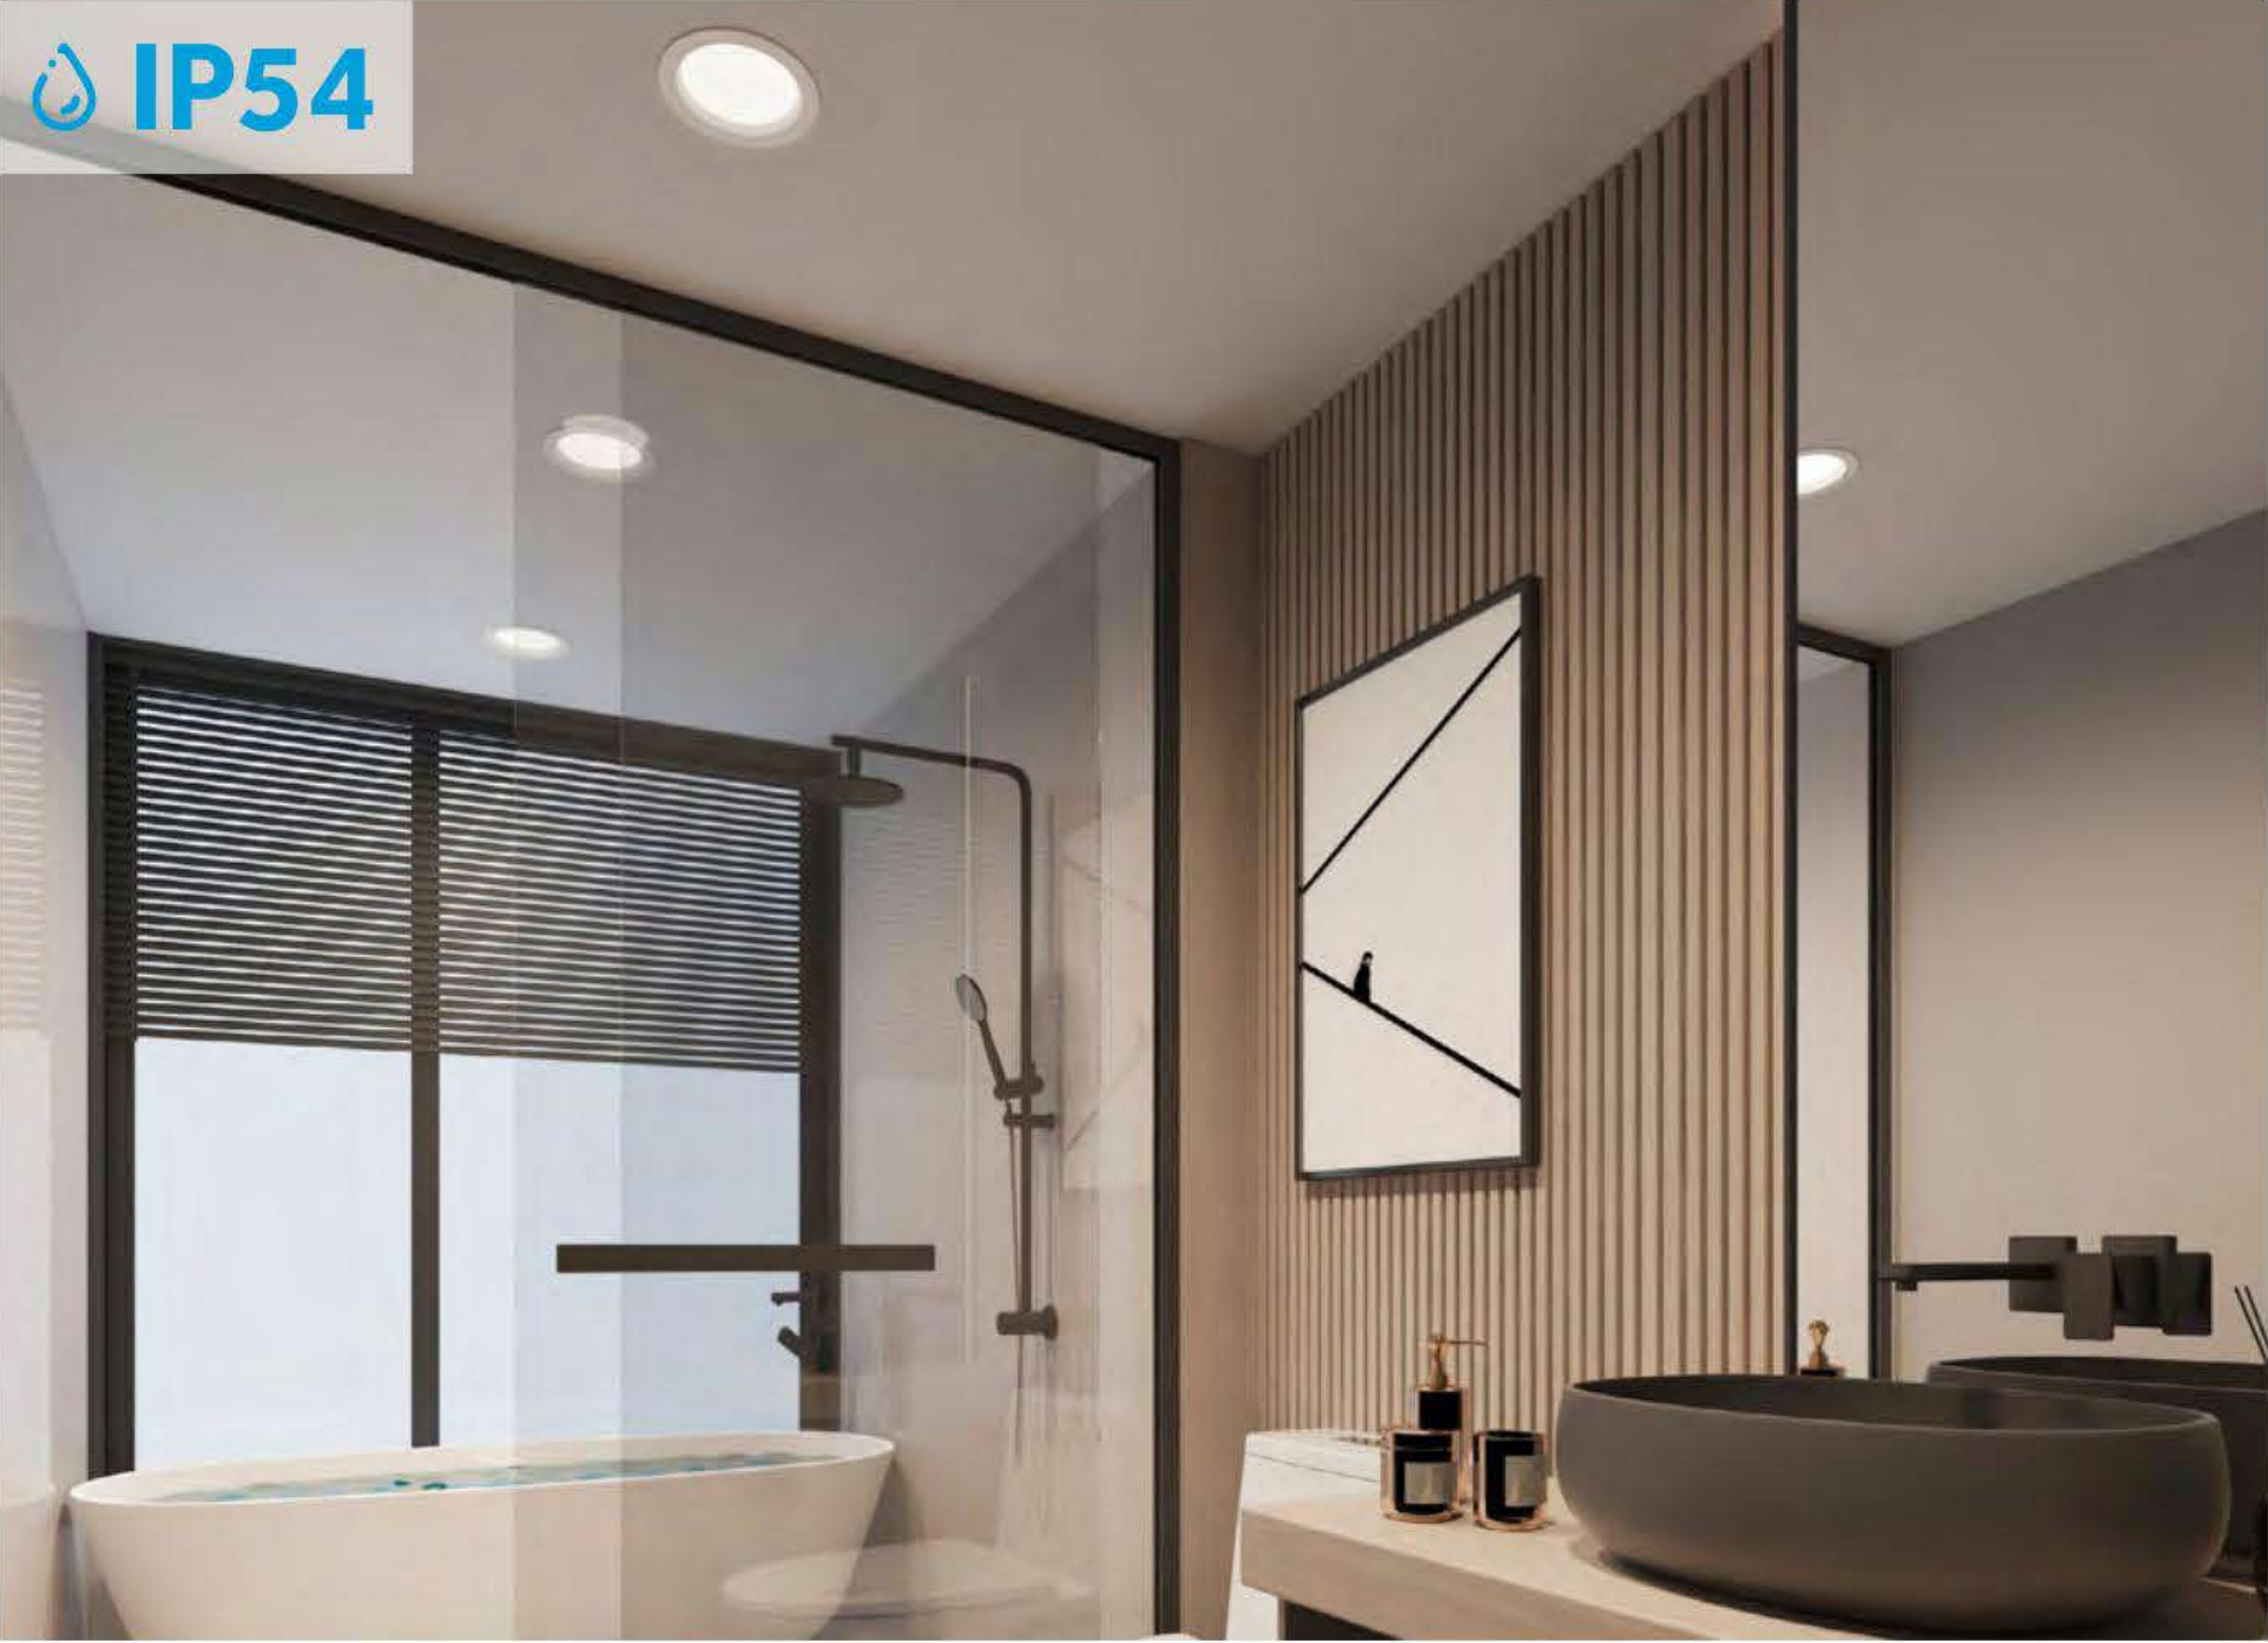

Appearance:
High precision die-casting aluminum intergrated radiator with excellent thermal conductivity. PMMA cover material is adopted. The area of the beam is larger and brighter.

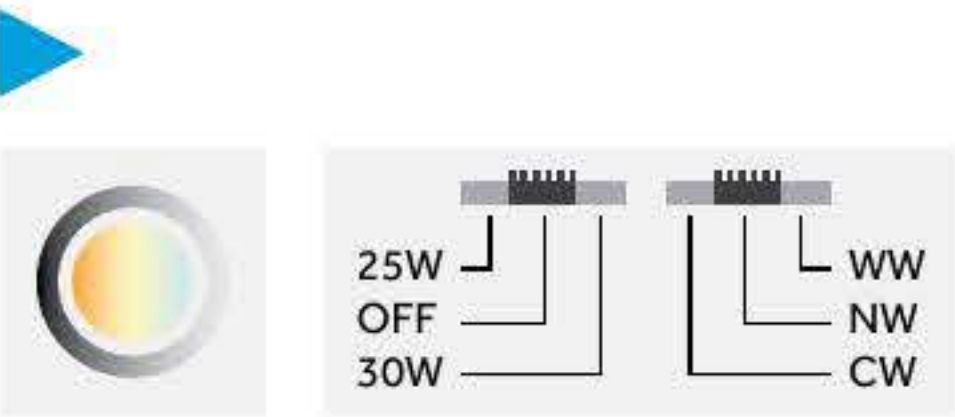

3-CCT&Wattage optional by switch
(For smd):

With two built-in switch for changing wattage and color temperature, the downlight shows its cost-effective on saving inventory.



DAMP Downlight Series


RECESSED

DOWN LIGHT (SMD)



DOWN LIGHT (SMD)


	DL03CD	DL04CD	DL05CD	DL06CD	DL08CD	DL09CD
Type	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	10W	15W	20W	30W	40W	48W
Beam Angle	100°	100°	100°	100°	100°	100°
Lumen (lm)	1380	2070	2760	3795	5520	6624
Cut-out (mm) ⓘ	Ø75-95	Ø120-135	Ø140-155	Ø165-185	Ø205-220	Ø230-255
Size (DxHmm)	Ø110x25	Ø145x25	Ø165x25	Ø195x39	Ø230x39	Ø265x39
N.W/PC (kgs)	0.22	0.32	0.36	0.57	0.8	1.03
Q'ty/CTN (pcs)	48	36	28	12	24	20

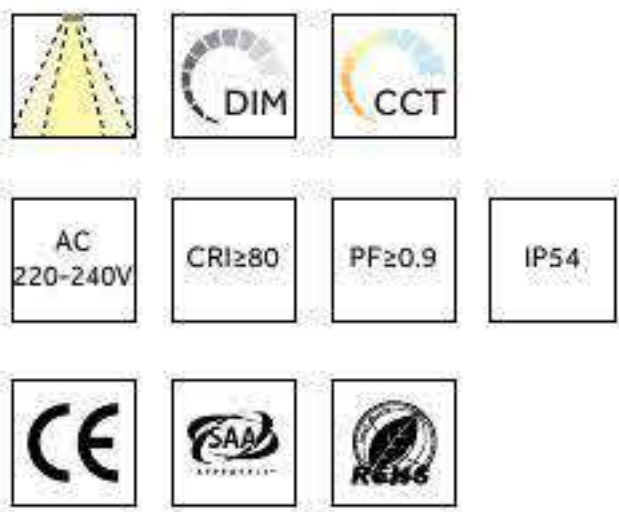

FINISH: ☐ White ☒ Black **CCT:** 3000K 5700K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

XF Series with SMD high efficiency LED chip, external driver. Luminarie color can be black and white for optional. 6 sizes: 3/4/5/6/8/9 inch for optional. Ultra-thin design is suitable for very low ceilings.

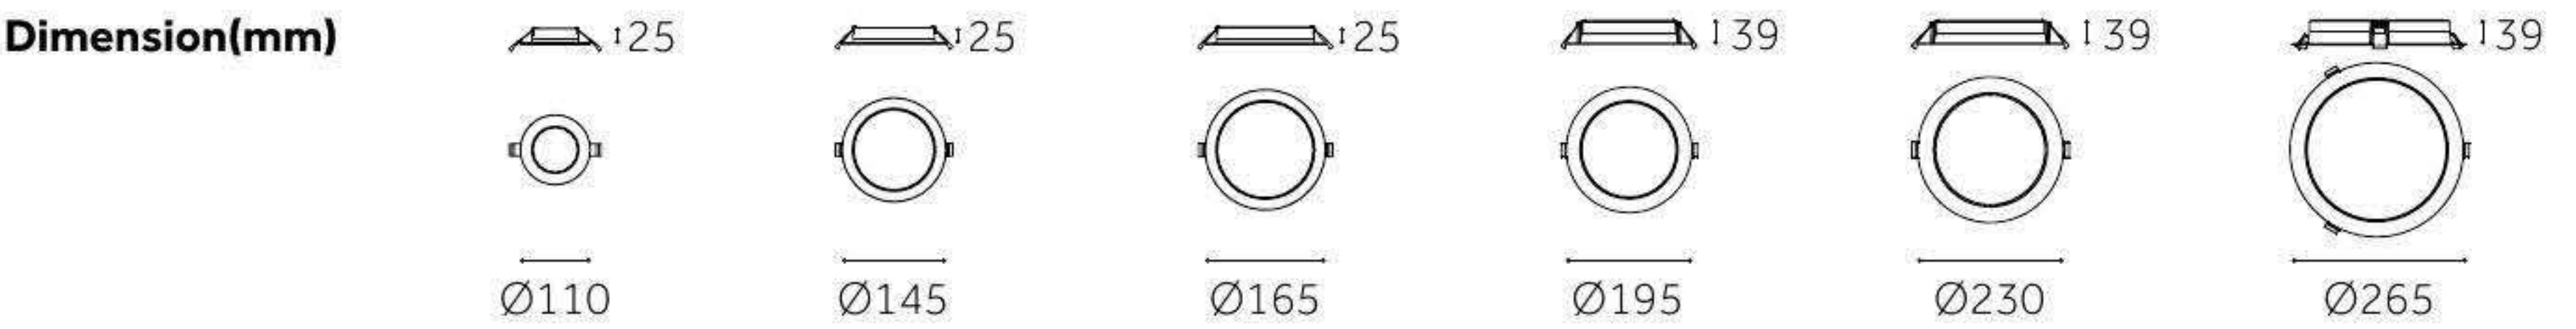

ⓘ Ø75-95mm ⓘ Ø120-135mm ⓘ Ø140-155mm ⓘ Ø165-185mm ⓘ Ø205-220mm ⓘ Ø230-255mm


DOWN LIGHT
(SMD)



DOWN LIGHT
(SMD)

RS-001FS

Type	Fixed
Wattage	9W/12W/14W/21W
Beam Angle	90°
Lumen (lm)	978/1288/1553/2243
Cut-out (mm) ⓘ	Ø110
Size (DxHmm)	Ø120x88
N.W/PC (kgs)	0.53
Q'ty/CTN (pcs)	18

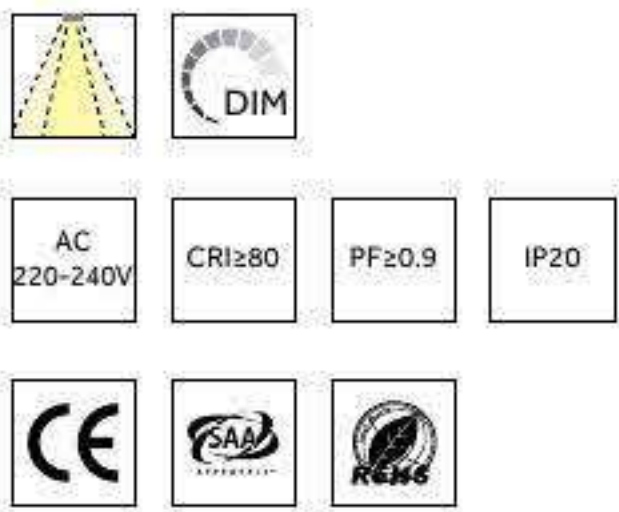


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 5700K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminaire color can be black, white and silver for optional. Durable die-casting aluminum body with heat sink. High efficiency and brand COB LED chip. Multi-reflector system for optional beam angle.

Dimension(mm)

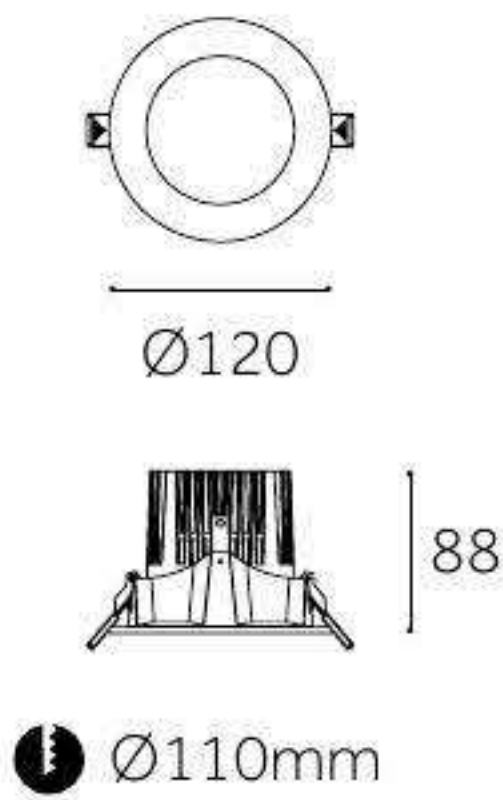



LED DOWN LIGHT (COB)

LED Downlight has high transmittance of light, which plays an important role in main lighting. With solutions of SMD and COB, LED Downlight can meet your different lighting demands in different scenes, offering different beam angle, lumen output then give you the lighting effect you want.

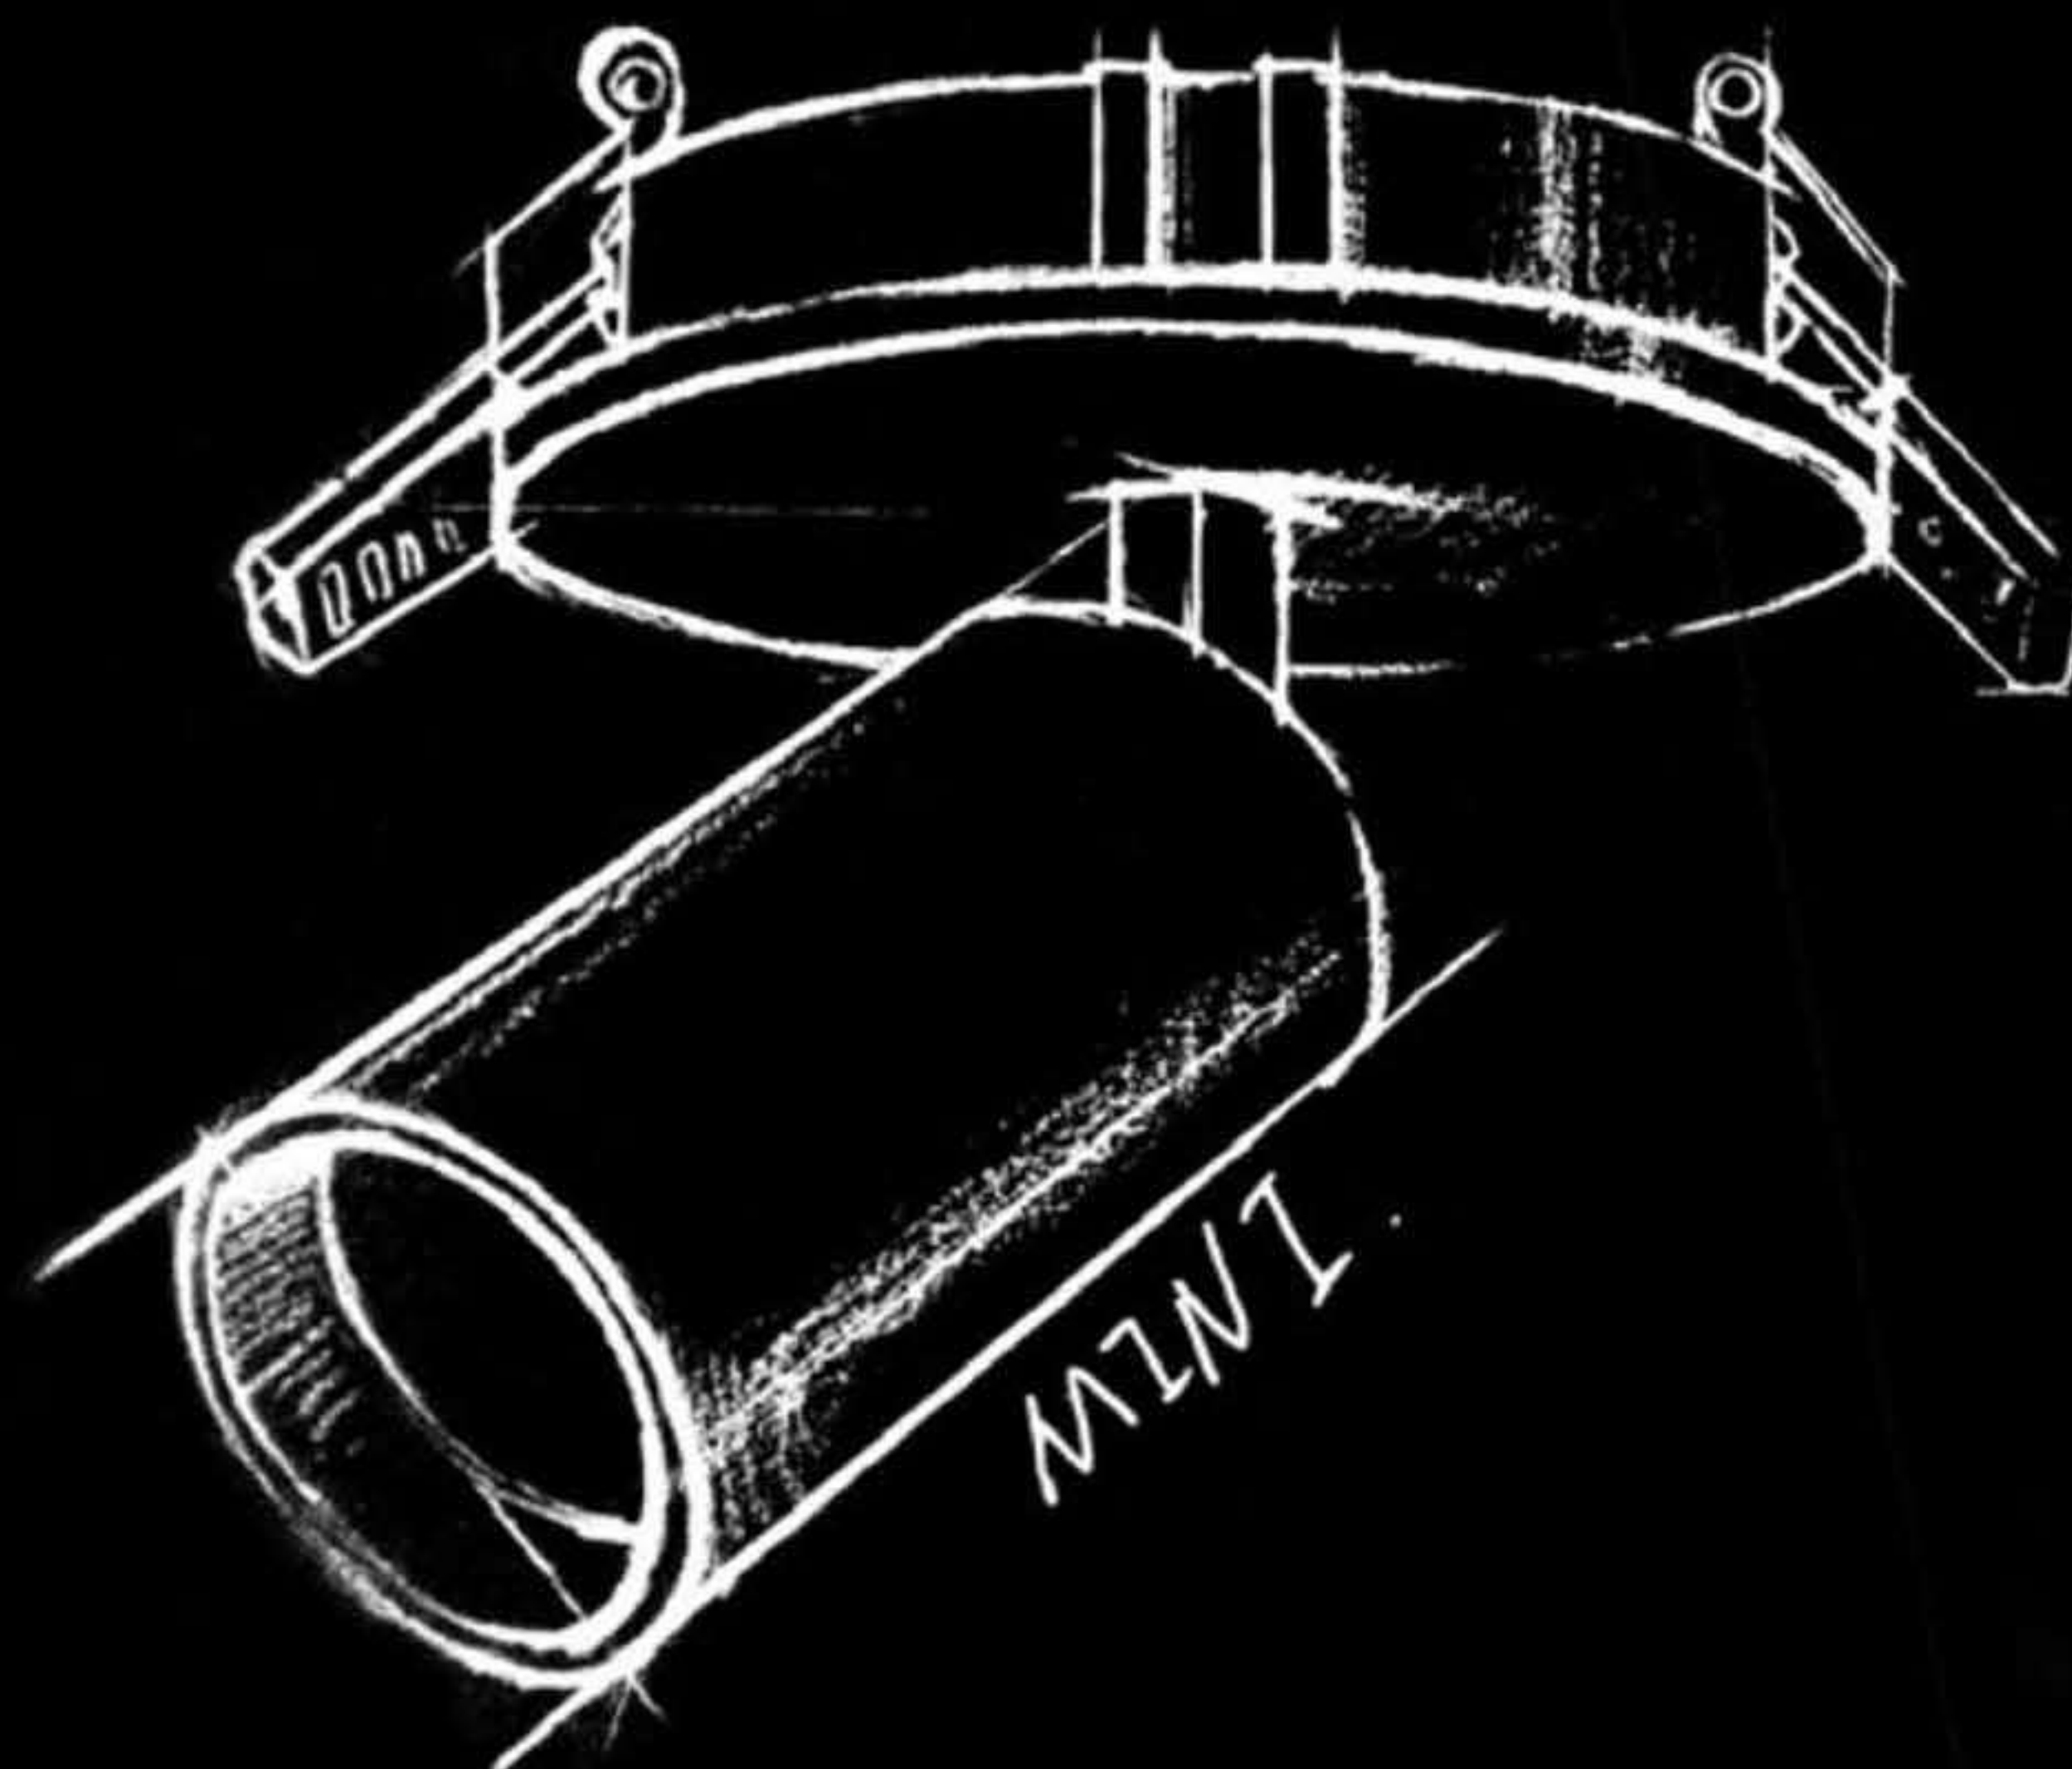


- White.
- Gold.
- Silver mist
- Rose gold.

- Bright silver
- Matte black
- Green color

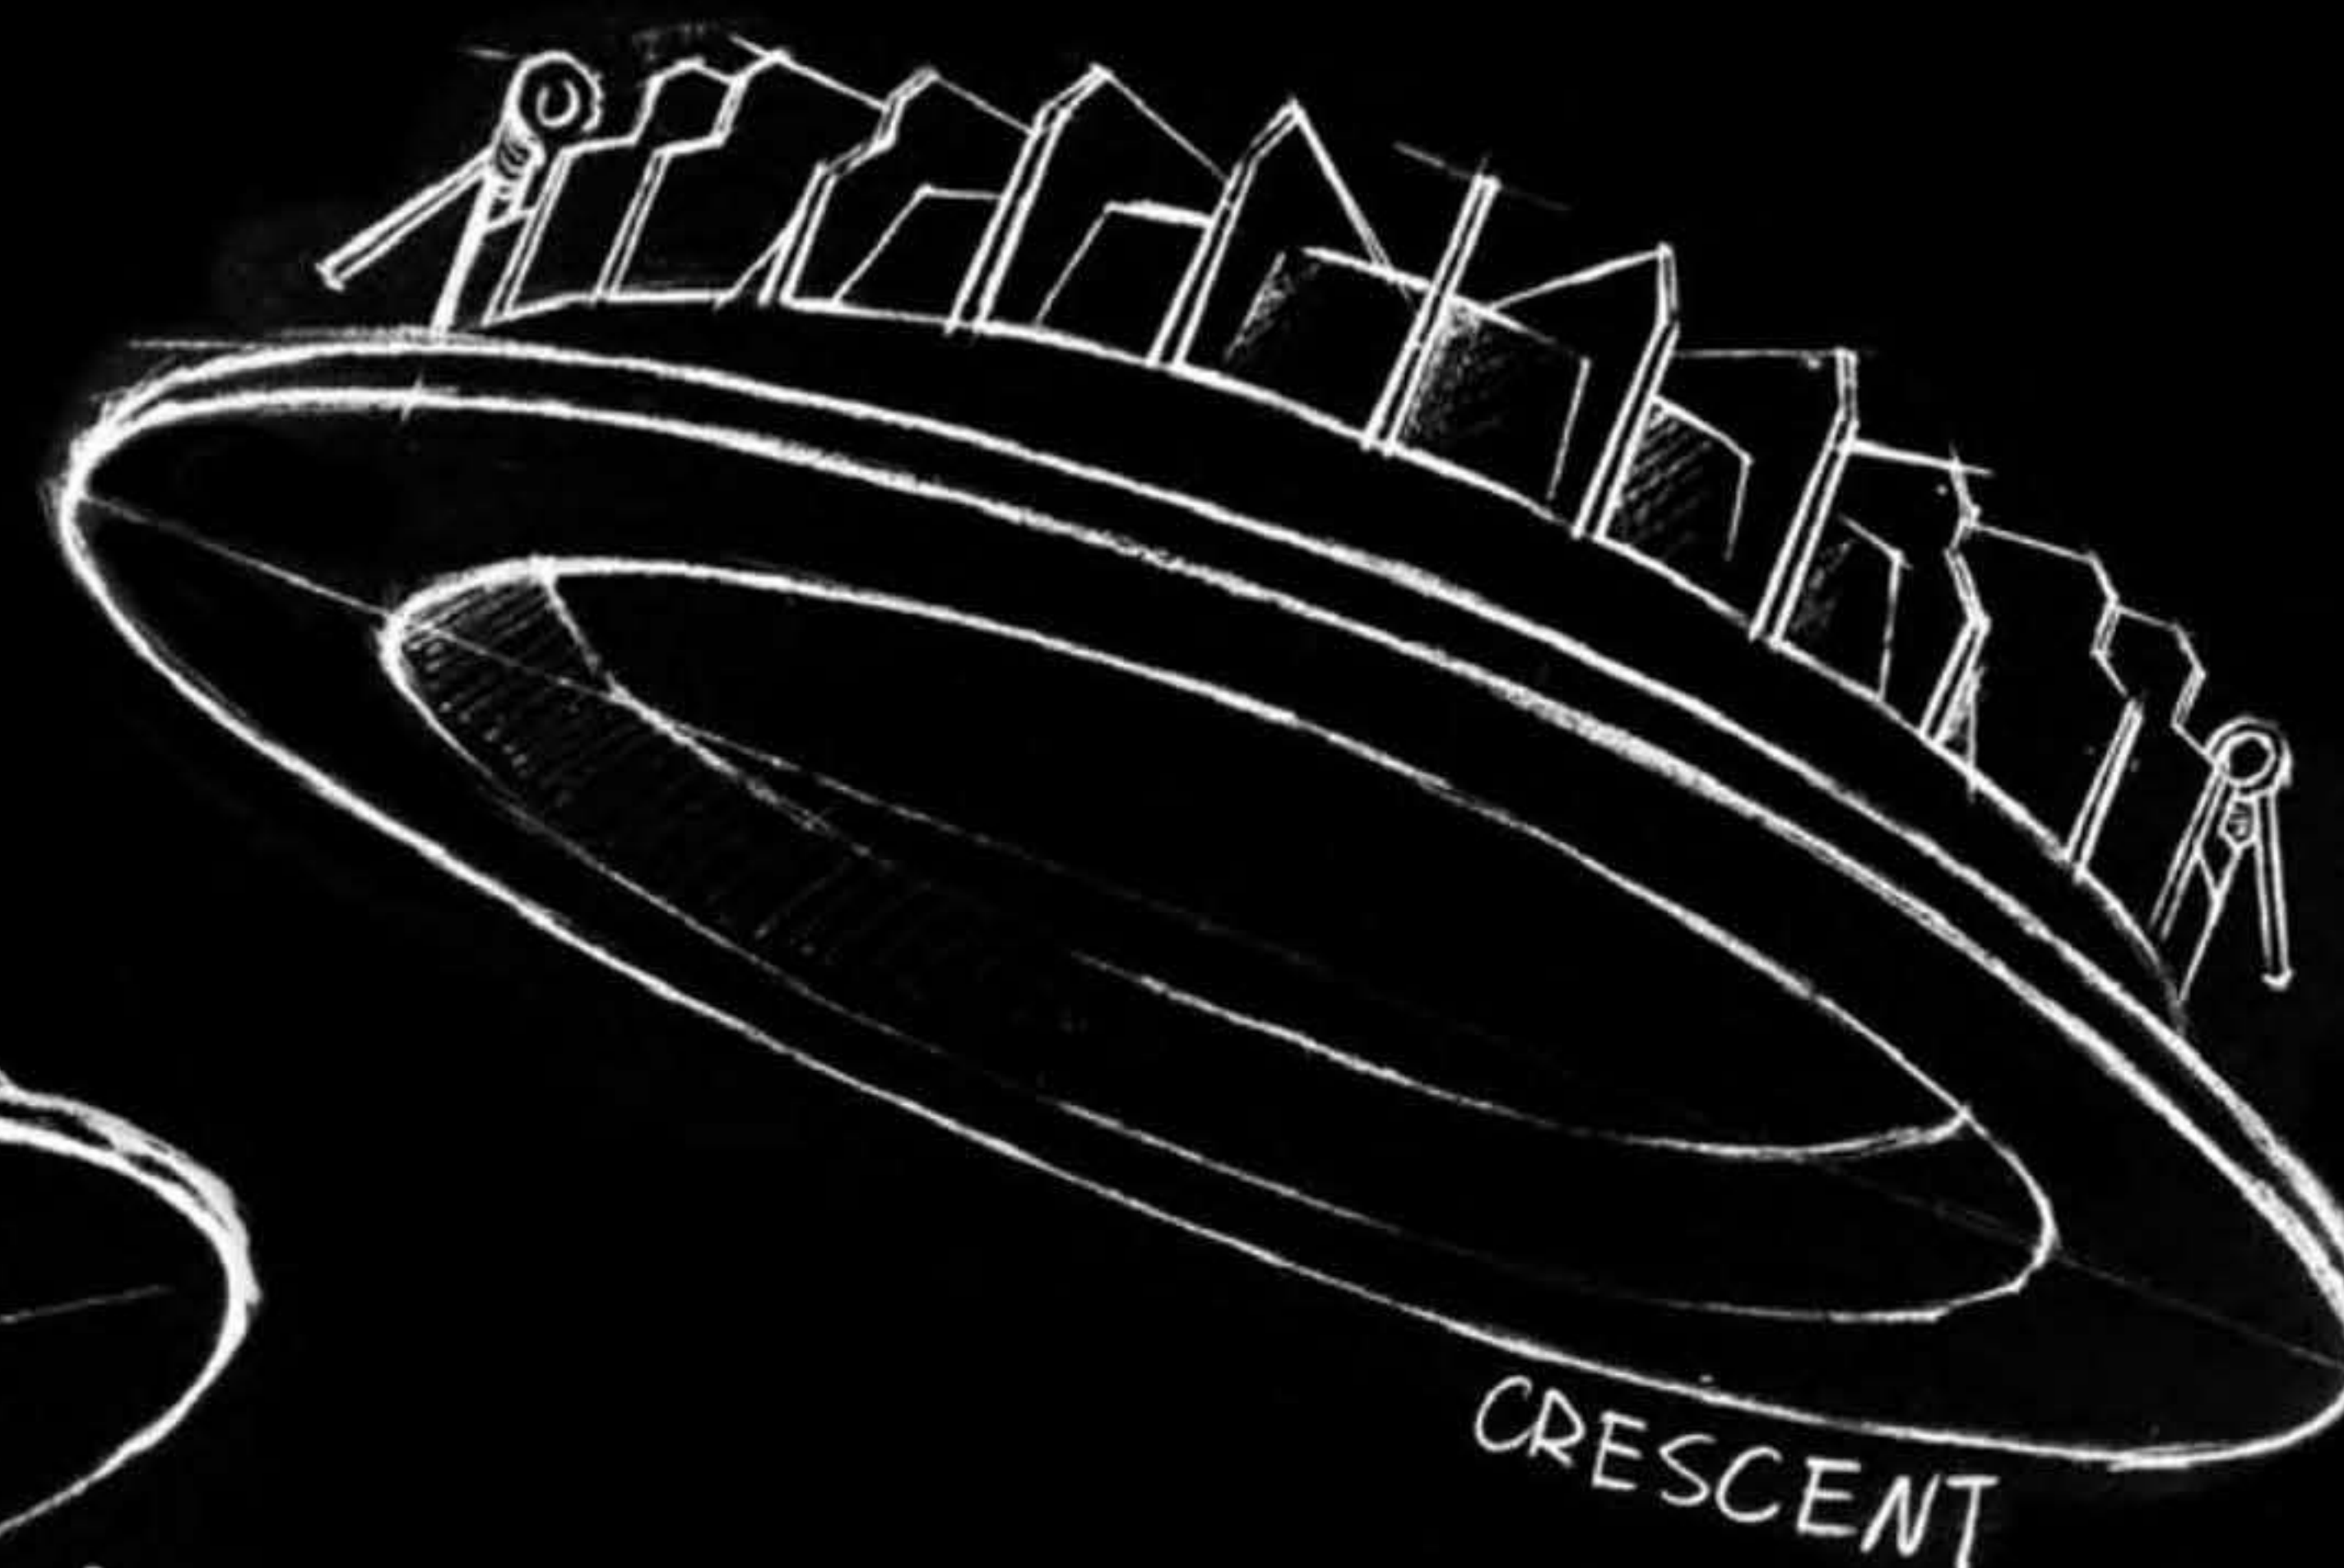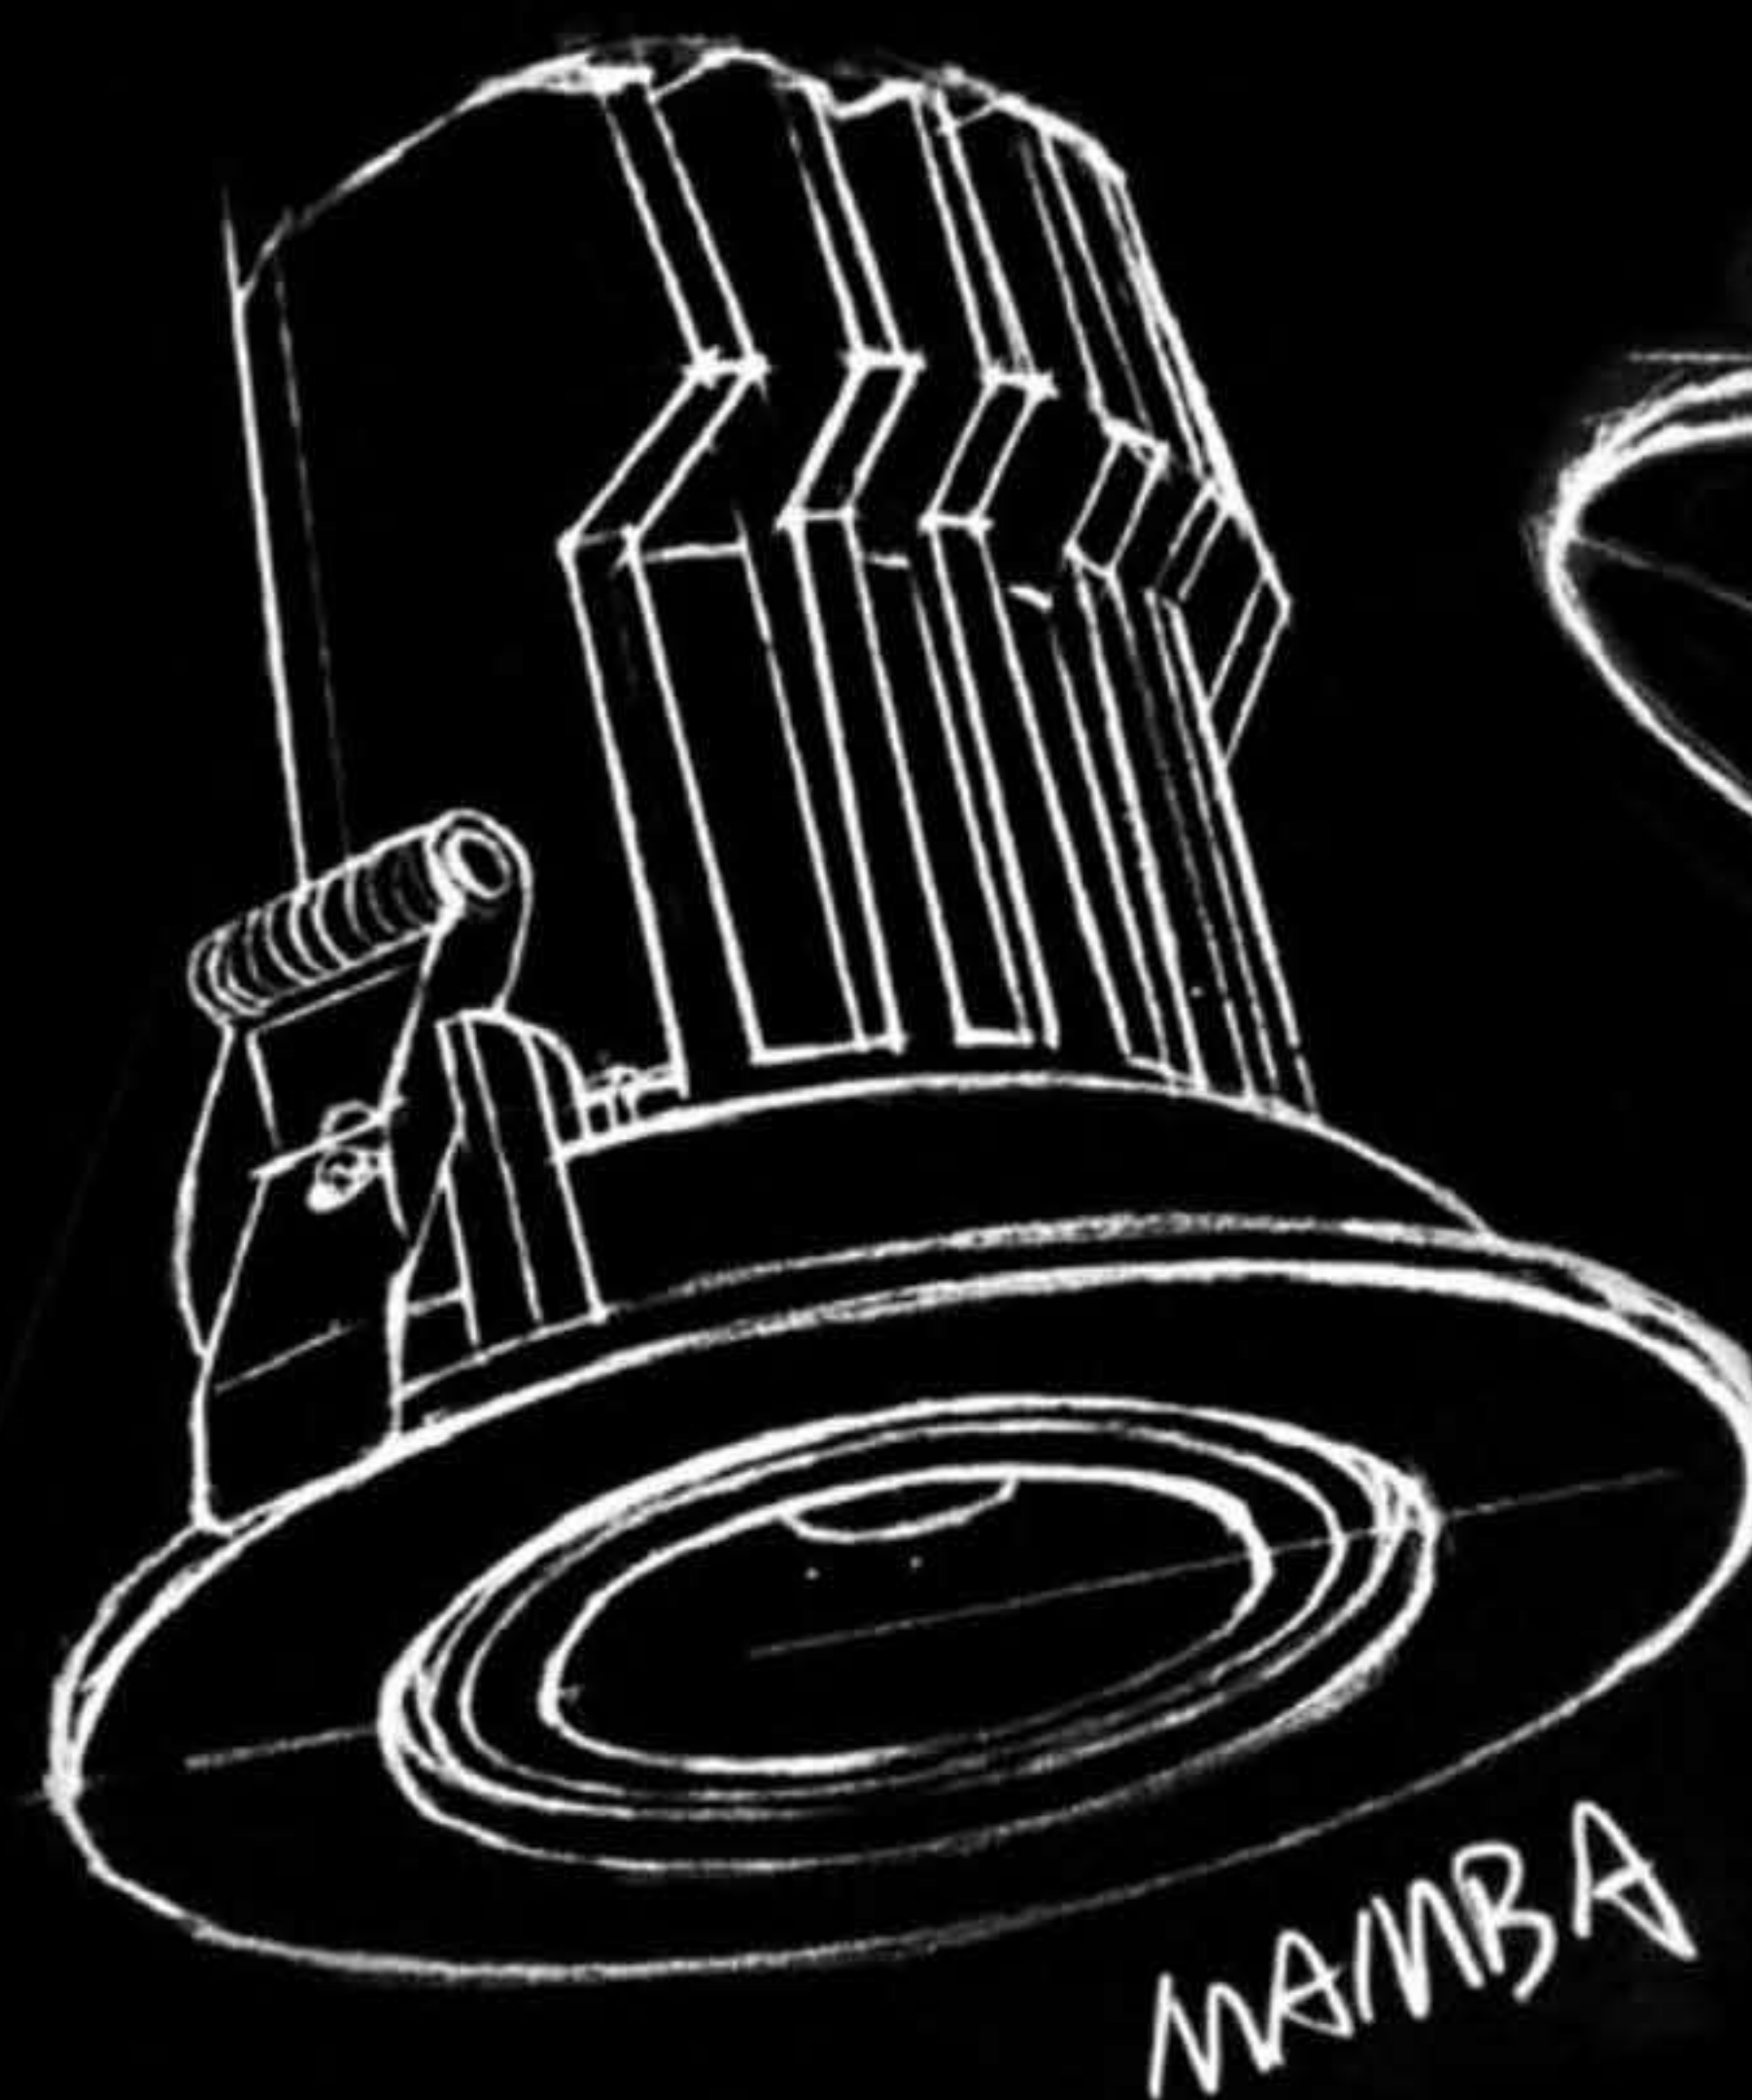



AEROLITE Downlight Series

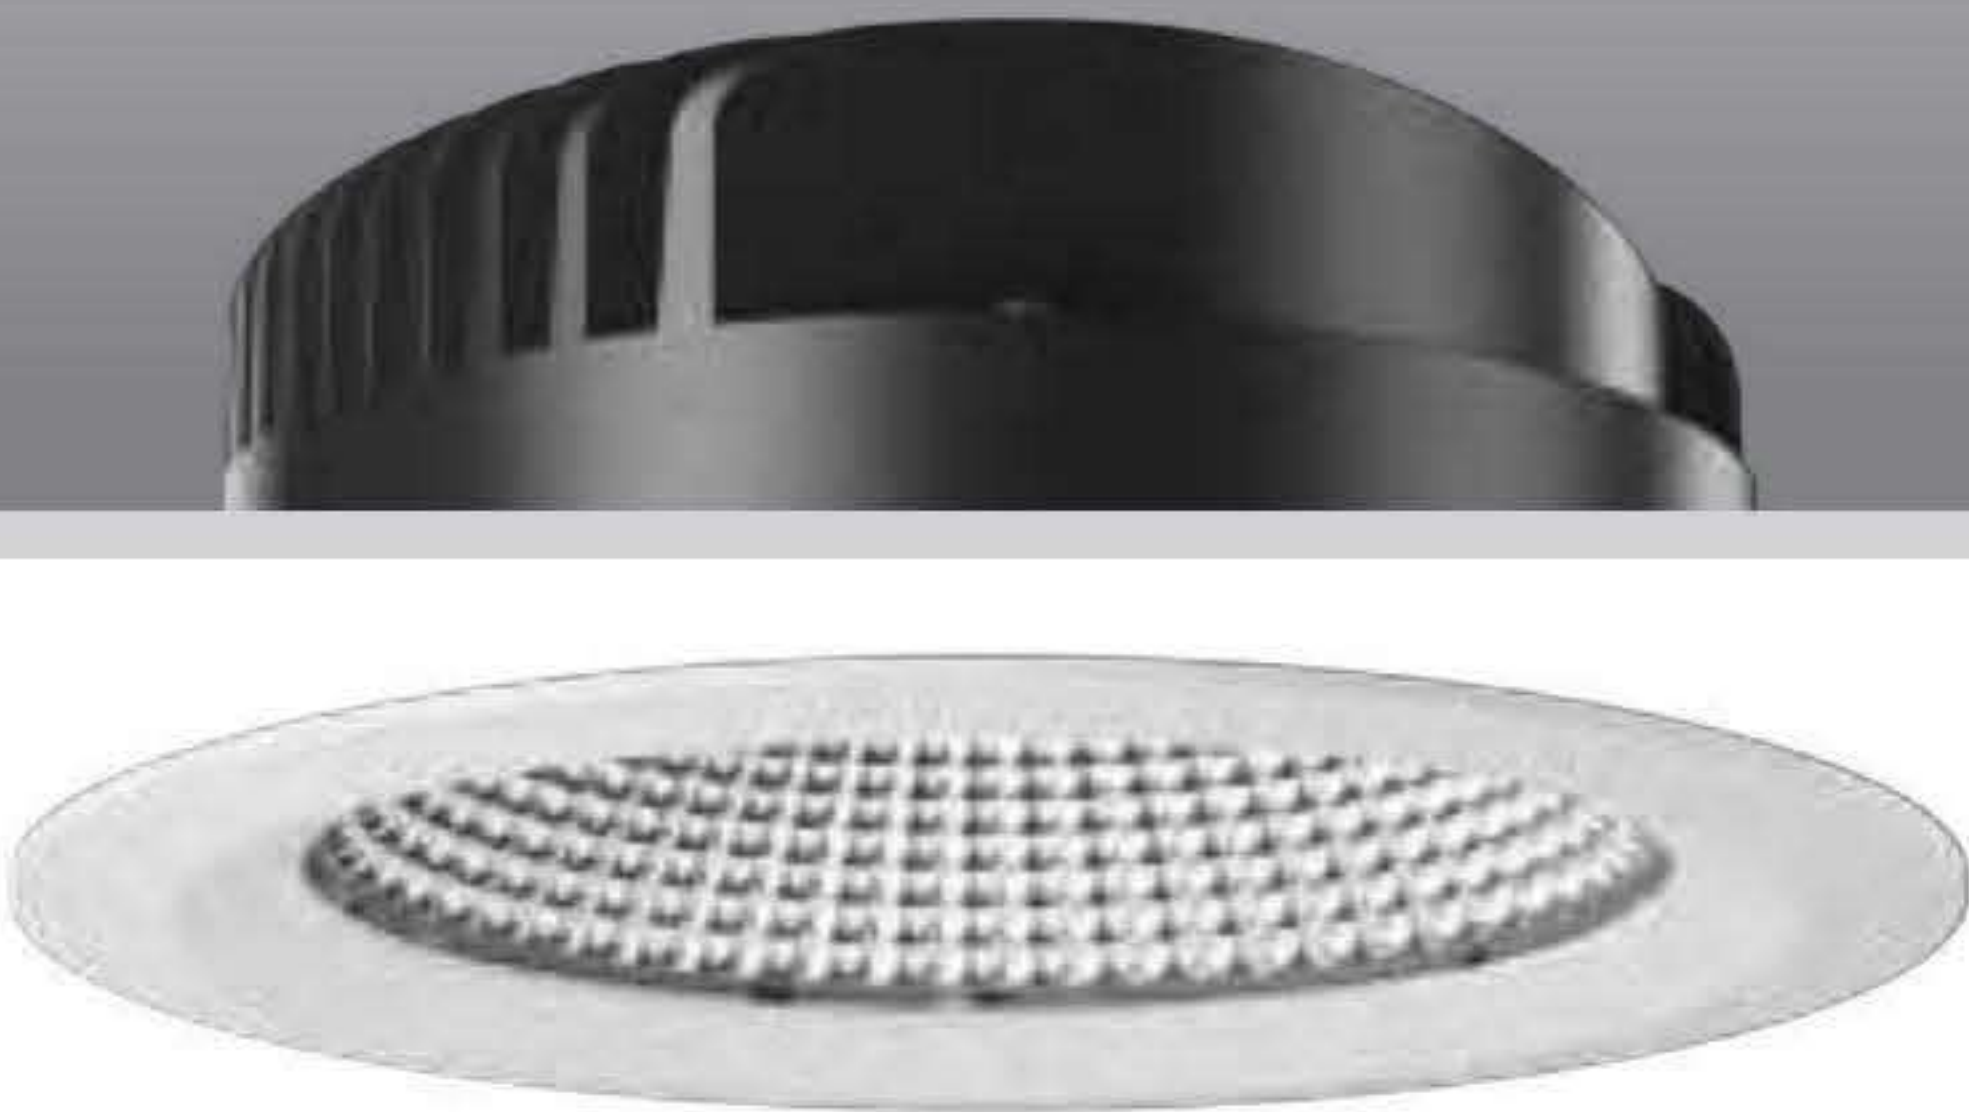

RECESSED

	RS-003C	RS-004C	RS-005C
Type	Fixed	Fixed	Fixed
Wattage	6W/9W	6W/9W/12W/15W	12W/15W/20W/24W
Beam Angle	35°/60°	35°/60°	35°/60°
Lumen (lm)	646/990	646/995/1320/1650	1322/1658/2219/2650
Cut-out (mm) ⓘ	Ø90	Ø125	Ø145
Size (DxHmm)	Ø110x75	Ø155x85	Ø175x85
N.W/PC (kgs)	0.49	0.71	0.82
Q'ty/CTN (pcs)	27	16	16

Dimension(mm)

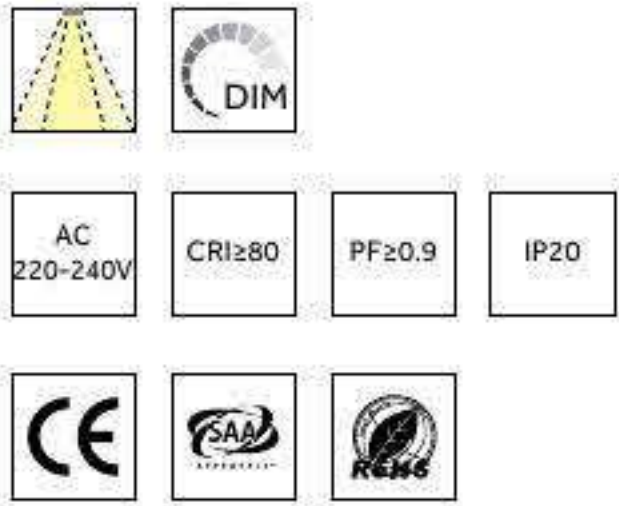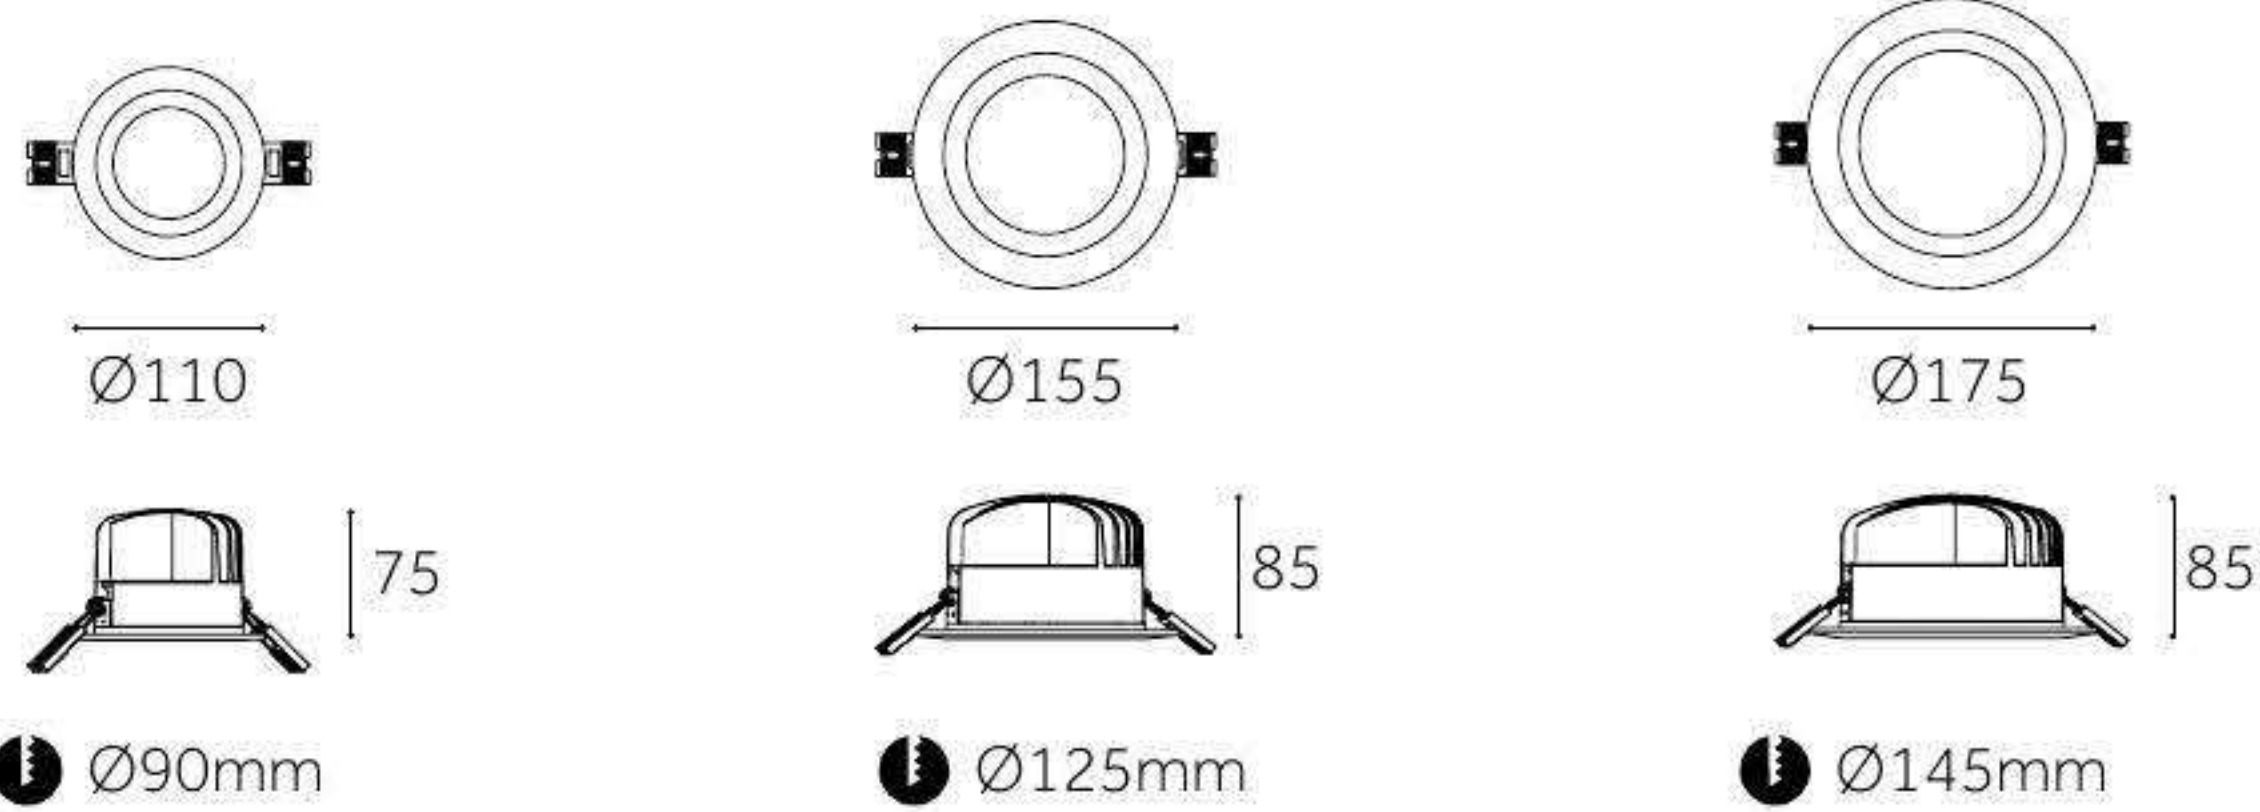


FINISH: ☐ White frame + Black heat sink **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

AEROLITE Series New structure with compact and prtble design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose.




	RS-006C	RS-007C
Type	Fixed	Fixed
Wattage	12W/15W/20W/24W/30W/36W	20W/24W/30W/36W/42W/48W
Beam Angle	35°/60°	35°/60°
Lumen (lm)	1357/1650/2250/2640/3320/3980	2250/2640/3320/3980/4620/5280
Cut-out (mm)	Ø165	Ø210
Size (DxHmm)	Ø195x86	Ø245x100
N.W/PC (kgs)	1.2	1.78
Q'ty/CTN (pcs)	12	6

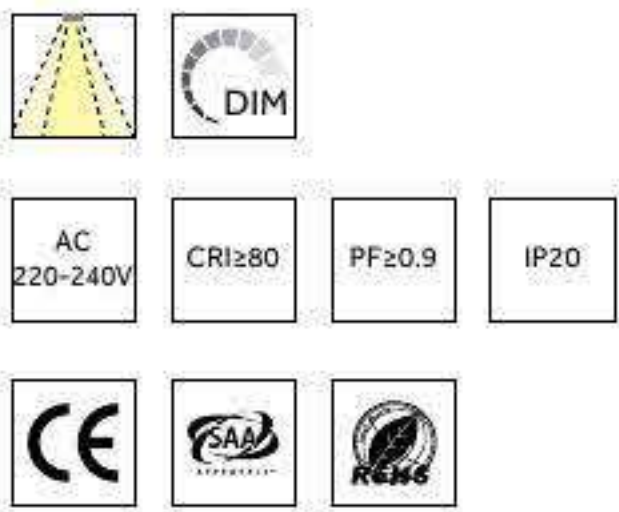

FINISH: ☐ White frame + Black heat sink **CCT:** 3000K 6000K


DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

AEROLITE Series New structure with compact and prtble design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose.

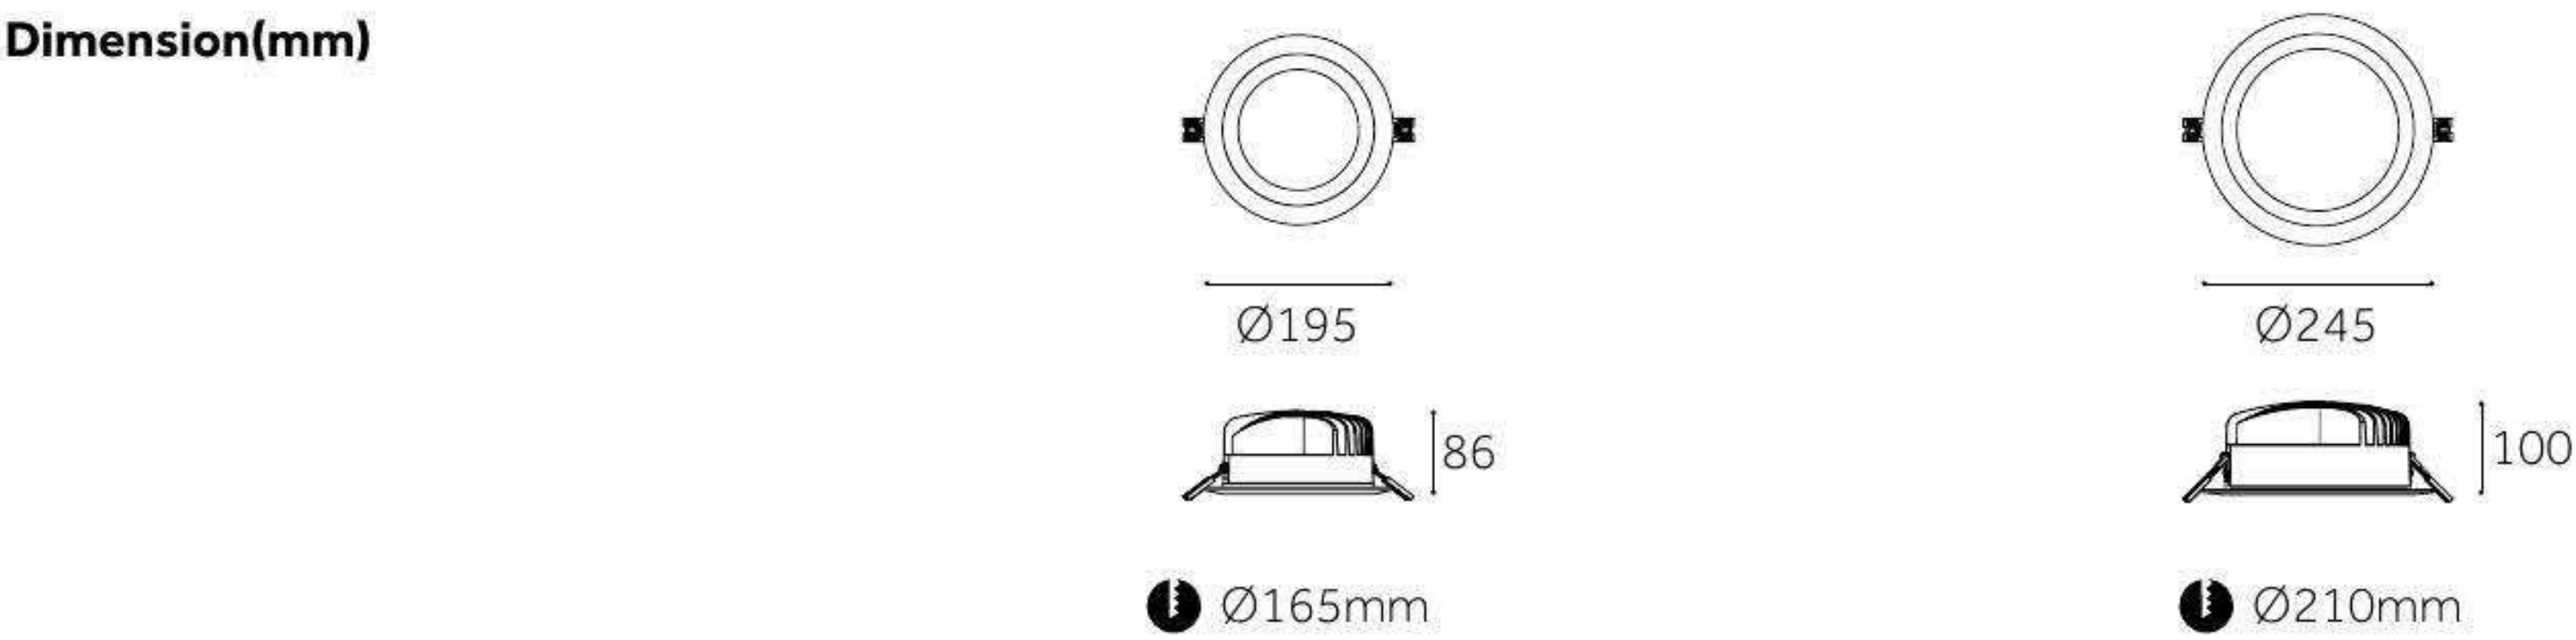




RS-1005C				
Type	Fixed			
Wattage	7W	10W	15W	30W
Beam Angle	33.3°	90.6°	99.1°	126.1°
Lumen (lm)	552	920	1725	2933
Cut-out (mm)	Ø70	Ø90	Ø150	Ø205
Size (DxHmm)	Ø90x41	Ø120x50	Ø170x50	Ø225x52
N.W/PC (kgs)	0.12	0.22	0.45	0.73
Q'ty/CTN (pcs)	50	50	20	20

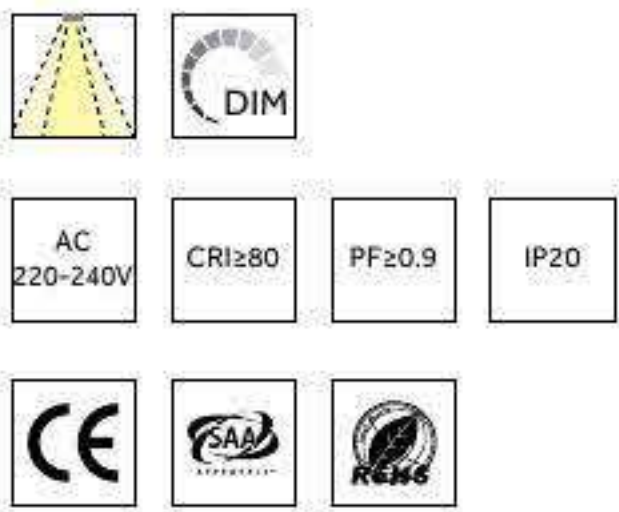


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K


DIMMING: ☒ Non-Dimmable

STAR Series with COB luminus LED chip, external driver. Luminarie color can be black,white and silver for optional. Four size 7W, 10W, 15W ,30W can be selected.

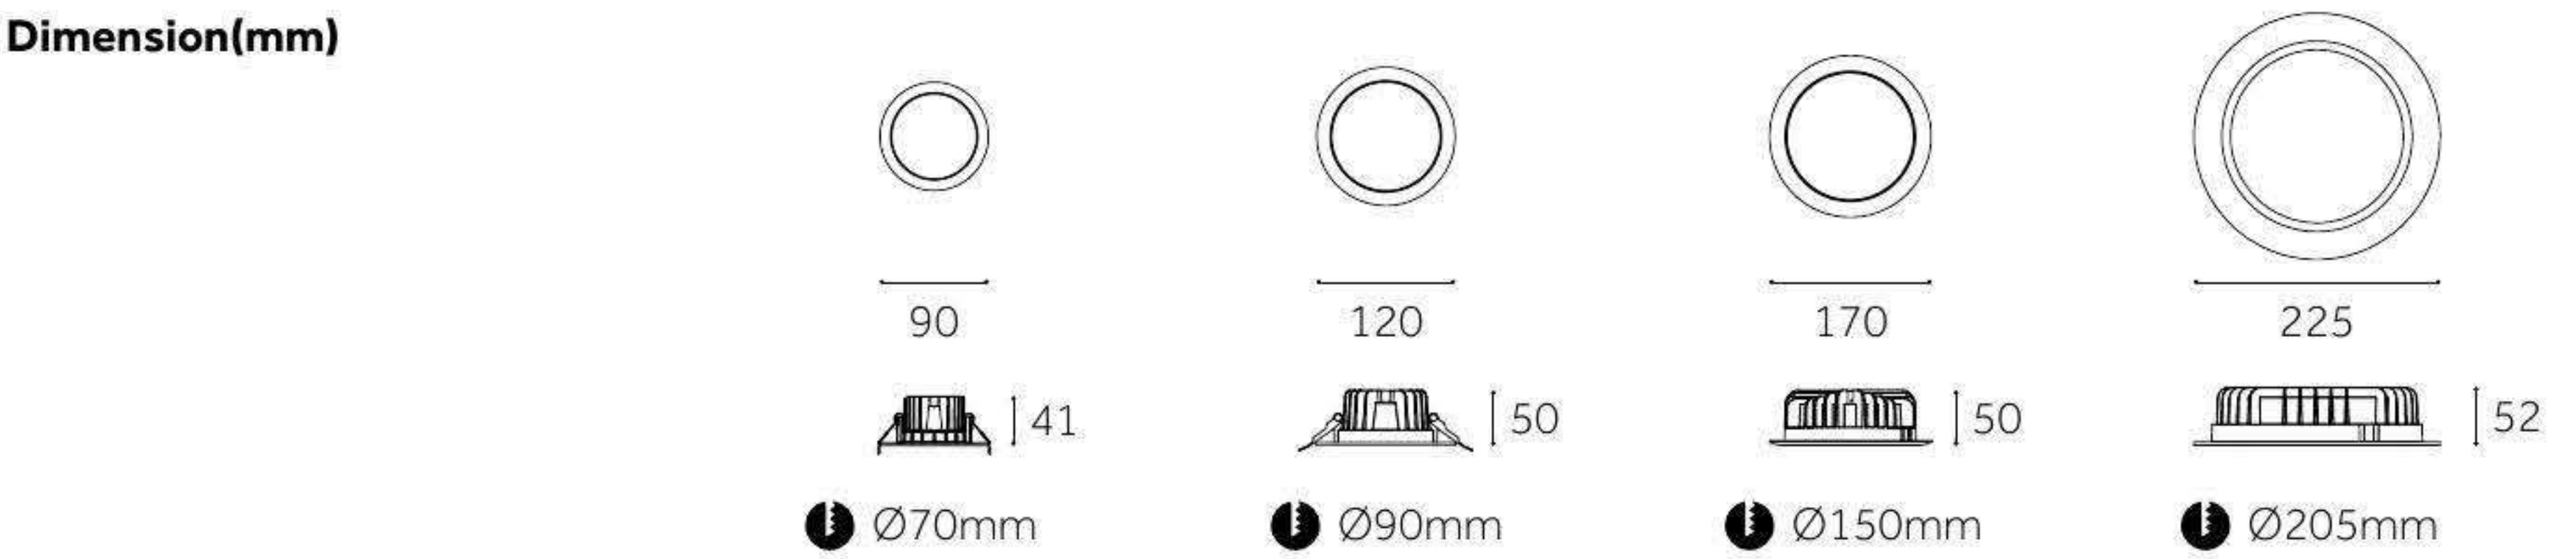

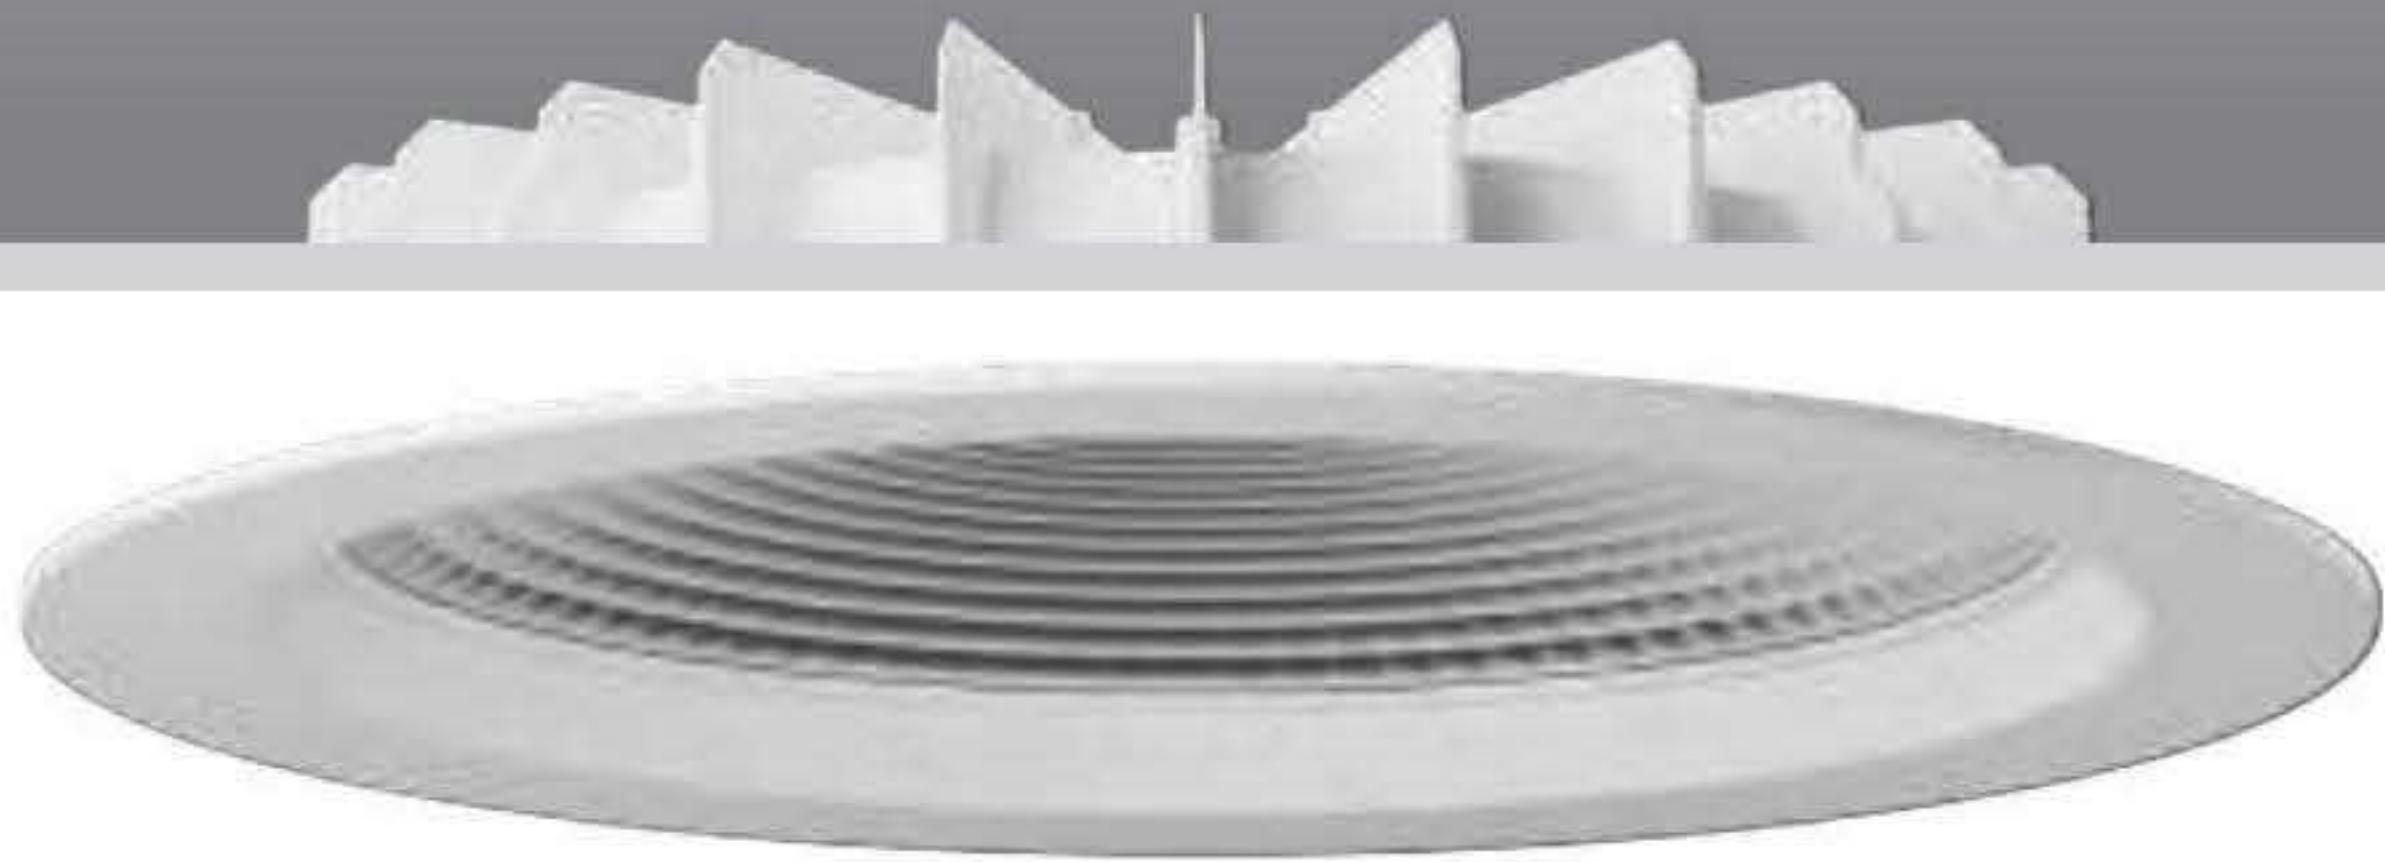


	RS-06C	RS-08C
Type	Fixed	Fixed
Wattage	30W	40W
Beam Angle	90°	90°
Lumen (lm)	3450	4600
Cut-out (mm)	Ø165-185	Ø200-220
Size (DxHmm)	Ø195x50	Ø230x50
N.W/PC (kgs)	0.67	0.94
Q'ty/CTN (pcs)	18	12

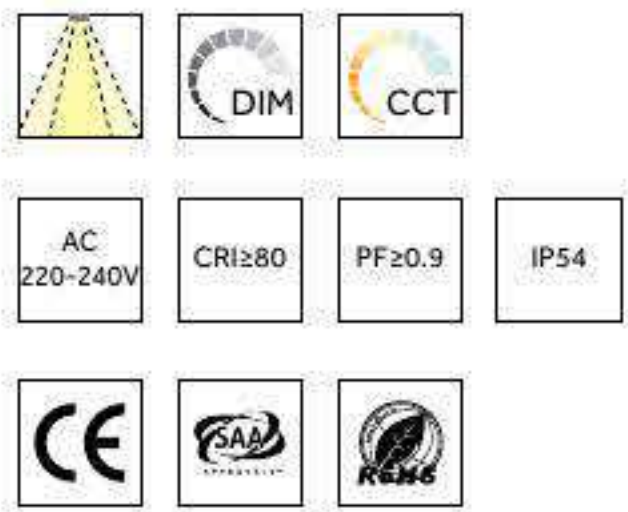

FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

CRESCENT Series LED COB Downlight with high efficiency LED COB chip, external driver. High precision die-cast aluminum integrated radiator and excellent thermal conductivity. 1-CCT and 3-CCT optional(3000K&4000K&5700K).

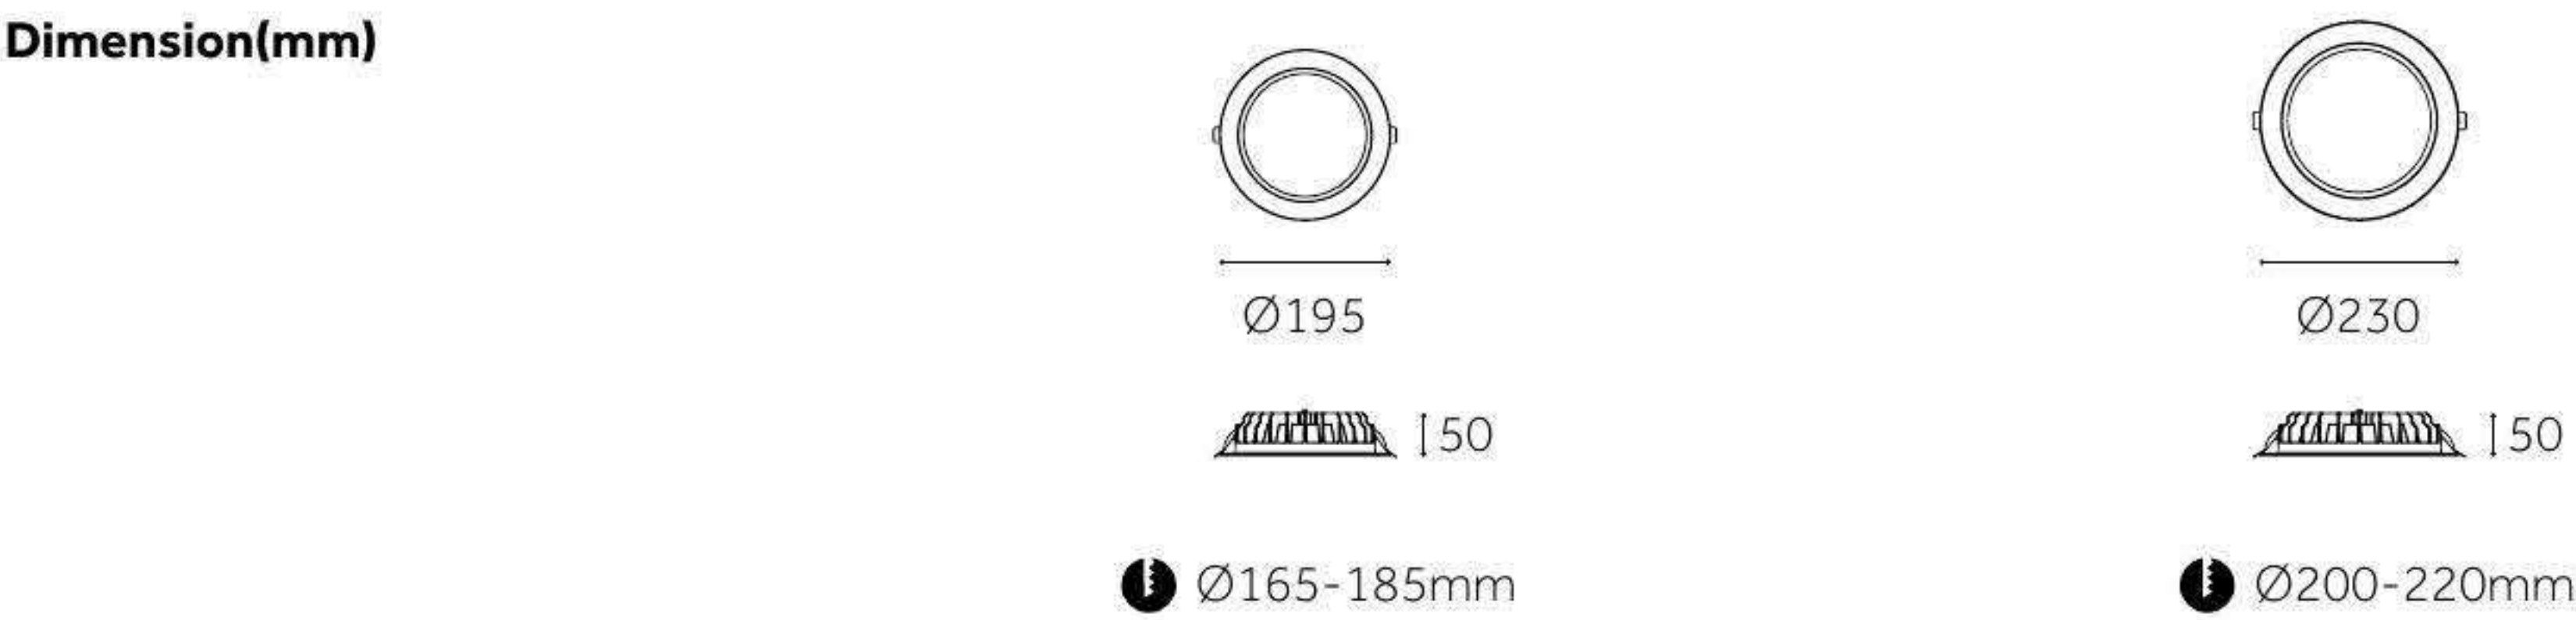



DOWN LIGHT
(COB)


MINI

LED Light

DIY DESIGN

Color diversity: It can adapt to different space decoration style.

Rotation design: It can replacement faster.

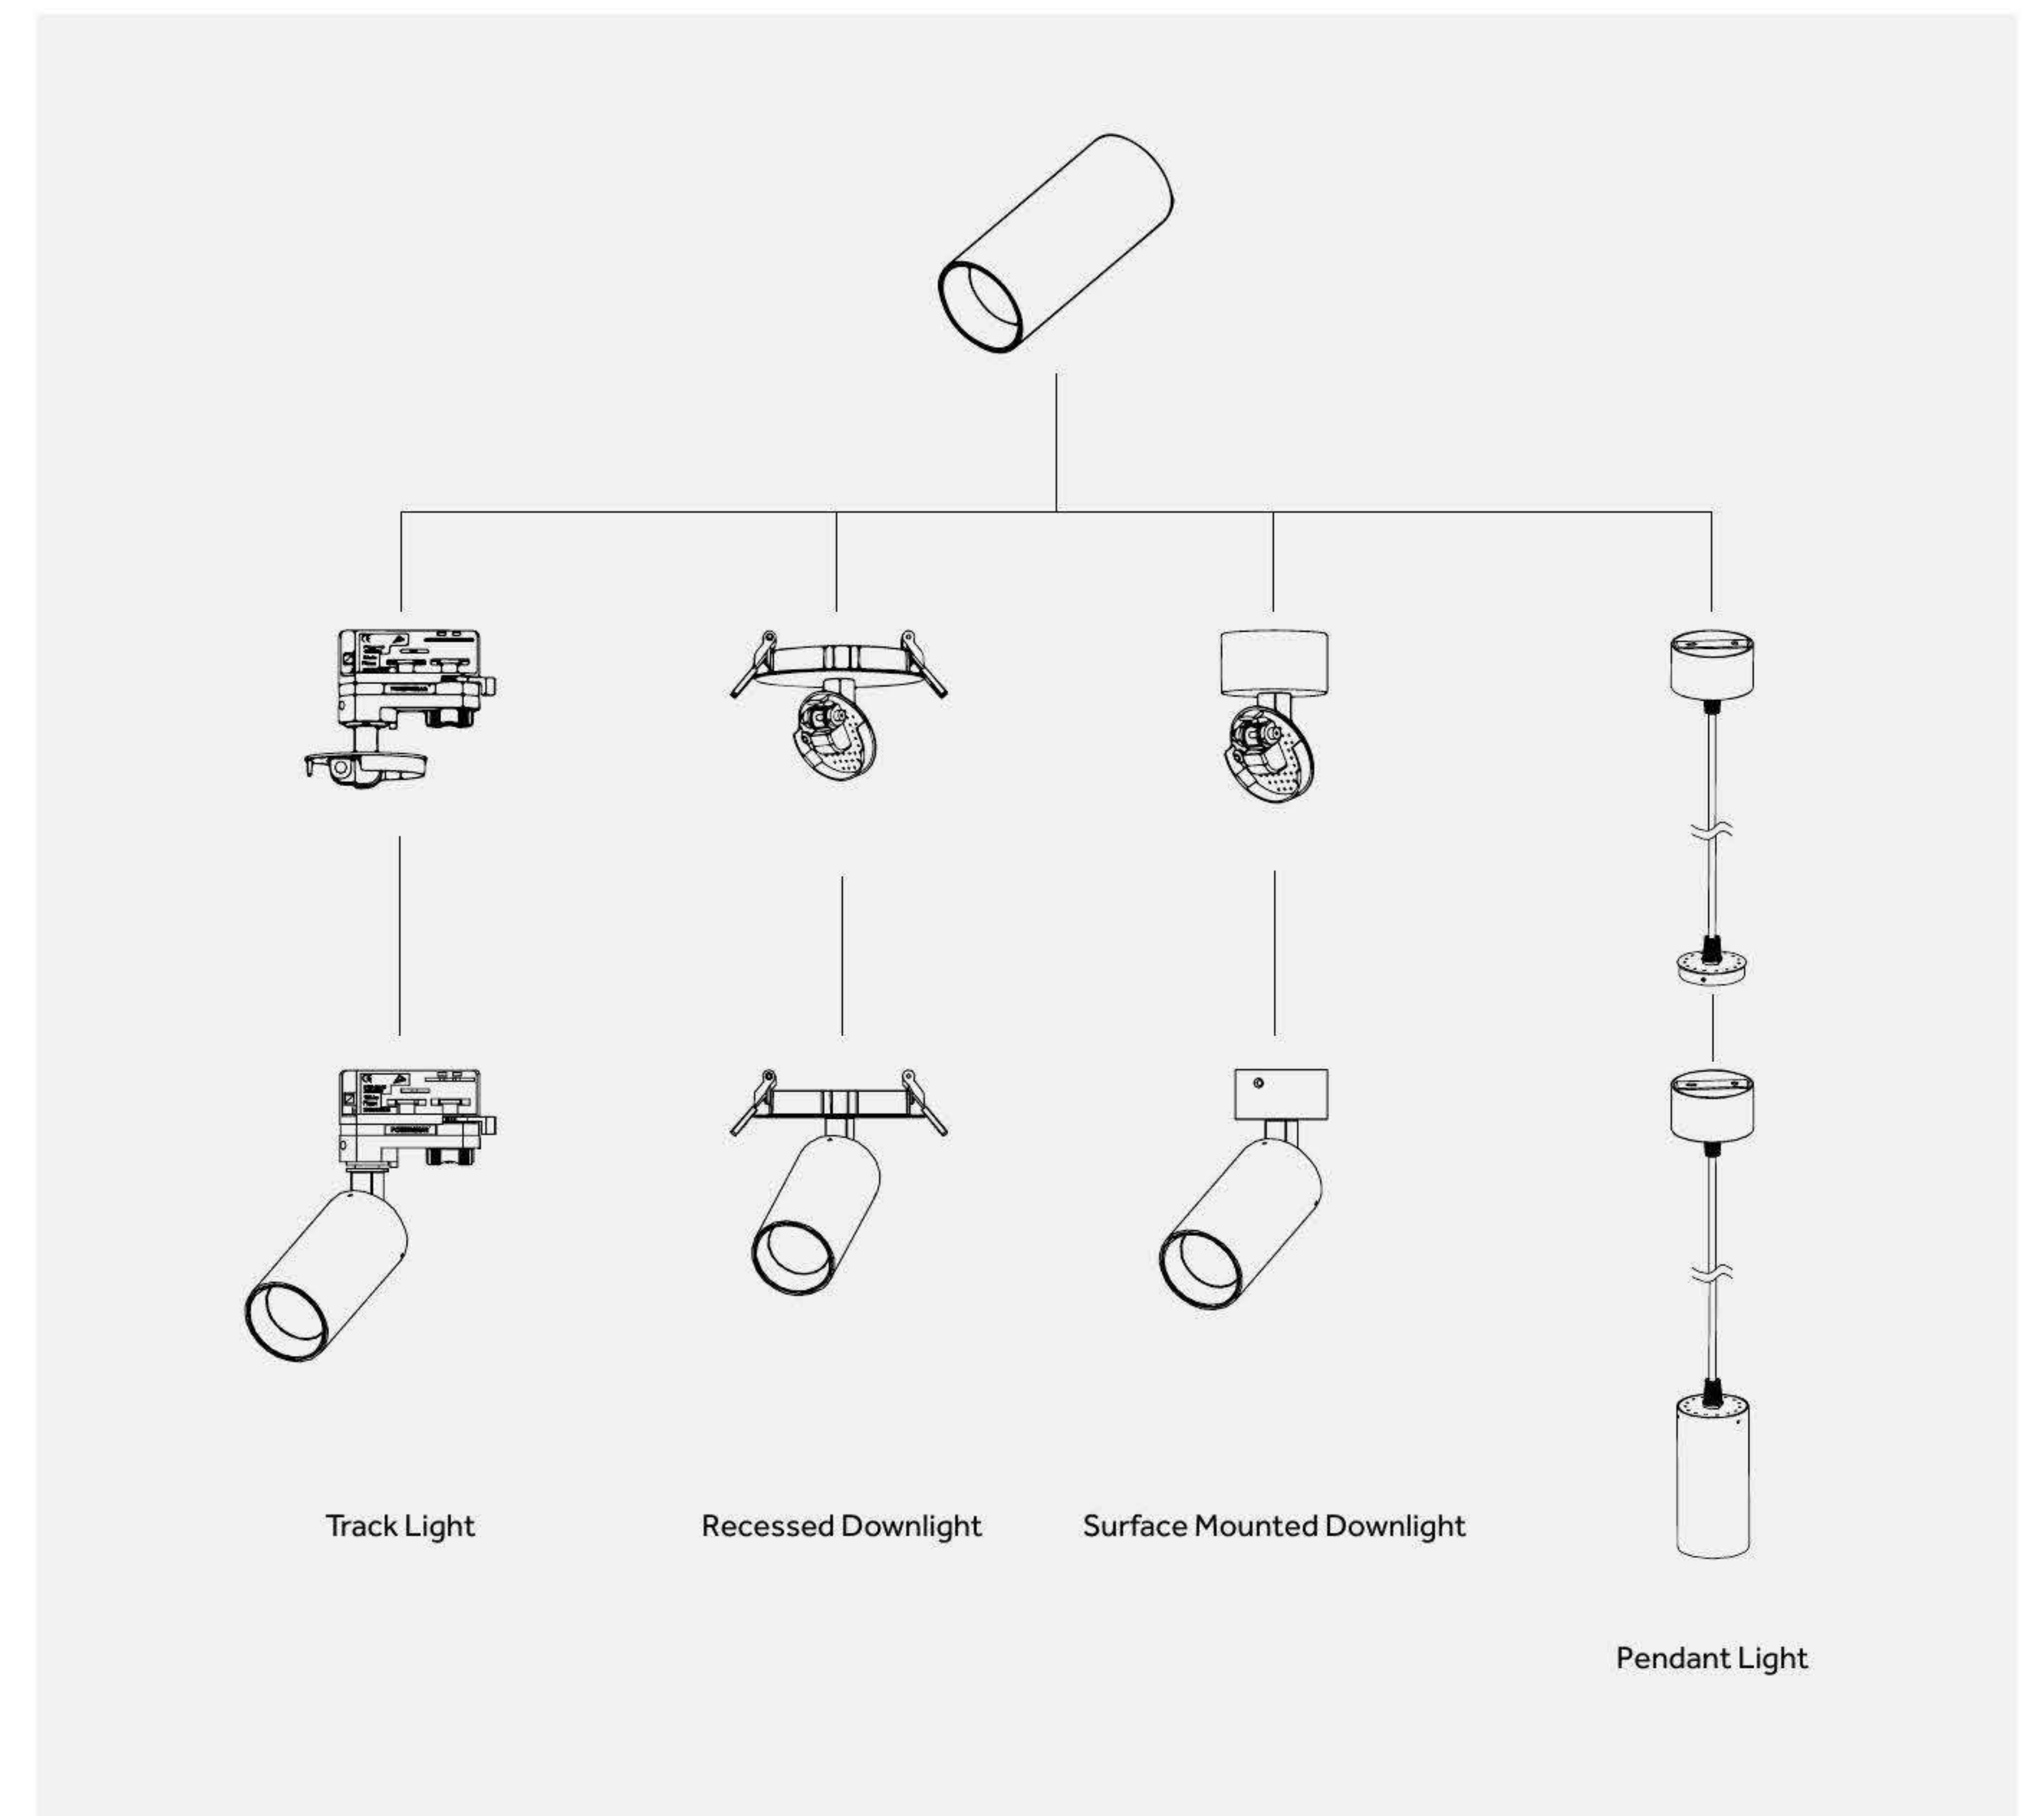


DOWN LIGHT
(COB)



DOWN LIGHT (COB)

DOWN LIGHT (COB)

	SP-55T	SP-65T	SP-75T
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	9W	18W	30W
Beam Angle	23°/38°/45°	23°/38°/45°	23°/38°/45°
Lumen (lm)	990	1980	3300
Cut-out (mm) ⓘ	Ø100	Ø100	Ø100
Size (DxLmm)	Ø55x110	Ø63x145	Ø75x165
N.W/PC (kgs)	0.4	0.63	0.84
Q'ty/CTN (pcs)	32	24	20

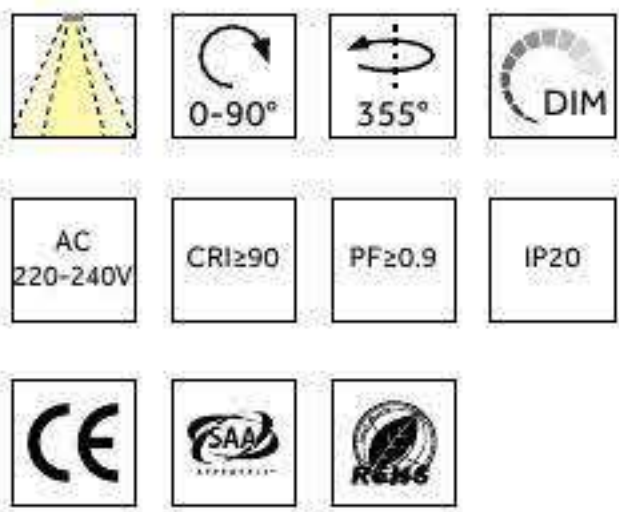


- FINISH:** ☐ White ☐ Silver ☒ Black
- CCT:**

3000K6000K
- OPTIONAL:** ☐ White ☒ Black ☐ Golden ☐ Sliver
- DIMMING:** ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels,restaurants and other public buildings.

Dimension(mm)

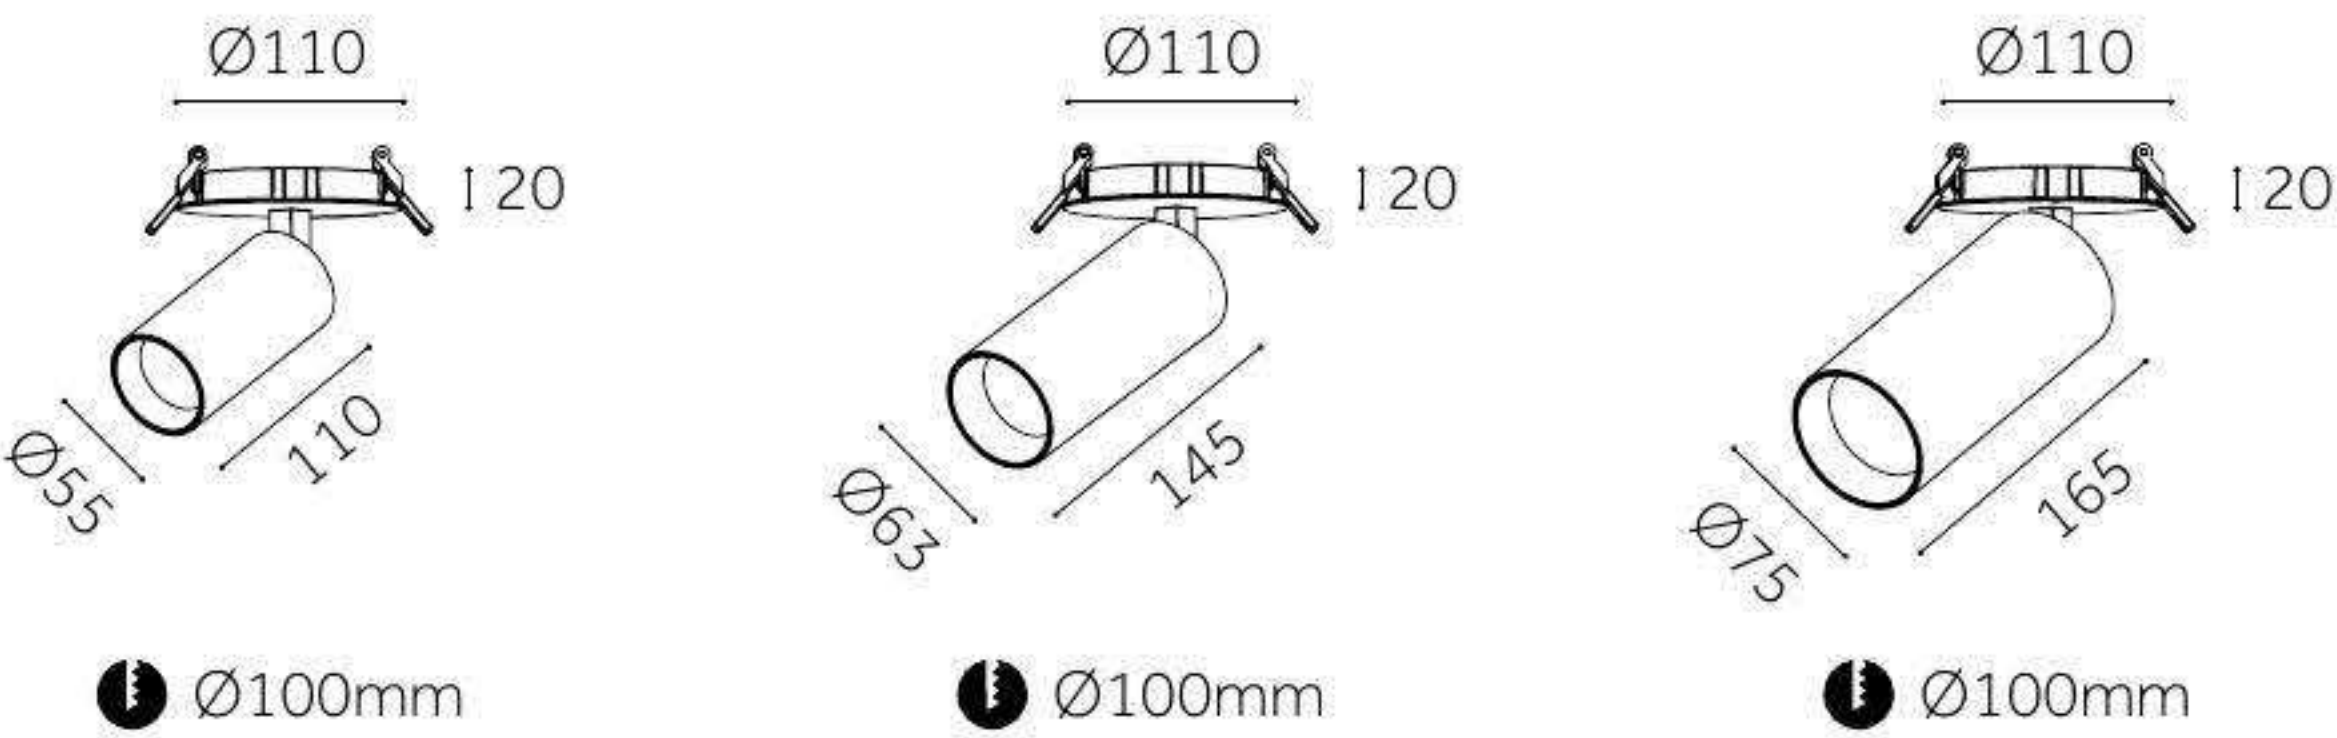

EAGLE EYE Downlight Series

RECESSED


DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

SP-60C

Type	Adjustable 90°+350°
Wattage	10W/15W/20W
Beam Angle	15°-70°
Lumen (lm)	1039/1725/2536
Cut-out (mm) ⓘ	Ø75
Size (DxHmm)	Ø60x184
N.W/PC (kgs)	0.65
Q'ty/CTN (pcs)	20

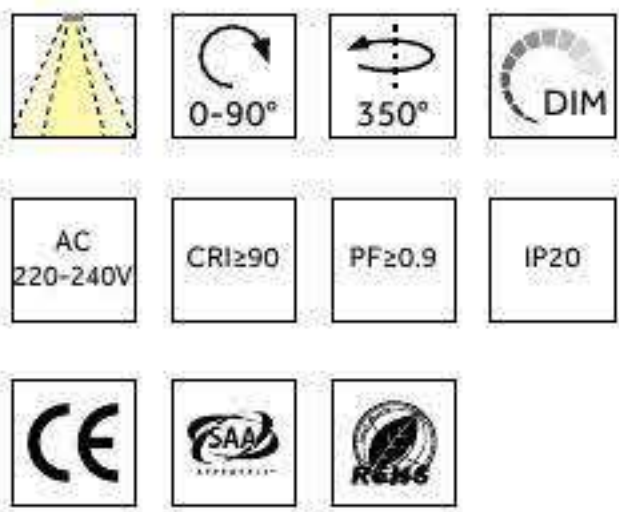


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

EAGLE EYE Series with high efficiency brand COB LED chip, build-in driver. Aluminum die-casting body and heat sink which is better air dissipation. Adjustable beam angle from 15°-70°.

Dimension(mm)

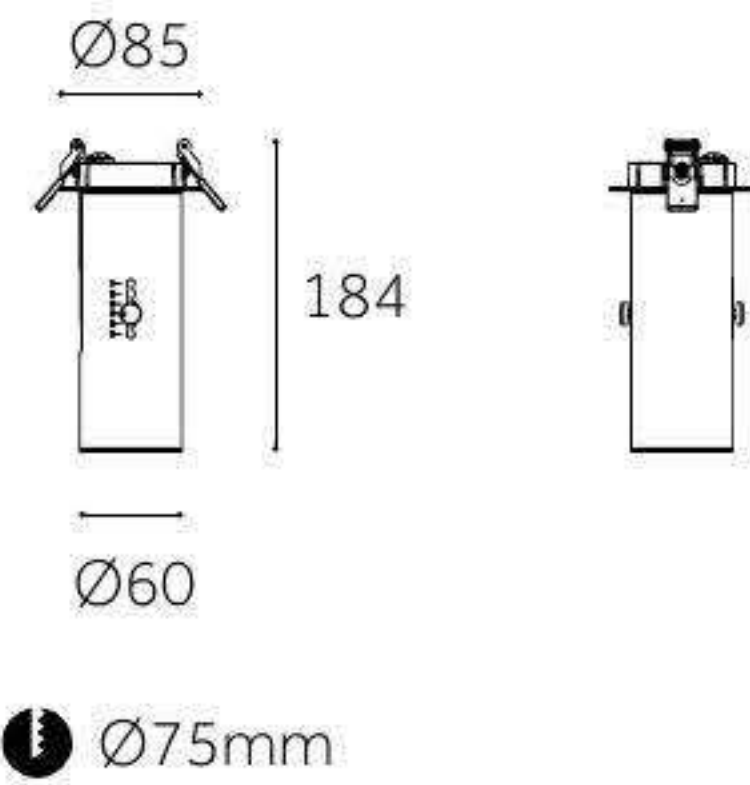


DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

SP-01TM

Type	Adjustable 90°+350°
Wattage	9W/12W/14W/21W
Beam Angle	16°/24°/50°
Lumen (lm)	1081/1415/1679/2438
Cut-out (mm) ⓘ	Ø125
Size (DxHmm)	Ø130x115
N.W/PC (kgs)	1
Q'ty/CTN (pcs)	12

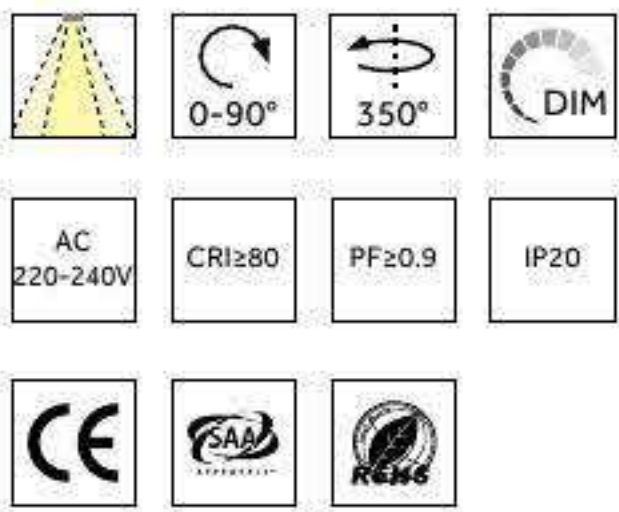


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminaire color can be black, white and silver for optional. Durable die-casting aluminum body with heat sink. High efficiency and brand COB LED chip. Multi-reflector system for optional beam angle.

Dimension(mm)

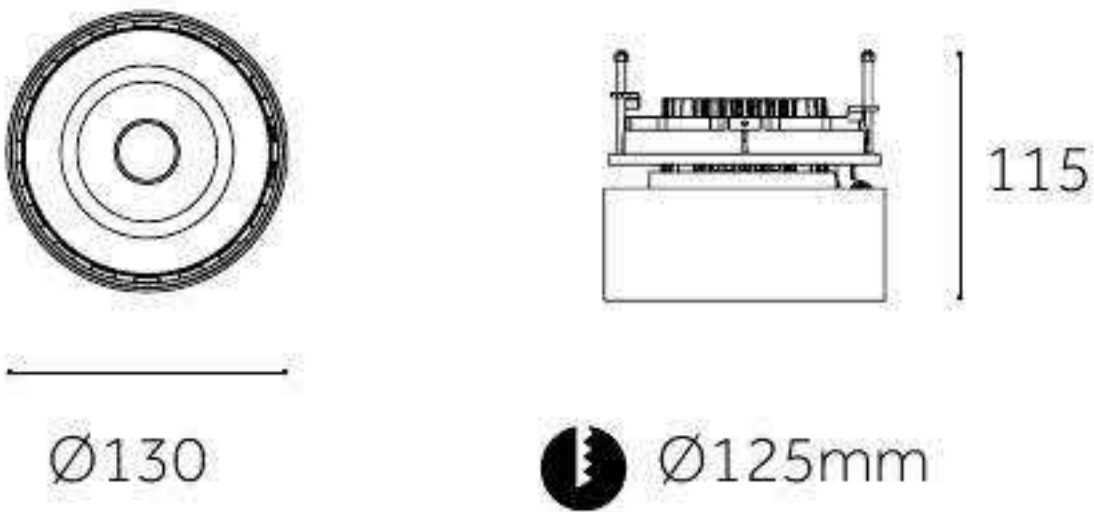




DOWN LIGHT
(COB)

POWER

LED Downlight

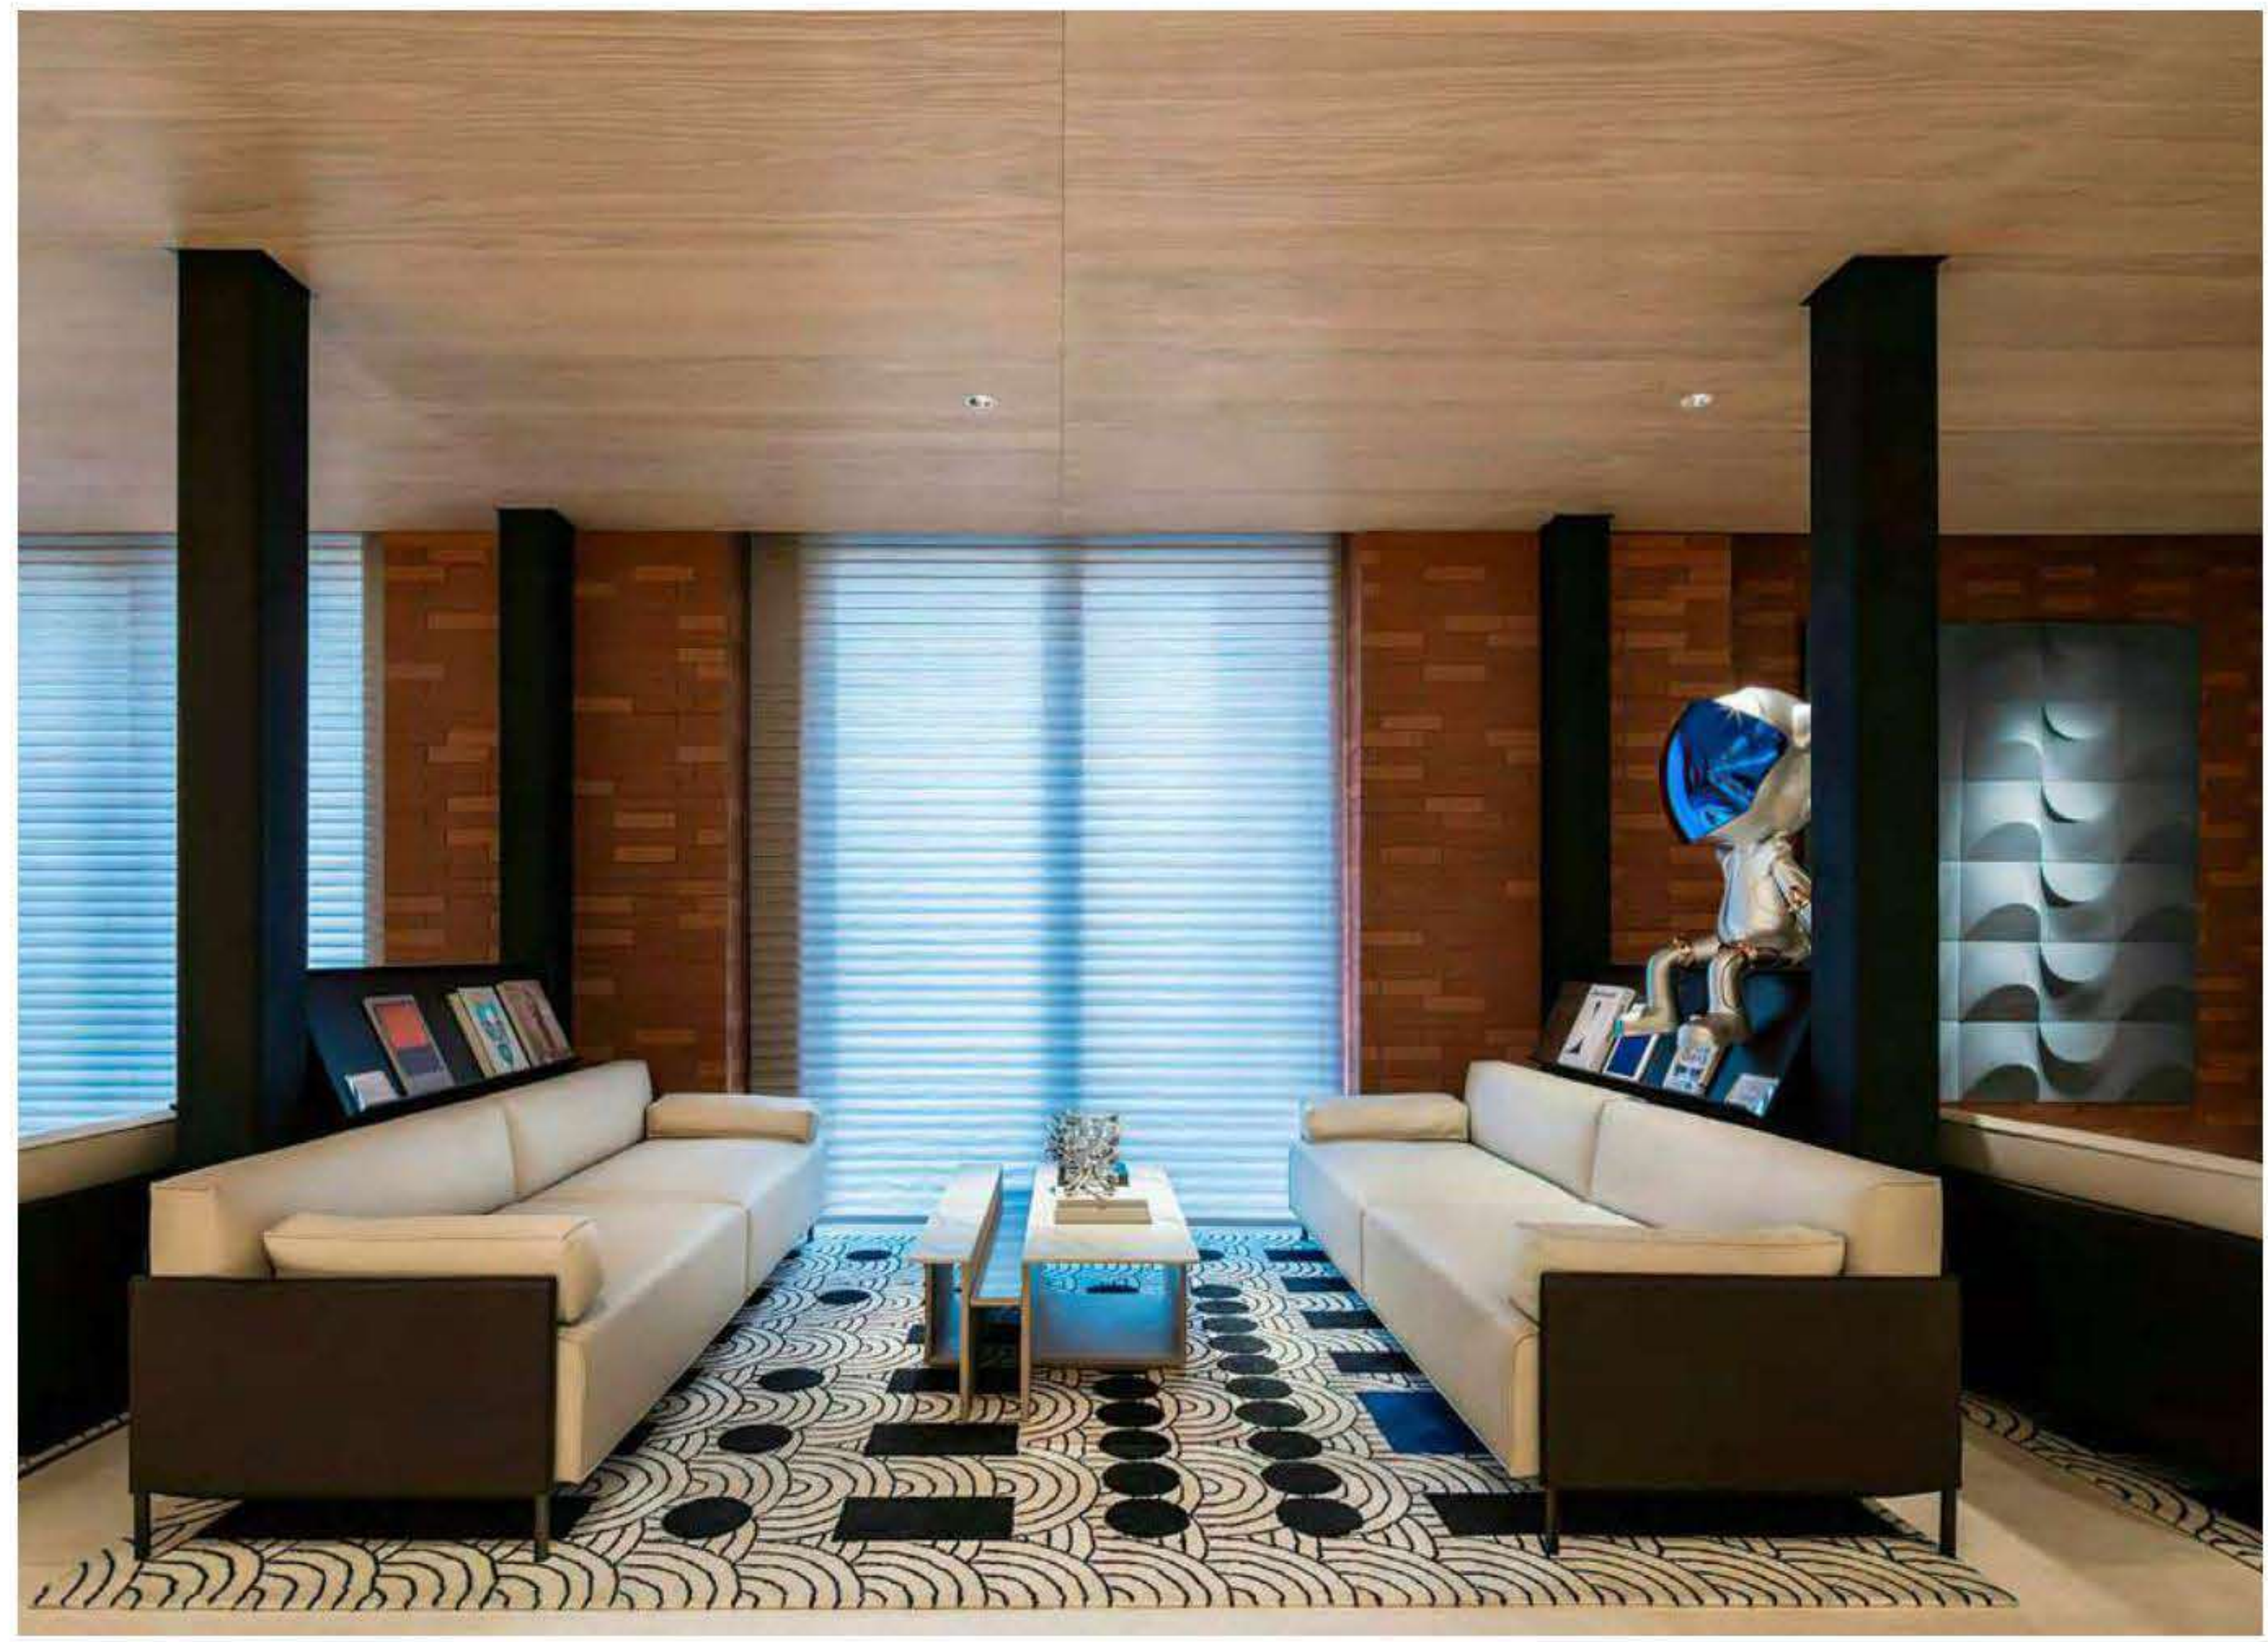

DOWN LIGHT
(COB)

With color of bright white, bright black,
gun black, bright silver, matt silver

Reflector

- Bright silver
- Bright black
- Matt silver

Lens



- Bright white
- Bright black
- Gun black
- Bright silver
- Matt silver



POWER

Downlight Series


RECESSED

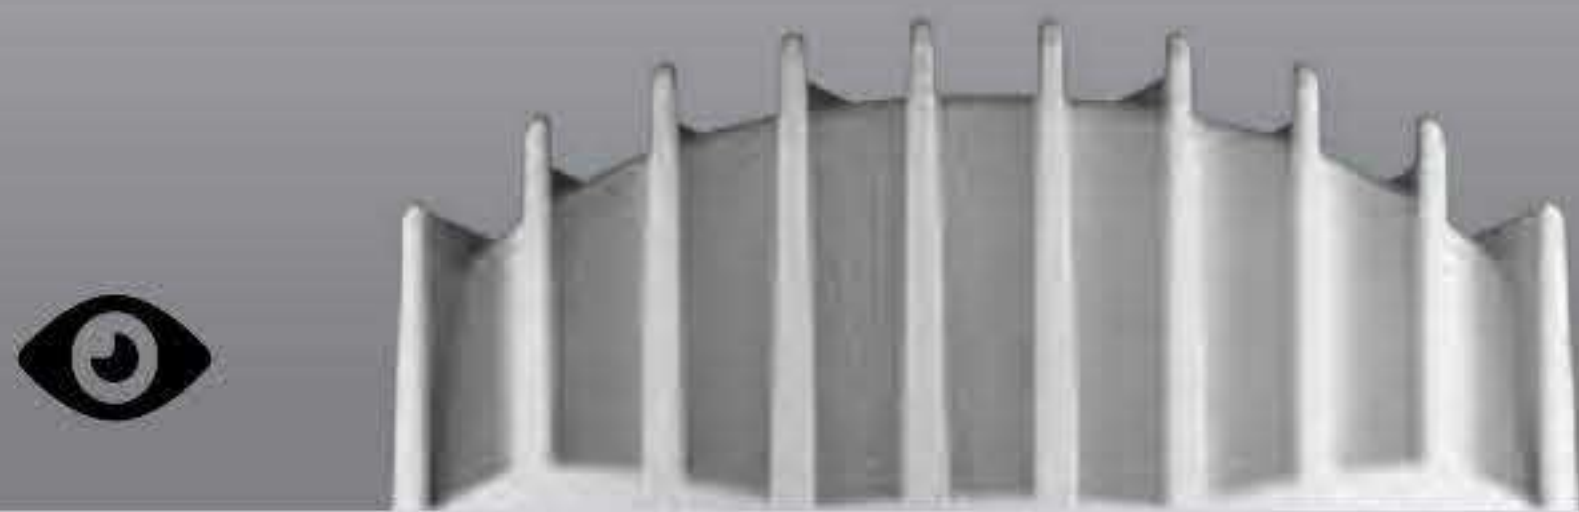

Type	DL02M-C	DL03M-C	DL04M-C	DL06M-C	DL08M-C
	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	10W	18W	30W	40W	50W
Beam Angle	24°/55°	24°/55°	24°/55°	15°/24°/38°/55°	15°/24°/38°/55°
Lumen (lm)	1100	1980	3300	4400	5500
Cut-out (mm) ⓘ	Ø75	Ø90	Ø125	Ø165	Ø200
Size (DxHmm)	Ø86x55	Ø101x60	Ø140x73	Ø180x94	Ø214x110
N.W/PC (kgs)	0.24	0.32	0.48	1.11	1.32
Q'ty/CTN (pcs)	50	50	30	18	12

DOWN LIGHT
(COB)


DOWN LIGHT
(COB)

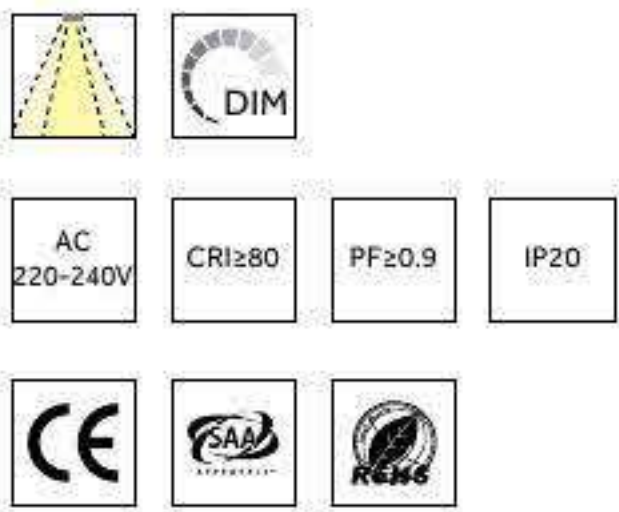

- FINISH:** ☐ White ☒ Black
- CCT:** 3000K 6000K
- OPTIONAL:** ☐ Bright white ☒ Bright black ☐ Gun black ☐ Silver ☐ Matt silver
- DIMMING:** ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


KING KONG Series Integrated radiator with good quality, serialized size to meet different floors and scenes. Rigid thermal line design, highlighting the sense of science and technology, so named King Kong. The design of plastic pressure line cover is integrated with different color elements to present a more personalized appearance.

Dimension(mm)

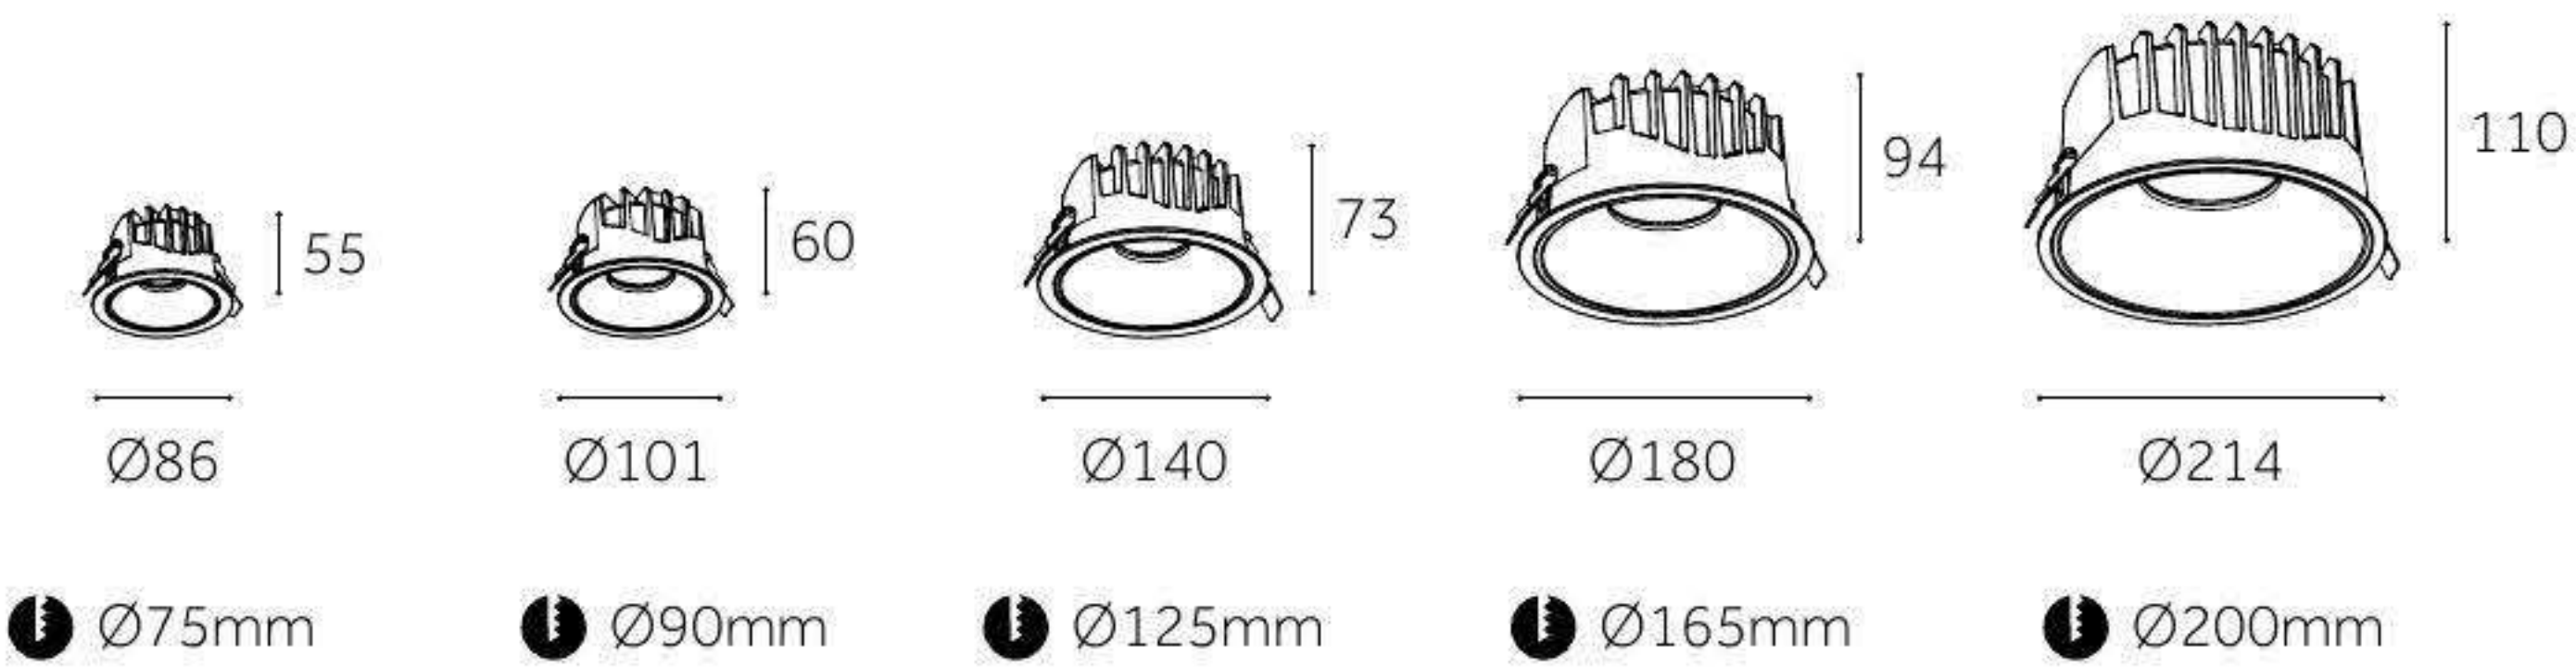




	SM-75C	SM-95C	SM-125C
Type	Adjustable 30°+350°	Adjustable 30°+350°	Adjustable 30°+350°
Wattage	10W	20W	30W
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
Lumen (lm)	1100	2200	3300
Cut-out (mm)	Ø75	Ø95	Ø125
Size (DxHmm)	Ø85x80	Ø104x108	Ø132x127
N.W/PC (kgs)	0.3	0.51	0.84
Q'ty/CTN (pcs)	50	30	20

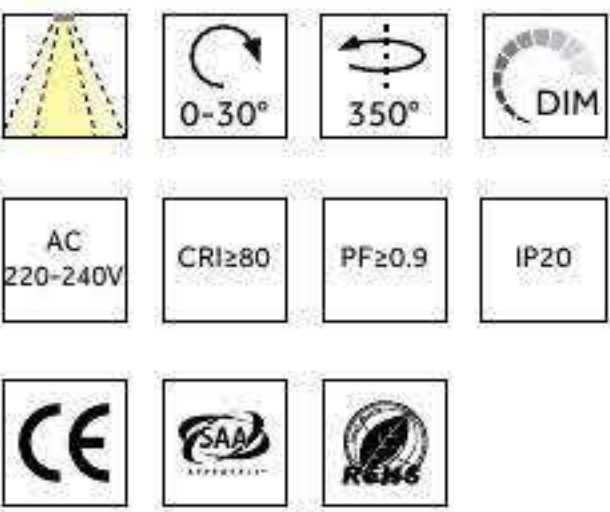

- FINISH:** ☐ White ☒ Black
- CCT:** 3000K 6000K
- OPTIONAL:** ☐ Bright white ☒ Bright black ☐ Gun black ☐ Silver ☐ Matt silver
- DIMMING:** ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

MAMBA Series The asymmetrical radiator design of the integrated radiator shows its individual appearance. It can be rotated 360°, the maximum swing angle is 30°. Available to use in various scenes and projects. Few spotlights on the market can achieve deep anti-glare, and can do UGR<10 with honeycomb.

Dimension(mm)

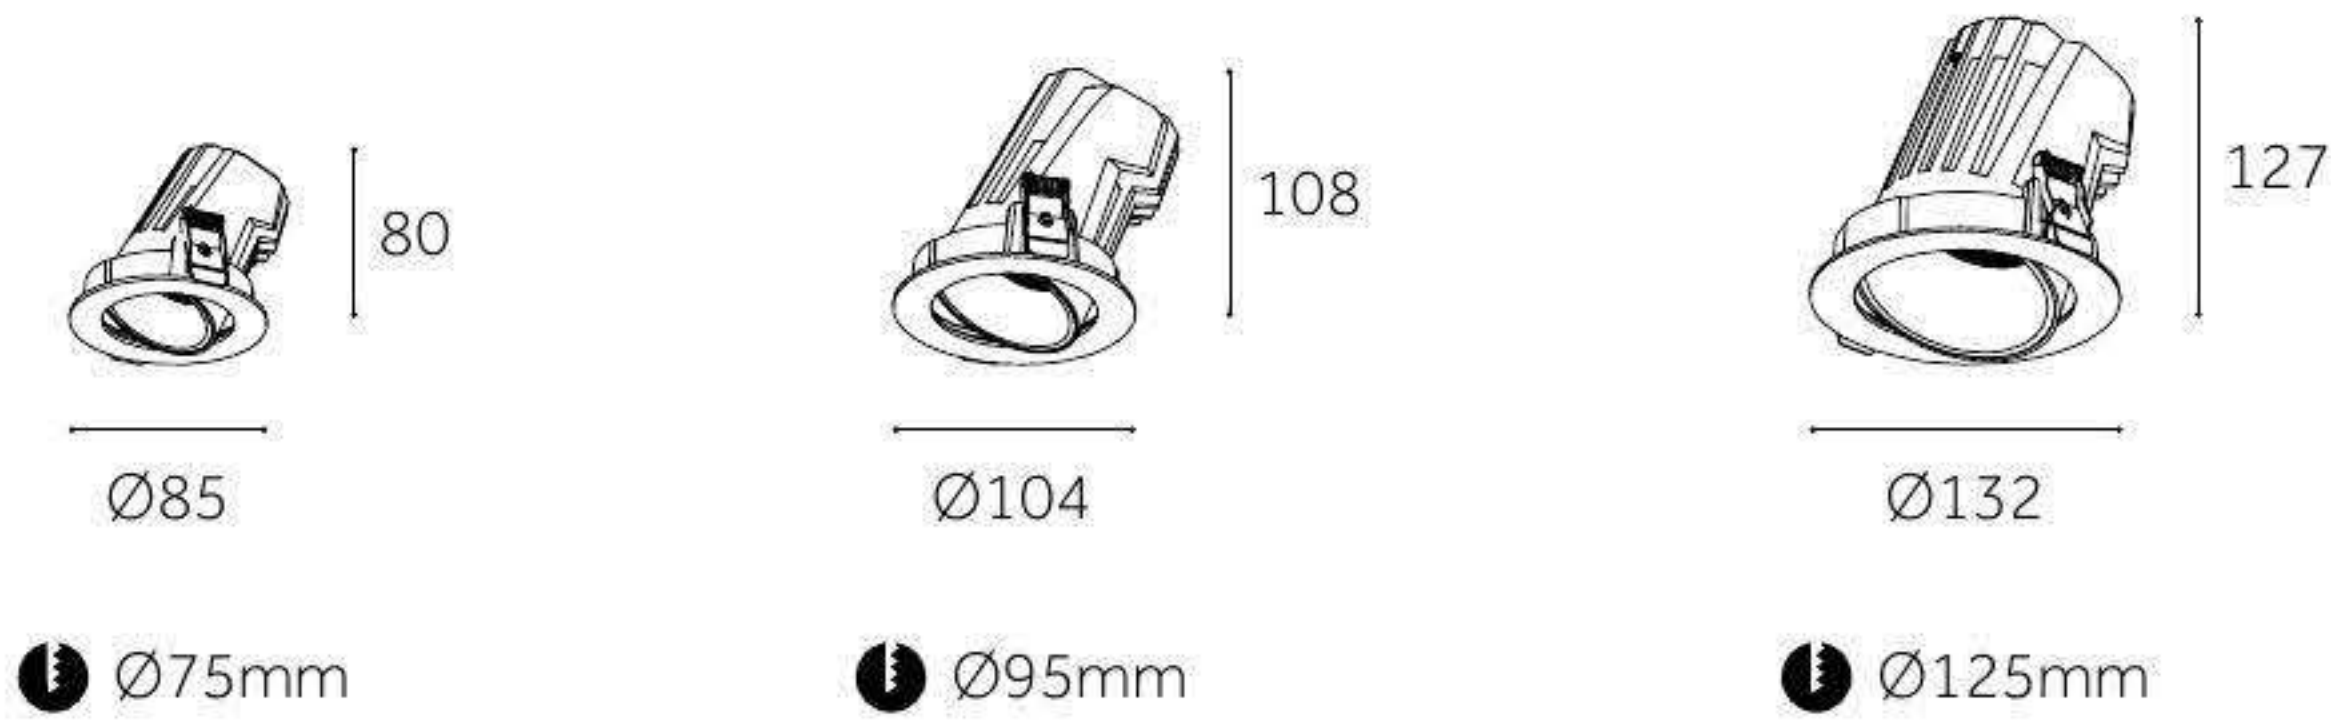

DOWN LIGHT
(COB)

RAINBOW

LED Downlight



RINGS FOR OPTIONAL




- White
- Gold
- Silver mist
- Rose gold
- Bright silver
- Matte black
- Gun color

7 color rings for optional.



LED downlight with die-casting housing, provides perfect and comfortable lighting and excellent thermal dissipation.

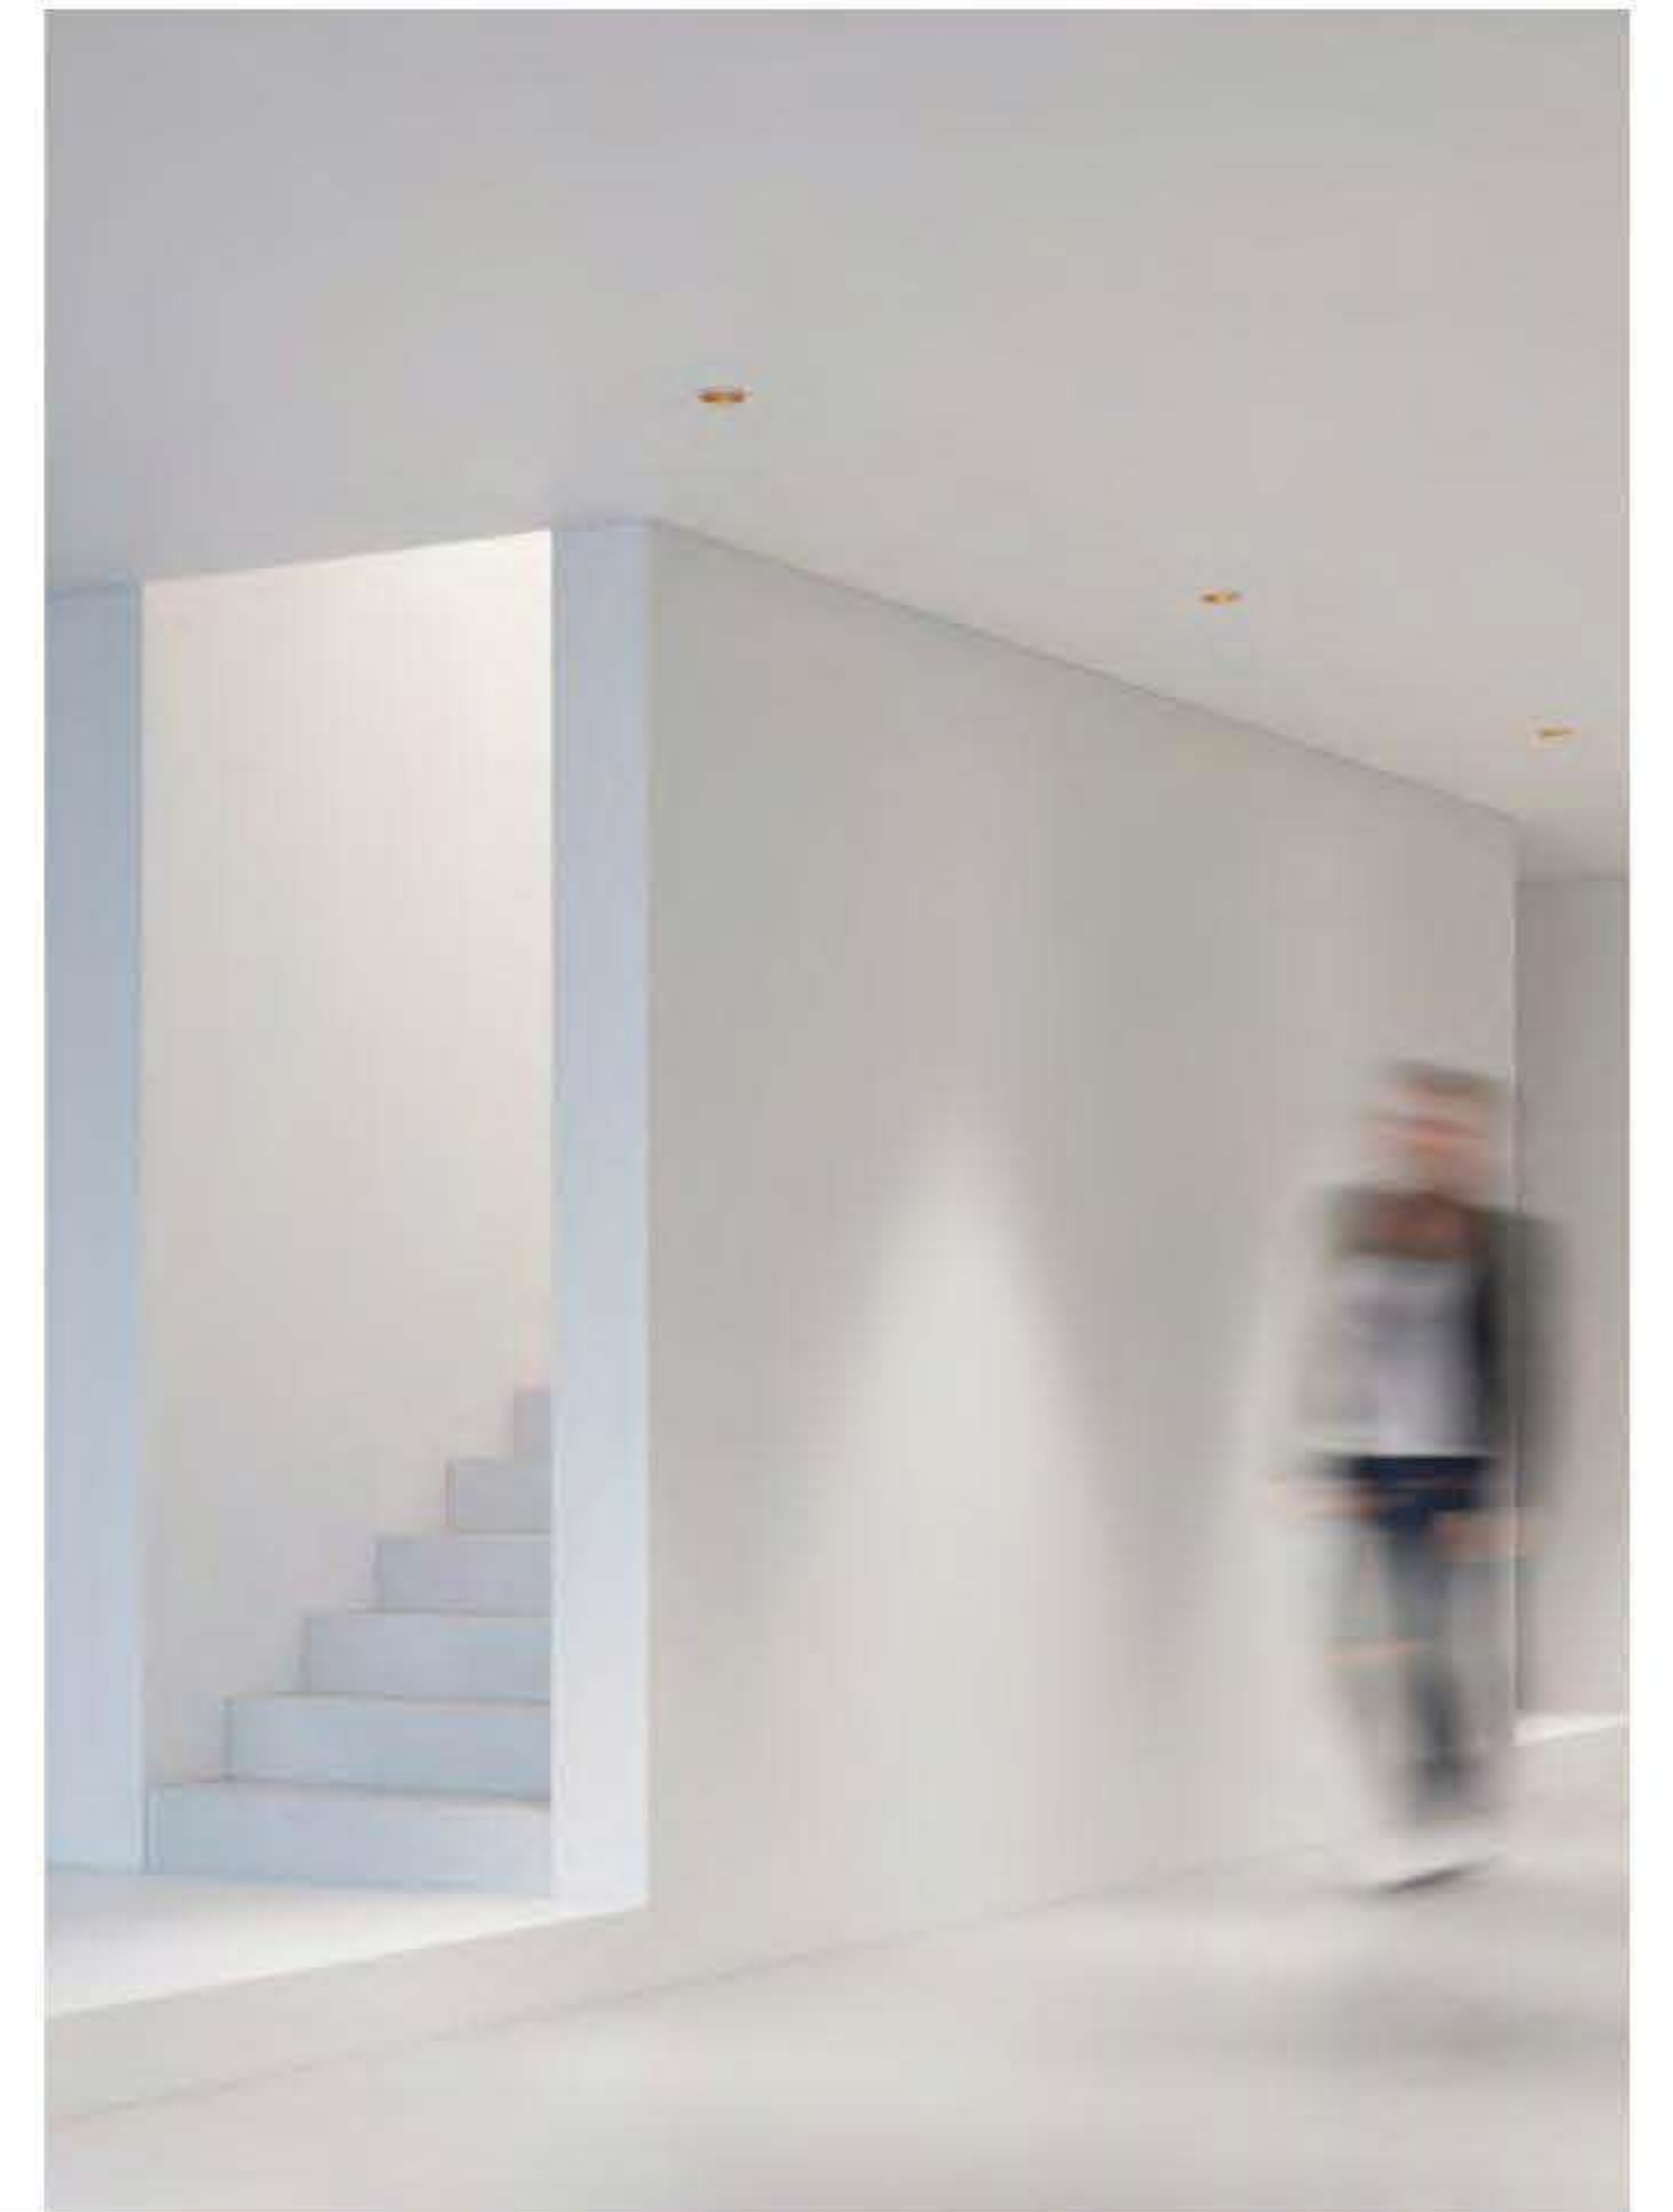


DOWN LIGHT
(COB)

RAINBOW Downlight Series

RECESSED



	TL-65C	TL-75C
Type	Fixed	Fixed
Wattage	7W	10W
Beam Angle	15°/24°/36°	15°/24°/36°
Lumen (lm)	662	950
Cut-out (mm)	Ø65	Ø75
Size (DxHmm)	Ø75x60	Ø85x78
N.W/PC (kgs)	0.25	0.3
Q'ty/CTN (pcs)	36	36

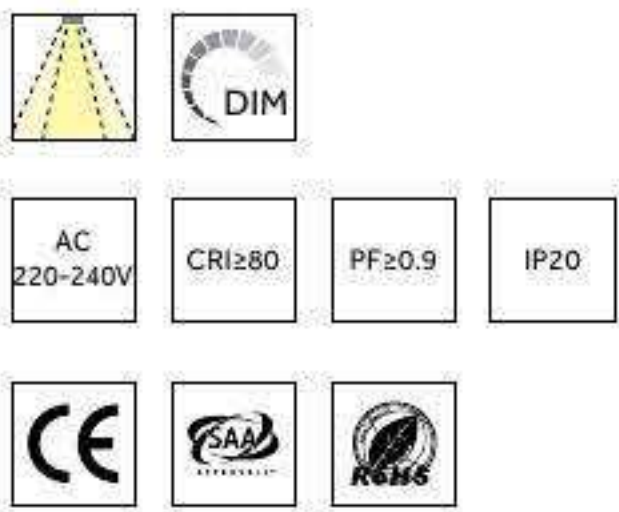

- FINISH:** ☐ White ☒ Black
- CCT:**

3000K6000K
- OPTIONAL:** ☐ White ☒ Silver mist ☐ Bright silver ☐ Gun color
☒ Gold ☐ Rose gold ☐ Matte black
- DIMMING:** ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

RAINBOW Series LED Downlight with high efficiency Bridgelux COB chip, wtih external driver.
7 color rings for optional, meet your different needs.

Dimension(mm)



SPRING Downlight Series


RECESSED



DOWN LIGHT (COB)

DOWN LIGHT (COB)

Type	DS-2022C				DS-2023C			
	Fixed				Adjustable 15°			
Wattage	7W	12W	20W	30W	7W	12W	20W	30W
Beam Angle	38°				24°/38°			
Lumen (lm)	722	1232	2051	3143	735	1232	2051	3143
Cut-out (mm) ⓘ	Ø75	Ø90	Ø115	Ø145	Ø75	Ø85	Ø120	Ø140
Size (DxHmm)	Ø83x81	Ø100x105	Ø130x116	Ø160x125	Ø85x57	Ø97x73	Ø130x88	Ø165x95
N.W/PC (kgs)	0.21	0.23	0.52	0.7	0.22	0.32	0.58	0.75
Q'ty/CTN (pcs)	48	36	18	12	48	36	18	12


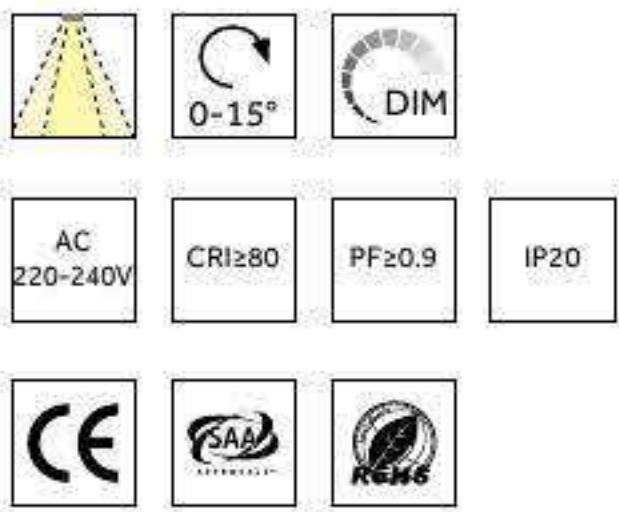



FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

SPRING Series LED downligh with high efficiency COB LED chip, external driver. Narrow frame design.

Dimension(mm)

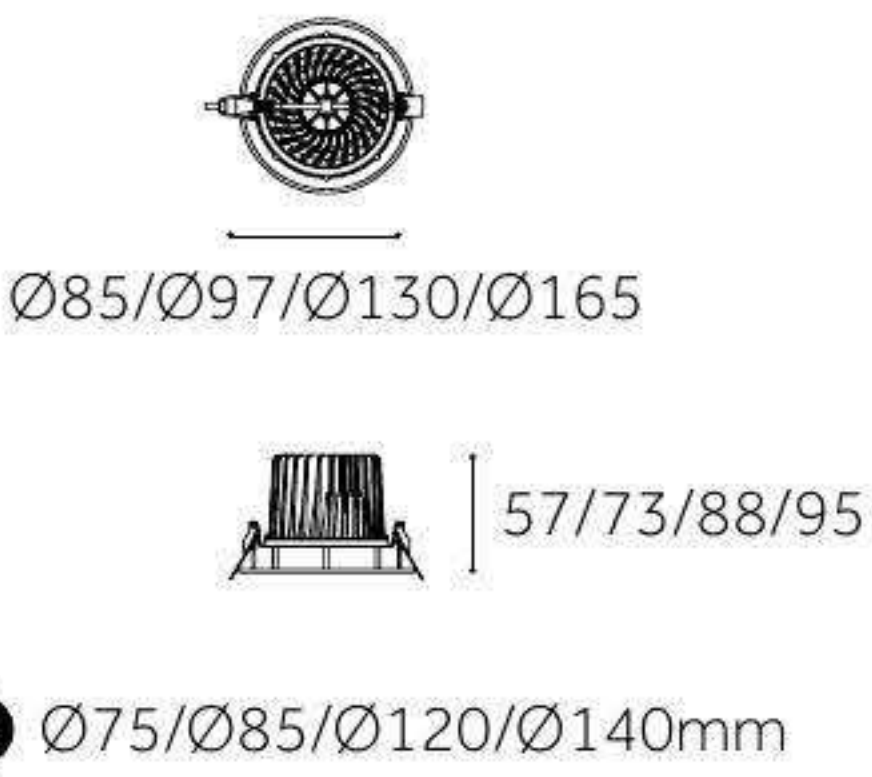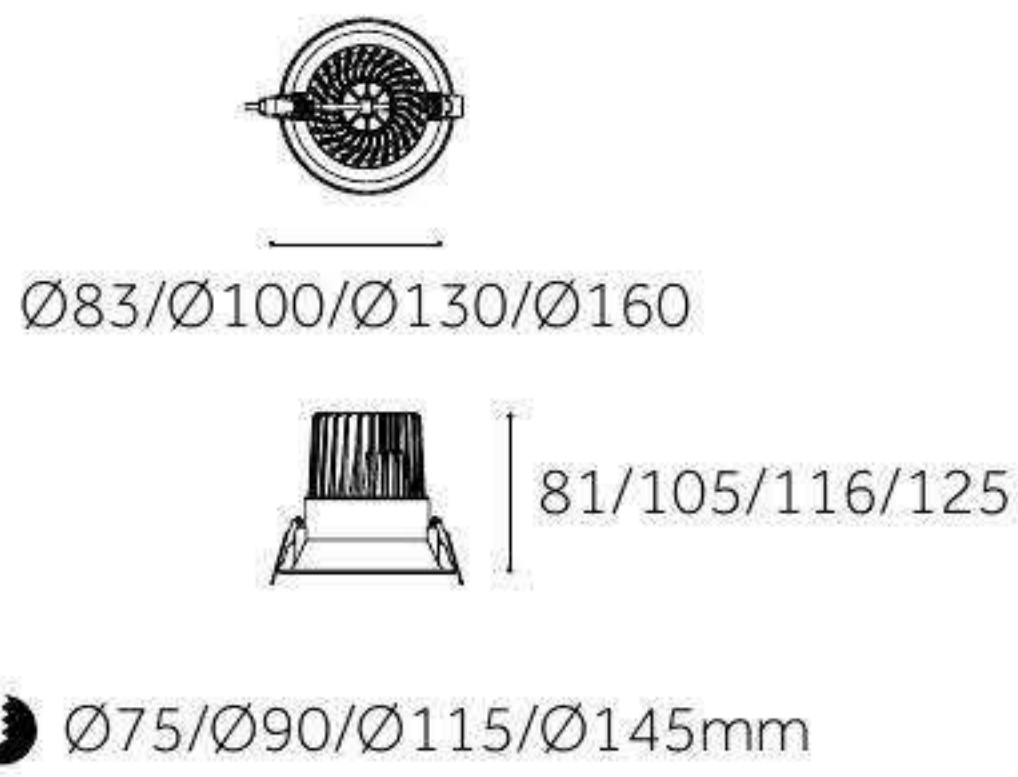

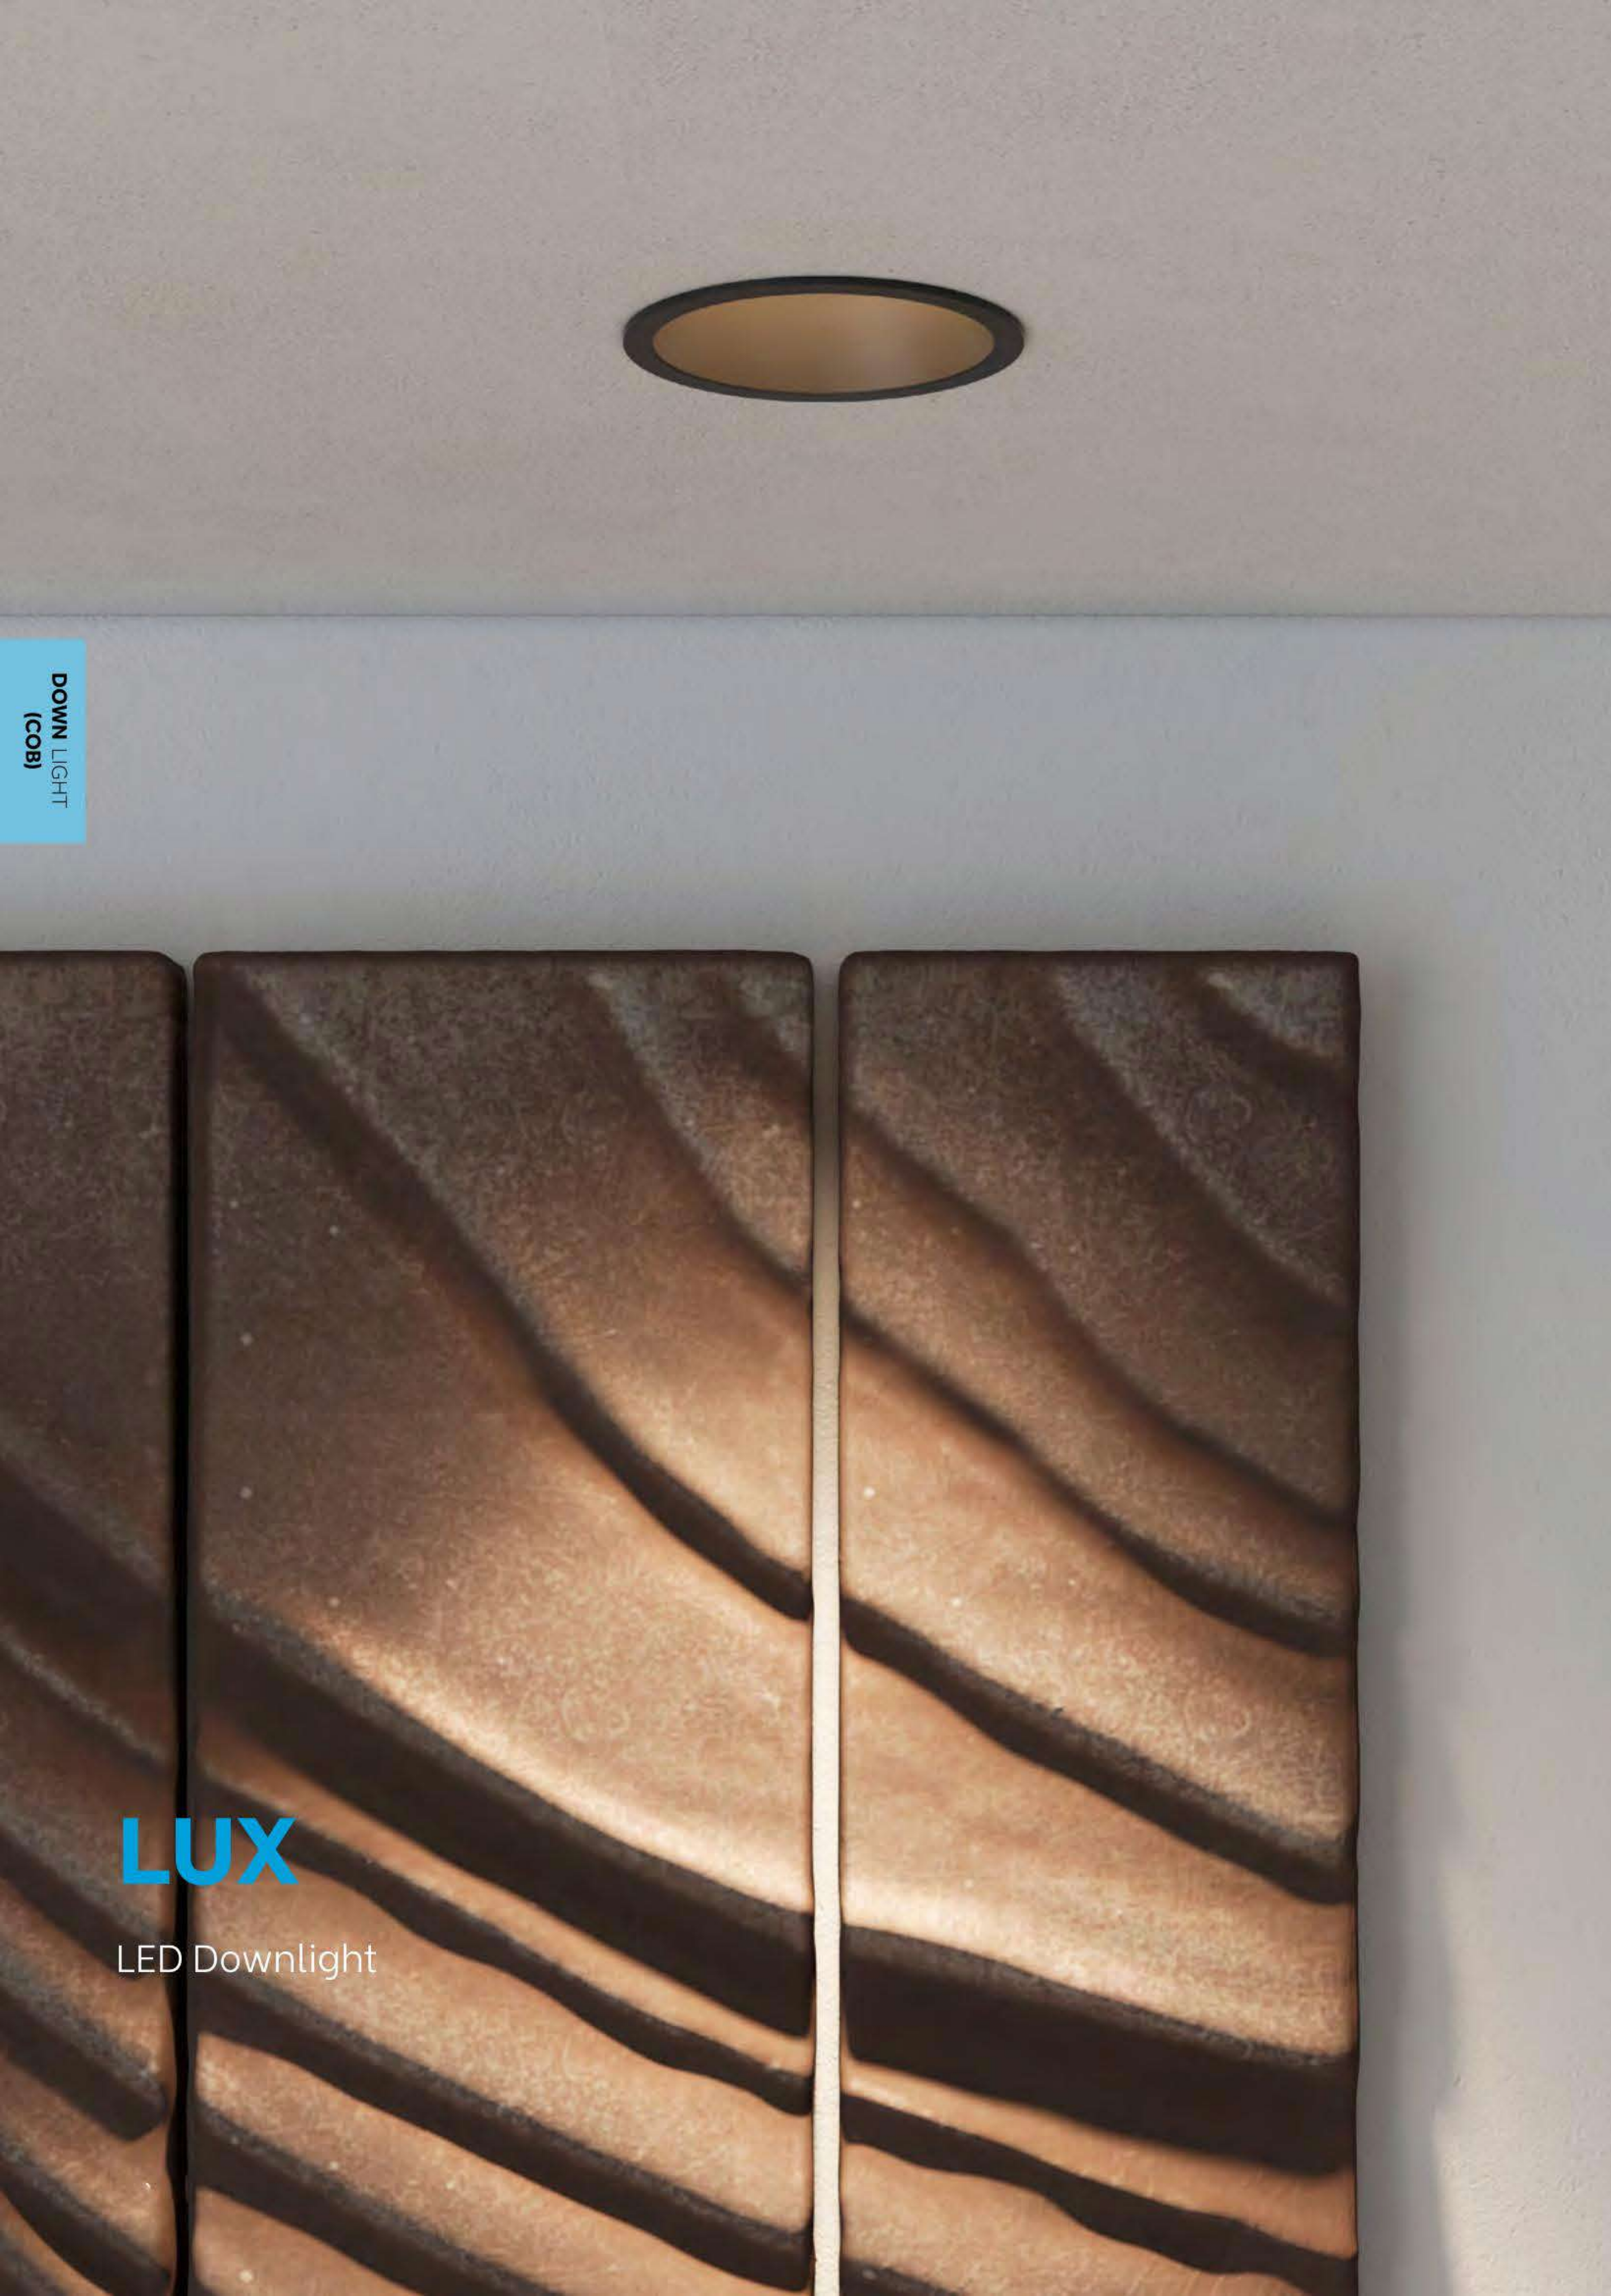

DOWN LIGHT
(COB)

LUX

LED Downlight



IP54

DOWN LIGHT
(COB)


RECESSED SPOTLIGHT

High CRI downlight is available in two versions, fixed or tilting. One heat sink can do three items Downlight, easily to change the frame.






	LUX-DL03D-C	LUX-SP03D-C	LUX-DL03D-1-C
Type	Fixed	Adjustable 15°	Fixed
Wattage	10W	10W	10W
Beam Angle	36°/60°	15°/24°/38°/60°	36°/60°
Lumen (lm)	978	978	978
Cut-out (mm) ⓘ	Ø75-85	Ø85-95	Ø90
Size (DxHmm)	Ø90x52	Ø102x58	Ø102x70
N.W/PC (kgs)	0.3	0.37	0.34
Q'ty/CTN (pcs)	50	50	50

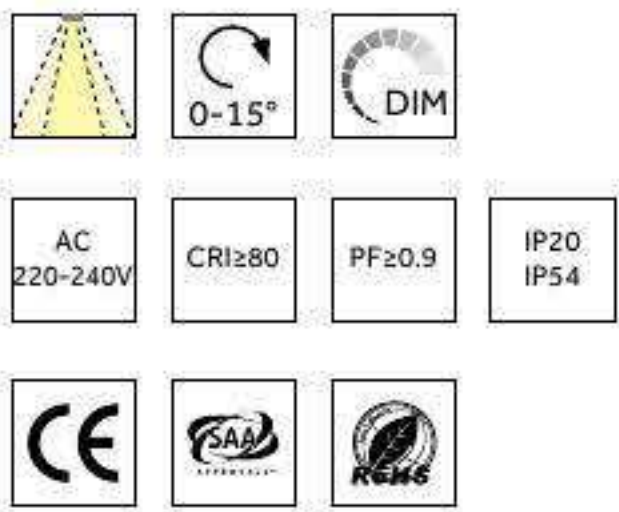

FINISH: ○ White ● Silver ● Black **CCT:** 3000K 6000K


DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

LUX Series with COB Bridgelux LED chip, external driver. Luminarie color can be black, white and silver for optional. One heat sink can do three Downlight, easily to change the frame. Fixed Downlight and adjustable Downlight for optional.

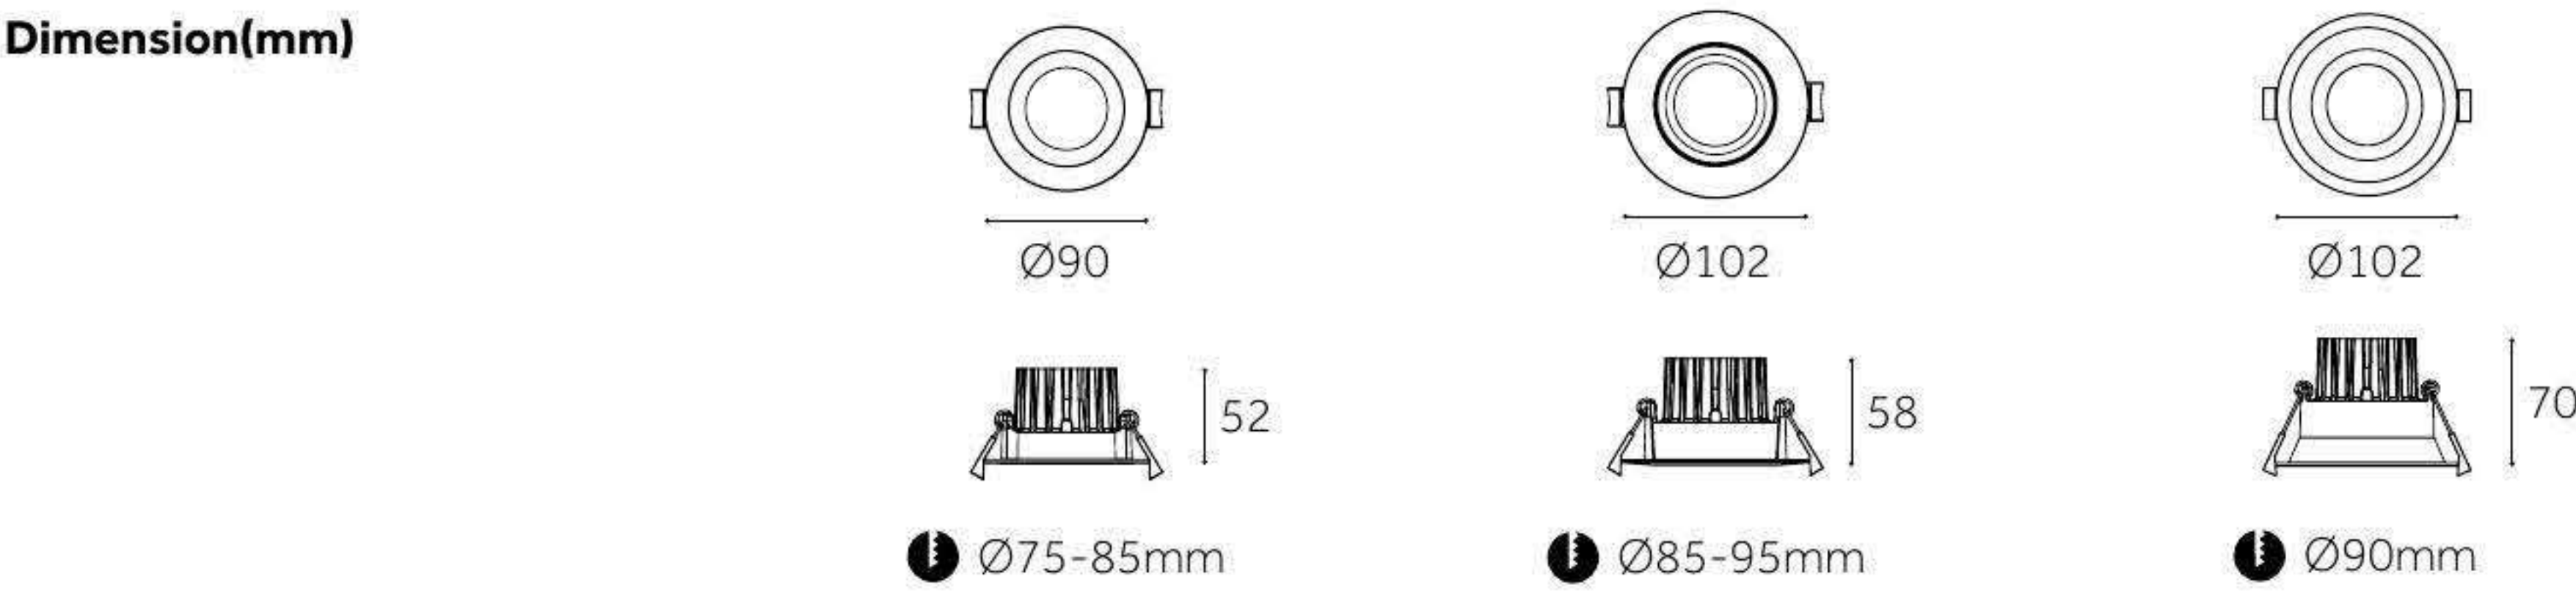



	GE-04GM	GE-05TM	GE-06RM
Type	Fixed	Adjustable 70°	Adjustable 70°
Wattage	9W/12W/14W/21W	9W/12W/14W/21W	9W/12W/14W/21W
Beam Angle	16°/24°/50°	16°/24°/50°	16°/24°/50°
Lumen (lm)	1081/1415/1679/2438	1081/1415/1679/2438	874/1150/1369/1990
Cut-out (mm)	Ø110	Ø110	Ø110
Size (DxHmm)	Ø120x88	Ø120x97	Ø120x97
N.W/PC (kgs)	0.53	0.53	0.54
Q'ty/CTN (pcs)	18	18	18

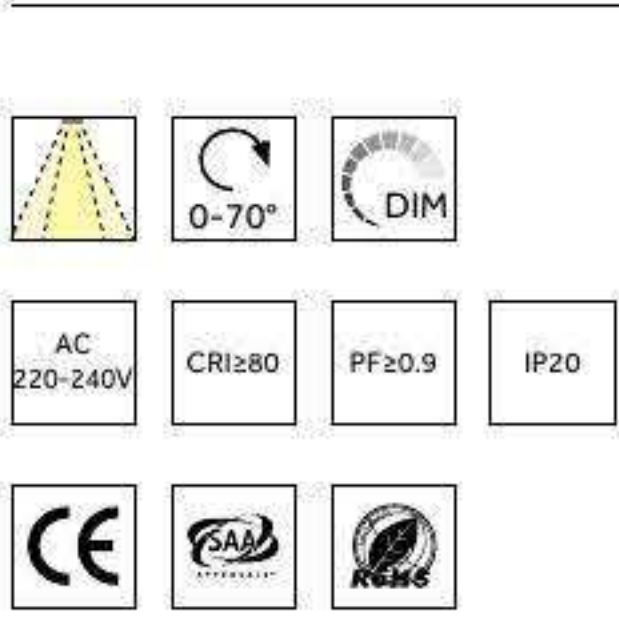


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminaire color can be black, white and silver for optional. Durable die-casting aluminum body with good heat sink. High efficiency COB chip. Multi-reflectors for your optional.

Dimension(mm)

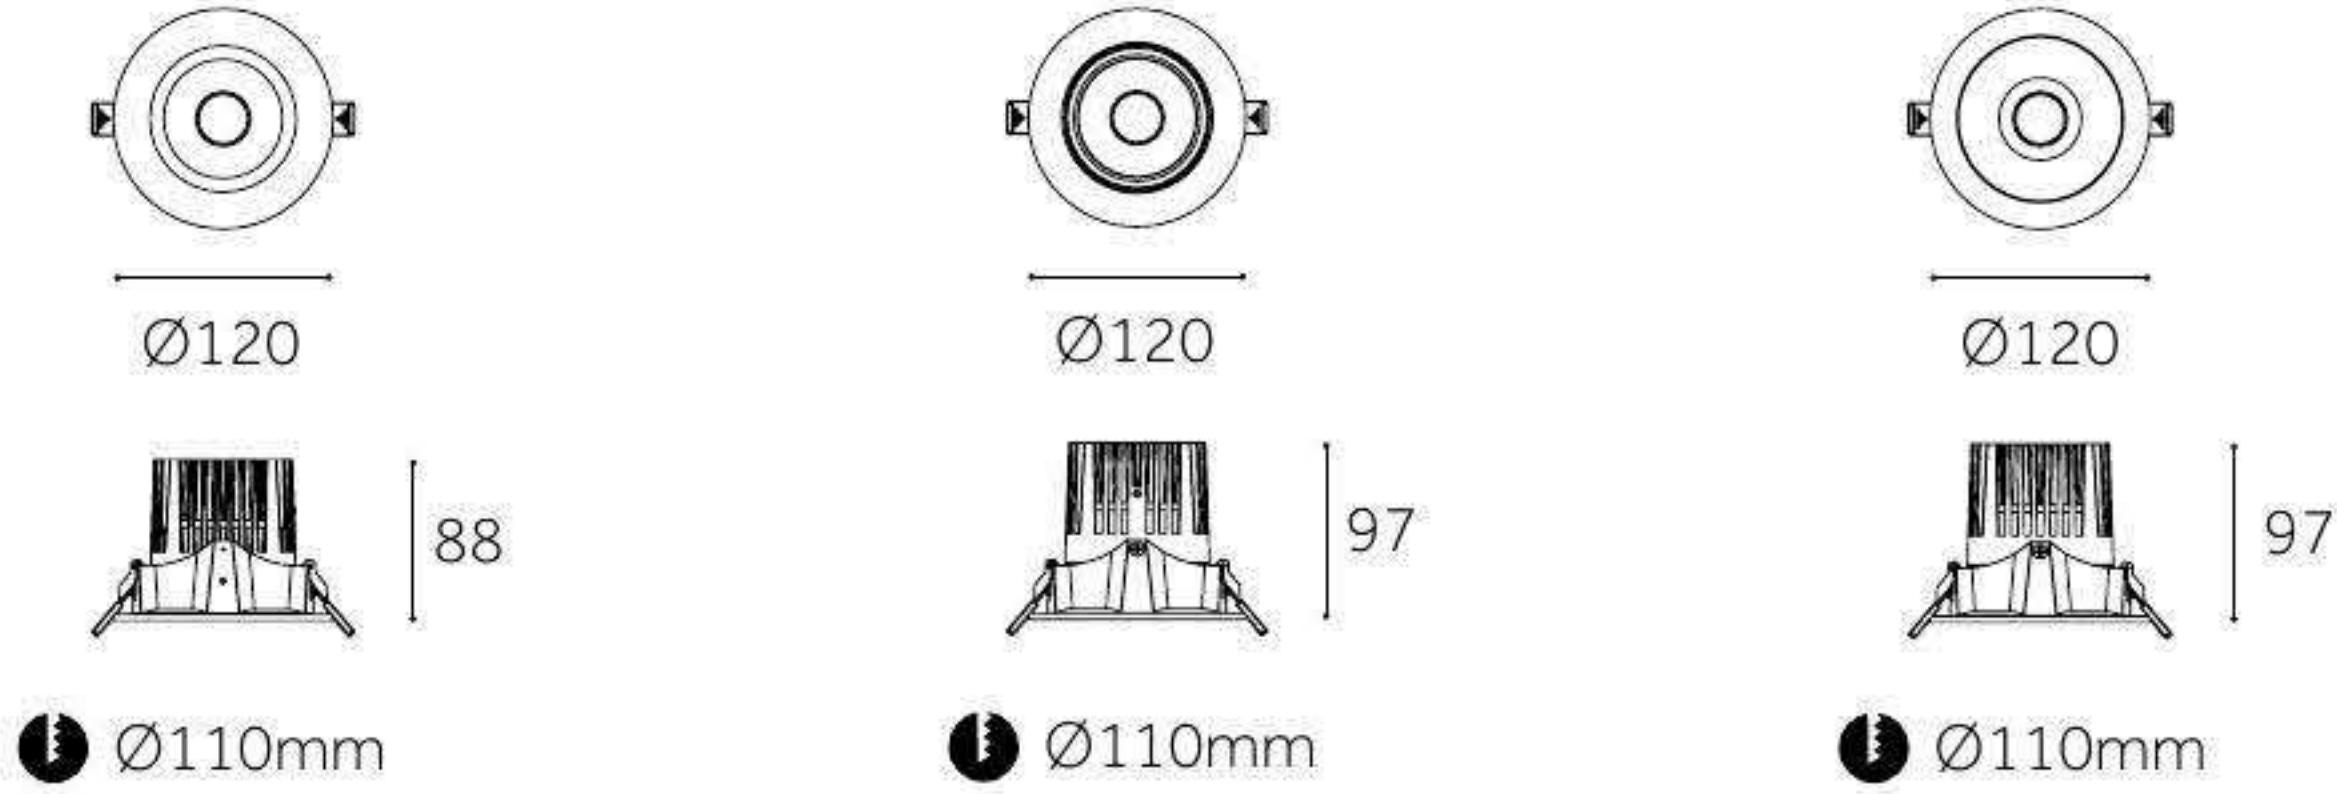




	DS-4809C	DS-4815C	DS-4820C	DS-4824C	DS-4830C	DS-4840C
Type	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	9W	15W	20W	24W	30W	40W
Beam Angle	60°	60°	60°	60°	60°	60°
Lumen (lm)	725-828	1208-1380	1610-1840	1932-2208	2415-2760	3220-3680
Cut-out (mm) ⓘ	Ø75	Ø90	Ø110	Ø135	Ø160	Ø190-200
Size (DxHmm)	Ø83x49	Ø100x56	Ø122x66	Ø145x76	Ø173x86	Ø210x103
N.W/PC (kgs)	0.18	0.27	0.42	0.48	0.64	0.94
Q'ty/CTN (pcs)	100	50	30	20	20	10

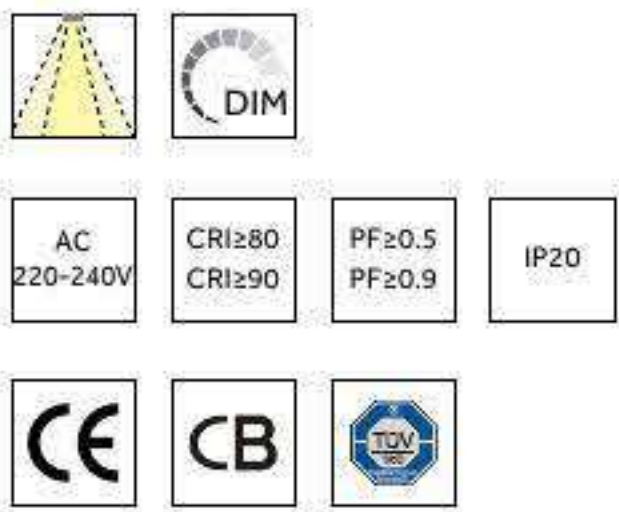


FINISH: ☐ White ☒ Black **CCT:** ☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting





VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

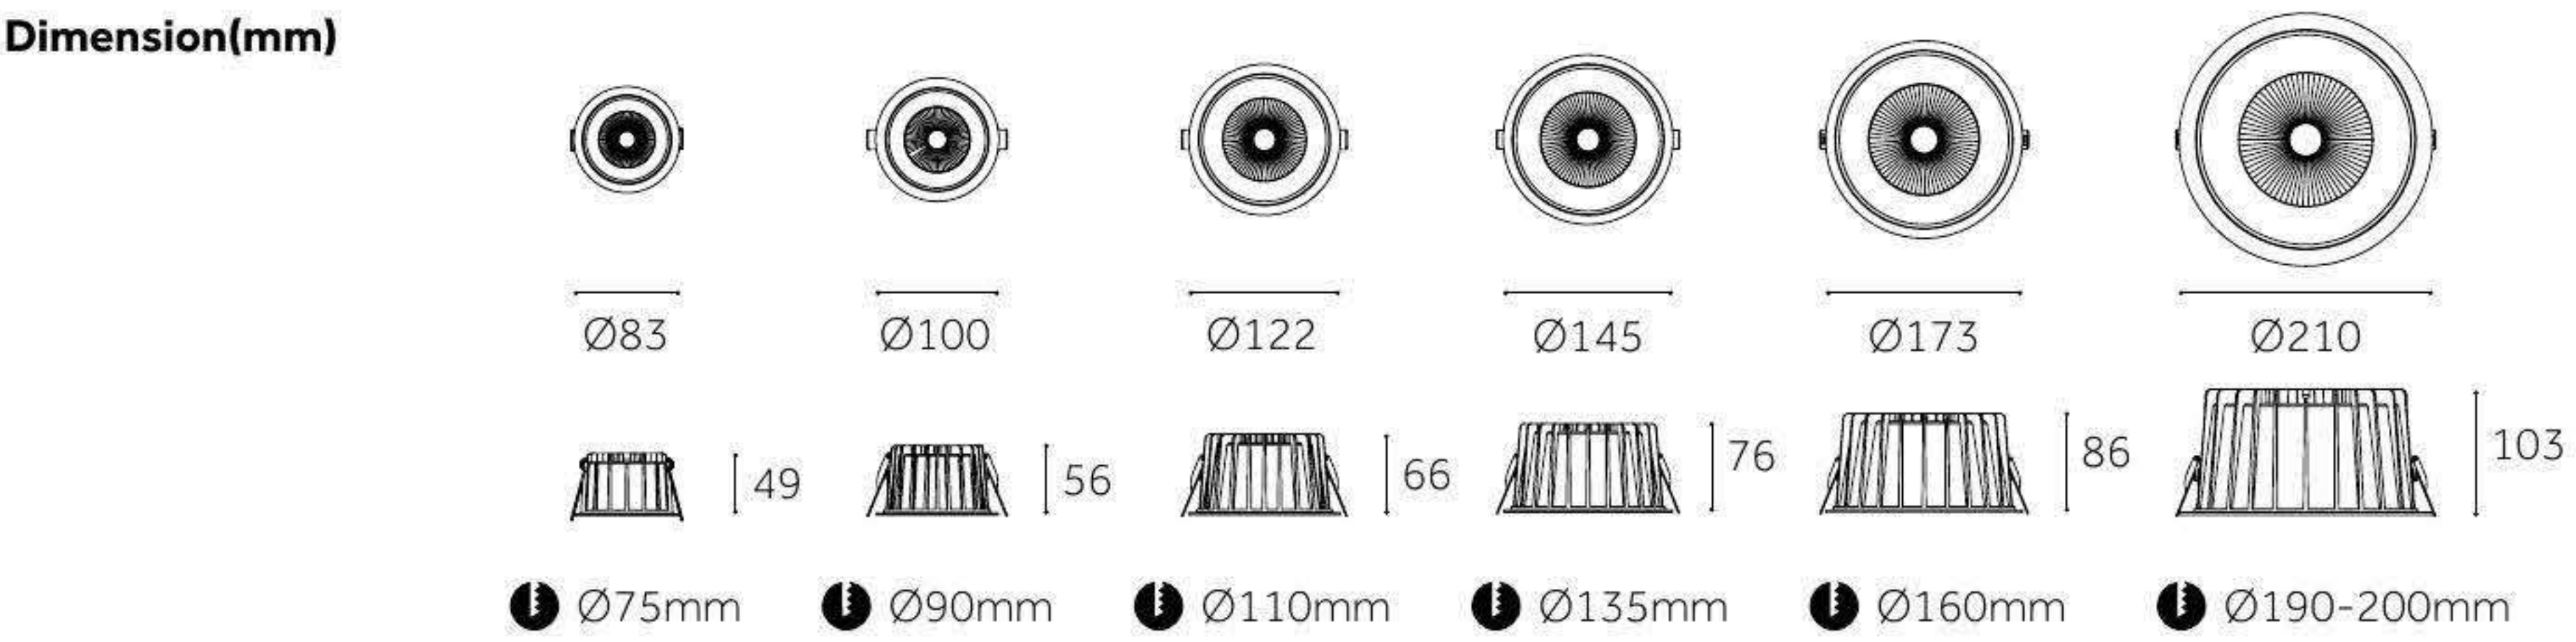

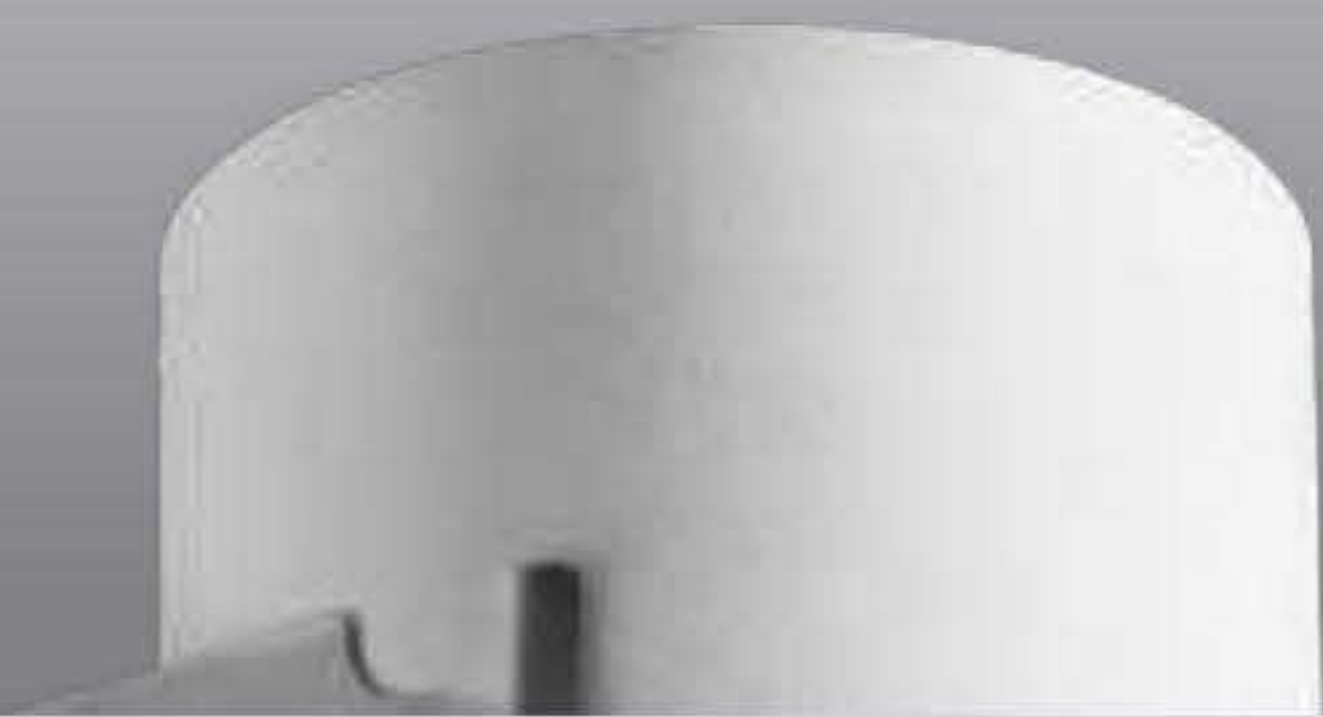

	DS-4706C	DS-4709C	DS-4712C
Type	Fixed	Fixed	Fixed
Wattage	6W	9W	12W
Beam Angle	15°/30°/45°	15°/30°/45°	15°/30°/45°
Lumen (lm)	483-552	725-828	966-1104
Cut-out (mm) ⓘ	Ø55	Ø75	Ø75
Size (DxHmm)	Ø60x50	Ø85x66	Ø85x66
N.W/PC (kgs)	0.16	0.22	0.22
Q'ty/CTN (pcs)	100	50	50

Dimension(mm)

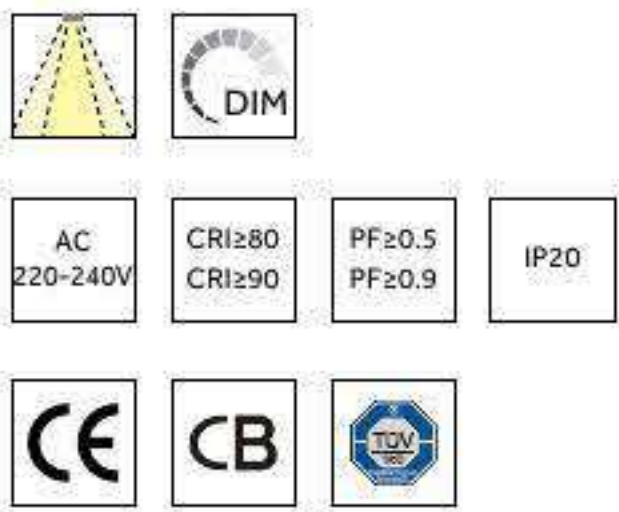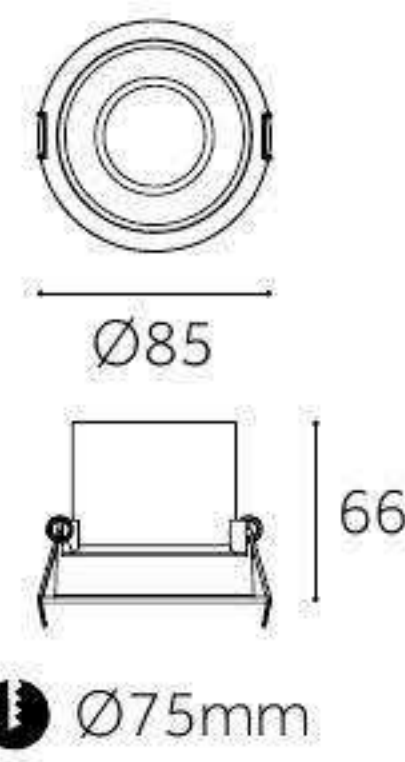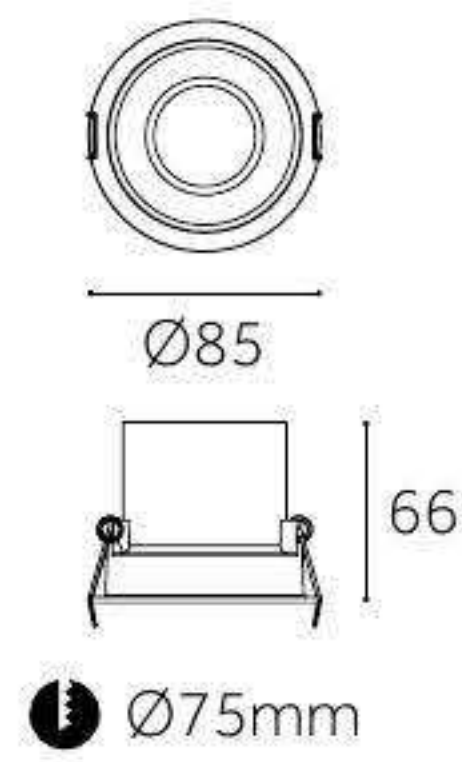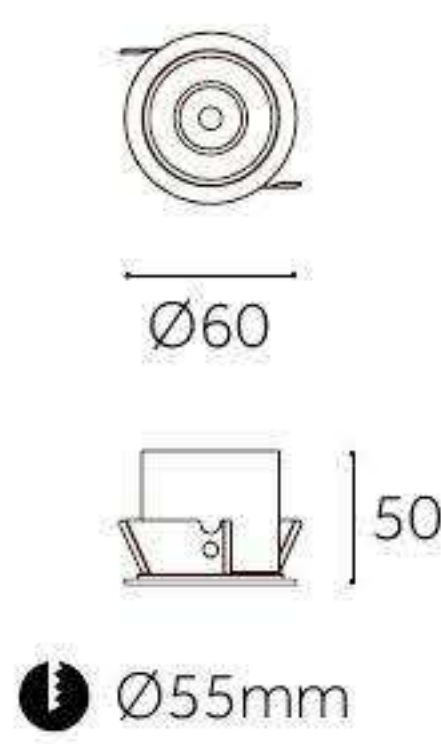


FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.



	DS-4851R		DS-4852R	
Type	Fixed		Fixed	
Wattage	12W	15W	20W	24W
Beam Angle	12°		12°	
Lumen (lm)	966-1104	1208-1380	1610-1840	1932-2208
Cut-out (mm) ⓘ	Ø75		Ø95	
Size (DxHmm)	Ø85x80		Ø105x100	
N.W/PC (kgs)	0.34		0.64	
Q'ty/CTN (pcs)	50		50	30




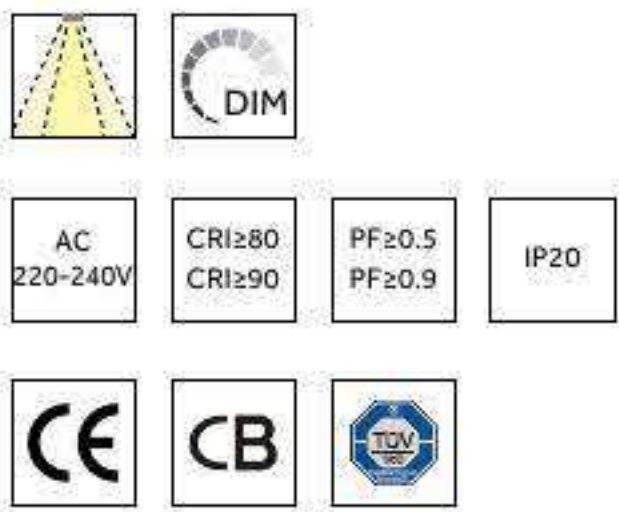


FINISH: ☐ White ☒ Black **CCT:** ☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

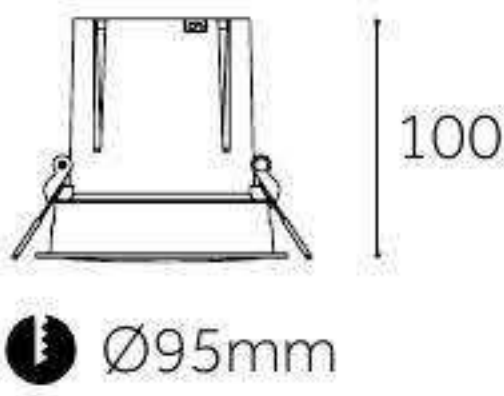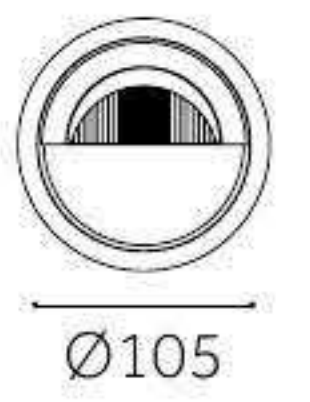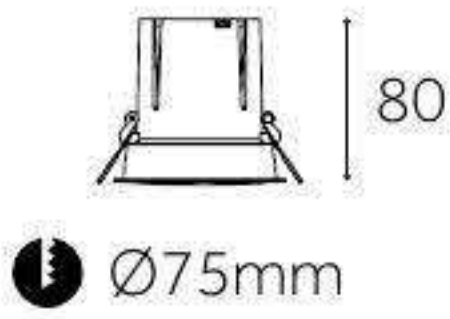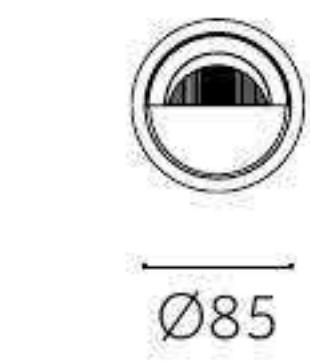




	DS-6102C		DS-6103C	DS-6104C	DS-6105C	DS-6106C	DS-6109C
Type	Fixed		Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	6W	9W	12W	15W	20W	30W	40W
Beam Angle	24°/38°		24°/38°	24°/38°	24°/38°	24°/38°	24°/38°
Lumen (lm)	483-552	725-828	966-1104	1208-1380	1610-1840	2415-2760	3220-3680
Cut-out (mm)	Ø75		Ø75	Ø95	Ø125	Ø125	Ø150
Size (DxHmm)	Ø85x88		Ø85x100	Ø105x110	Ø138x123	Ø138x138	Ø160x150
N.W/PC (kgs)	0.2		0.27	0.36	0.59	0.73	0.88
Q'ty/CTN (pcs)	50		50	50	12	8	8

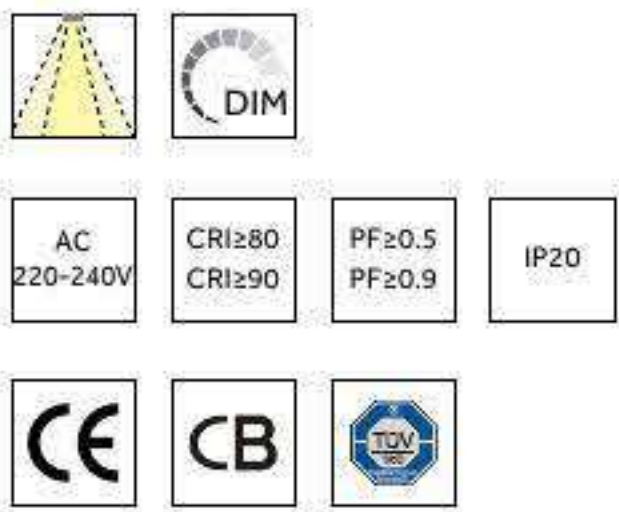

FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

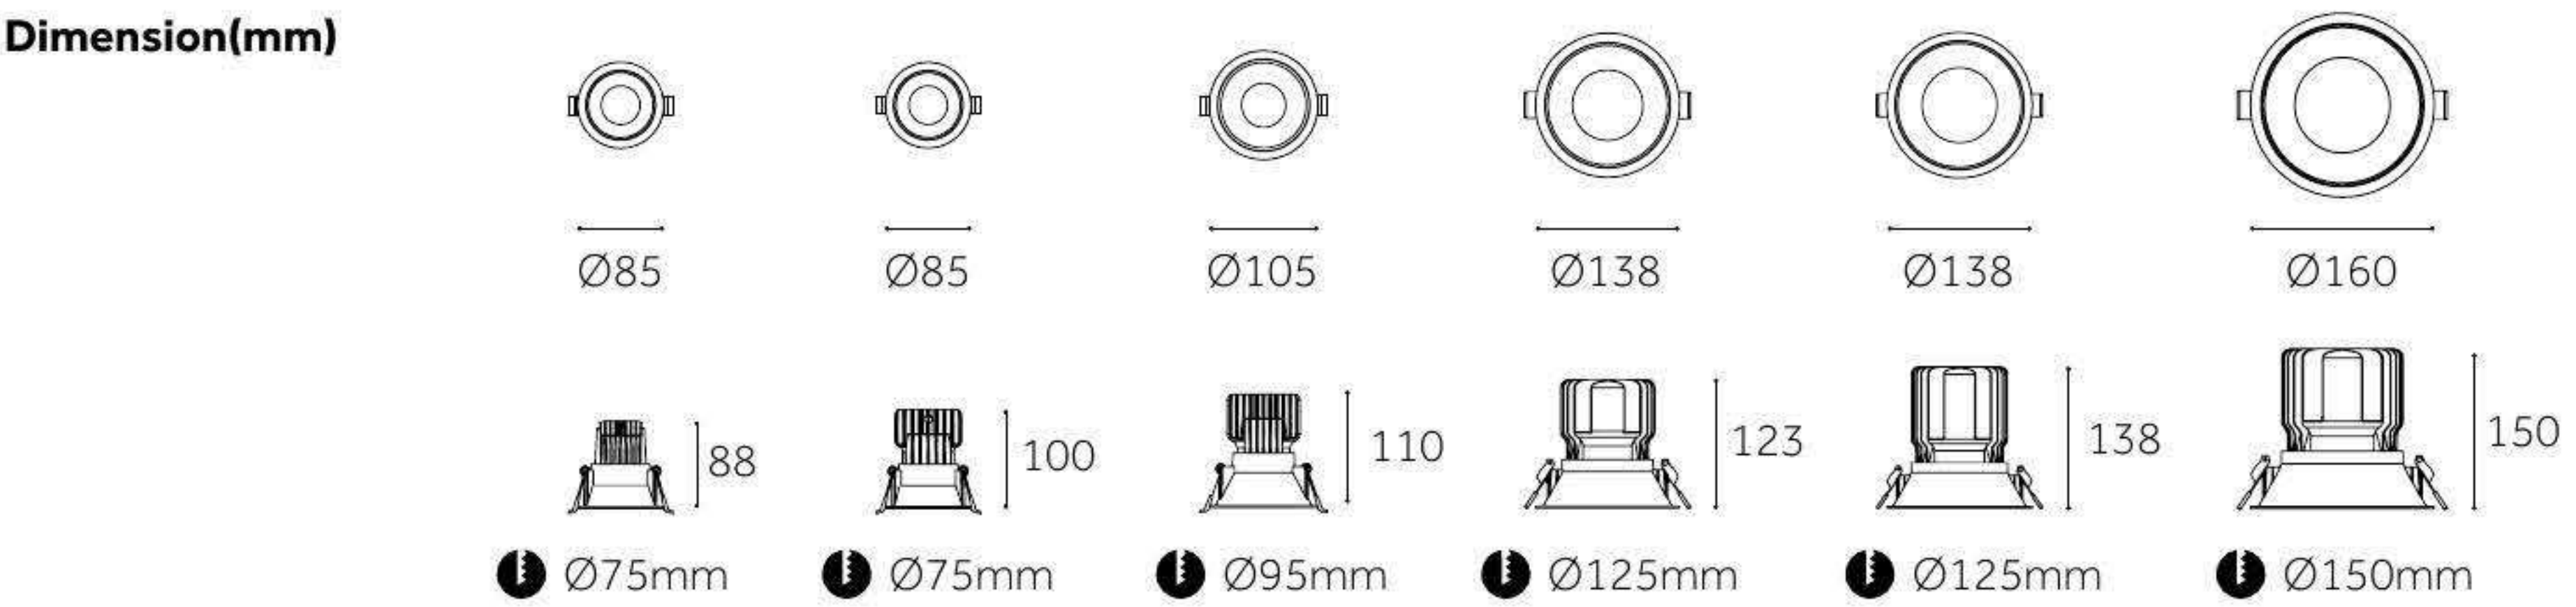


DOWN LIGHT
(COB)



	DS-6112C		DS-6113C
Type	Fixed		Fixed
Wattage	6W	9W	12W
Beam Angle	24°/38°		24°/38°
Lumen (lm)	483-552	725-828	966-1104
Cut-out (mm)	75x75		75x75
Size (DxHmm)	85x85x88		85x85x100
N.W/PC (kgs)	0.21		0.27
Q'ty/CTN (pcs)	50		50

DOWN LIGHT
(COB)


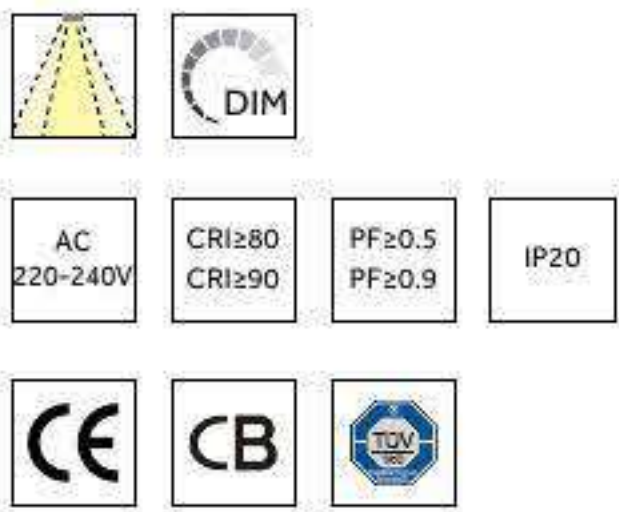


FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K



DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VELA Series Attractive appearance, high quality pure alluminium housing, good heat dissipation and erosion resistant. Adopts constant current supply to start up the light quickly.

Dimension(mm)

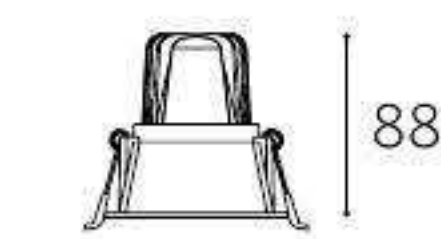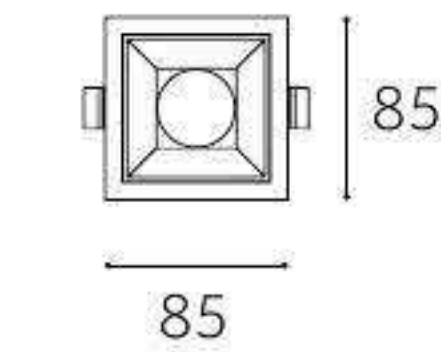


75x75mm

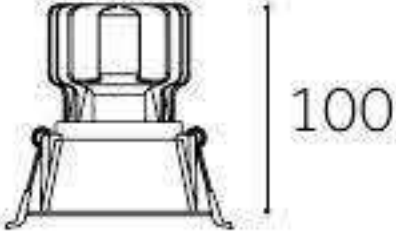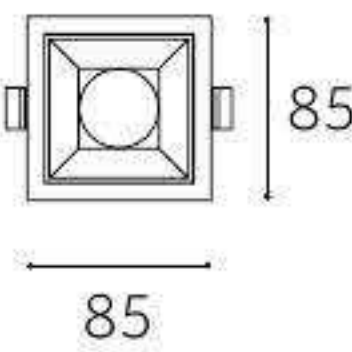

75x75mm

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)

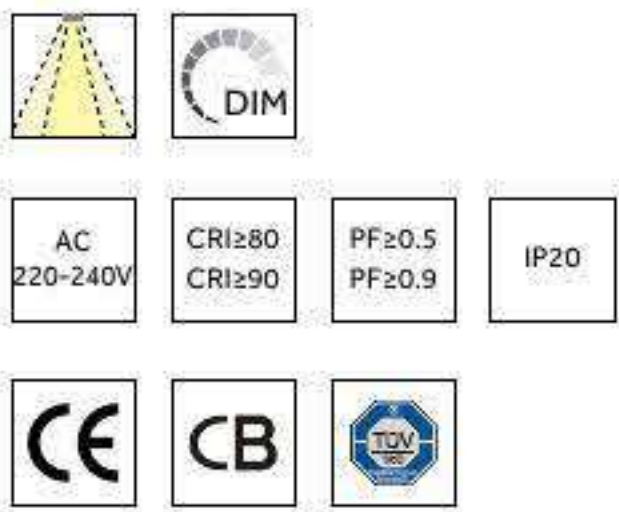


FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

	DS-6704C	DS-6705C	DS-6706C	DS-6707C
Type	Fixed	Fixed	Fixed	Fixed
Wattage	8W	10W	10W	15W
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°
Lumen (lm)	644-736	805-920	805-920	1208-1380
Cut-out (mm) ⓘ	Ø55	Ø55	Ø75	Ø75
Size (DxHmm)	Ø63x64	Ø63x85	Ø85x70	Ø85x83
N.W/PC (kgs)	0.15	0.18	0.27	0.3
Q'ty/CTN (pcs)	50	50	50	50

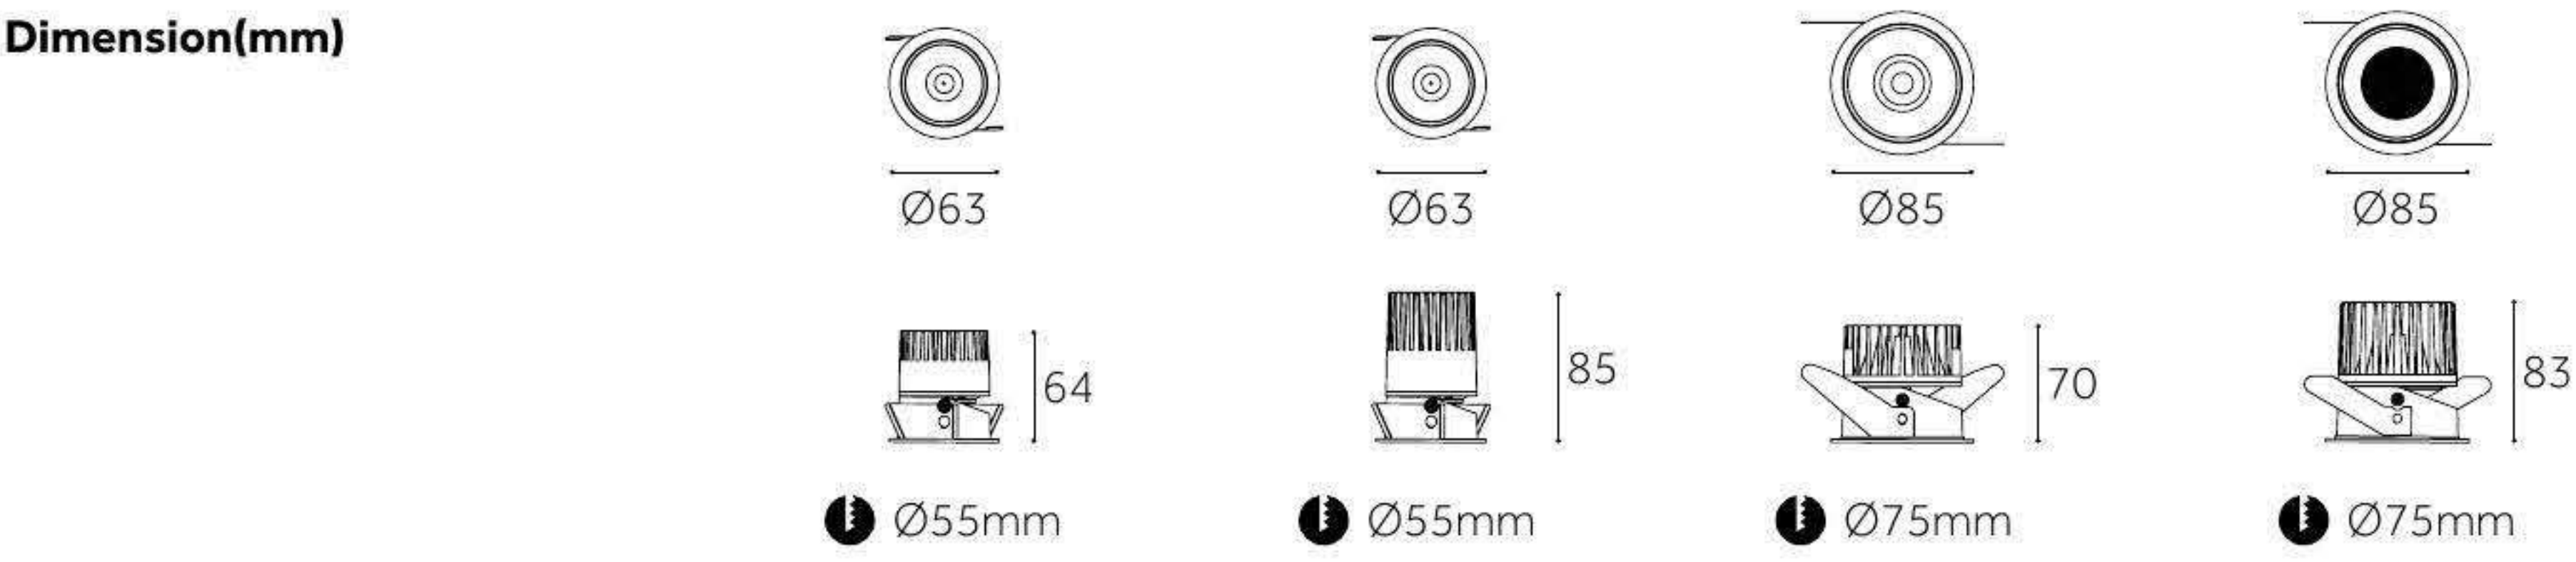



	DS-4071B		DS-4073B	DS-4075B	
Type	Adjustable 30°		Adjustable 30°	Adjustable 30°	
Wattage	12W	15W	20W	28W	33W
Beam Angle	15°/24°/38°		15°/24°/38°	15°/24°/38°	
Lumen (lm)	1104-1242	1380-1553	1840-2070	2576-2898	3036-3416
Cut-out (mm)	Ø115		Ø170	Ø200	
Size (DxHmm)	Ø130x122		Ø190x160	Ø220x189	
N.W/PC (kgs)	0.34		0.81	1.05	
Q'ty/CTN (pcs)	16		12	108	

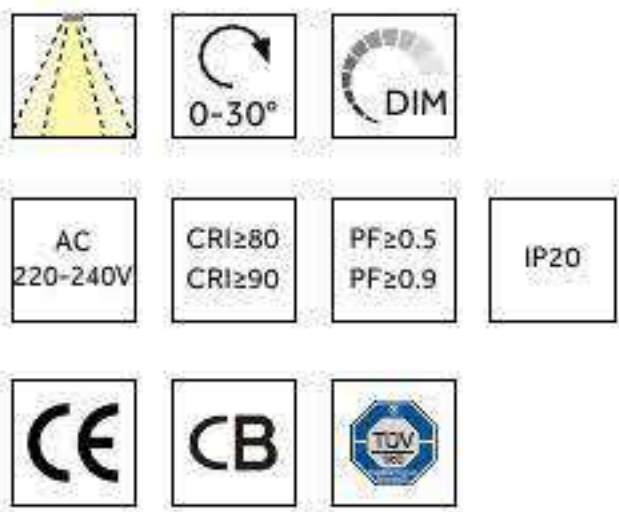


FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K


DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

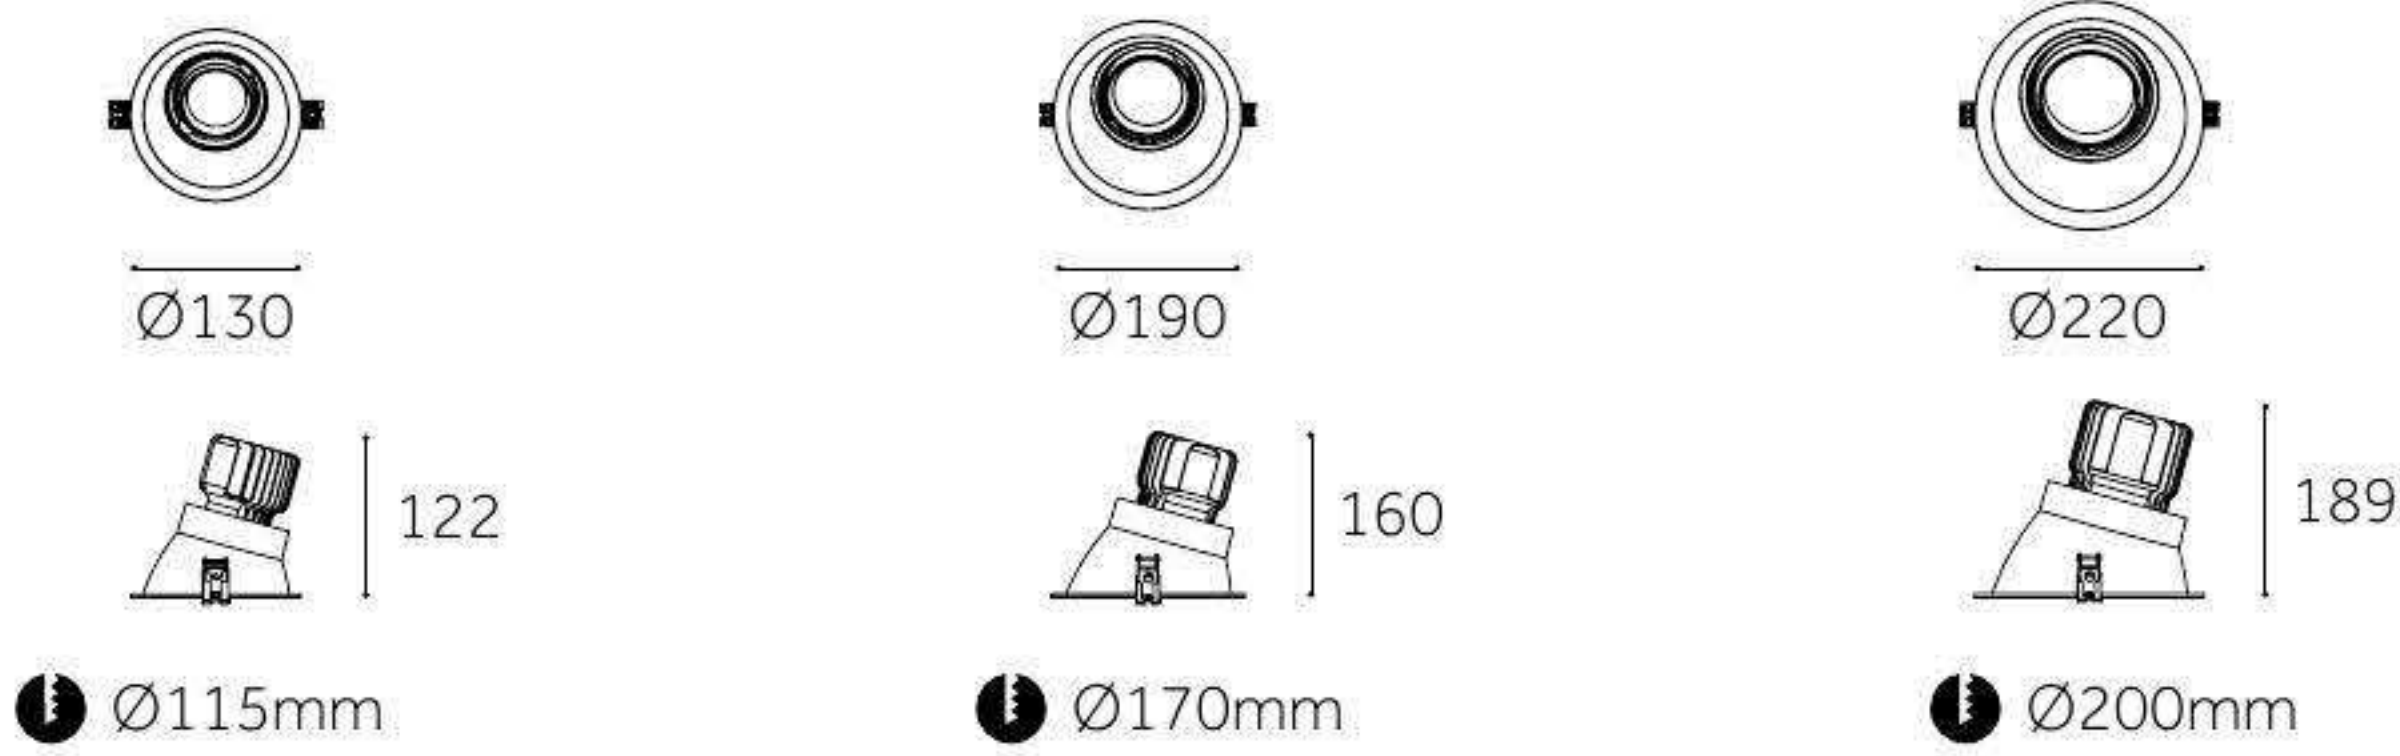

DS-S681

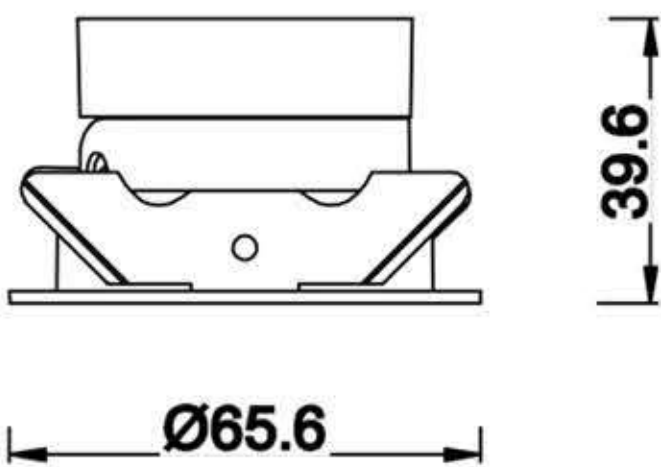

Specifications

Code No	Dimension	Cut hole	Efficiency(lm / w±5%)			Luminous Flux (lm) ±5%			1PCS/Box Size	100PCS/Carton Size
			3000K	4000K	5700K	3000K	4000K	5700K		
DS-S681	Φ46*55mm								10.5*7.7*5.8CM	55*32*26CM
DS- 6810R	Φ65*40mm	Φ55mm	57	61	60	489	523	515	7*7*10.5CM	35*28*25CM
DS- 6811R	Φ65*36mm	Φ55mm	52	56	55	444	476	468	7*7*10.5CM	35*28*25CM
DS- 6812R	Φ65*36mm	Φ55mm	56	60	59	475	510	502	7*7*10.5CM	35*28*25CM
DS- 6816R	Φ59.5*27mm	Φ65mm	58	62	61	490	524	515	9.5*9.5*7CM	45*36*25CM
Watt(W)		9W								
Beam Angle (°)		15°/24°/38°/60°								
CRI		≥90								
Input Voltage(V)		DC40-48V								
IP Rating		IP20								
Operating Temp.(°C)		-20°C~40°C								
Storage Temp.(°C)		-20°C~75°C								
Lifetime (hr)		30,000H								

CCT



Reflector Color Changle



DS- S681



DS-6810R



DS-6811R




DS-6812R



DS-6816R


DS-S682/ S683

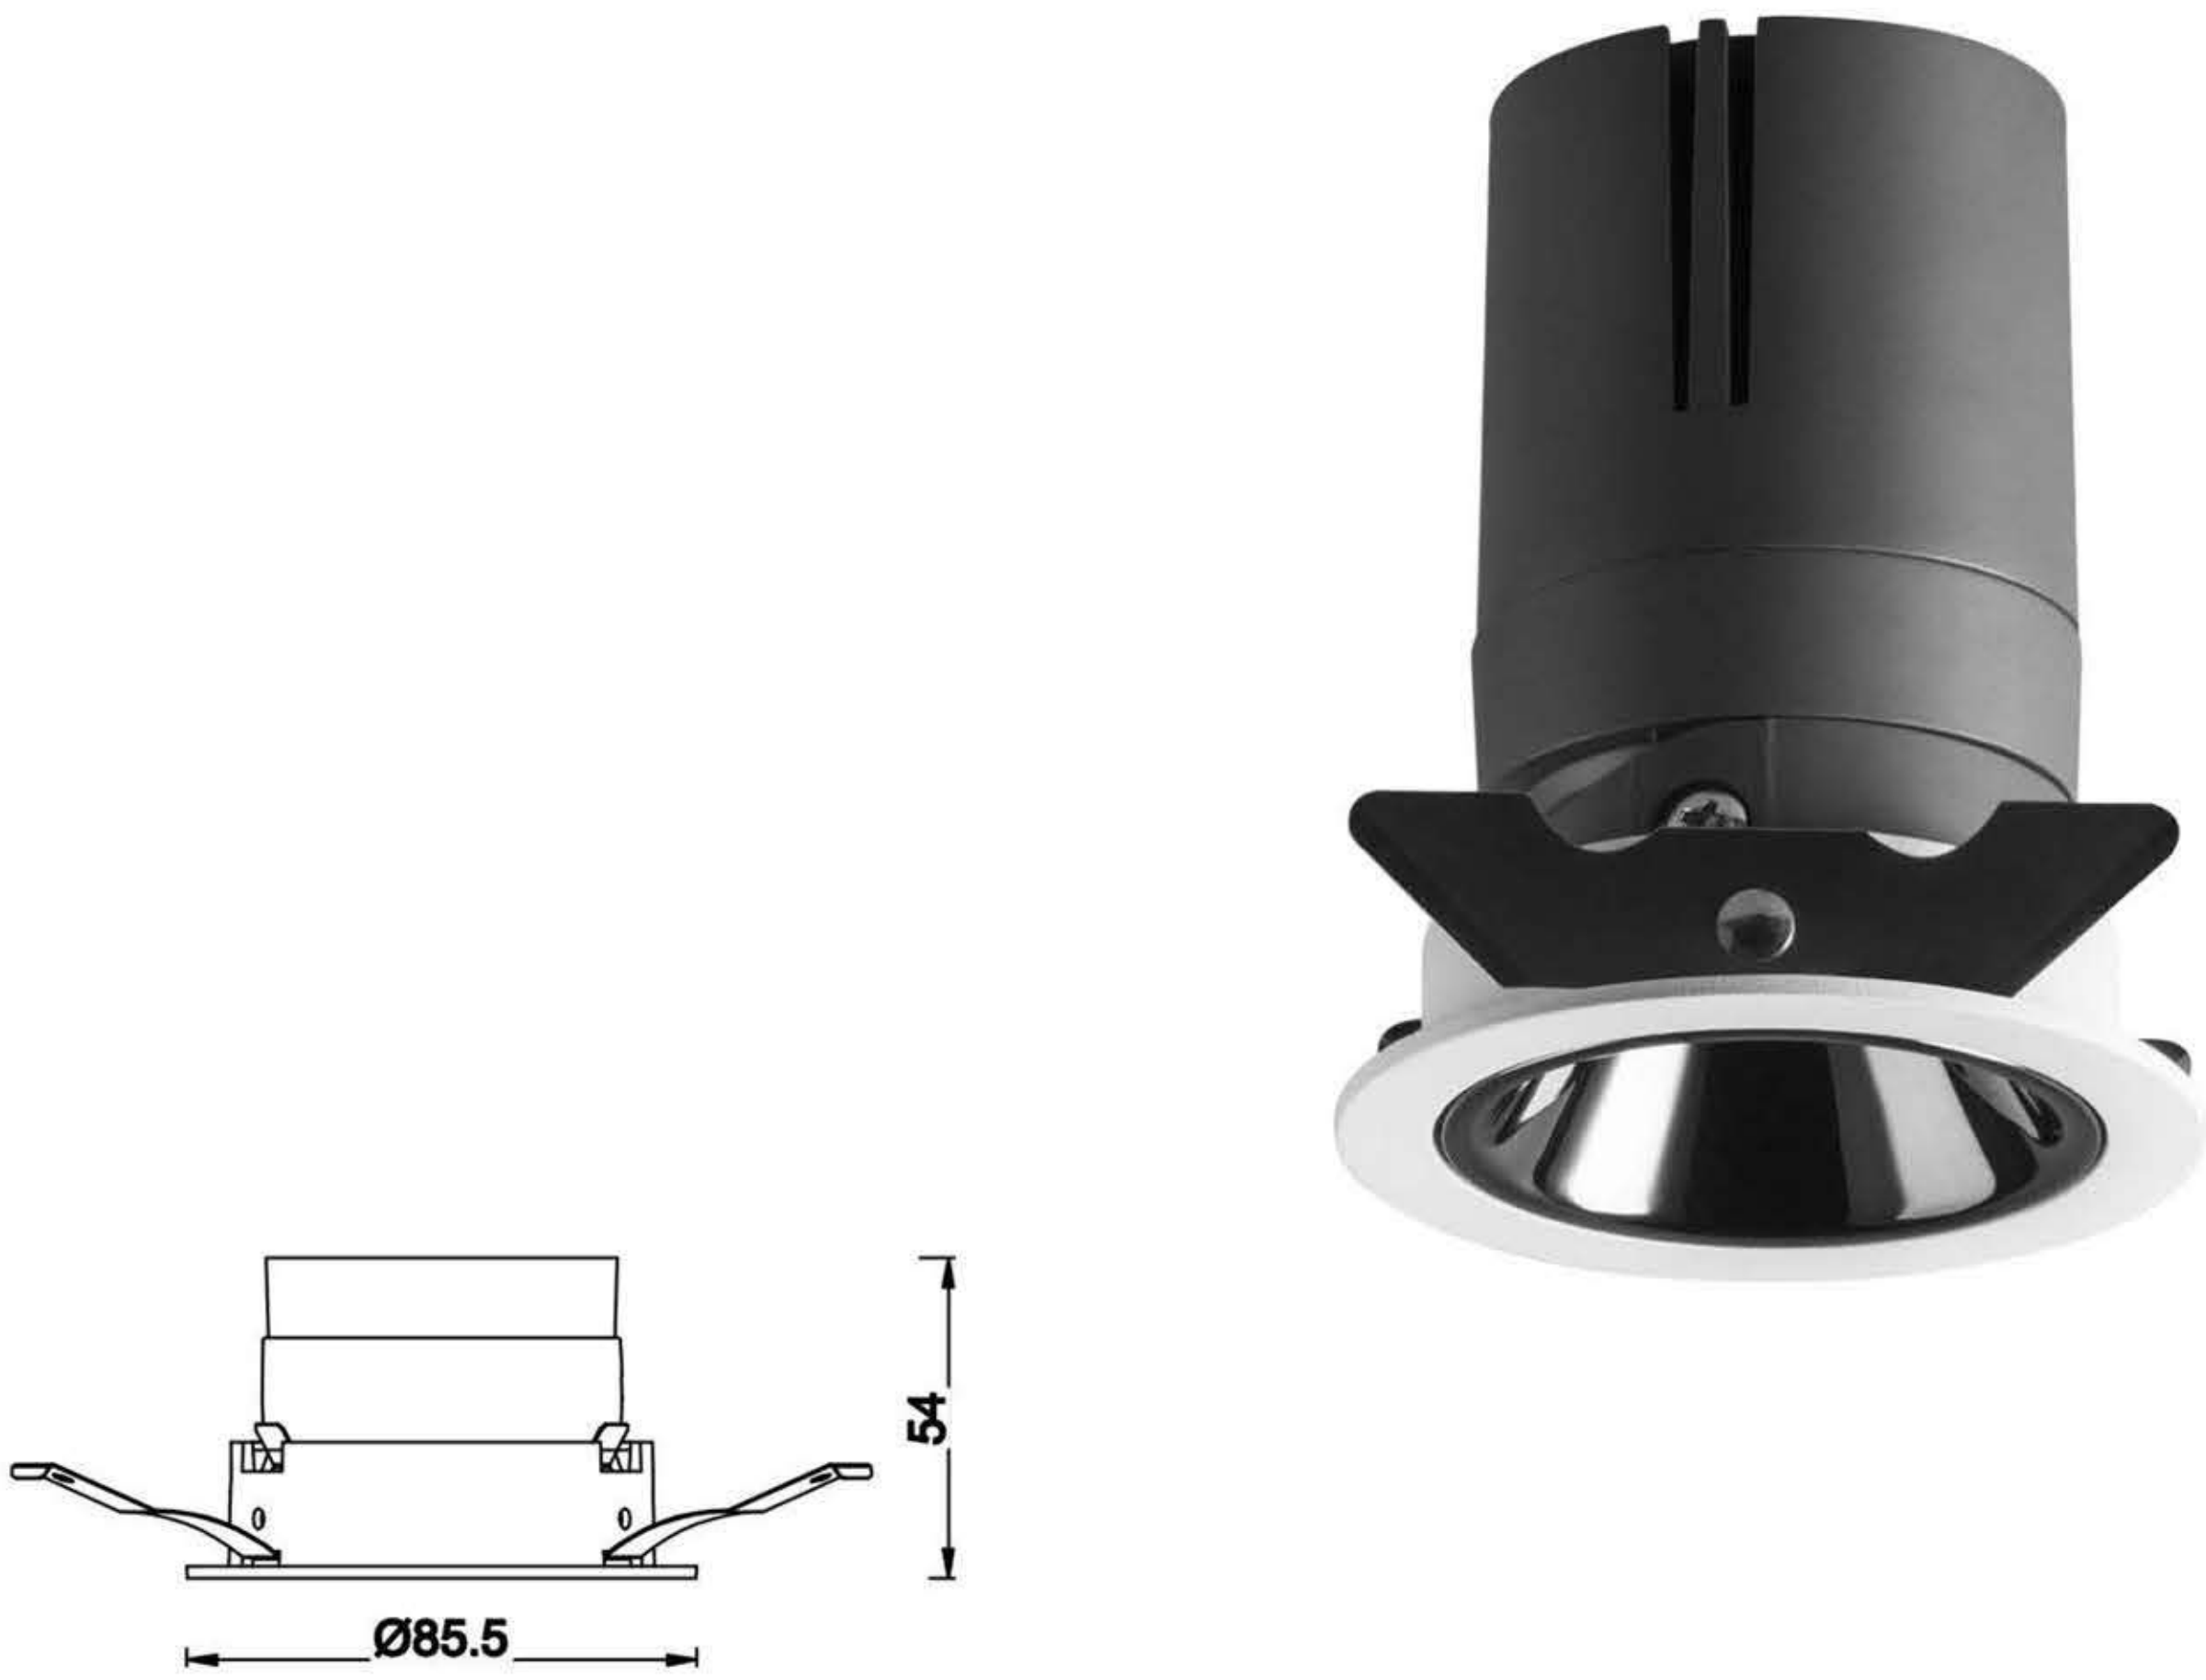


Specifications

Code No	Dimension	Cut hole	Efficiency(lm / w±5%)			Luminous Flux (lm) ±5%			1PCS/Box Size	100PCS/Carton Size
			3000K	4000K	5700K(9w)	3000K	4000K	5700K(9w)		
DS-S683	Φ58*72mm								9.5*9.5*7cm	57*32.5*19cm
DS-S682	Φ58*49mm								9.5*9.5*7cm	57*36*30cm
DS-6820R	Φ85*54mm	Φ75mm	60	65	64	501	543	534	9.5*9.5*7cm	47*38*32cm
DS-6821R	Φ85*54mm	Φ75mm	60	65	64	501	543	534	9.5*9.5*7cm	47*38*30cm
DS-6822S	85*85*58mm	75*75mm	61	66	65	505	546	835	9.5*9.5*7cm	52*38*35cm
DS-6824R	Φ85*55mm	Φ75mm	75	81	80	614	663	655	9.5*9.5*7cm	52*40*36cm
DS-6825R	Φ110*52mm	Φ100mm	74	80	89	610	656	648	11*11*6.5cm	65*46*35cm
DS-6826R	Φ74.5*33mm	Φ75mm	61	66	65	512	554	546	10.5*10.5*7cm	65*54*30cm
DS-6827R	Φ74.5*33mm	Φ75mm	61	66	65	512	554	546	10.5*10.5*7cm	65*54*30cm
DS-6829R	Φ85*38mm	Φ75mm	63	68	67	517	558	549	9.5*9.5*7cm	47*38*30cm
DS-6830R	Φ85*54mm	Φ75mm	57	61	60	480	515	507	9.5*9.5*7cm	50*38*30cm
DS-6831R	Φ85*54mm	Φ75mm	57	61	60	480	515	507	9.5*9.5*7cm	52*38*32cm
DS-6832S	72*72*58mm	75*75mm	61	66	65	505	548	540	14*7.7*7.5cm	55*40*32cm
DS-6860R	Φ105*60mm	Φ90mm	64	69	68	519	559	551	12.2*11.8*7.5cm	57*46*35cm
DS-6861R	Φ105*60mm	Φ90mm	64	69	68	519	559	551	11*11*6.5cm	57*46*35cm
DS-6866R	Φ89.5*33mm	Φ90mm	63	68	67	524	568	559	12.2*11.8*7.5cm	70*60*33.5cm
DS-6867R	Φ89.5*33mm	Φ90mm	63	68	67	524	568	559	12.2*11.8*7.5cm	70*60*33.5cm

Watt(W)	9W/15W
Beam Angle (°)	15°/24°/36°/60°
CRI	≥90
Input Voltage(V)	DC40-48V
IP Rating	IP20
Operating Temp.(°C)	-20°C~40°C
Storage Temp.(°C)	-20°C~75°C
Lifetime (hr)	50,000H

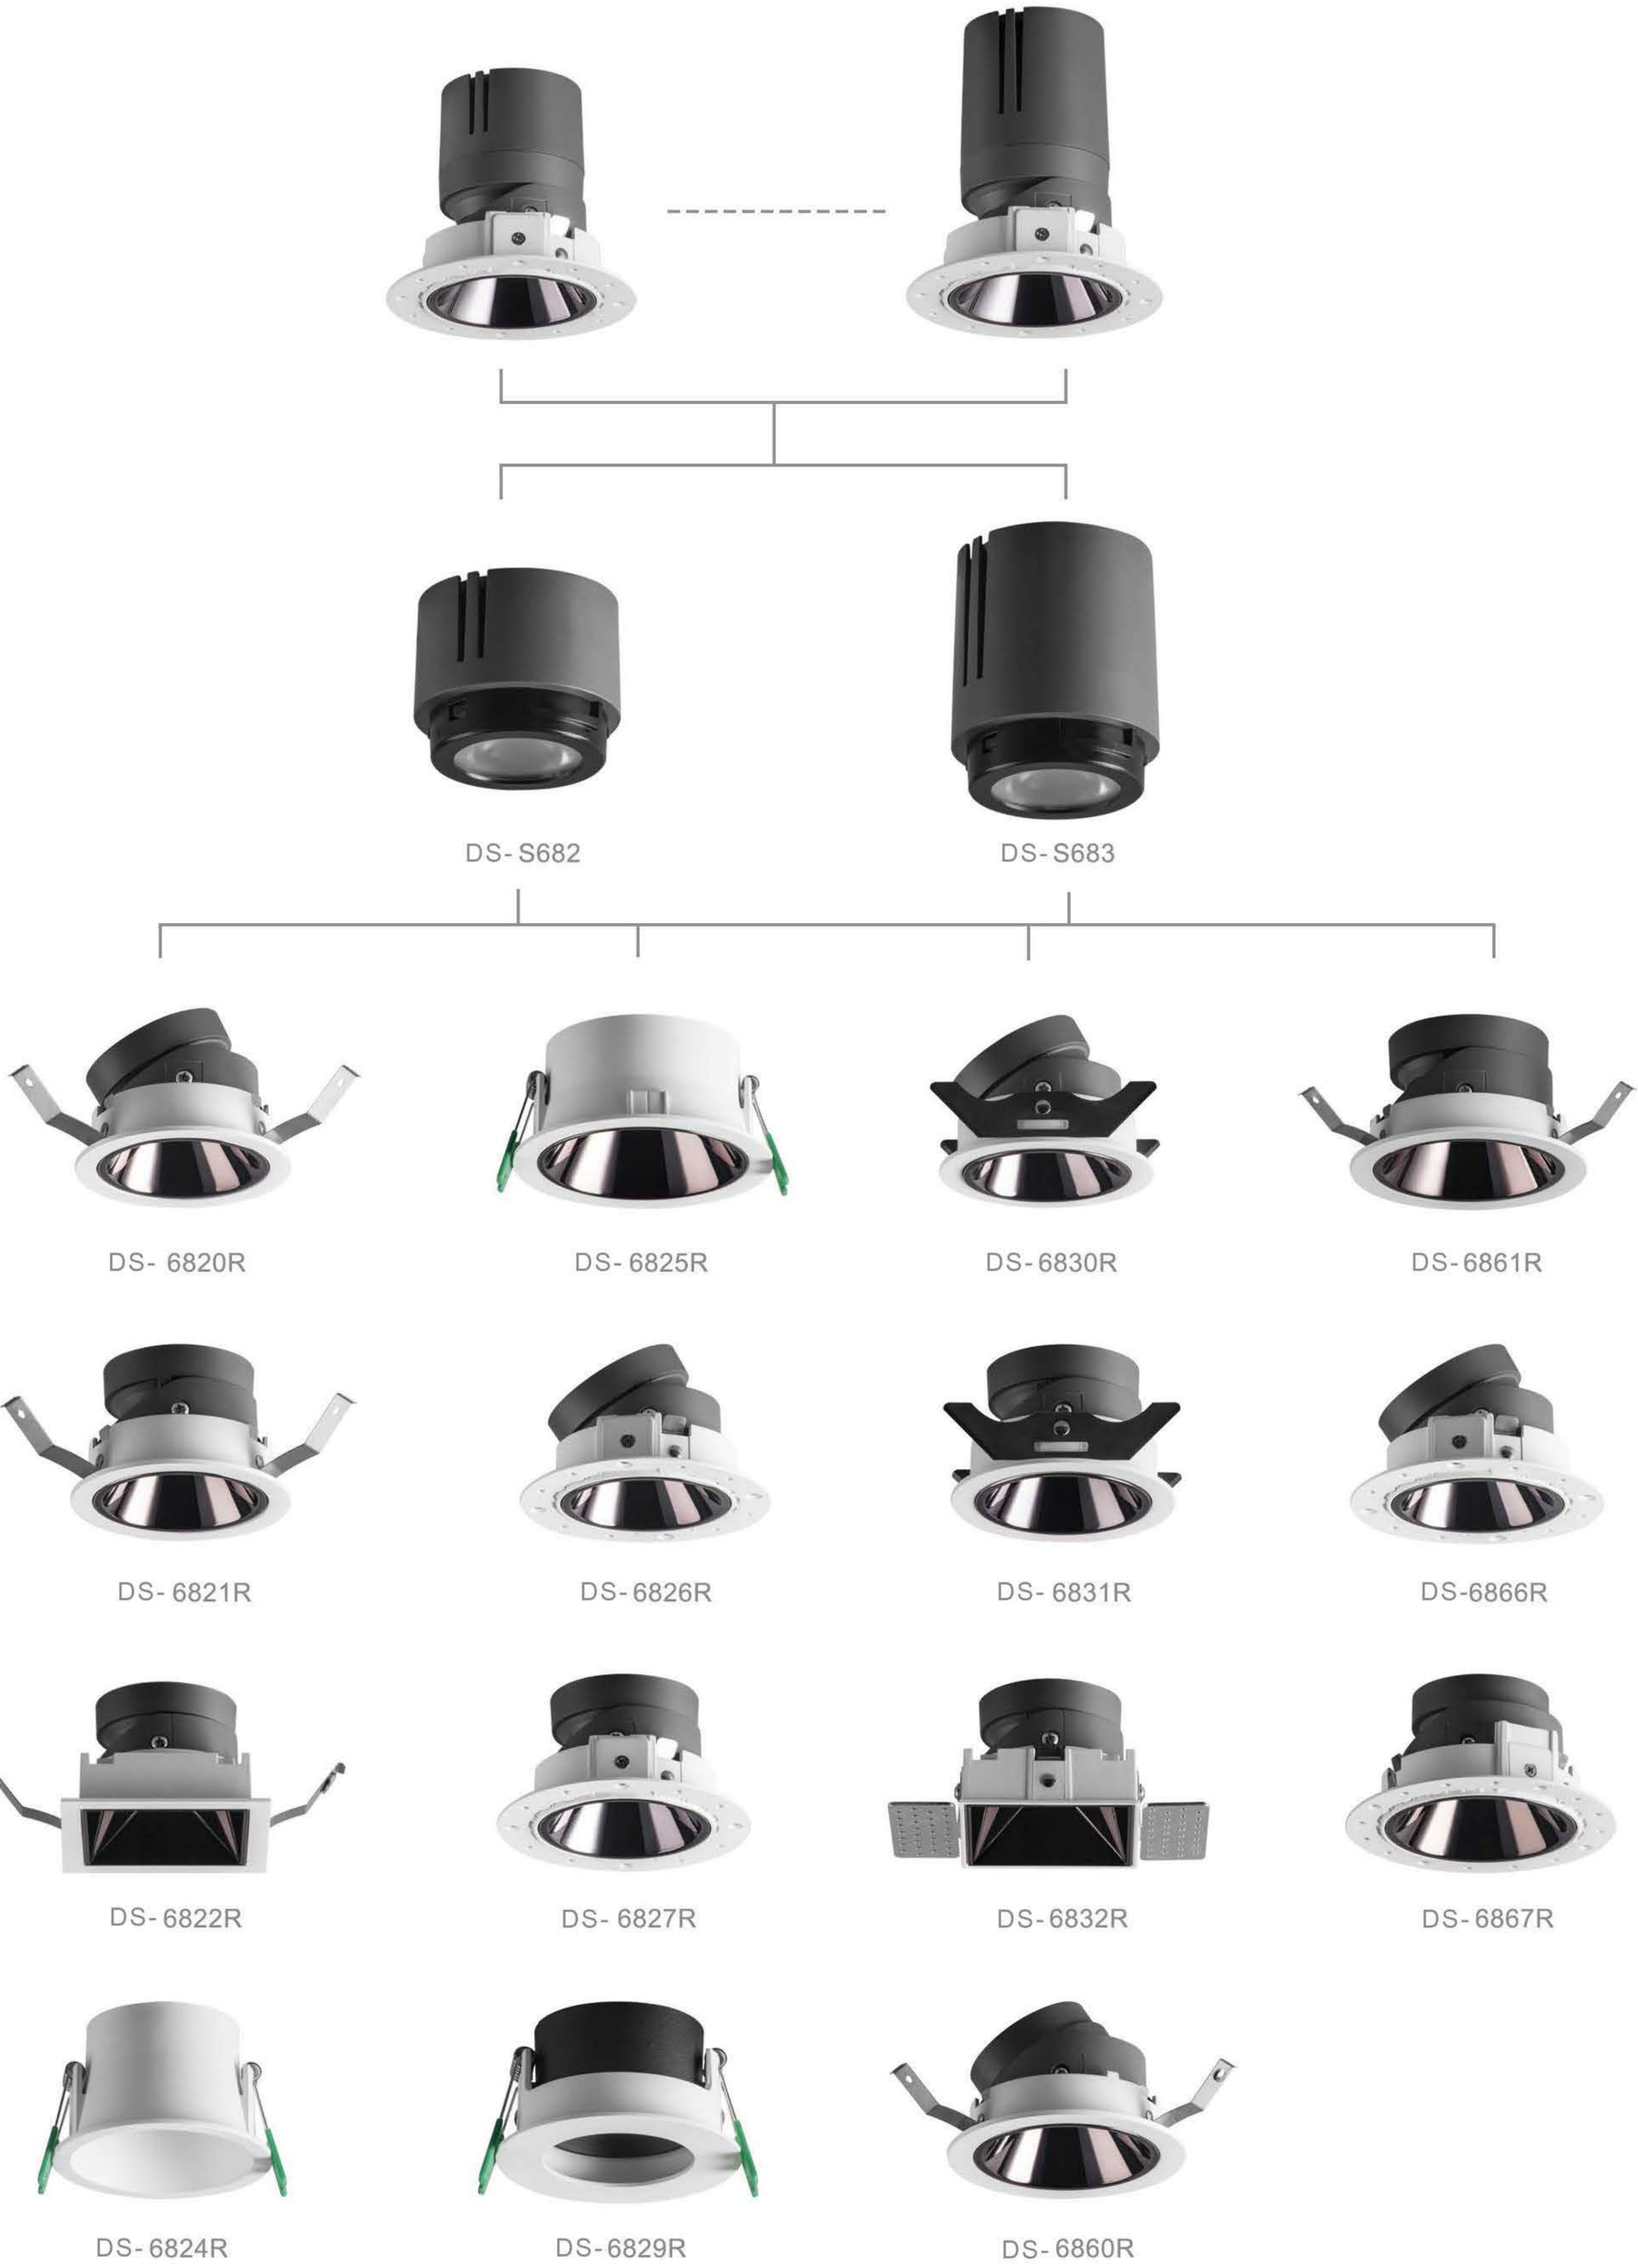

CCT



Reflector Color Changle



DS-S687

15°

24°

36°

60°

AC
220-240V


IP20

CRI≥90

CB

CE

RoHS

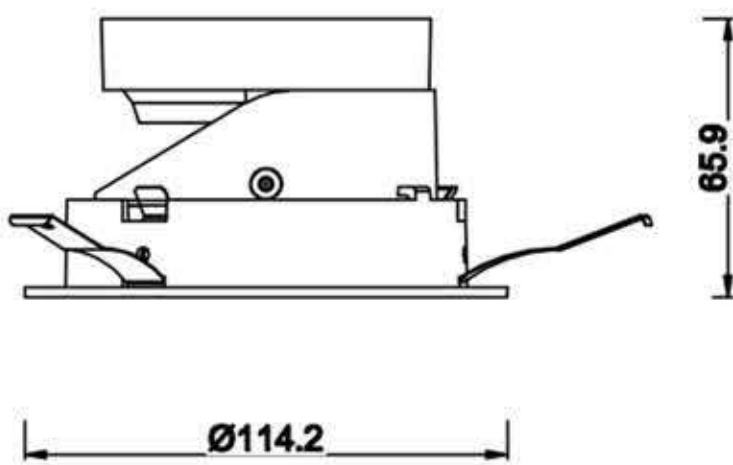

Specifications

Code No	Dimension	Cut hole	Efficiency(lm / w±5%)			Luminous Flux (lm) ±5%			1PCS/Box Size	100PCS/Carton Size
			3000K	4000K	5700K	3000K	4000K	5700K		
DS- S687	Φ77*88mm								13*11.5*9cm	55*28*26cm
DS- 6870R	Φ115*66mm	Φ100mm	62	67	66	1469	1574	1551	12.2*11.8*7.5cm	62*50*37cm
DS- 6871R	Φ115*66mm	Φ100mm	62	67	66	1469	1574	1551	12*11.8*7cm	62*50*37cm
DS- 6872S	12*112*74mm	100*100mm	63	67	66	1510	1594	1570	14.9*14.2*8.5cm	66*53*40cm
DS- 6874R	Φ110*65mm	Φ100mm	83	89	88	1970	2109	2085	11.3*11*7.5cm	63.5*46*41cm
DS- 6875R	Φ135*63mm	Φ120mm	84	90	89	1980	2115	2091	14.5*13.5*7.5cm	70*32*37.5cm
DS- 6876R	Φ99.5*33mm	Φ100mm	69	74	73	1641	1753	1730	14.5*13.5*7.5cm	72*32*37cm
DS- 6877R	Φ99.5*33mm	Φ100mm	69	74	73	1641	1753	1730	14.5*13.5*7.5cm	72*32*37cm

Watt(W)	24W
Beam Angle (°)	15°/24°/36°/60°
CRI	≥90
Input Voltage(V)	DC40-48V
IP Rating	IP20
Operating Temp.(°C)	-20°C~40°C
Storage Temp.(°C)	-20°C~75°C
Lifetime (hr)	50,000H

CCT

3000K

4000K

5700K

Reflector Color Changle

Honeycomb

Diffuser

Glass

Black

Bright silver

Golden



DS-S688

15°

24°

36°

60°

AC
220-240V


IP20

CRI≥90

CB

CE

RoHS

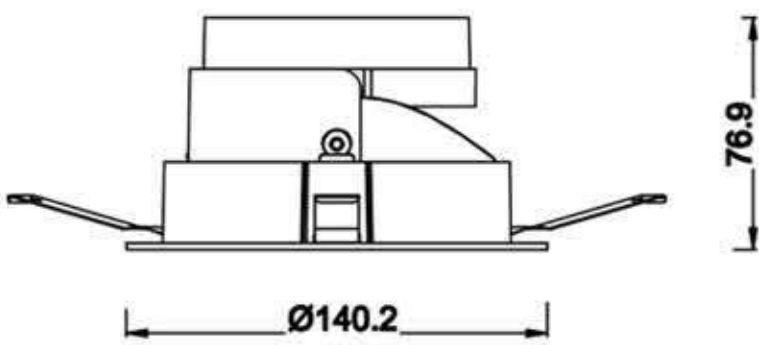

Specifications

Code No	Dimension	Cut hole	Efficiency(lm / w±5%)			Luminous Flux (lm) ±5%			1PCS/Box Size	100PCS/Carton Size
			3000K	4000K	5700K	3000K	4000K	5700K		
DS-S688	Φ87*105mm								13*11.5*9cm	60*38*28cm
DS-6880R	Φ140*78mm	Φ125mm	77	83	82	2495	2656	2624	14.9*14.2*8.5cm	76*31.5*42cm
DS-6881R	Φ140*78mm	Φ125mm	81	87	86	2604	2784	2752	14.8*14.8*8.5cm	76*31.5*42cm
DS-6882S	140*140*84mm	125*125mm	76	82	81	2404	2624	2592	15.7*14.2*9cm	77*34*45cm
DS-6884R	Φ138*87mm	Φ125mm	83	89	88	2628	2848	2816	14.5*14.5*9cm	75*34*47cm
DS-6885R	Φ145*75mm	Φ130mm	81	87	86	2567	2757	2708	14.5*13.5*7.5cm	75*33*47cm
DS-6886R	Φ119.7*33mm	Φ120mm	78	84	83	2465	2654	2623	15.7*14.2*9cm	77*33*42cm
DS-6887R	Φ119.7*33mm	Φ120mm	79	85	84	2499	2686	2654	15.7*14.2*9cm	77*33*42cm

Watt(W)	33W
Beam Angle (°)	15°/24°/36°/60°
CRI	≥90
Input Voltage(V)	DC40-48V
IP Rating	IP20
Operating Temp.(°C)	-20°C~40°C
Storage Temp.(°C)	-20°C~75°C
Lifetime (hr)	50,000H

CCT

3000K

4000K

5700K

Reflector Color Changle

Honeycomb

Diffuser

Glass

Black

Bright silver

Golden



DS-S689

15°

24°

36°

60°

AC
220-240V

IP20

CRI≥90

CB

CE

RoHS



Specifications

Code No	Dimension	Cut hole	Efficiency(lm / w±5%)			Luminous Flux (lm) ±5%			1PCS/Box Size	100PCS/Carton Size
			3000K	4000K	5700K	3000K	4000K	5700K		
DS-S689	Φ87*105mm								13*13*10.5cm	55*28*28cm
DS-6890R	Φ165*86mm	Φ150mm	79	85	84	3115	3315	3276	18*16.7*9.6cm	51.5*48.5*38cm
DS-6891R	Φ165*86mm	Φ150mm	79	85	84	3115	3315	3276	18*18*11cm	55*47*37cm
DS-6892S	165*165*91mm	150*150mm	74	80	79	2906	3120	3081	18*16.7*11.5cm	52*50*37.5cm
DS-6894R	Φ164*104mm	Φ150mm	81	87	86	3172	3393	3354	18*16.7*11.5cm	55*37*38.5cm
DS-6896R	Φ145*33mm	Φ145mm	77	83	82	2993	3237	3198	18*16.7*11.5cm	50*47*38cm
DS-6897R	Φ145*33mm	Φ145mm	78	84	83	3037	3276	3237	18*16.7*11.5cm	50*47*38cm
Watt(W)		40W								
Beam Angle (°)		15°/24°/36°/60°								
CRI		≥90								
Input Voltage(V)		DC40-48V								
IP Rating		IP20								
Operating Temp.(°C)		-20°C~40°C								
Storage Temp.(°C)		-20°C~75°C								
Lifetime (hr)		50,000H								

CCT

3000K

4000K

5700K

Reflector Color Changle

Honeycomb

Diffuser

Glass

Black

Bright silver

Golden



DOWN LIGHT
(COB)



DS-S681
6W/9W
15°/24°/36°
Ø46x55

+



DS-6810R
Ø65x40
Cut-out: Ø55



DS-6811R
Ø65x36
Cut-out: Ø55



DS-6812R
Ø65x36
Cut-out: Ø55



DS-6816R
Ø59.5x27
Cut-out: Ø60



DS-S682
6W/9W
15°/24°/36°
Ø58x49



DS-S683
12W/15W
15°/24°/36°
Ø58x72

+



DS-6820R
Ø85x54
Cut-out: Ø75



DS-6821R
Ø85x54
Cut-out: Ø75



DS-6822S
85x85x58
Cut-out: 75x75



DS-6824R
Ø85x55
Cut-out: Ø75

+



DS-6825R
Ø110x52
Cut-out: Ø100



DS-6826R
Ø74.5x33
Cut-out: Ø75



DS-6827R
Ø74.5x33
Cut-out: Ø75



DS-6829R
Ø85x38
Cut-out: Ø75

+



DS-6830R
Ø85x54
Cut-out: Ø75



DS-6831R
Ø85x54
Cut-out: Ø75



DS-6832S
72x72x58
Cut-out: 75x75



DS-6860R
Ø105x60
Cut-out: Ø90

+



DS-6861R
Ø105x60
Cut-out: Ø90



DS-6866R
Ø89.5x33
Cut-out: Ø90



DS-6867R
Ø89.5x33
Cut-out: Ø90



DS-S687
20W/24W
15°/24°/36°
Ø77x88

+



DS-6870R
Ø115x66
Cut-out: Ø100



DS-6871R
Ø115x66
Cut-out: Ø100



DS-6872S
112x112x74
Cut-out: 100x100



DS-6874R
Ø110x65
Cut-out: Ø100

+



DS-6875R
Ø135x63
Cut-out: Ø120



DS-6876R
Ø99.5x33
Cut-out: Ø100



DS-6877R
Ø99.5x33
Cut-out: Ø100



DS-S688
28W/33W
15°/24°/36°
Ø87x105

+



DS-6880R
Ø140x78
Cut-out: Ø125



DS-6881R
Ø140x78
Cut-out: Ø125



DS-6882S
140x140x84
Cut-out: 125x125



DS-6884R
Ø138x87
Cut-out: Ø125

+



DS-6885R
Ø145x75
Cut-out: Ø130



DS-6886R
Ø119.7x33
Cut-out: Ø120



DS-6887R
Ø119.7x33
Cut-out: Ø120



DS-S689
38W/42W
15°/24°/36°
Ø102x116

+



DS-6890R
Ø165x86
Cut-out: Ø150



DS-6891R
Ø165x86
Cut-out: Ø150



DS-6892S
165x165x91
Cut-out: 150x150



DS-6894R
Ø165x104
Cut-out: Ø150



DS-6896R
Ø145x33
Cut-out: Ø145



DS-6897R
Ø145x33
Cut-out: Ø145


DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

DOWN LIGHT
(COB)

	DS-1031B	DS-1041B	DS-1051B	
Type	Adjustable 30°	Adjustable 30°	Adjustable 30°	
Wattage	15W	20W	30W	40W
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	
Lumen (lm)	1380-1553	1840-2070	2760-3105	3680-4140
Cut-out (mm) 	105x105	140x140	160x160	
Size (WxLxHmm)	116x116x98	160x160x120	176x176x134	
N.W/PC (kgs)	0.48	1.0	1.29	1.47
Q'ty/CTN (pcs)	20	10	10	

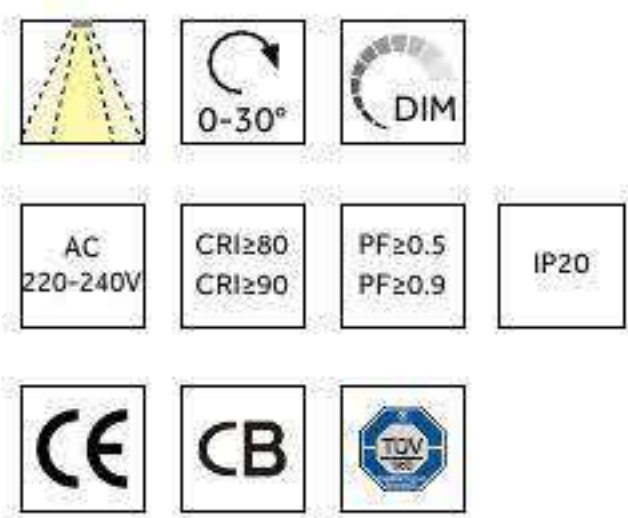


FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

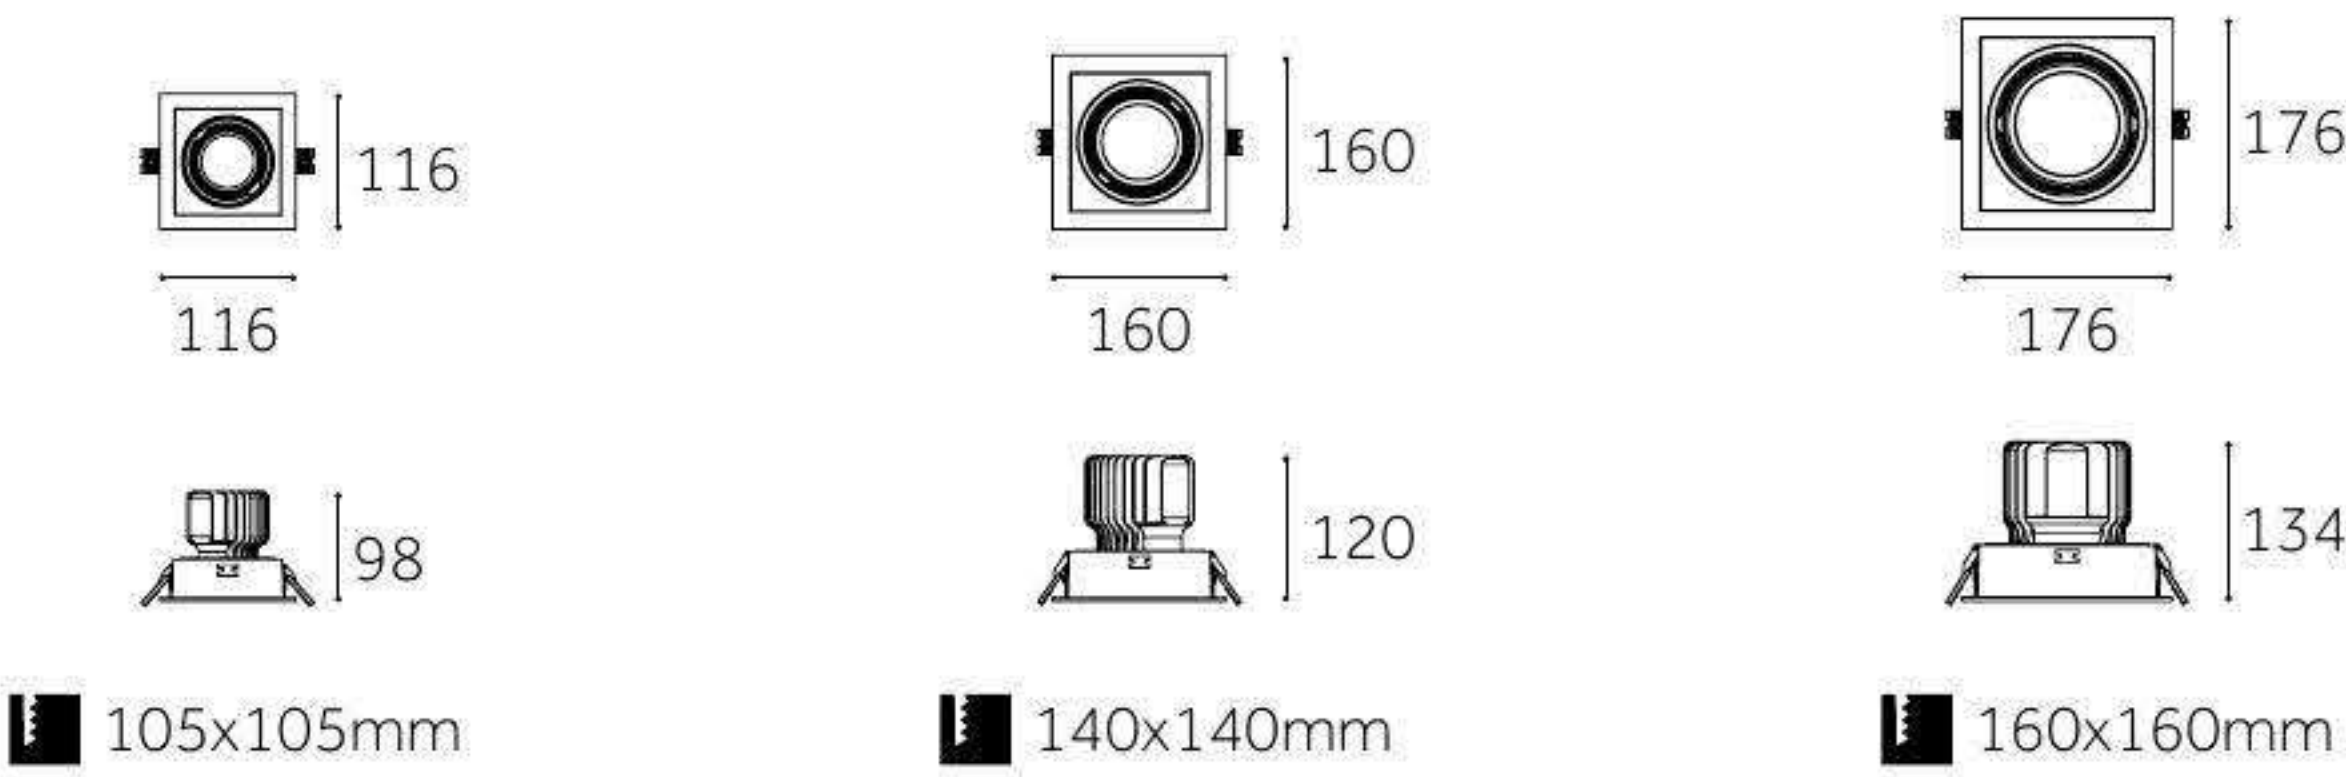




	DS-1031B	DS-1041B	DS-1051B	
Type	Adjustable 30°	Adjustable 30°	Adjustable 30°	
Wattage	15Wx2	20Wx2	30Wx2	40Wx2
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	
Lumen (lm)	1380x2-1553x2	1840x2-2070x2	2760x2-3105x2	3680x2-4140x2
Cut-out (mm)	200x105	270x140	310x160	
Size (WxLxHmm)	214x116x84	290x160x120	325x176x134	
N.W/PC (kgs)	1.0	1.59	2.43	2.79
Q'ty/CTN (pcs)	10	10	10	

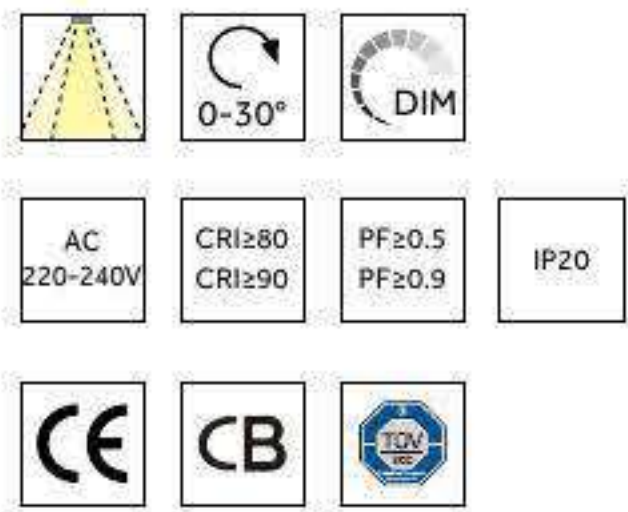

FINISH: ☐ White ☒ Black **CCT:** ☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

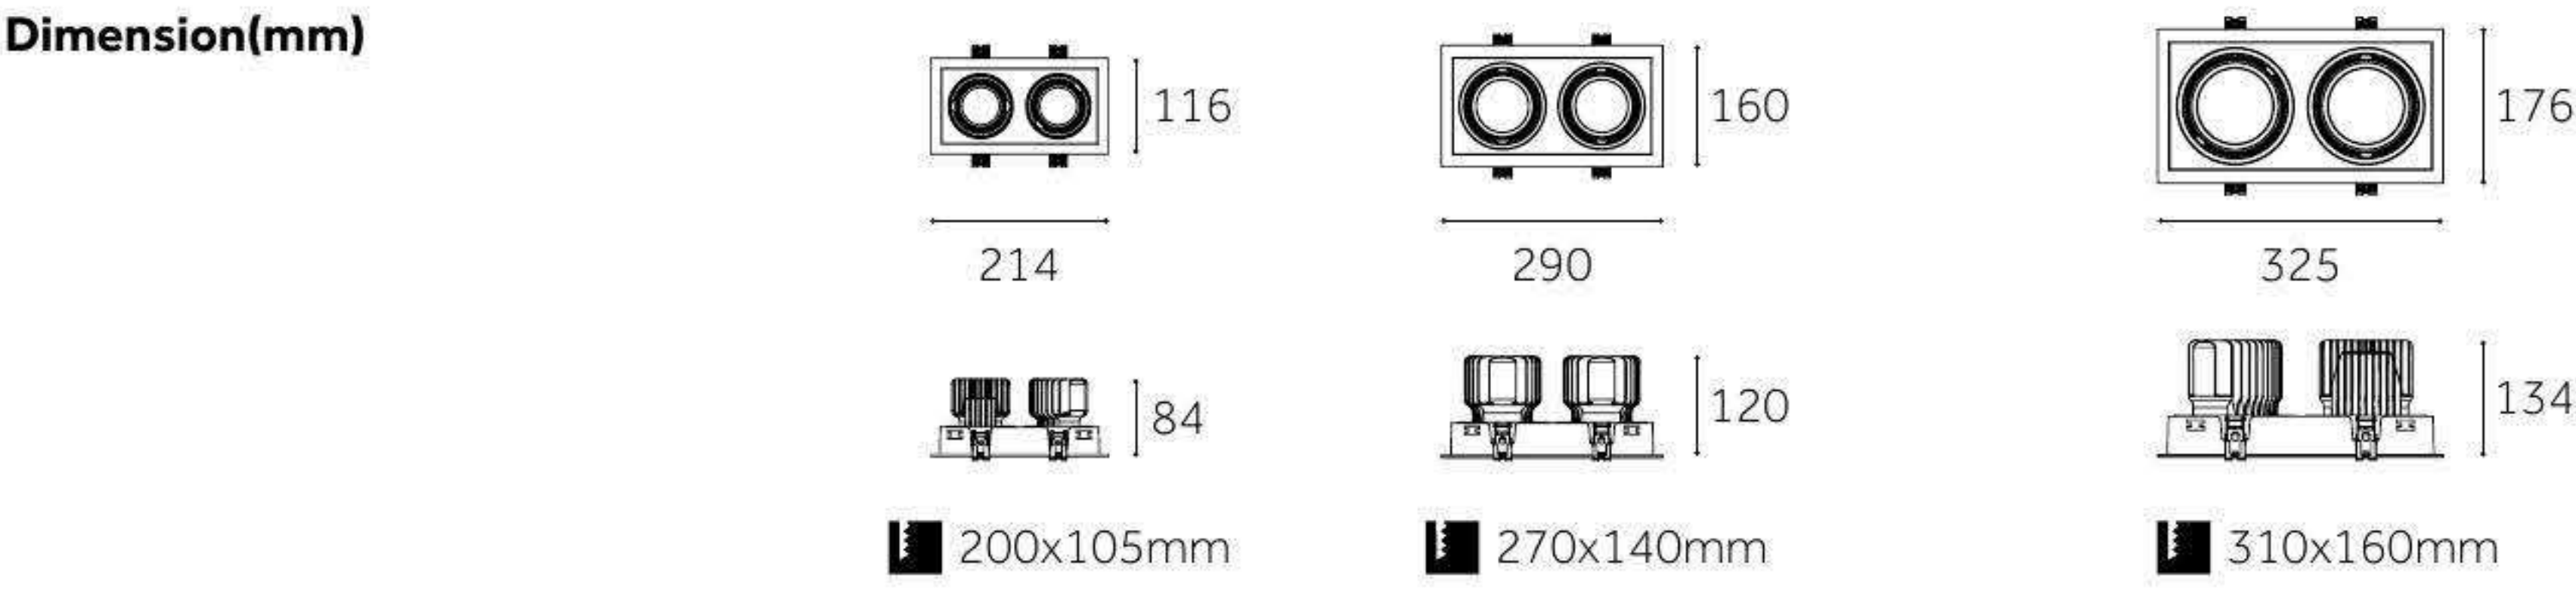




DOWN LIGHT
(COB)

DOWN LIGHT
(COB)

	DS-1032B	DS-1042B	DS-1052B	
Type	Adjustable 30°	Adjustable 30°	Adjustable 30°	
Wattage	15Wx3	20Wx3	30Wx3	40Wx3
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	
Lumen (lm)	1380x3-1553x3	1840x3-2070x3	2760x3-3105x3	3680x3-4140x3
Cut-out (mm)	290x105	400x140	460x160	
Size (WxLxHmm)	307x116x84	420x160x120	474x176x134	
N.W/PC (kgs)	1.47	2.38	3.02	3.56
Q'ty/CTN (pcs)	10	8	8	6

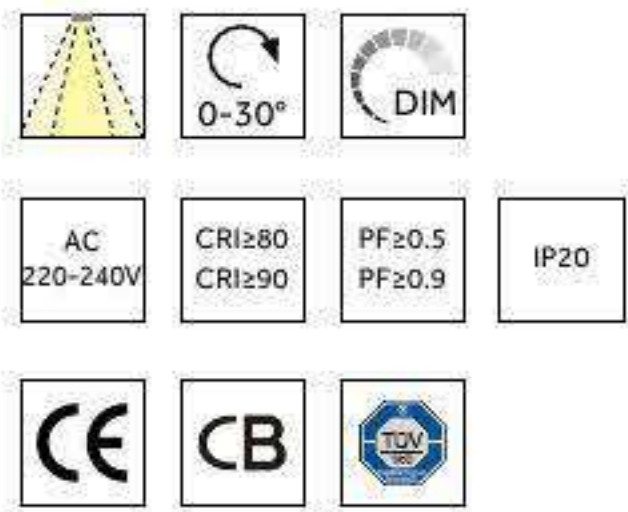


FINISH: ☐ White ☒ Black **CCT:** ☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

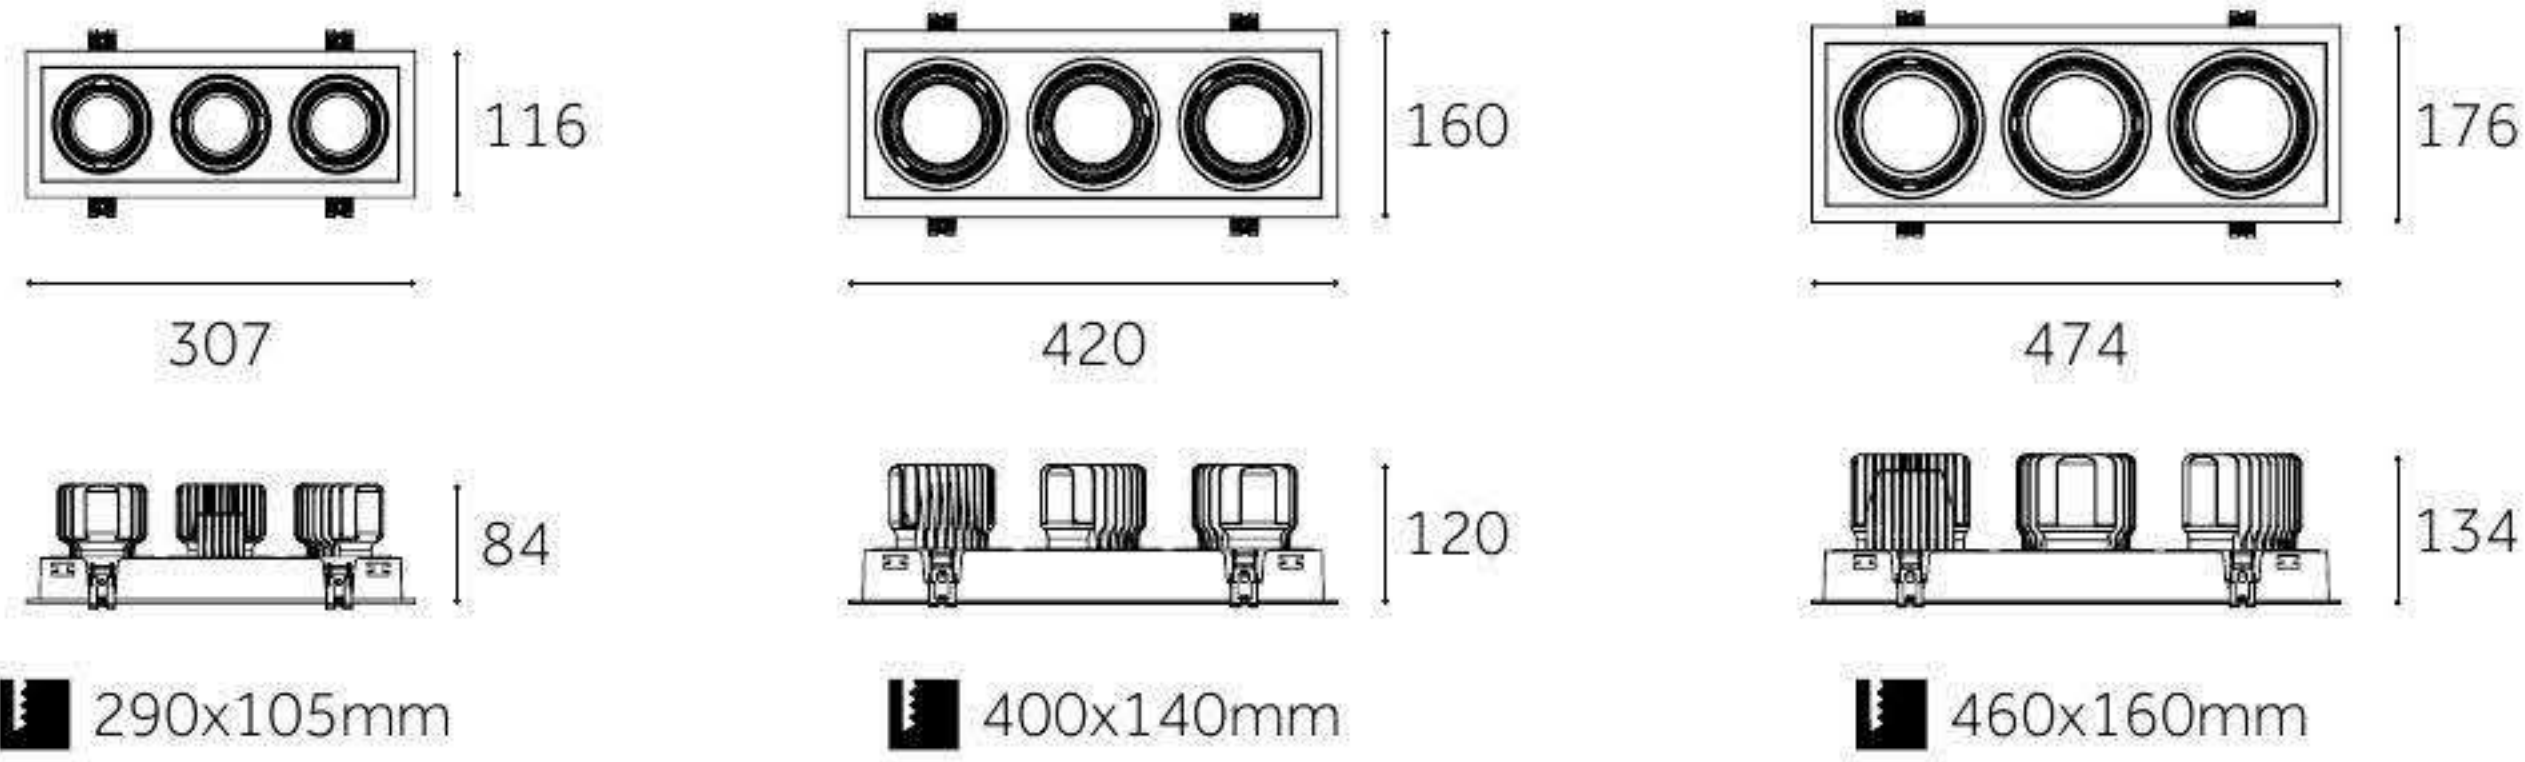




Single head, double heads and triple heads provide more choices for you. High CRI brings excellent lighting effect, adjustable direction offers various lighting orientation.




LUX
LED Grill Light

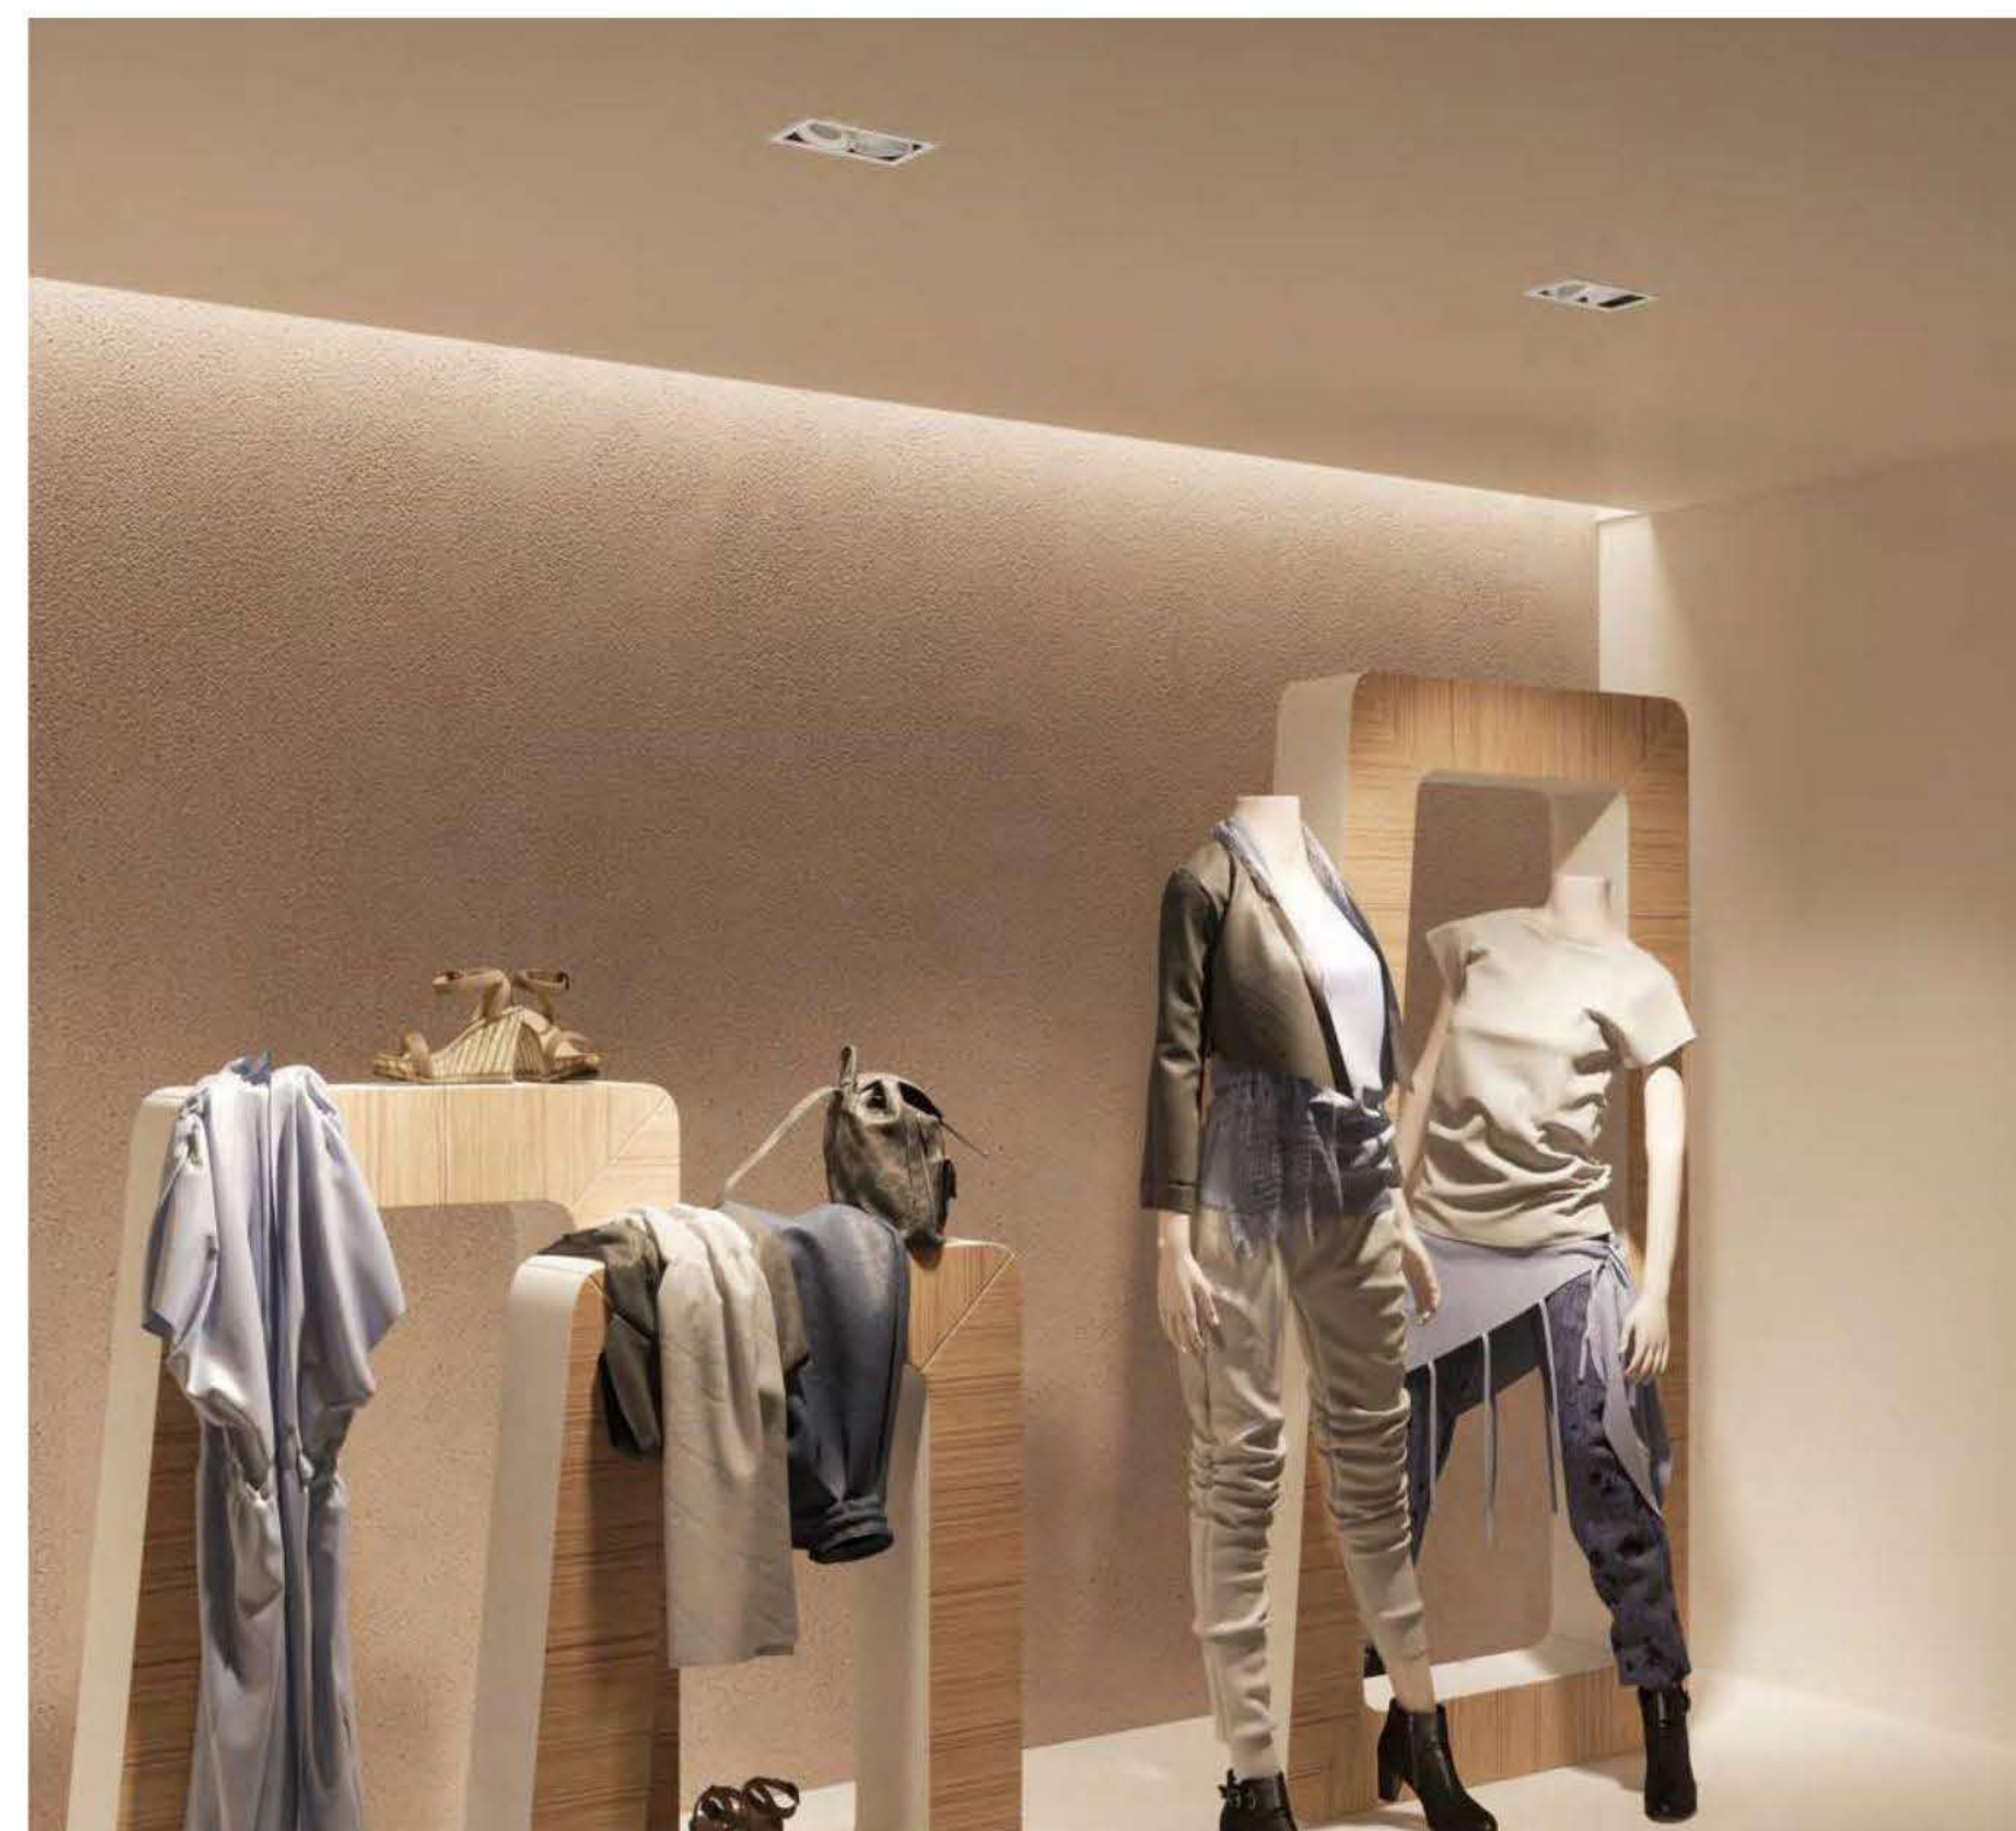

DOWN LIGHT
(COB)



	HT-2511A	HT-3011A	HT-4011A	HT-3011B	HT-4011B
Type	Fixed	Fixed	Fixed	Adjustable 30°	Adjustable 30°
Wattage	12W	20W	35W	20W	35W
Beam Angle	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°
Cut-out (mm)	Ø75	Ø95	Ø125	Ø125	Ø150
Size (DxHmm)	Ø85x70	Ø108x85	Ø135x97	Ø138x90	Ø165x100
Q'ty/CTN (pcs)	50	30	18	12	8

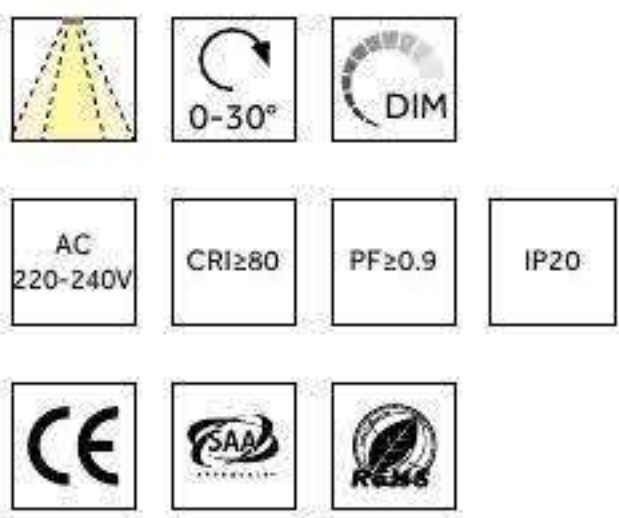


FINISH: ☐ White

CCT: ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K


DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VAST Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

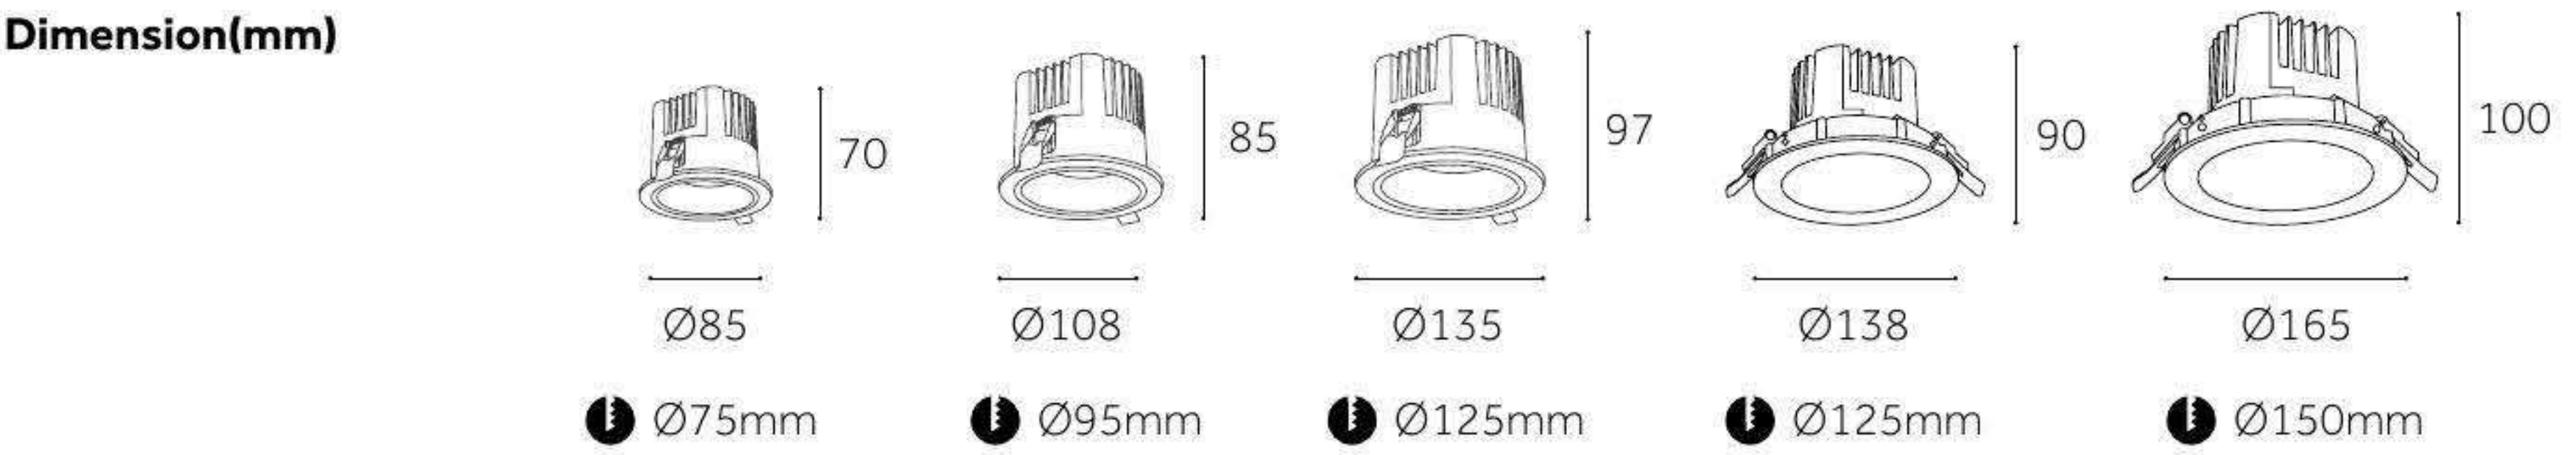



	HH-T2511	HH-T3011	HH-T4011
Type	Fixed	Fixed	Fixed
Wattage	12W	20W	35W
Beam Angle	15°/23°/38°	15°/23°/38°	15°/23°/38°
Cut-out (mm)	Ø75	Ø95	Ø125
Size (DxHmm)	Ø85x70	Ø108x85	Ø135x97

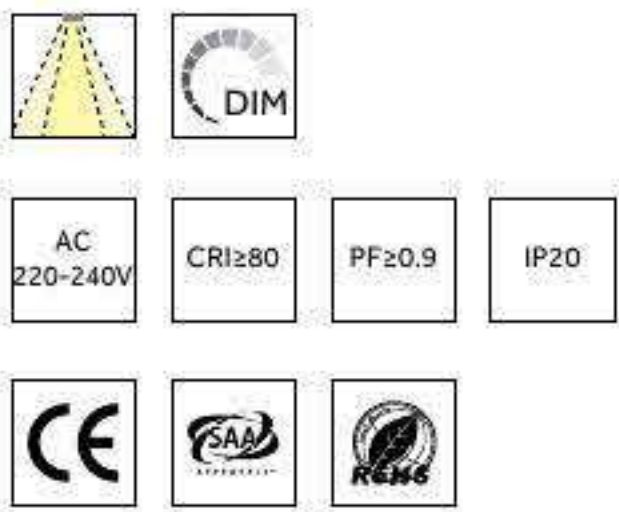


FINISH: ☐ White

CCT: 3000K 6000K

DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

VAST Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

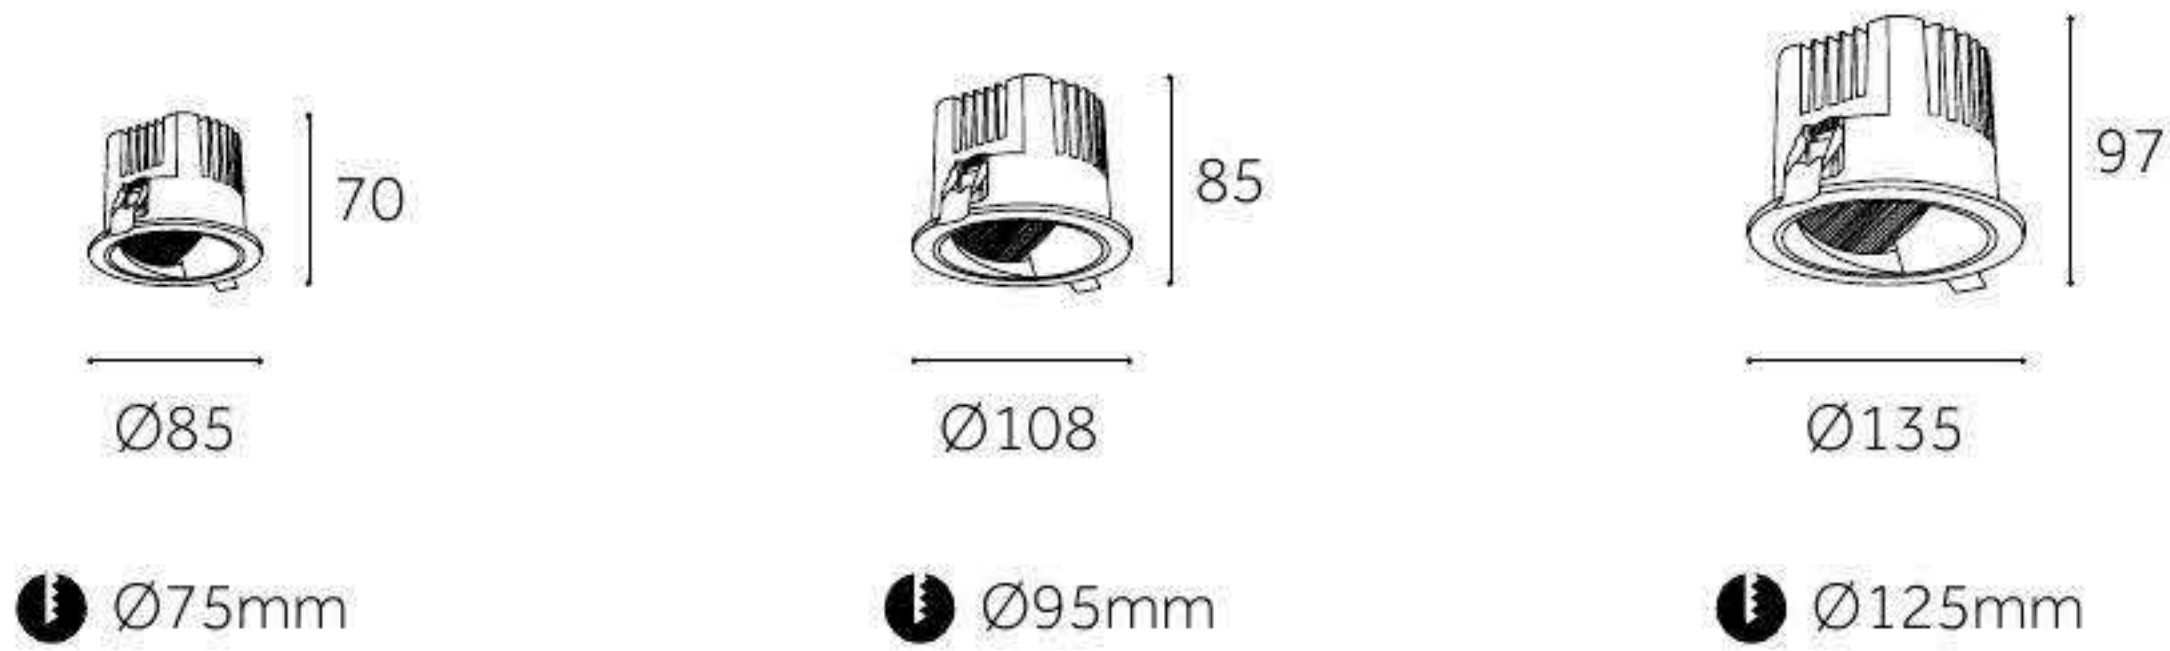

DOWN LIGHT
(COB)




DOWN LIGHT
(COB)

STARS A

LED Downlight




VANZ Series Independently designed product appearance, Buckle modular structure, easy installation and maintenance. Free splicing like Russian cubes provides enough illumination for high-rise space, and square boxes provide flexible lighting modes.

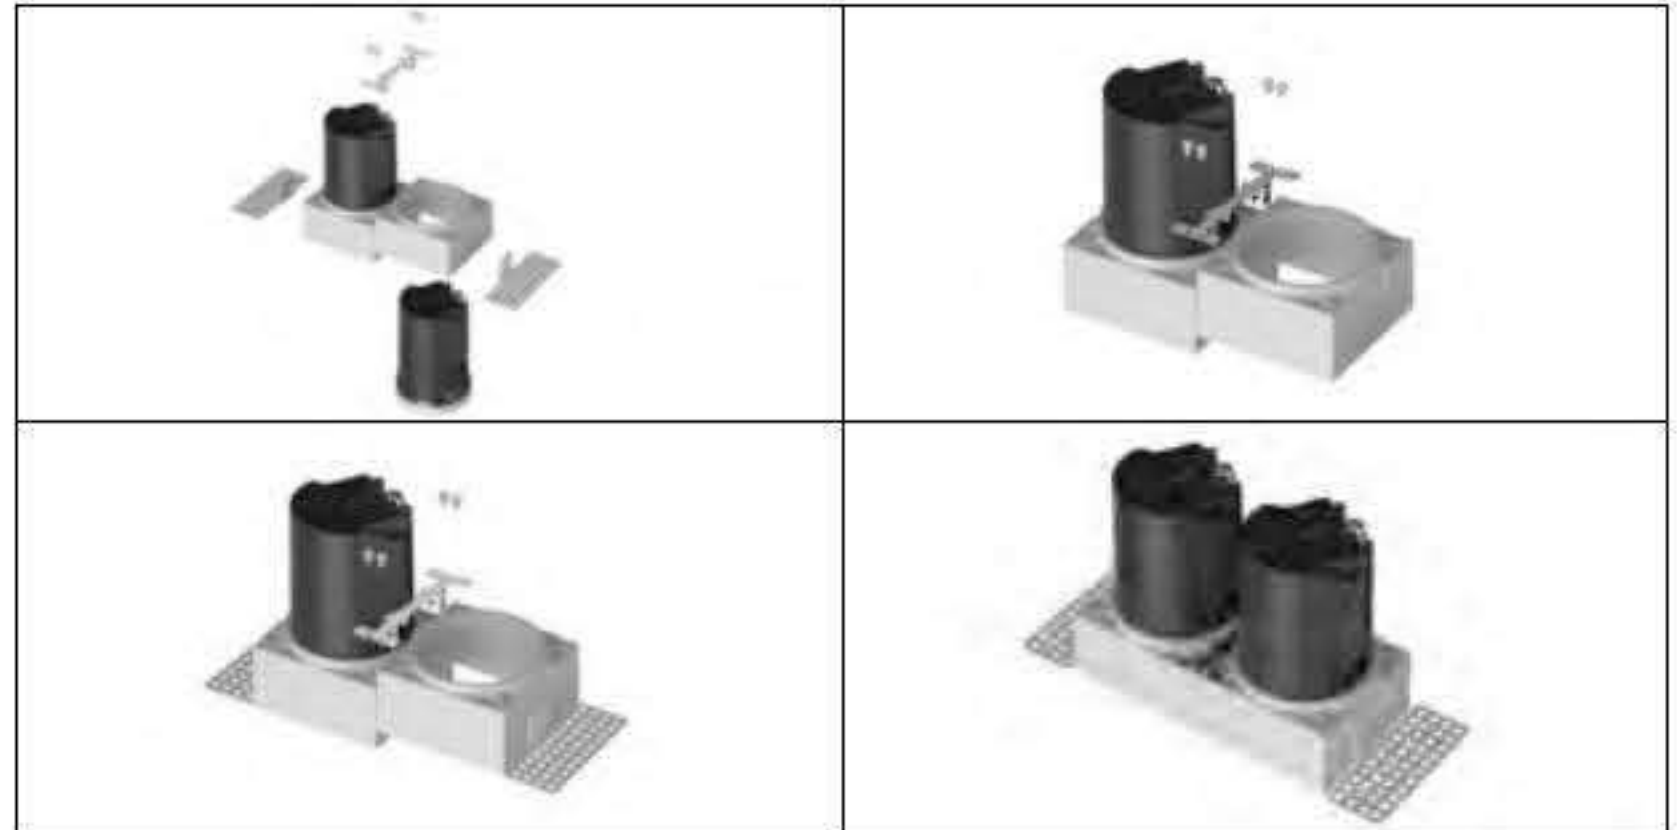



Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (DxHmm)
DXA-323T	7W	15°/24°/38°/60°			Ø55	Ø61.6x80
DXA-323	7W	15°/24°/38°/60°			Ø57.5	Ø61.6x80
DXA-324T	12W	8°/15°/24°/38°/60°			Ø75	Ø84x100.5
DXA-324	12W	8°/15°/24°/38°/60°			Ø75	Ø72.4x100.5
DXA-325T	20W	15°/24°/38°/60°			Ø95	Ø110x121.5
DXA-325	20W	15°/24°/38°/60°			Ø95	Ø91.5x121.5

OPTIONAL:  White  Black  Silver  Golden  Gun black  Silver mist

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXA-323ST	7W	15°/24°/38°/60°			55x55	63.5x63.5x87.5
DXA-323S	7W	15°/24°/38°/60°			57.5x57.5	53.8x53.8x87.5
DXA-324ST	12W	8°/15°/24°/38°/60°			75x75	84.5x84.5x112
DXA-324S	12W	8°/15°/24°/38°/60°			77x77	73.5x73.5x112
DXA-325ST	20W	15°/24°/38°/60°			95x95	104.5x104.5x137.5
DXA-325S	20W	15°/24°/38°/60°			97x97	93.6x93.6x137.5
DXA-323ST-2	7Wx2	15°/24°/38°/60°			120x60	129.5x68.5x84
DXA-323S-2	7Wx2	15°/24°/38°/60°			123x62	115.5x54.5x84
DXA-324ST-2	12Wx2	8°/15°/24°/38°/60°			164x77	180x90.5x112
DXA-324S-2	12Wx2	8°/15°/24°/38°/60°			166.5x79.5	163x73.5x112
DXA-325ST-2	20Wx2	15°/24°/38°/60°			207x95	223.5x109.5x133.5
DXA-325S-2	20Wx2	15°/24°/38°/60°			209x97	207.5x93.5x133.5


OPTIONAL:  White  Black  Silver  Golden  Gun black  Silver mist

DOWN LIGHT
(COB)



Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXA-323ST-3	7Wx3	15°/24°/38°/60°			163x55	171x63.5x87.5
DXA-323S-3	7Wx3	15°/24°/38°/60°			165.5x57.5	161.5x53.8x87.5
DXA-324ST-3	12Wx3	8°/15°/24°/38°/60°			222x75	231.5x84.5x112
DXA-324S-3	12Wx3	8°/15°/24°/38°/60°			224.5x77	220.5x73.5x112
DXA-325ST-3	20Wx3	15°/24°/38°/60°			284x95	293.5x104.5x137.5
DXA-W325S-3	20Wx3	15°/24°/38°/60°			287x97	281x93.6x137.5


OPTIONAL: White Black Silver Golden Gun black Silver mist

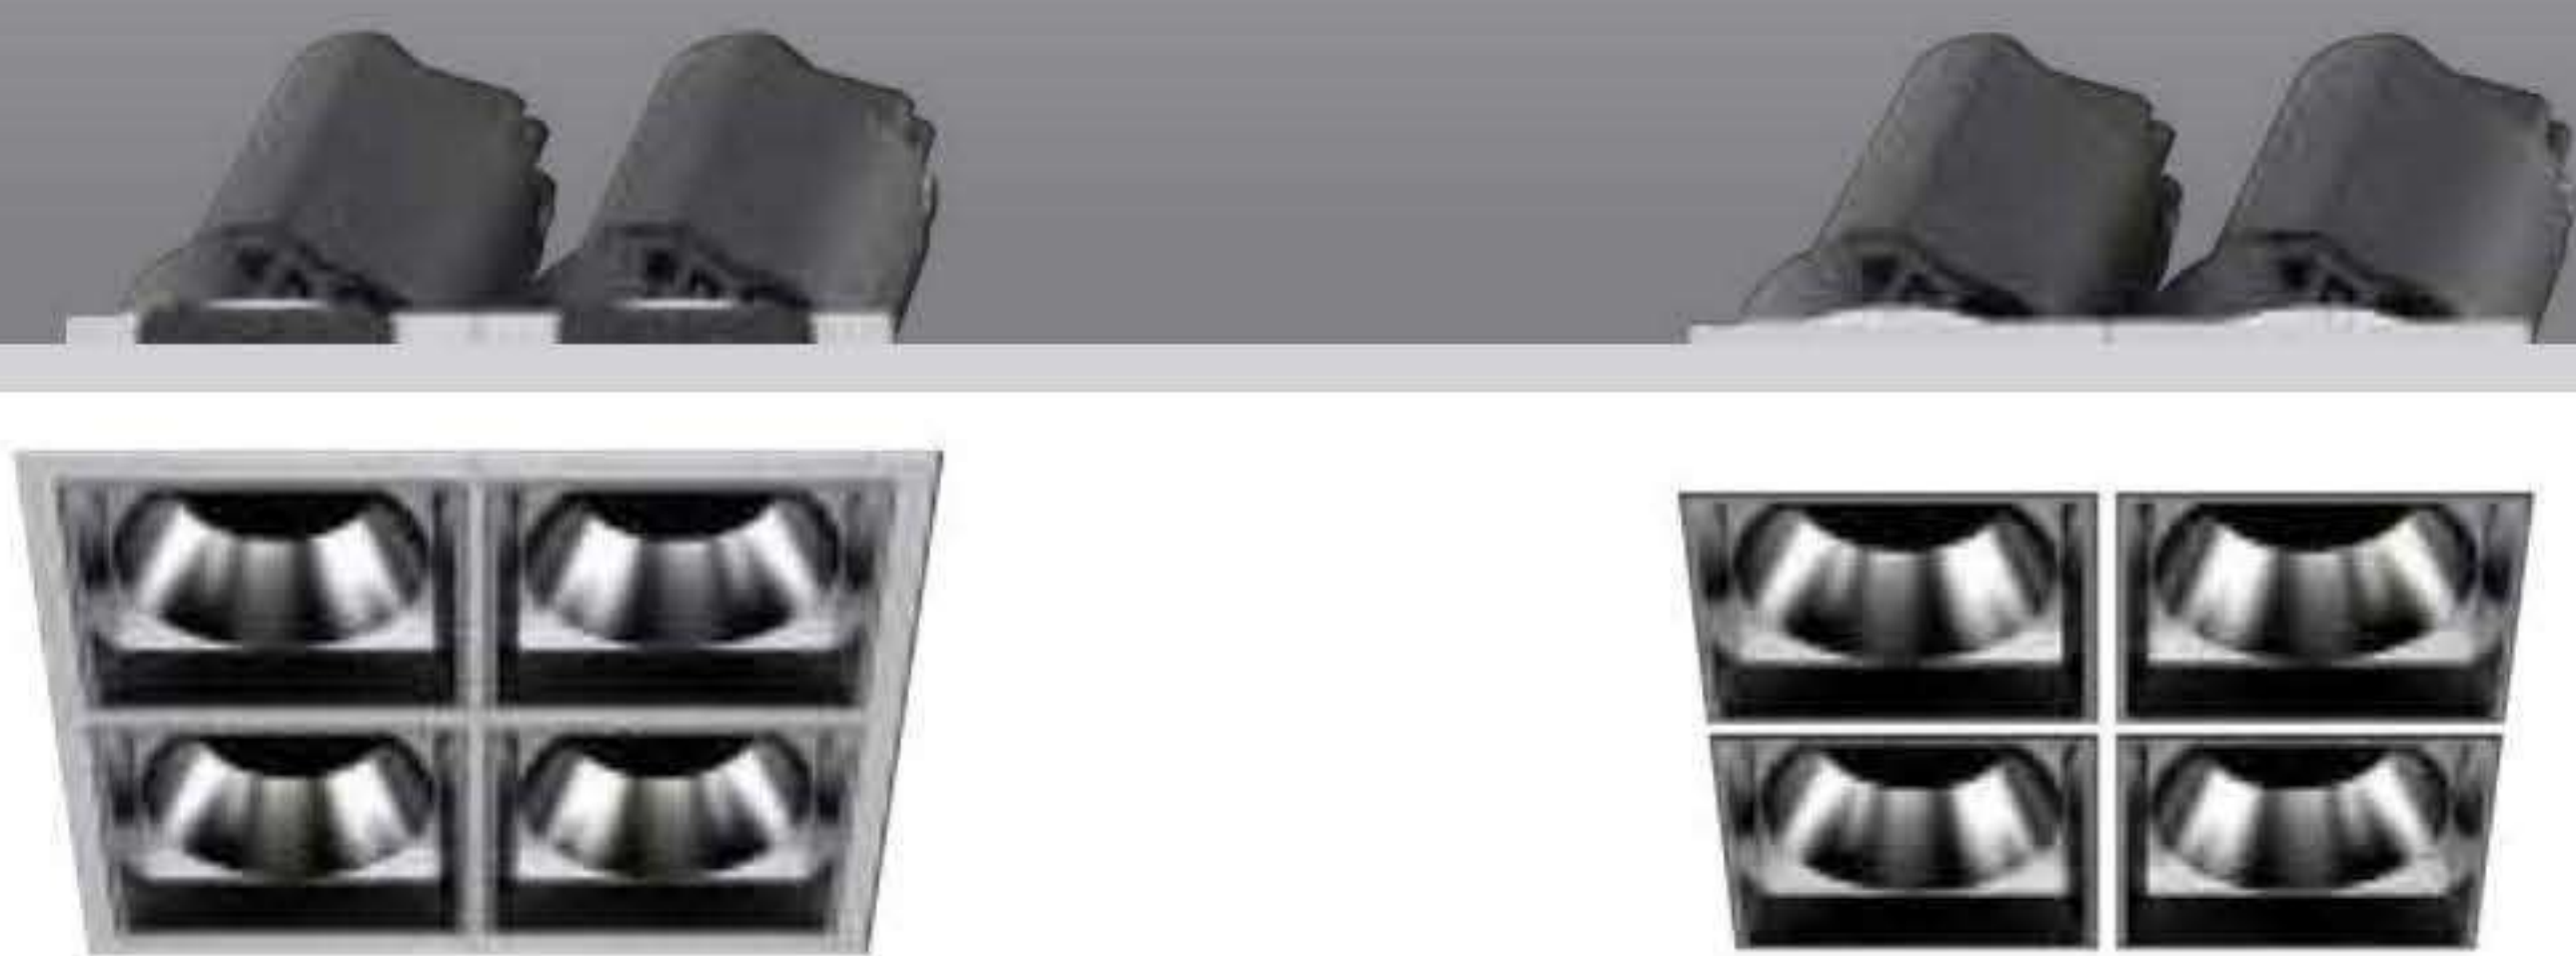


Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXA-323ST-4	7Wx4	15°/24°/38°/60°			108.5x108.5	117x117x87.5
DXA-323S-4	7Wx4	15°/24°/38°/60°			111x111	107.6x107.6x87.5
DXA-324ST-4	12Wx4	8°/15°/24°/38°/60°			150x150	158x158x112
DXA-324S-4	12Wx4	8°/15°/24°/38°/60°			152.5x152.5	147x147x112
DXA-325ST-4	20Wx4	15°/24°/38°/60°			190x190	198x198x137.5
DXA-325S-4	20Wx4	15°/24°/38°/60°			192x192	187x187x137.5

OPTIONAL: White Black Silver Golden Gun black Silver mist

DOWN LIGHT
(COB)

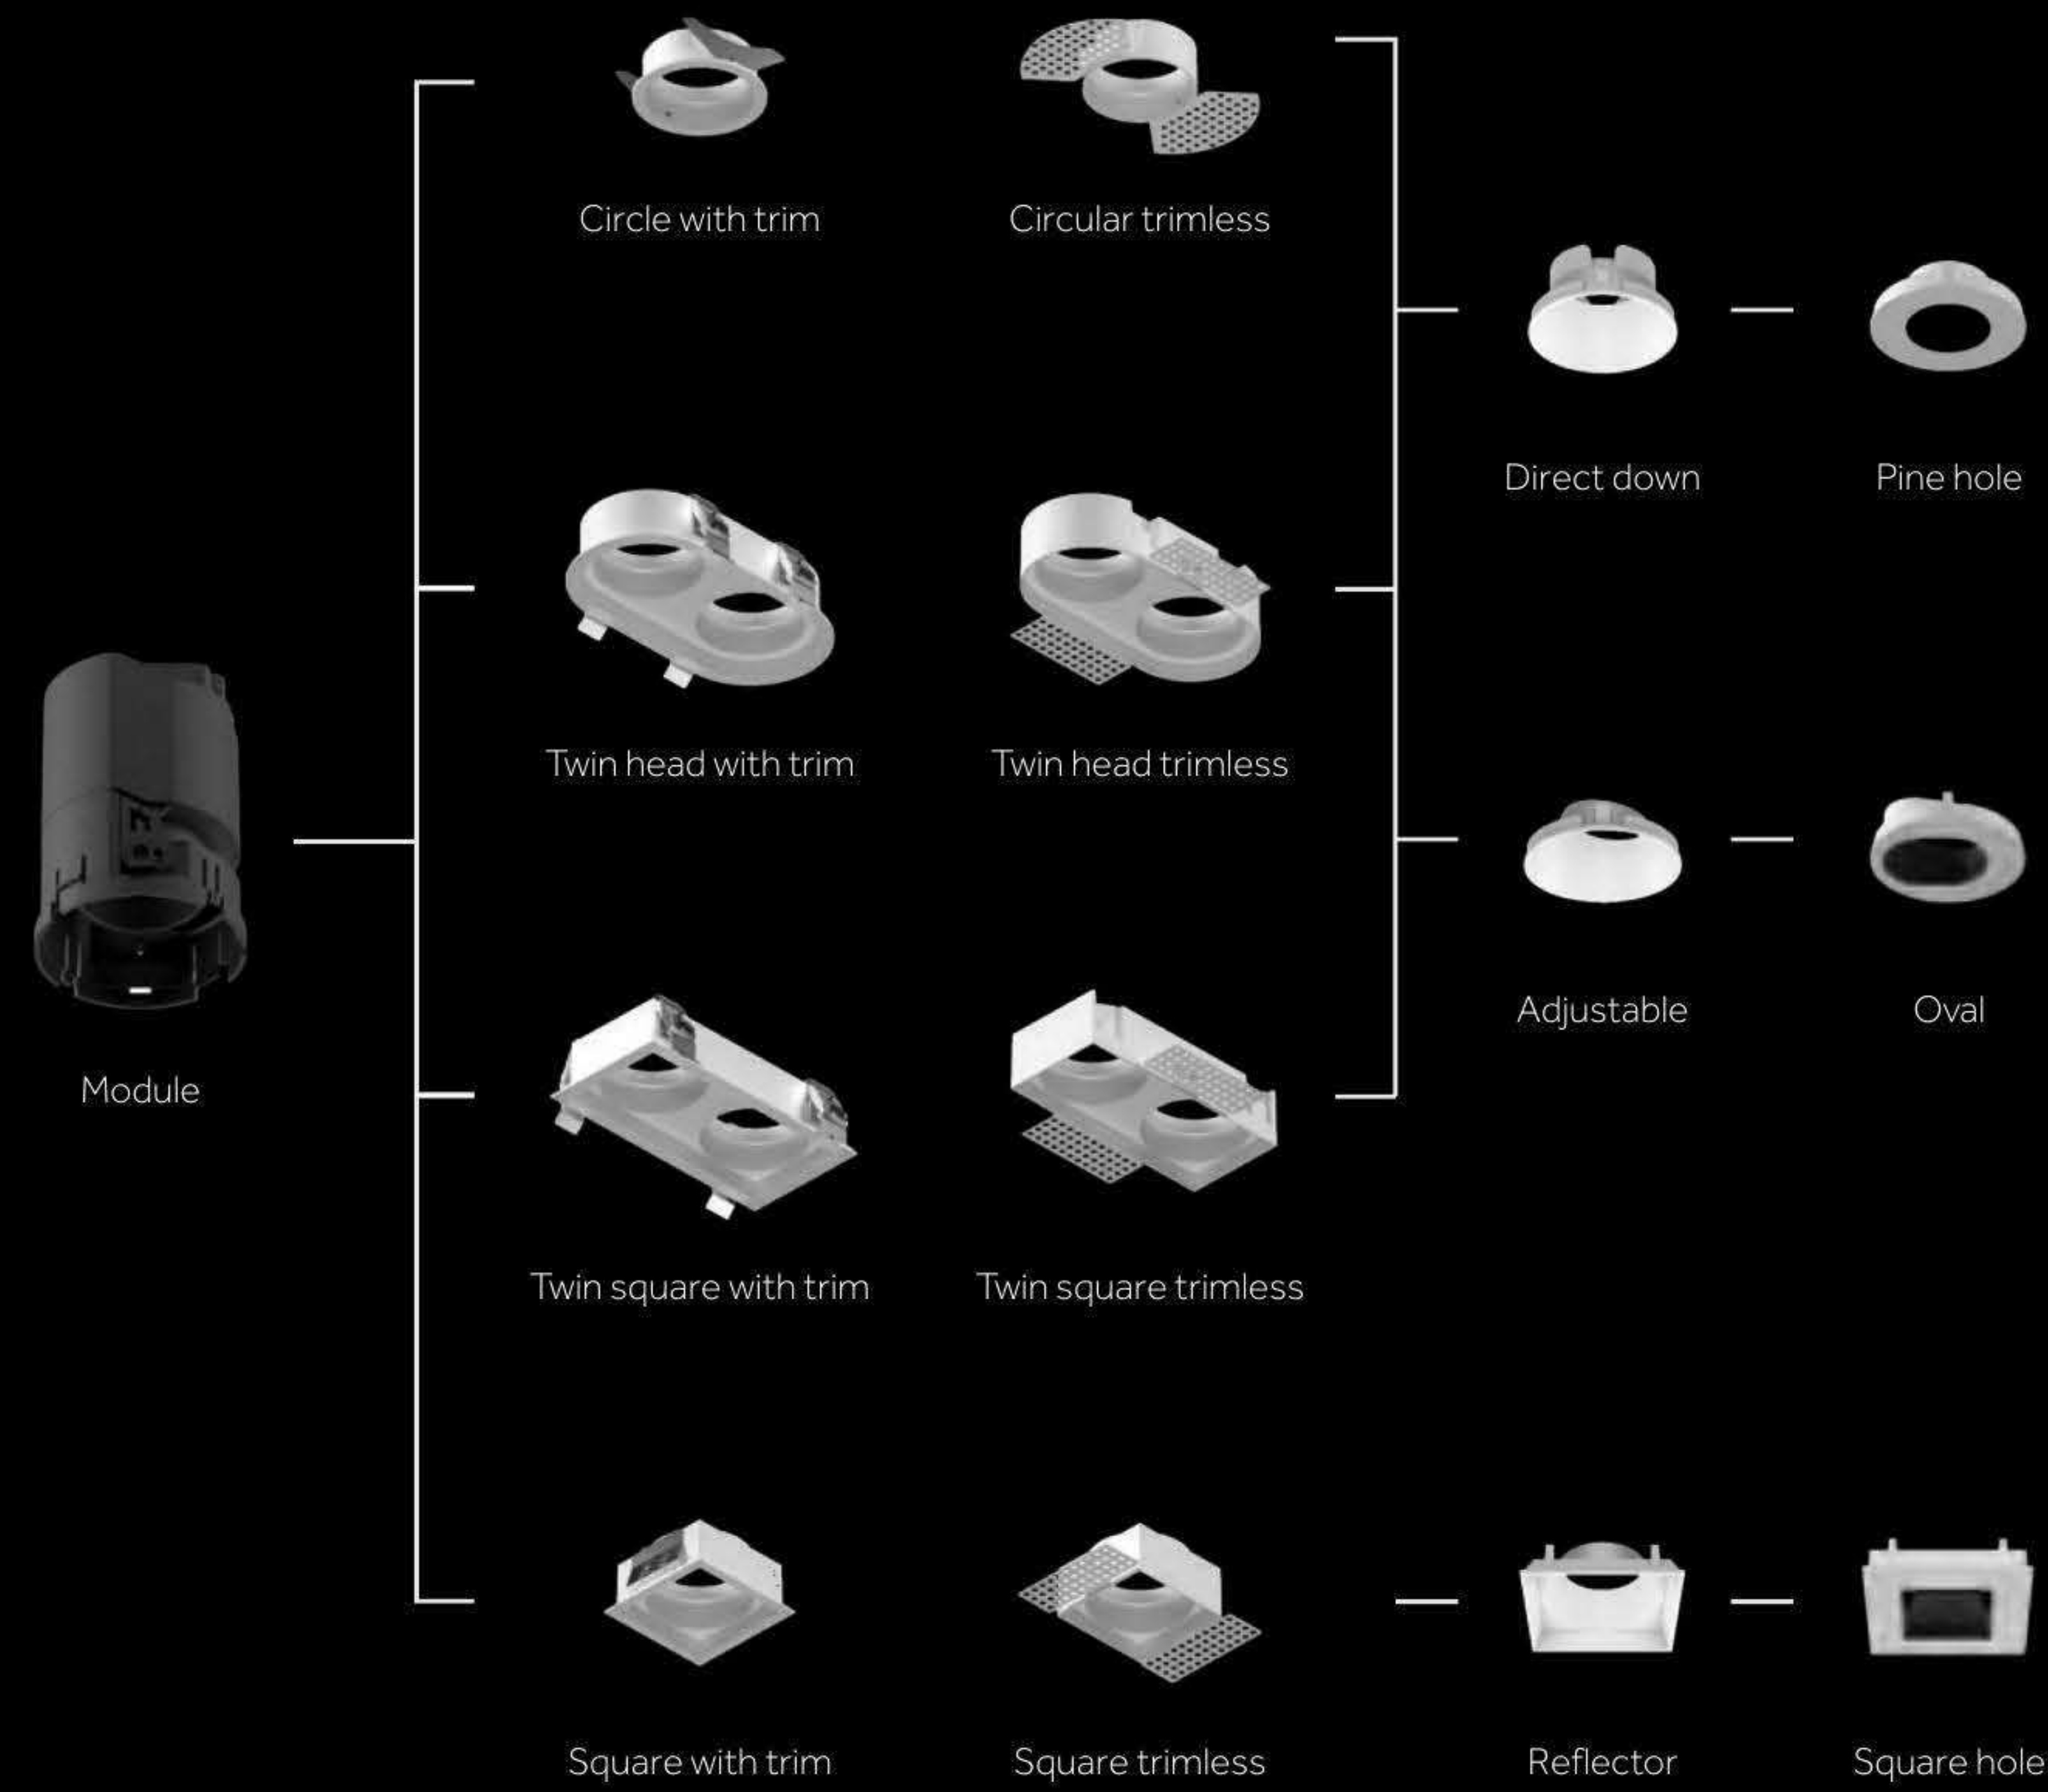

Reflector color:

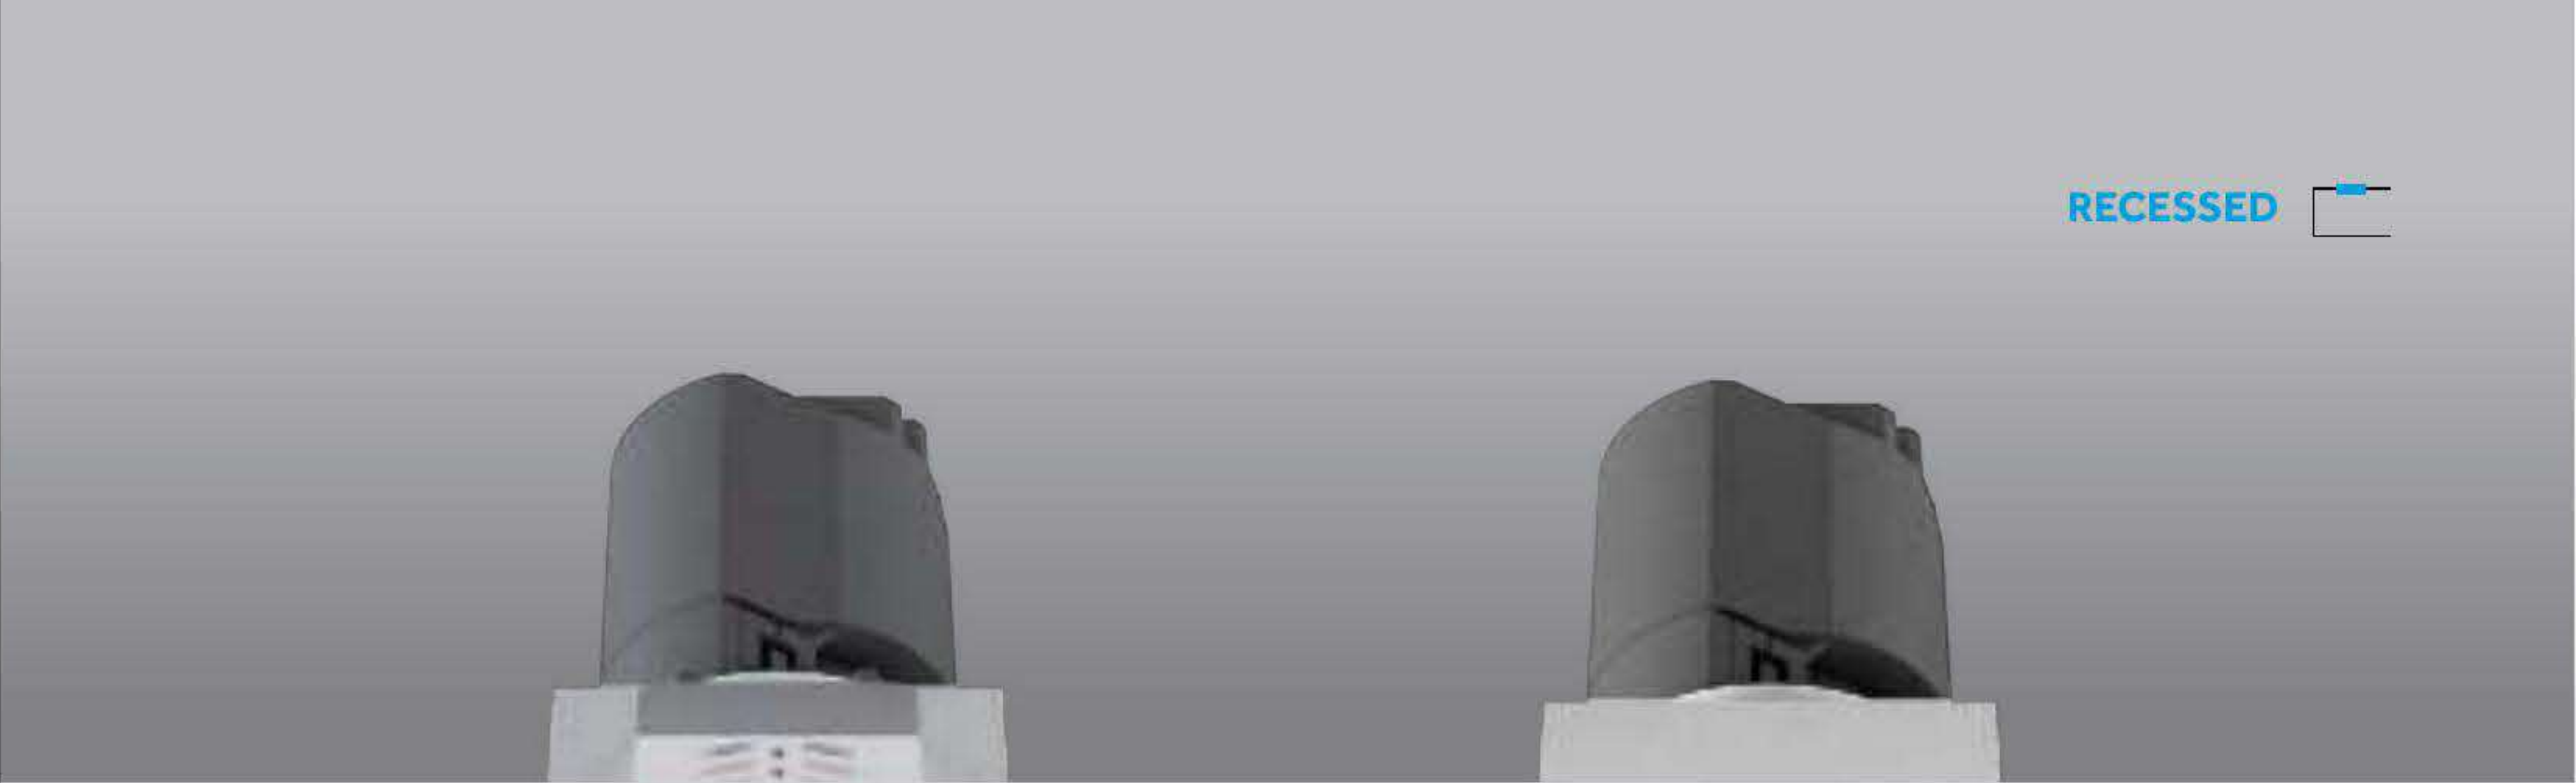

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXA-W323-1A	7W	15°/24°/38°/60°			55x55	63.5x63.5x87.5
DXA-W323-1A	7W	15°/24°/38°/60°			57.5x57.5	53.8x53.8x87.5
DXA-W324-1A	12W	8°/15°/24°/38°/60°			75x75	84.5x84.5x112
DXA-W324-1A	12W	8°/15°/24°/38°/60°			77x77	73.5x73.5x112
DXA-W325-1A	20W	15°/24°/38°/60°			95x95	104.5x104.5x137.5
DXA-W325-1A	20W	15°/24°/38°/60°			97x97	93.6x93.6x137.5

OPTIONAL: ○ White ● Black ● Silver ● Golden ● Gun black ● Silver mist

Cut-out-55x55mm:



Cut-out-75x75mm:



Cut-out-95x95mm:





Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXA-W323-2A	7Wx2	15°/24°/38°/60°			108.5x55	117.3x63.5x87.5
DXA-W323-2A	7Wx2	15°/24°/38°/60°			111x57.5	107.6x53.8x87.5
DXA-W324-2A	12Wx2	8°/15°/24°/38°/60°			150x75	158x84.5x112
DXA-W324-2A	12Wx2	8°/15°/24°/38°/60°			152.5x77	147x73.5x112
DXA-W325-2A	20Wx2	15°/24°/38°/60°			190x95	198x104.5x137.5
DXA-W325-2A	20Wx2	15°/24°/38°/60°			192.5x97	187x93.6x137.5
DXA-W323-3A	7Wx3	15°/24°/38°/60°			163x55	171x63.5x87.5
DXA-W323-3A	7Wx3	15°/24°/38°/60°			165.5x57.5	161.5x53.8x87.5
DXA-W324-3A	12Wx3	8°/15°/24°/38°/60°			222x75	231.5x84.5x112
DXA-W324-3A	12Wx3	8°/15°/24°/38°/60°			224.5x77	220.5x73.5x112
DXA-W325-3A	20Wx3	15°/24°/38°/60°			284x95	293.5x104.5x137.5
DXA-W325-3A	20Wx3	15°/24°/38°/60°			287x97	281x93.6x137.5

OPTIONAL:  White  Black  Silver  Golden  Gun black  Silver mist


Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXA-W323-4A	7Wx4	15°/24°/38°/60°			108.5x108.5	117.3x117.3x87.5
DXA-W323-4A	7Wx4	15°/24°/38°/60°			111x111	107.6x107.6x87.5
DXA-W324-4A	12Wx4	8°/15°/24°/38°/60°			150x150	158x158x112
DXA-W324-4A	12Wx4	8°/15°/24°/38°/60°			152.5x152.5	147x147x112
DXA-W325-4A	20Wx4	15°/24°/38°/60°			190x190	198x198x137.5
DXA-W325-4A	20Wx4	15°/24°/38°/60°			192x192	187.2x187.2x137.5

OPTIONAL:  White  Black  Silver  Golden  Gun black  Silver mist

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)


DOWN LIGHT
(COB)

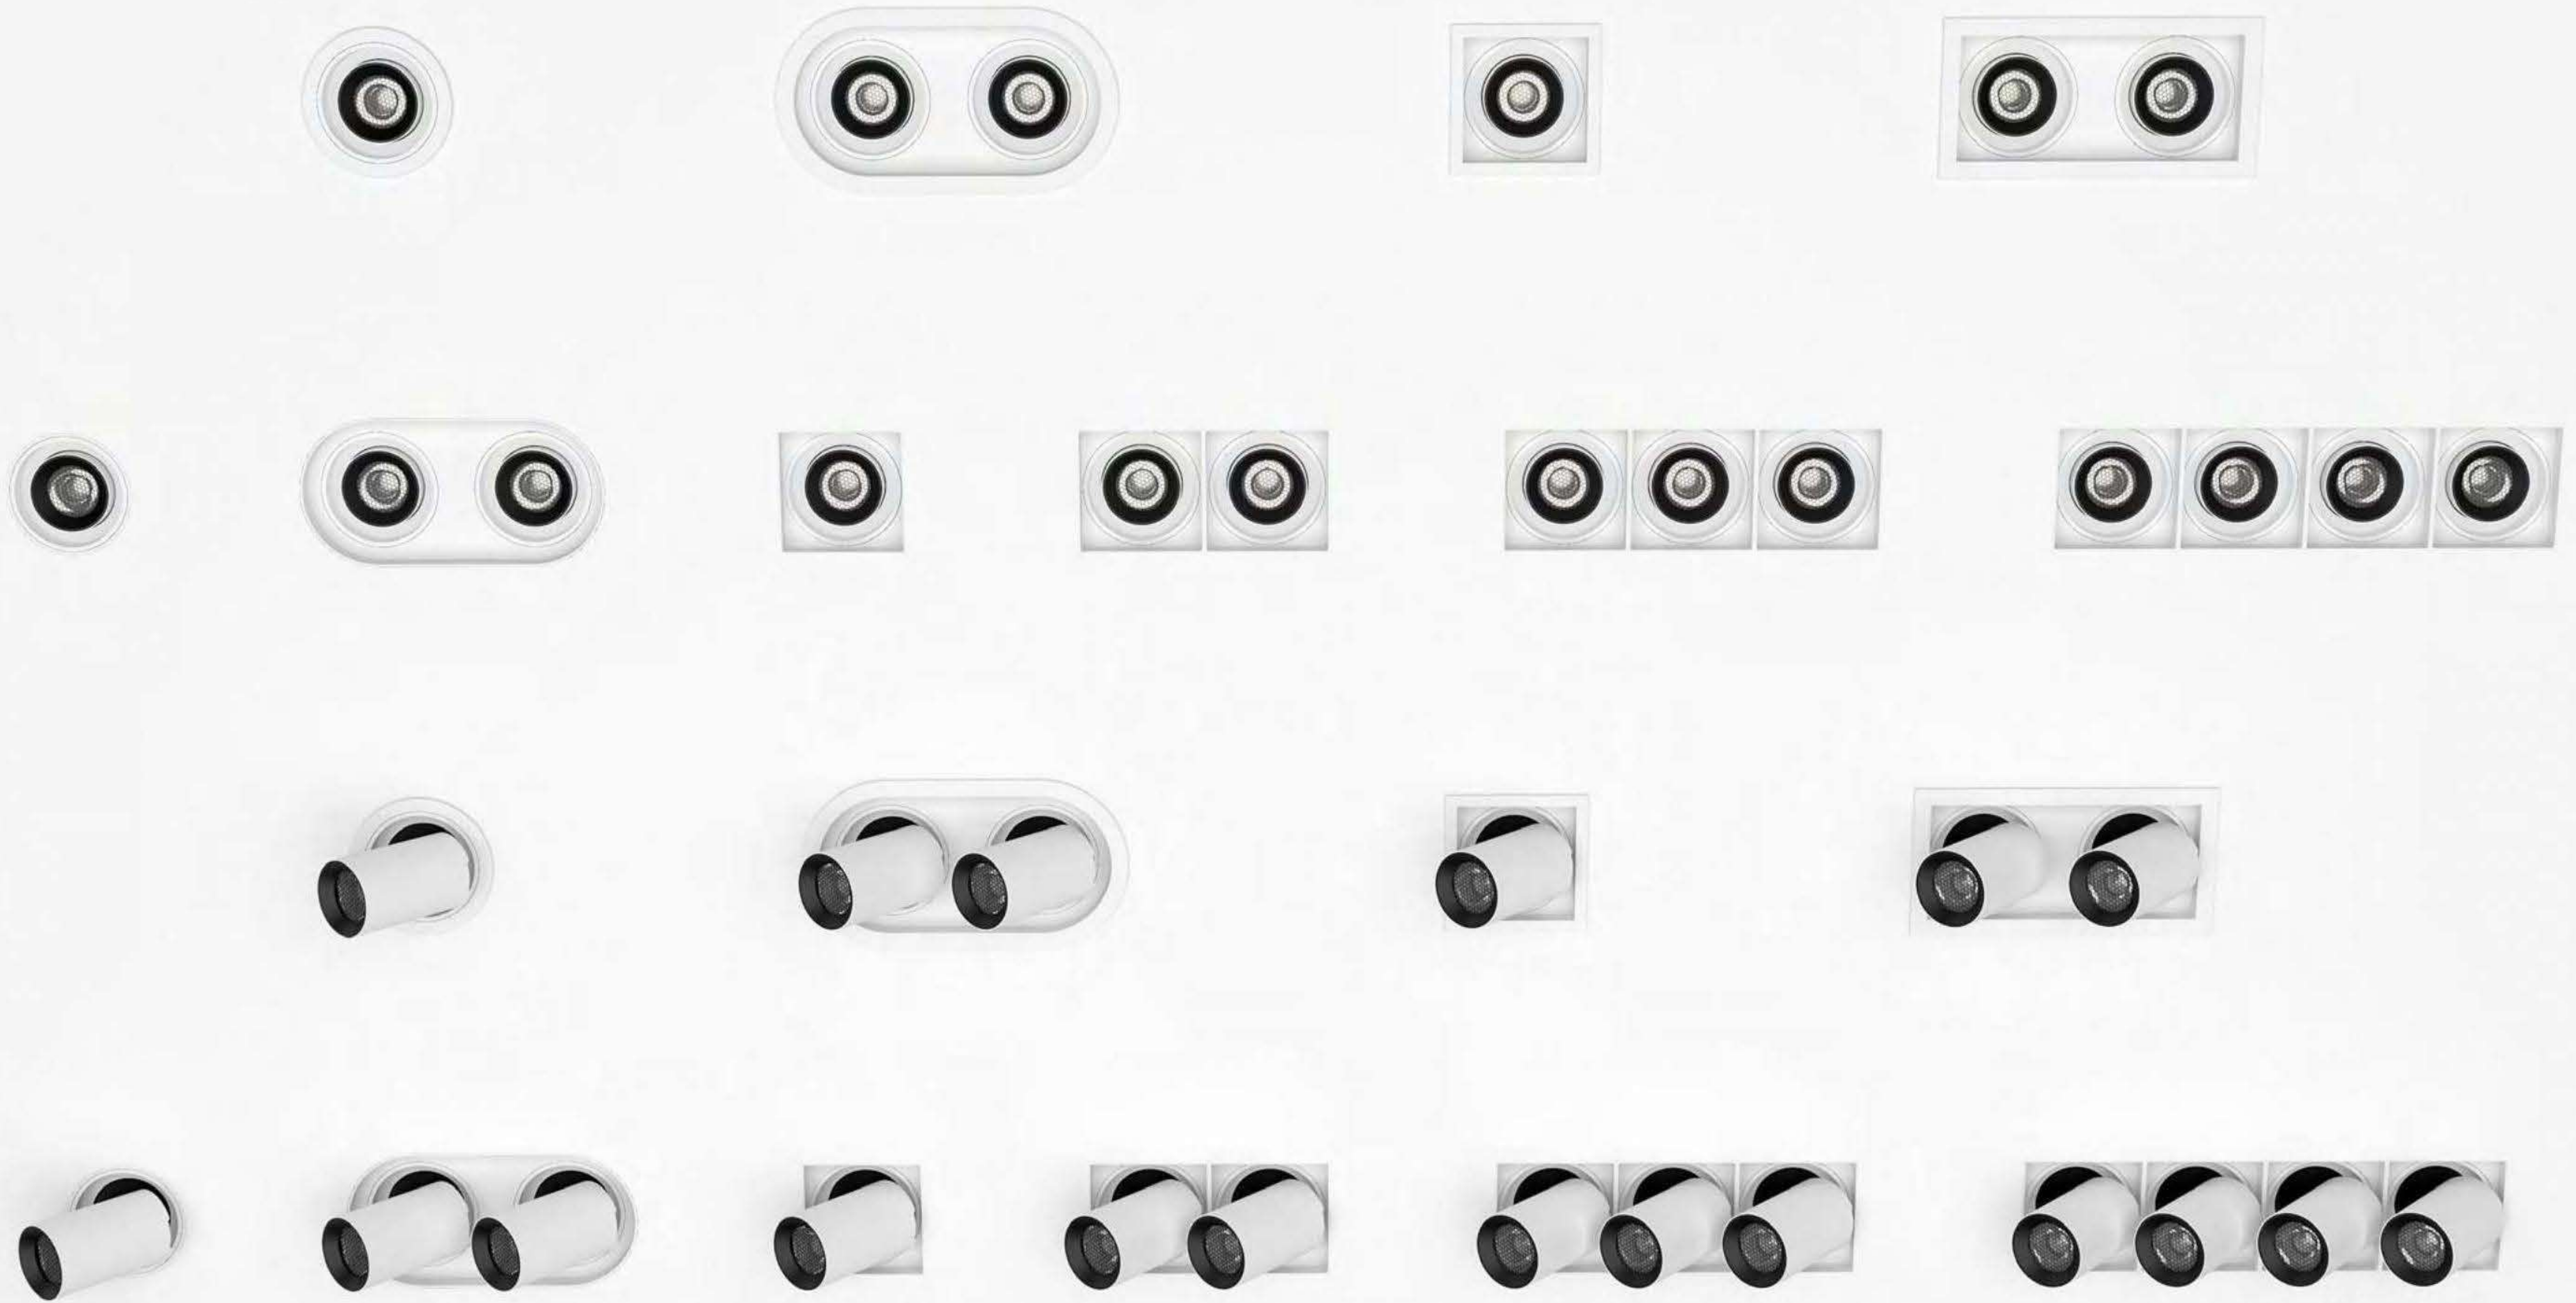


DOWN LIGHT
(COB)

STARS B

LED Downlight

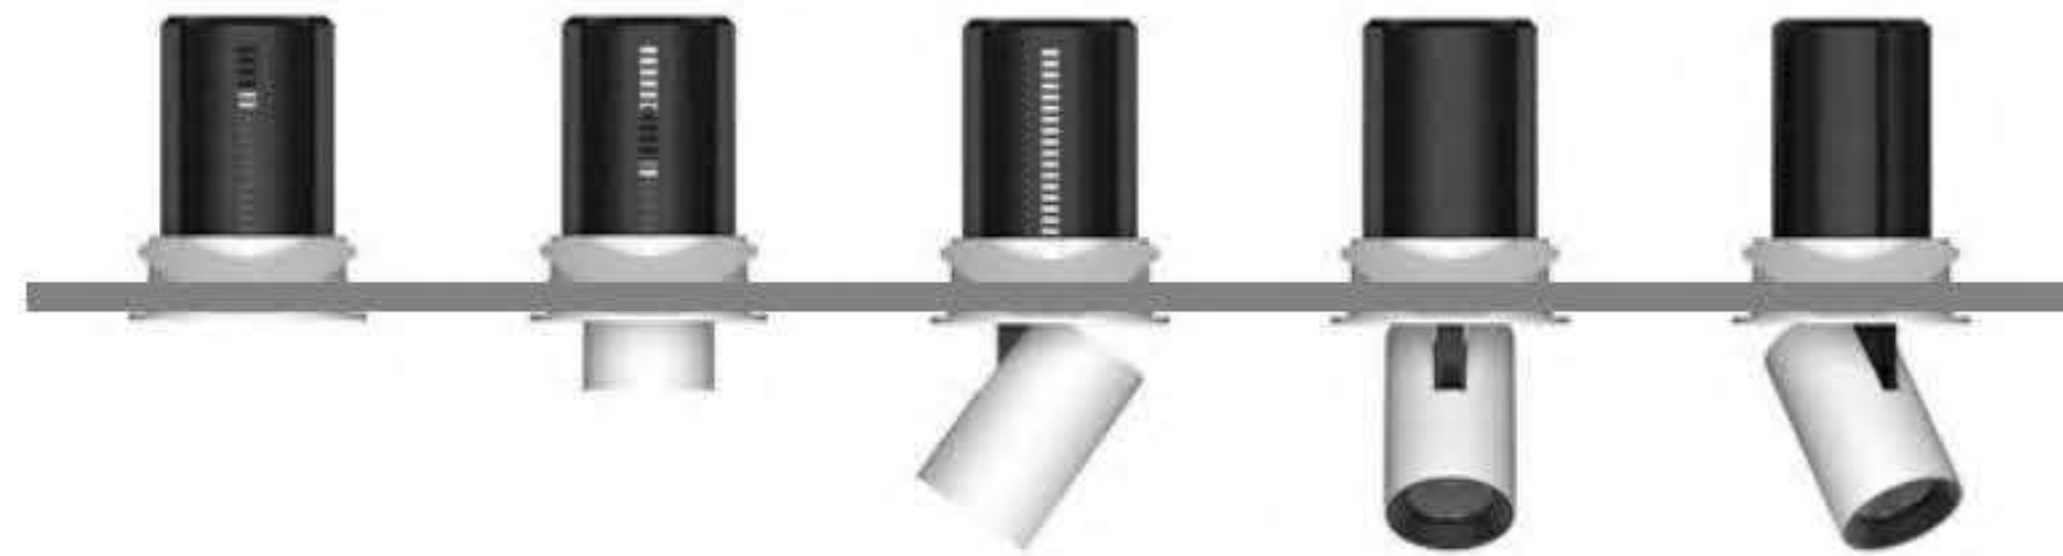

VANIE Series Free splicing approach, flexible configuration according to personalized or architectural request.

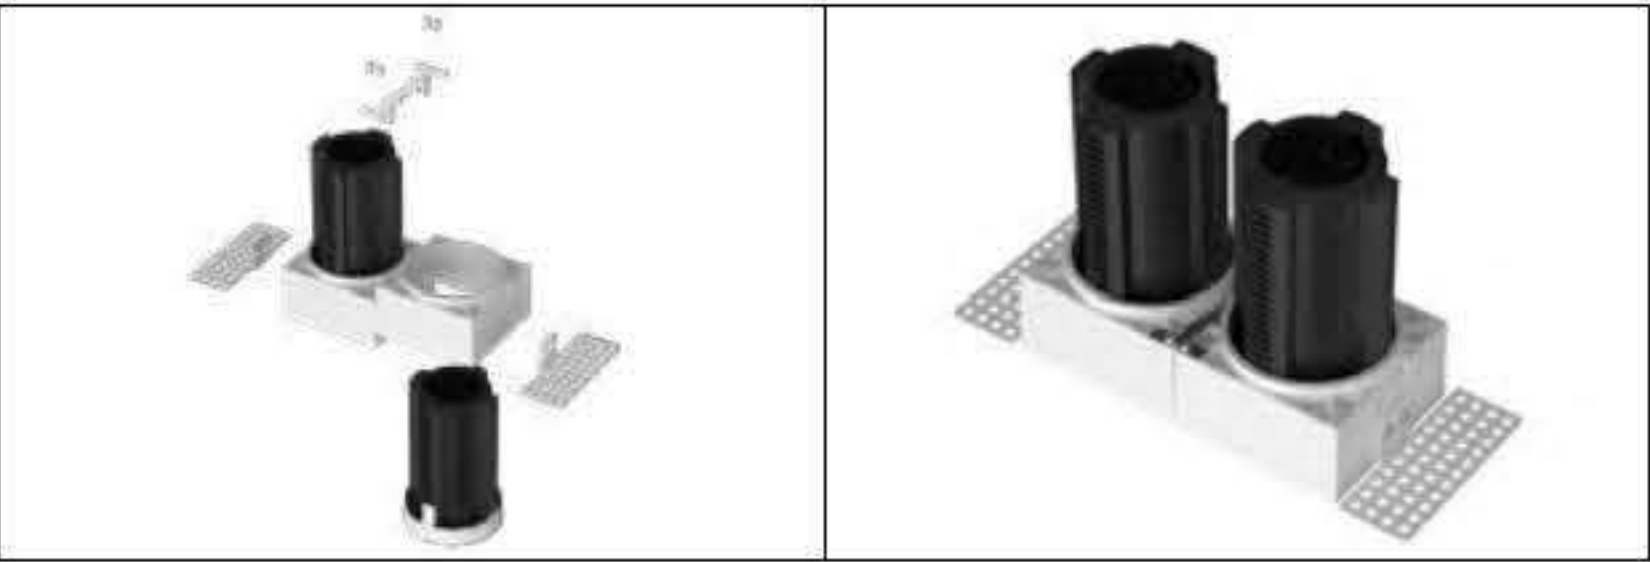

DOWN LIGHT
(COB)



Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (DxHmm)
DXB-323T	7W	10°/15°/24°/38°/60°			Ø55	Ø61.6x86
DXB-323	7W	10°/15°/24°/38°/60°			Ø57.5	Ø53x86
DXB-324T	12W	10°/15°/24°/38°/60°			Ø75	Ø84x104
DXB-324	12W	10°/15°/24°/38°/60°			Ø77	Ø72.5x104
DXB-325T	20W	10°/15°/24°/38°/60°			Ø95	Ø110x127
DXB-325	20W	10°/15°/24°/38°/60°			Ø97	Ø91.5x127



Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXB-323ST	7W	10°/15°/24°/38°/60°			55x55	63.5x63.5x94
DXB-323S	7W	10°/15°/24°/38°/60°			57.5x57.5	53.8x53.8x94
DXB-324ST	12W	10°/15°/24°/38°/60°			75x75	84.5x84.5x116
DXB-324S	12W	10°/15°/24°/38°/60°			77x77	73.5x73.5x116
DXB-325ST	20W	10°/15°/24°/38°/60°			95x95	93.6x93.6x144
DXB-325S	20W	10°/15°/24°/38°/60°			97x97	93.6x93.6x144
DXB-323ST-2	7Wx2	10°/15°/24°/38°/60°			120x60	129.5x68.5x91
DXB-323S-2	7Wx2	10°/15°/24°/38°/60°			120x62	115.5x54.5x91
DXB-324ST-2	12Wx2	10°/15°/24°/38°/60°			164x77	180x90.5x116
DXB-324S-2	12Wx2	10°/15°/24°/38°/60°			166.5x79.5	163x73.5x116
DXB-325ST-2	20Wx2	10°/15°/24°/38°/60°			207x95	223.5x109.5x140
DXB -325S-2	20Wx2	10°/15°/24°/38°/60°			209x97	207.5x93.5x140

DOWN LIGHT
(COB)



Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXB-323S-3	7Wx3	10°/15°/24°/38°/60°			163x55	171x63.5x94
DXB-323ST-3	7Wx3	10°/15°/24°/38°/60°			165.5x57.5	161.5x54x94
DXB-324ST-3	12Wx3	10°/15°/24°/38°/60°			222x75	231.5x84.5x116
DXB-324S-3	12Wx3	10°/15°/24°/38°/60°			224.5x77	220.5x73.5x116
DXB-325ST-3	20Wx3	10°/15°/24°/38°/60°			284x95	293.5x104.5x144
DXB-325S-3	20Wx3	10°/15°/24°/38°/60°			287x97	281x94x144

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
DXB-323S-4	7Wx4	10°/15°/24°/38°/60°			108.5x108.5	117.5x117.5x94
DXB-323ST-4	7Wx4	10°/15°/24°/38°/60°			111x111	107.6x107.6x94
DXB-324ST-4	12Wx4	10°/15°/24°/38°/60°			150x150	158x158x116
DXB-324S-4	12Wx4	10°/15°/24°/38°/60°			152.5x152.5	147x147x116
DXB-325ST-4	20Wx4	10°/15°/24°/38°/60°			190x190	198x198x144
DXB-325S-4	20Wx4	10°/15°/24°/38°/60°			192x192	187x187x144

ZIGBEE Downlight Series


SURFACE 



	ZY03-S	ZY04-S	ZY05-S
Type	Fixed	Fixed	Fixed
Wattage	15W	25W	35W
Beam Angle	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/38°/60°
Lumen (lm)	1668	2760	3772
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø90x103	Ø110x115	Ø130x115
N.W/PC (kgs)	0.46	0.72	0.9
Q'ty/CTN (pcs)	32	24	18

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)



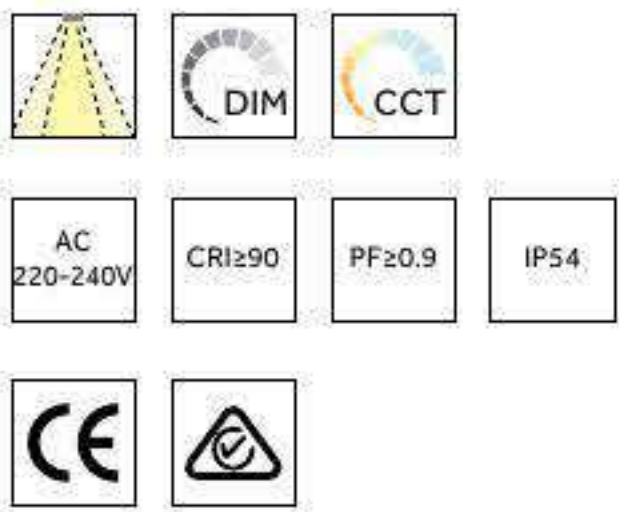


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K


DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

ZY Series Superior heat emission structure with patened technology and power supply configuration, the light can work efficiently and safety. Optimized light distribution design solution can make the optical property more excellent.

Dimension(mm)

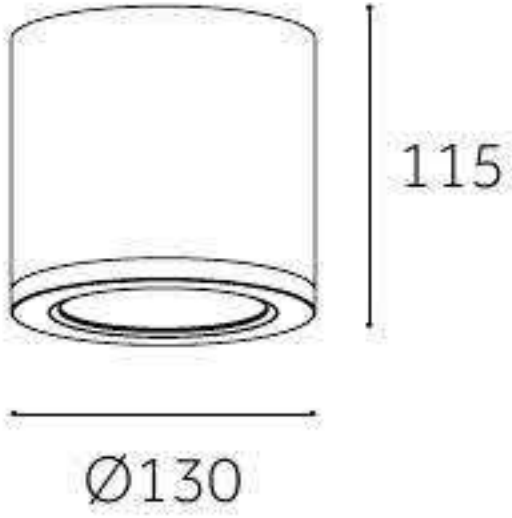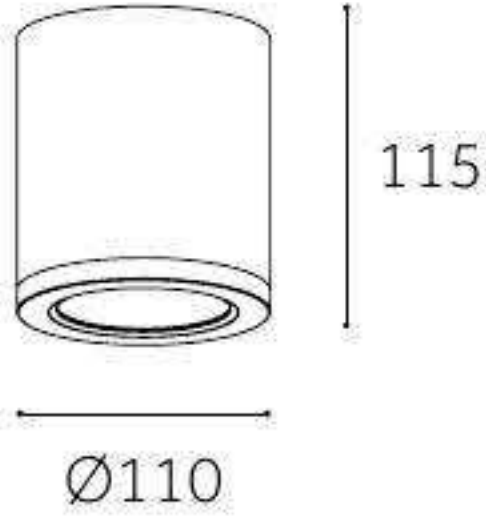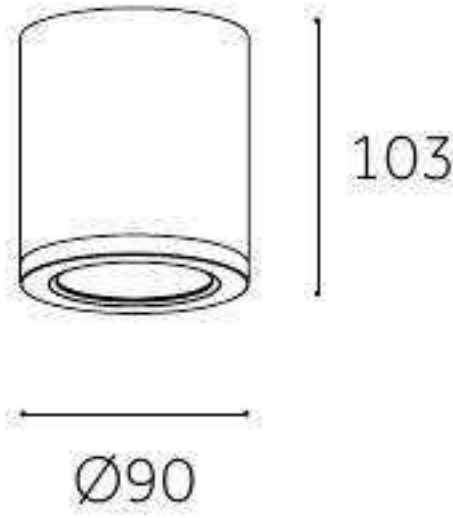

POWER-S Downlight Series


SURFACE 



	ZX02-S	ZX03-S	ZX04-S
Type	Fixed	Fixed	Fixed
Wattage	10W	20W	30W
Beam Angle	12°/24°/38°/55°	12°/24°/38°/55°	12°/24°/38°/55°
Lumen (lm)	805	1610	2415
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø75x90	Ø91x112	Ø128x137
N.W/PC (kgs)	0.33	0.51	0.98
Q'ty/CTN (pcs)	50	30	20

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)

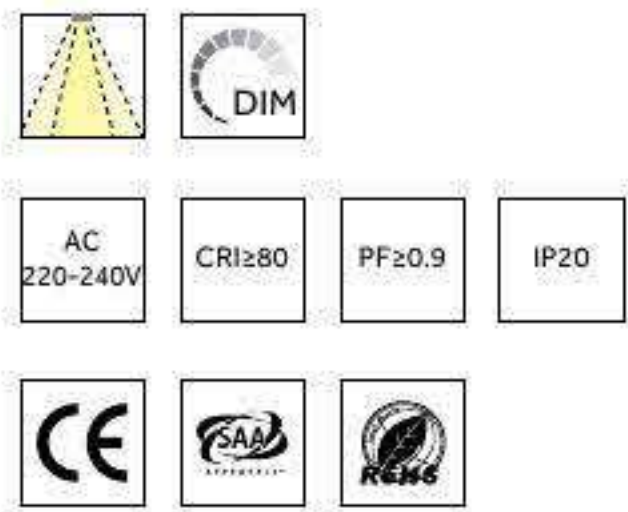


- FINISH:** ☐ White ☒ Black
- CCT:**

3000K

6000K
- OPTIONAL:** ☐ Bright white ☒ Bright black ☐ Black light ☐ Bright silver ☐ Silver mist
- DIMMING:** ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

KING KONG Series UGR<19 Surface Mounted Downlight,black and white optional.Use metal ceiling plate, die-cast lamp body radiator. Anti-glare cover, which can add honeycomb to make UGR < 12, the snap-back cover is easy to install and remove. Exquisite form and reasonable proportion.

Dimension(mm)

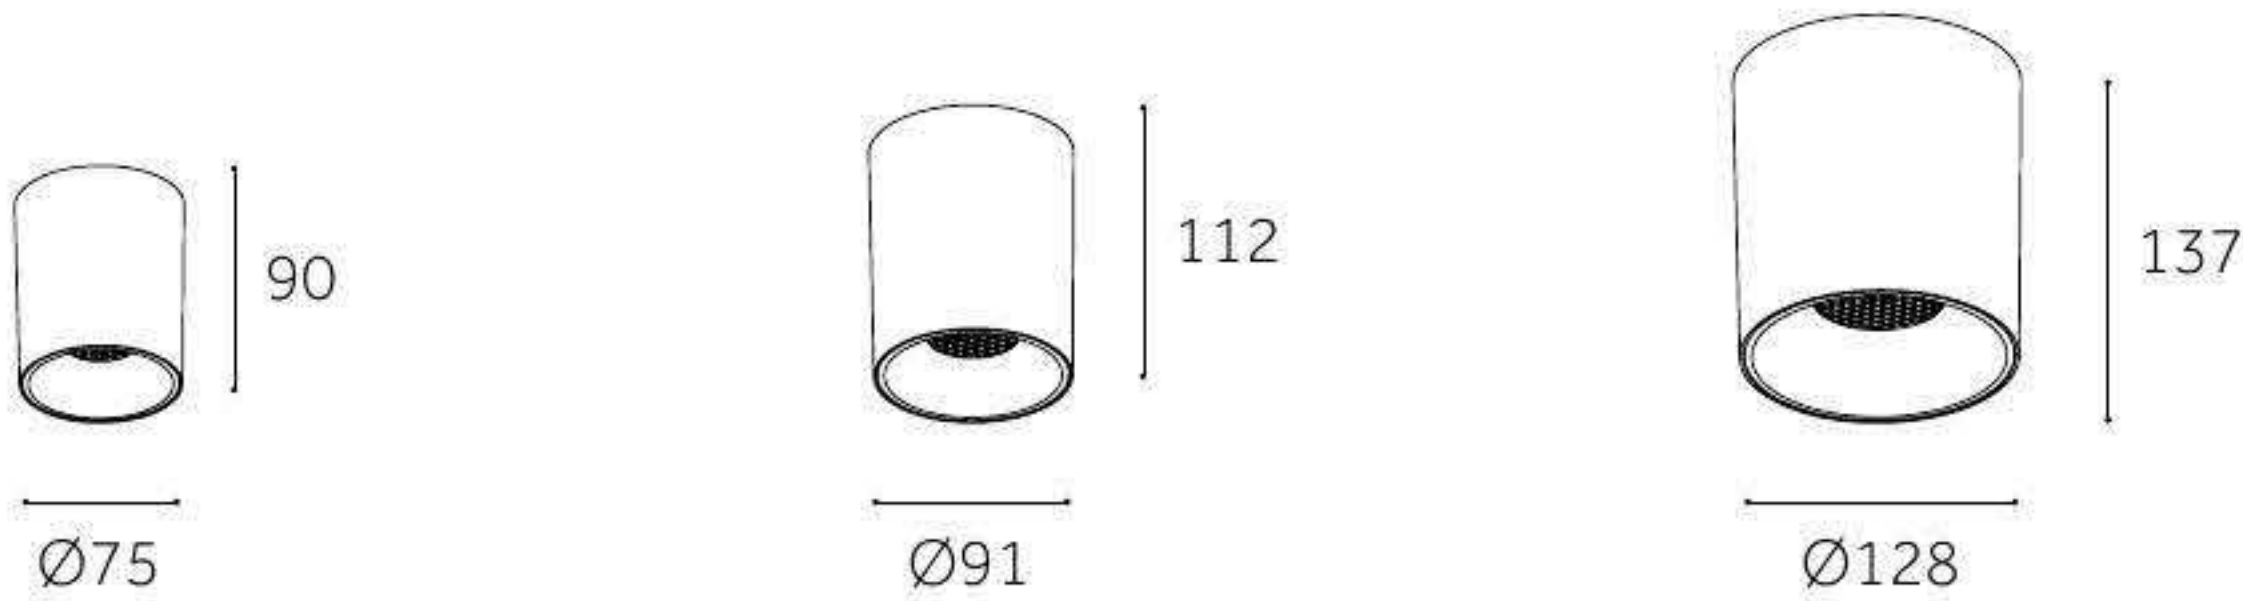




	SL63-C	SL75-C
Type	Fixed	Fixed
Wattage	18W	30W
Beam Angle	23°/38°/45°	23°/38°/45°
Lumen (lm)	1710	2737
Cut-out (mm) ⓘ	/	/
Size (DxLxHmm)	Ø63x145x1000	Ø75x165x1000
N.W/PC (kgs)	0.65	0.95
Q'ty/CTN (pcs)	27	18

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)

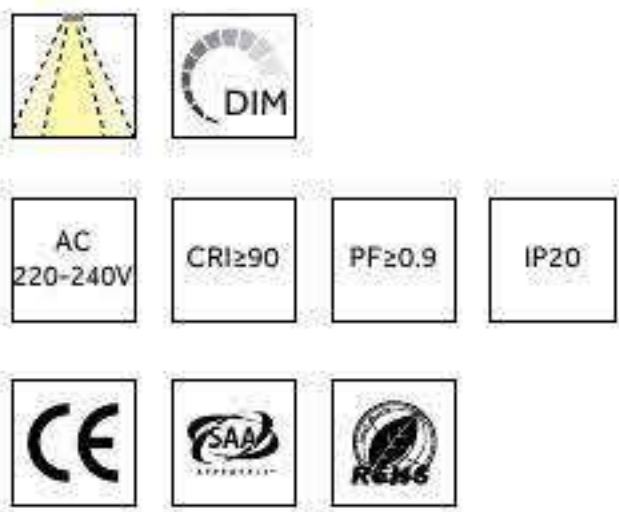



- FINISH:** ☐ White ☐ Silver ☒ Black
- CCT:**

3000K

6000K
- OPTIONAL:** ☐ White ☒ Black ☐ Golden ☐ Sliver
- DIMMING:** ☒ Triac

MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels,restaurants and other public buildings.

Dimension(mm)

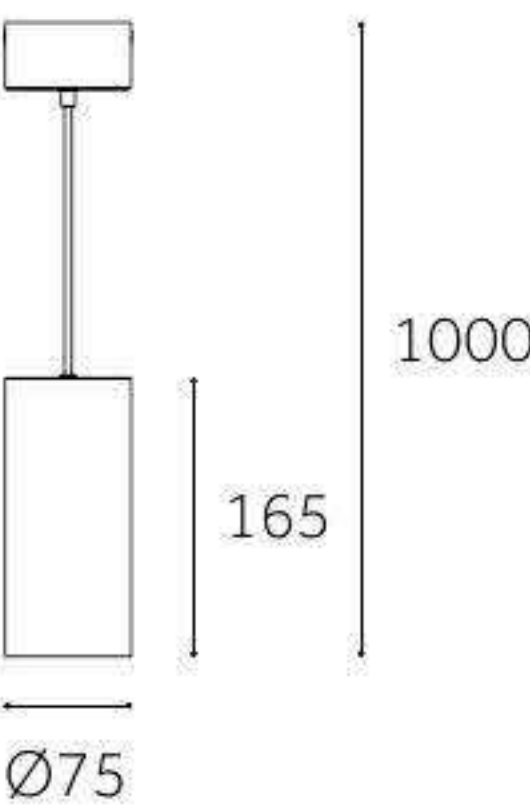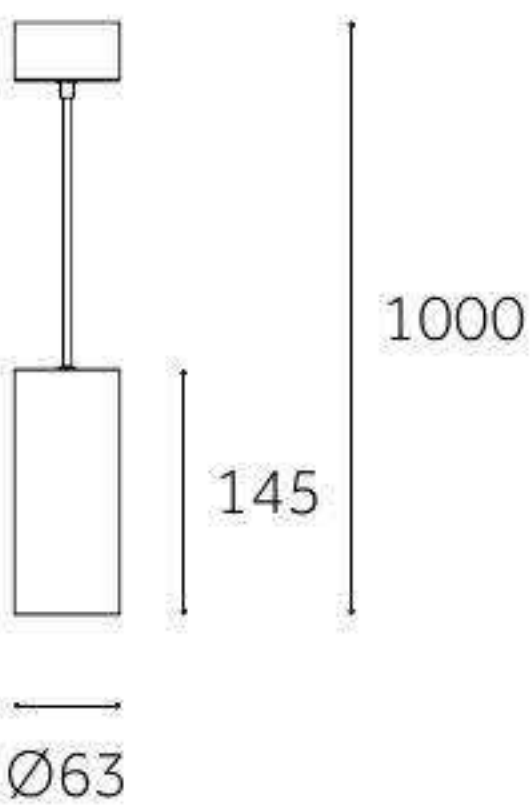




	SL03D-C	SL04D-C	SL05D-C
Type	Fixed	Fixed	Fixed
Wattage	15W	25W	35W
Beam Angle	15°/24°/38°/60°	15°/24°/38°/60°	24°/38°/60°
Lumen (lm)	1582	2649	3720
Cut-out (mm) ⓘ	/	/	/
Size (DxLxHmm)	Ø90x103x1200	Ø110x115x1200	Ø130x115x1200
N.W/PC (kgs)	0.56	0.82	0.96
Q'ty/CTN (pcs)	18	12	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)

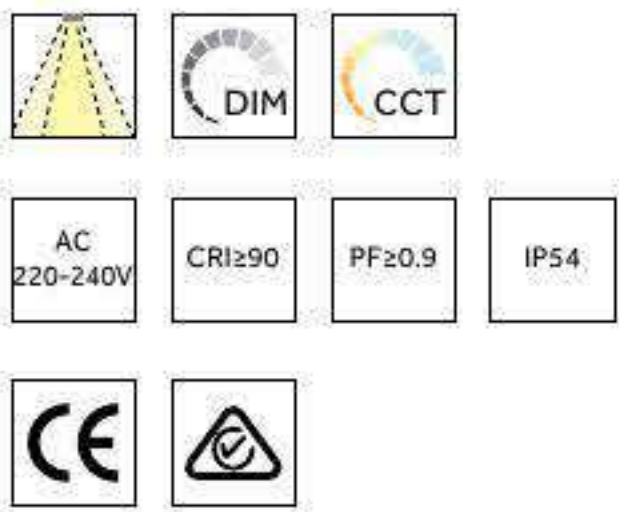


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

ZY Series Superior heat emission structure with patened technology and power supply configuration, the light can work efficiently and safety. Optimized light distribution design solution can make the optical property more excellent.

Dimension(mm)

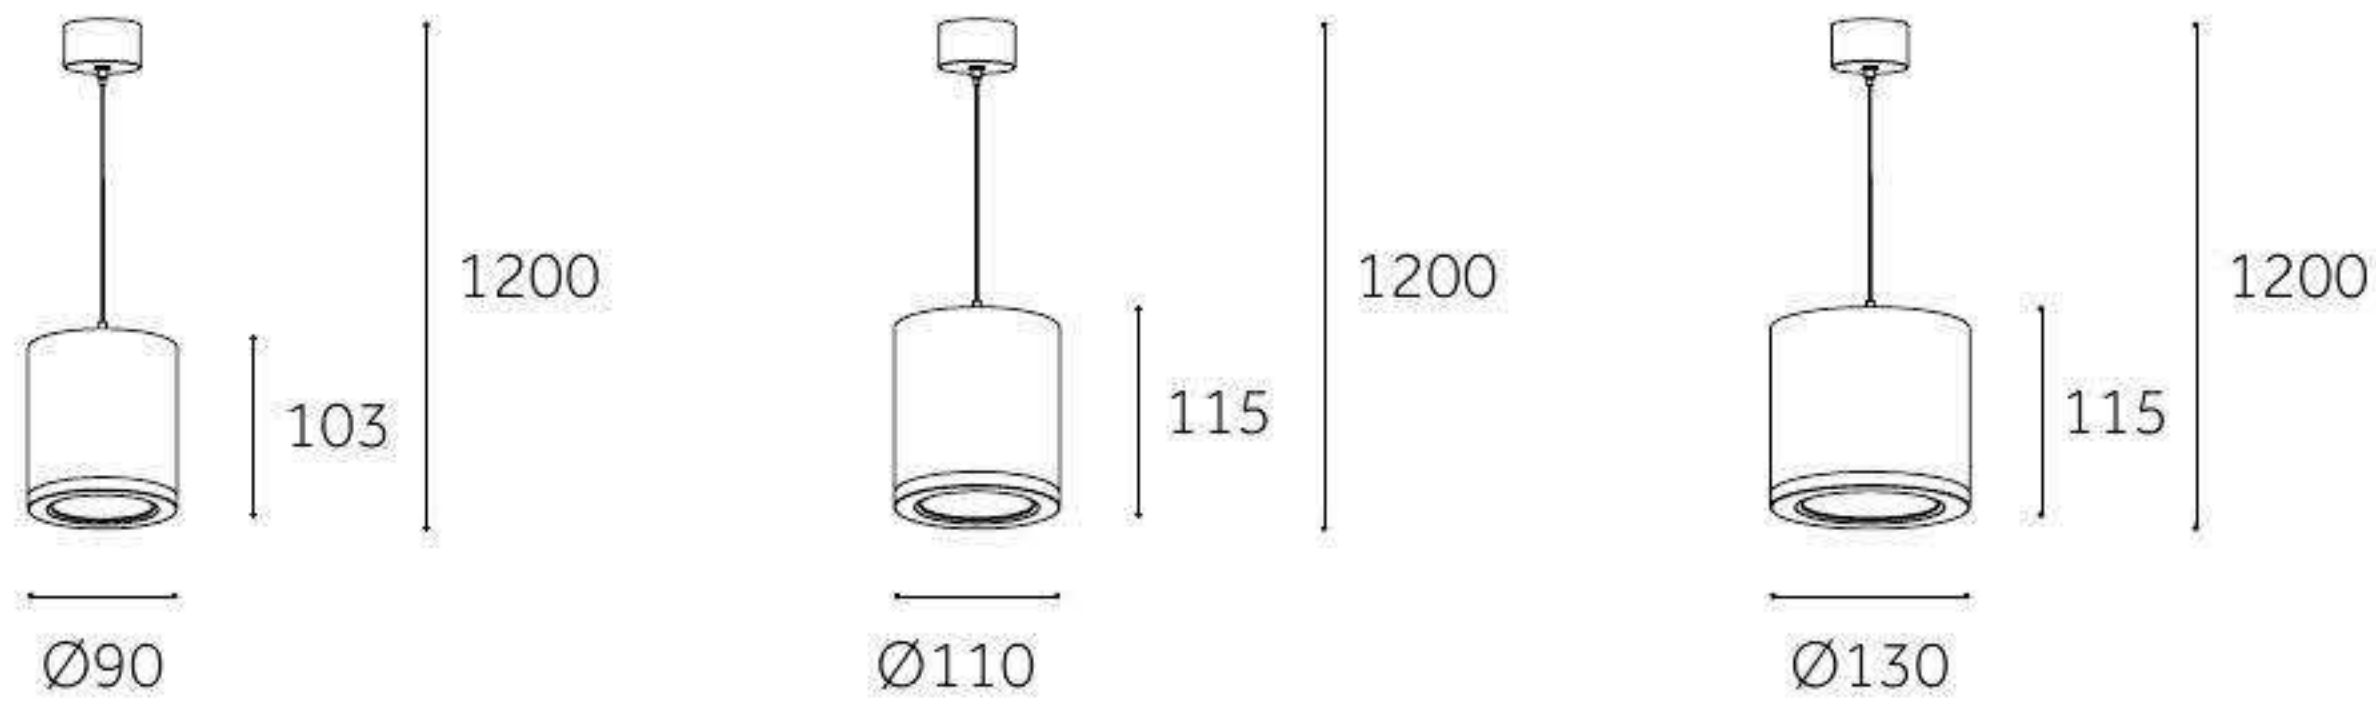




	MN-55C	MN-65C	MN-75C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	9W	18W	30W
Beam Angle	23°/38°/45°	23°/38°/45°	23°/38°/45°
Lumen (lm)	849	1710	2737
Cut-out (mm) ⓘ	/	/	/
Size (DxLmm)	Ø55x110	Ø63x145	Ø75x165
N.W/PC (kgs)	0.35	0.59	0.82
Q'ty/CTN (pcs)	40	25	20

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)

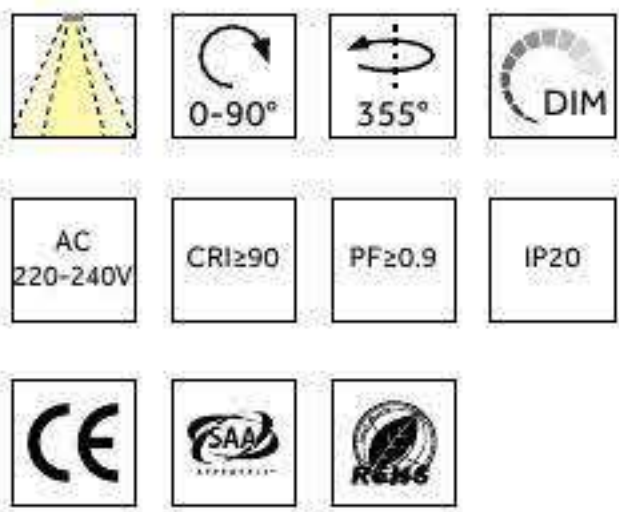


- FINISH:** ☐ White ☐ Silver ☒ Black
- CCT:**


3000K6000K
- OPTIONAL:** ☐ White ☒ Black ☐ Golden ☐ Sliver
- DIMMING:** ☒ Triac

MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels,restaurants and other public buildings.

Dimension(mm)

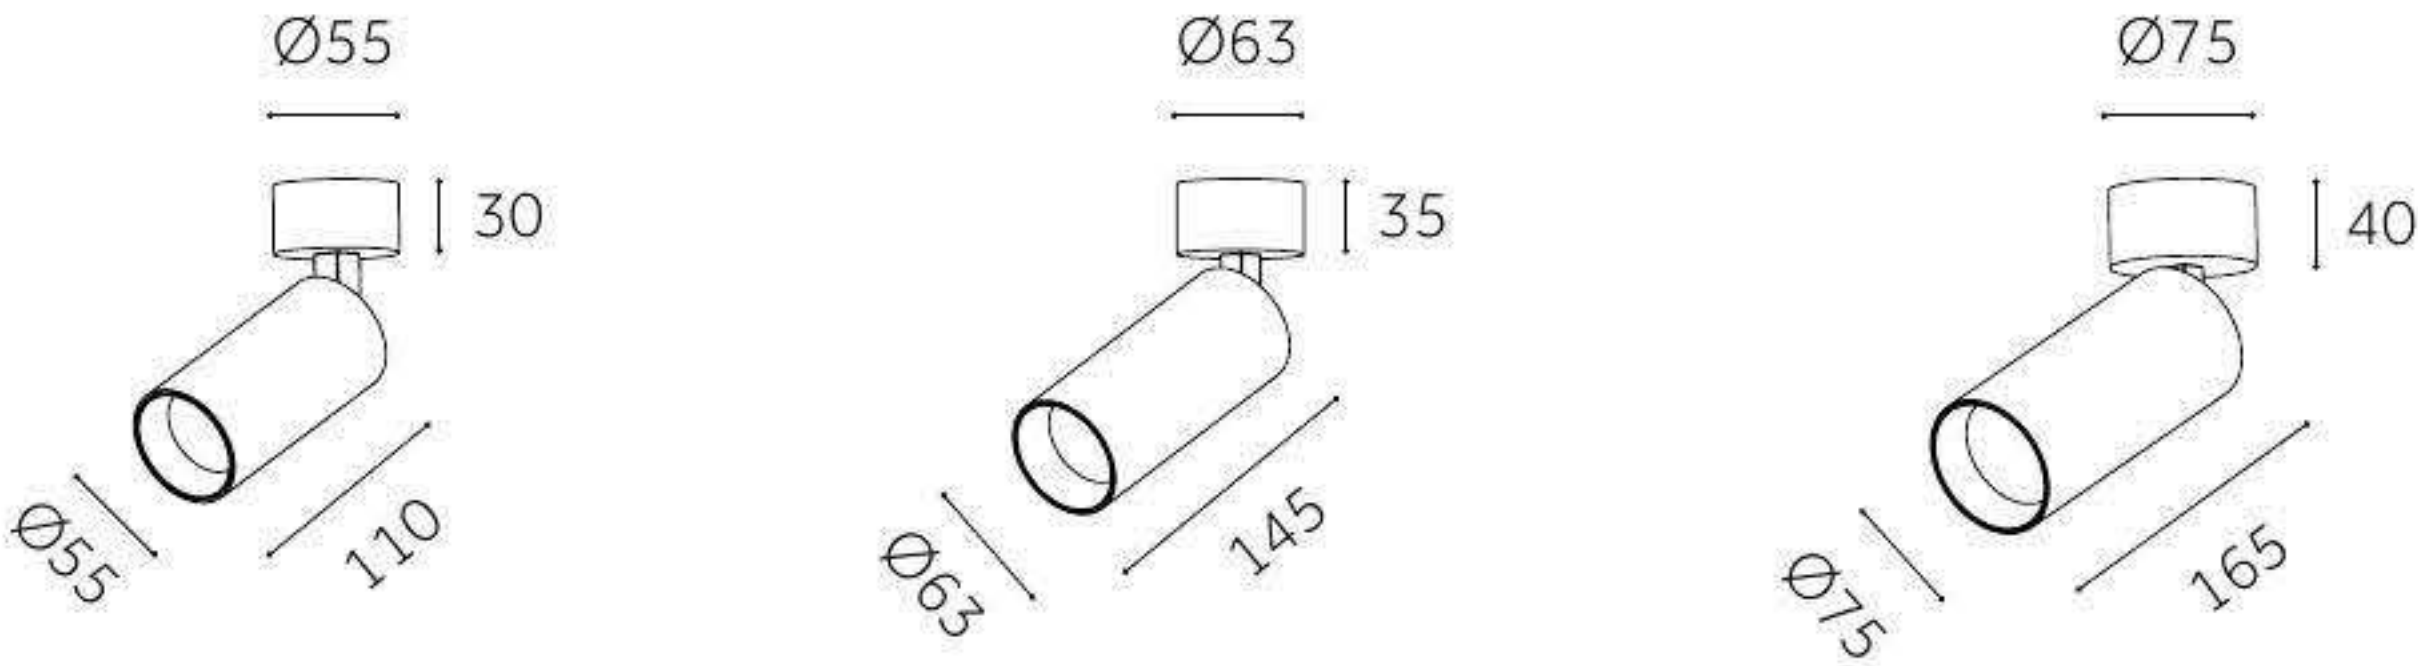

EAGLE EYE Downlight Series

SURFACE 


DOWN LIGHT
(Surface&Pendant)



DOWN LIGHT
(Surface&Pendant)

EX60-C

Type	Adjustable 90°
Wattage	10W/15W/20W
Beam Angle	15°-70°
Lumen (lm)	1000/1500/2100
Cut-out (mm) ⓘ	/
Size (DxHmm)	Ø60x318.5
N.W/PC (kgs)	0.8
Q'ty/CTN (pcs)	18

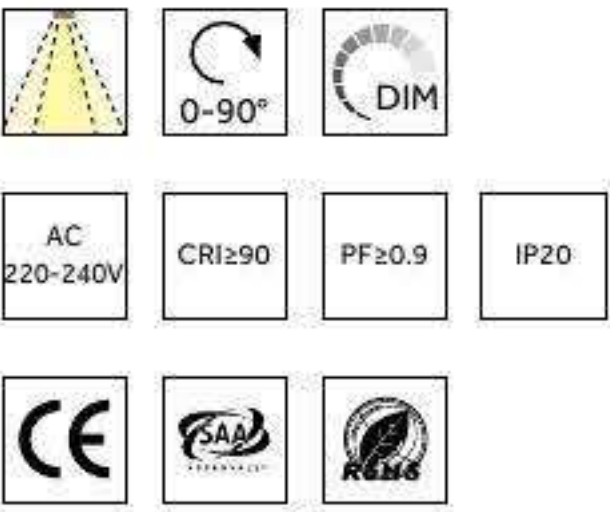


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 4000K 5000K 6000K

DIMMING: ☒ Non-Dimmable


EAGLE EYE Series with high efficiency brand COB LED chip, built-in driver. Aluminum die-casting body and heat sink which is better air dissipation. Adjustable beam angle from 15°-70°.

Dimension(mm)

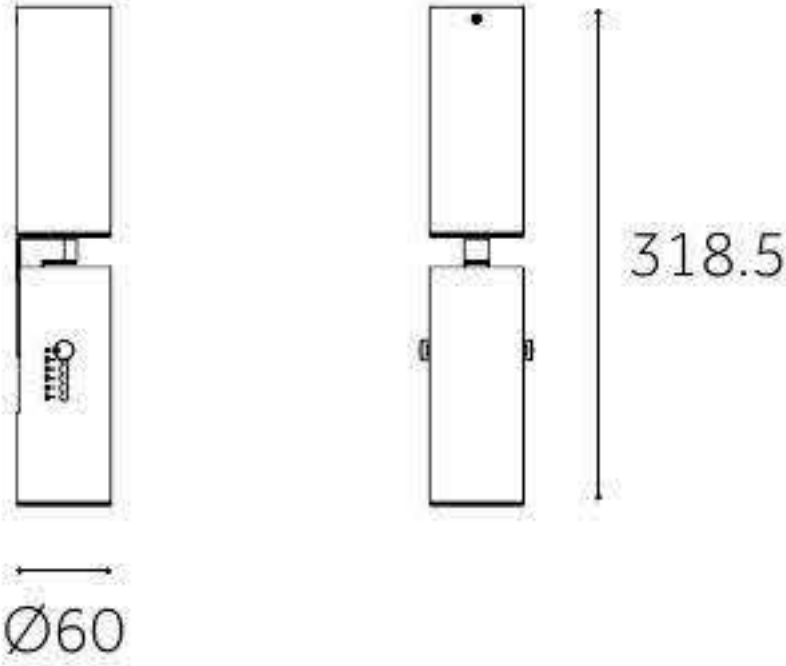




	EX05-F	EX05-C
Type	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	10W/15W/20W/25W	10W/15W/20W/25W
Beam Angle	95°	15°/25°/40°
Lumen (lm)	1145/1760/2399/2990	1116/1710/2332/2841
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø130x105	Ø130x105
N.W/PC (kgs)	1.46	1.46
Q'ty/CTN (pcs)	8	8

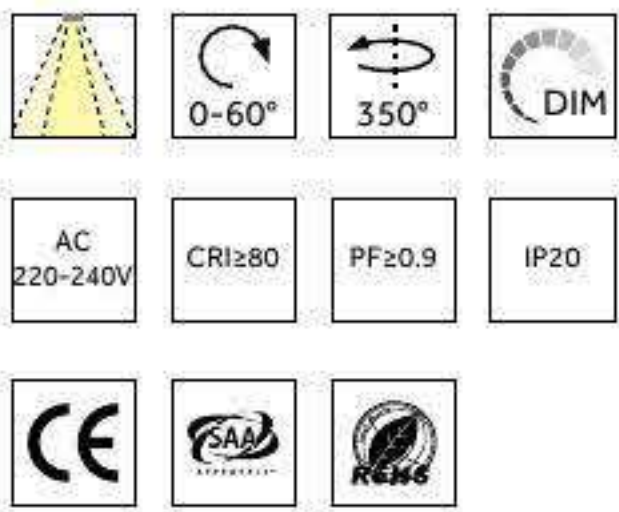


FINISH: ☐ White ☐ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Non-Dimmable

ARTEMIS Series products design with various installation options of surface-mounted, recessed, track and pendant. It provides excellent lighting effect for commercial space such as supermarkets and shops. 350 degree rotatable, 60 degree adjustable, the lamp head can be stretched to meet the adjustment of the different area. Button locked the angle, safe and convenient. 15°,25°,40° beam angle for COB version, 95° beam angle for SMD version.

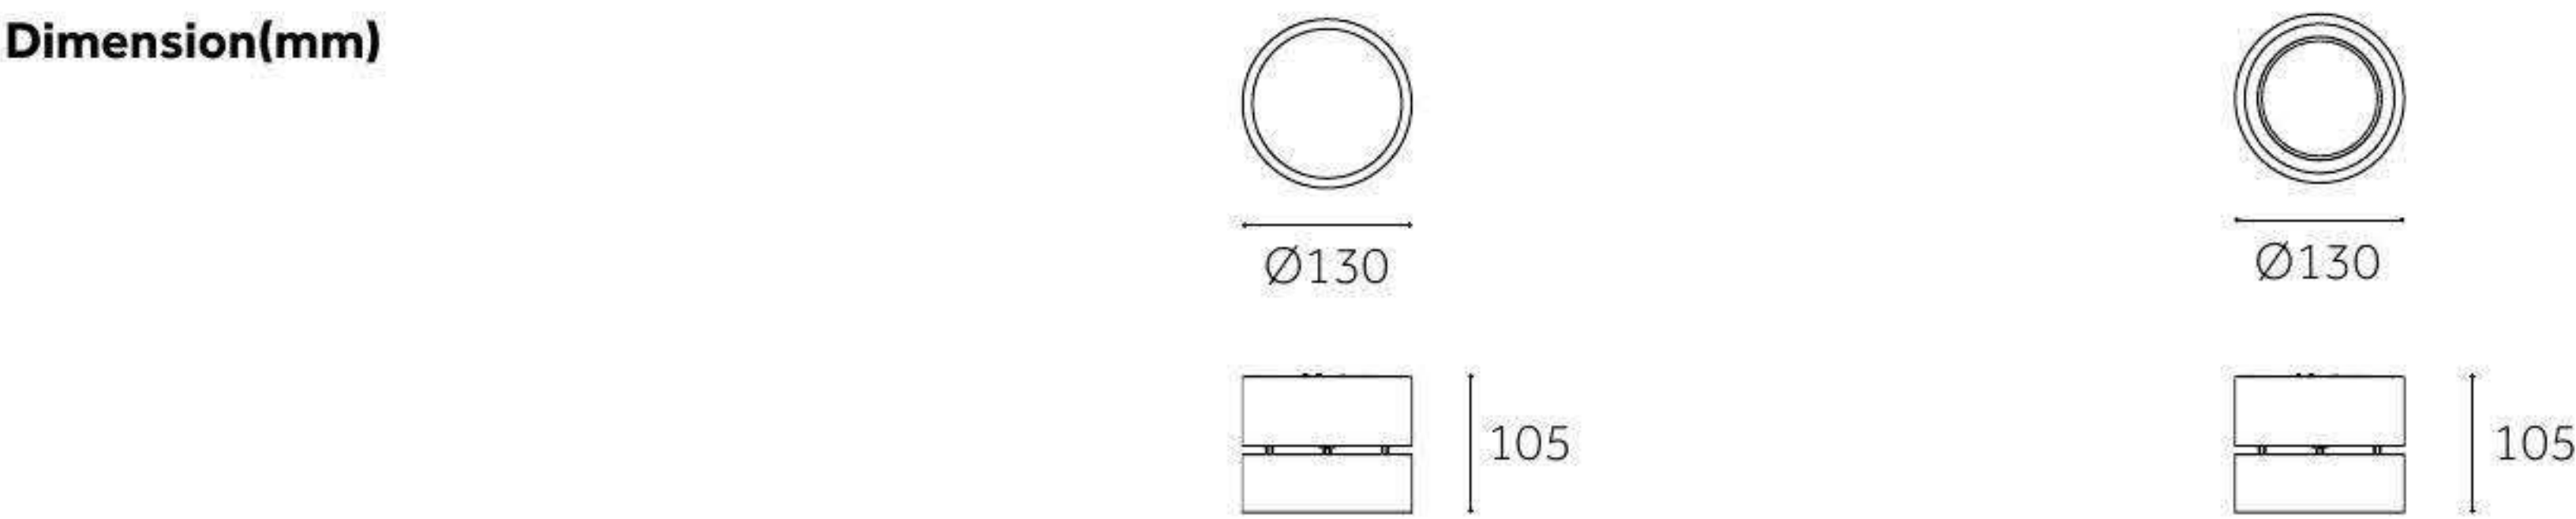

DOWN LIGHT
(Surface&Pendant)

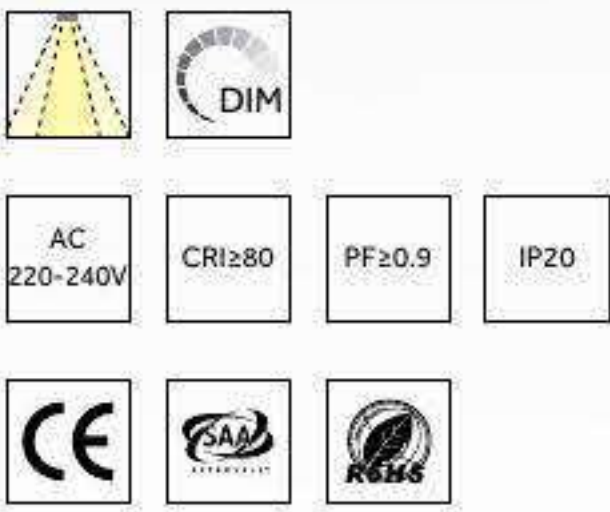

FINISH: ☐ White ☒ Black **CCT:** 3000K 6000K


DIMMING: ☒ No dim ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


FIREFLY Series Superior heat emission structure with patened technology and power supply configuration, the light can work efficiently and safety. Optimized light distribution design solution can make the optical property more excellent.

DOWN LIGHT
(Surface&Pendant)

	WL20B	WL25B	WL30B	WL35B	WL40B
Type	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	10W	15W	15W	20W	30W
Beam Angle	20°/40°	20°/40°	20°/40°	20°/40°	20°/40°
Cut-out (mm) ⓘ	/	/	/	/	/
Size (DxHmm)	Ø75x100	Ø75x152	Ø95x100	Ø95x152	Ø115x152

Dimension(mm)

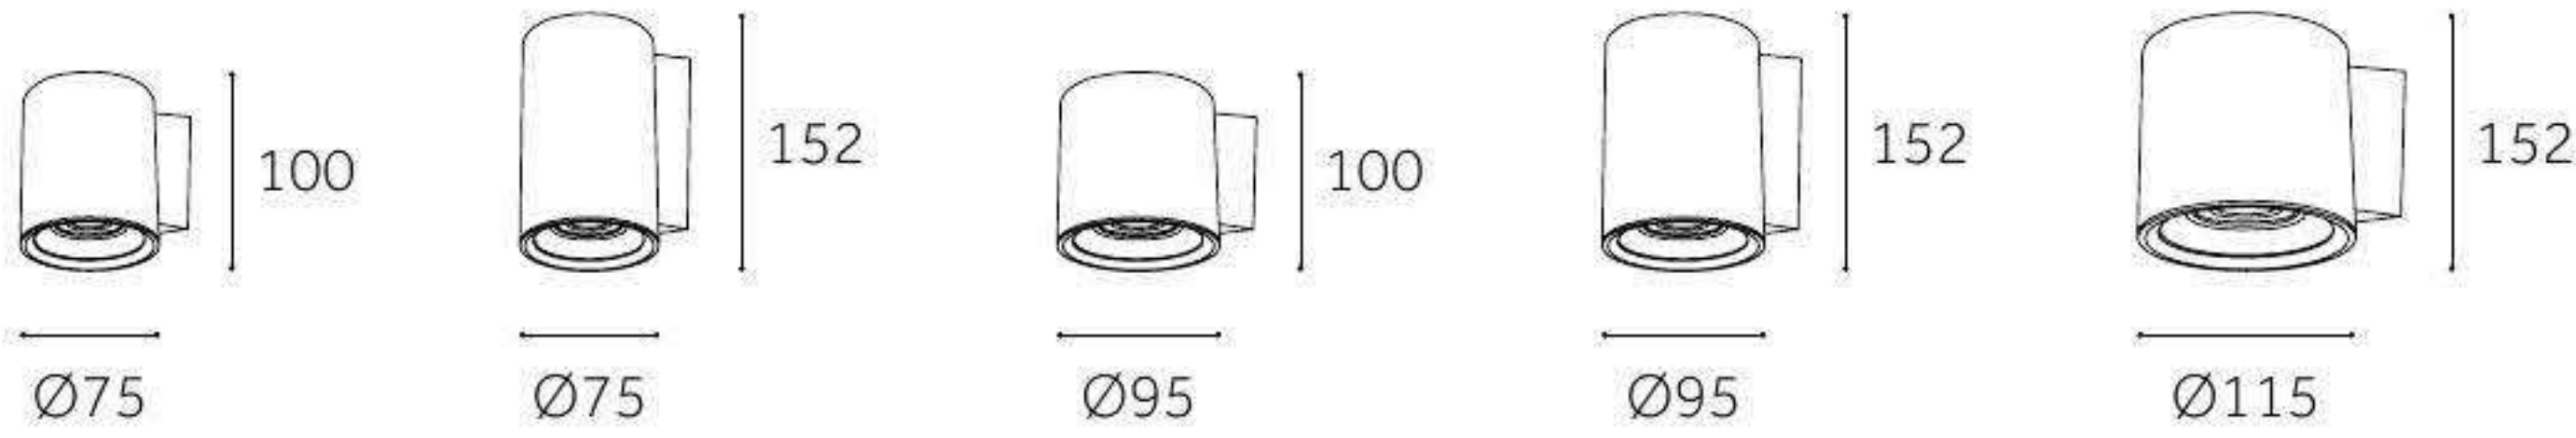

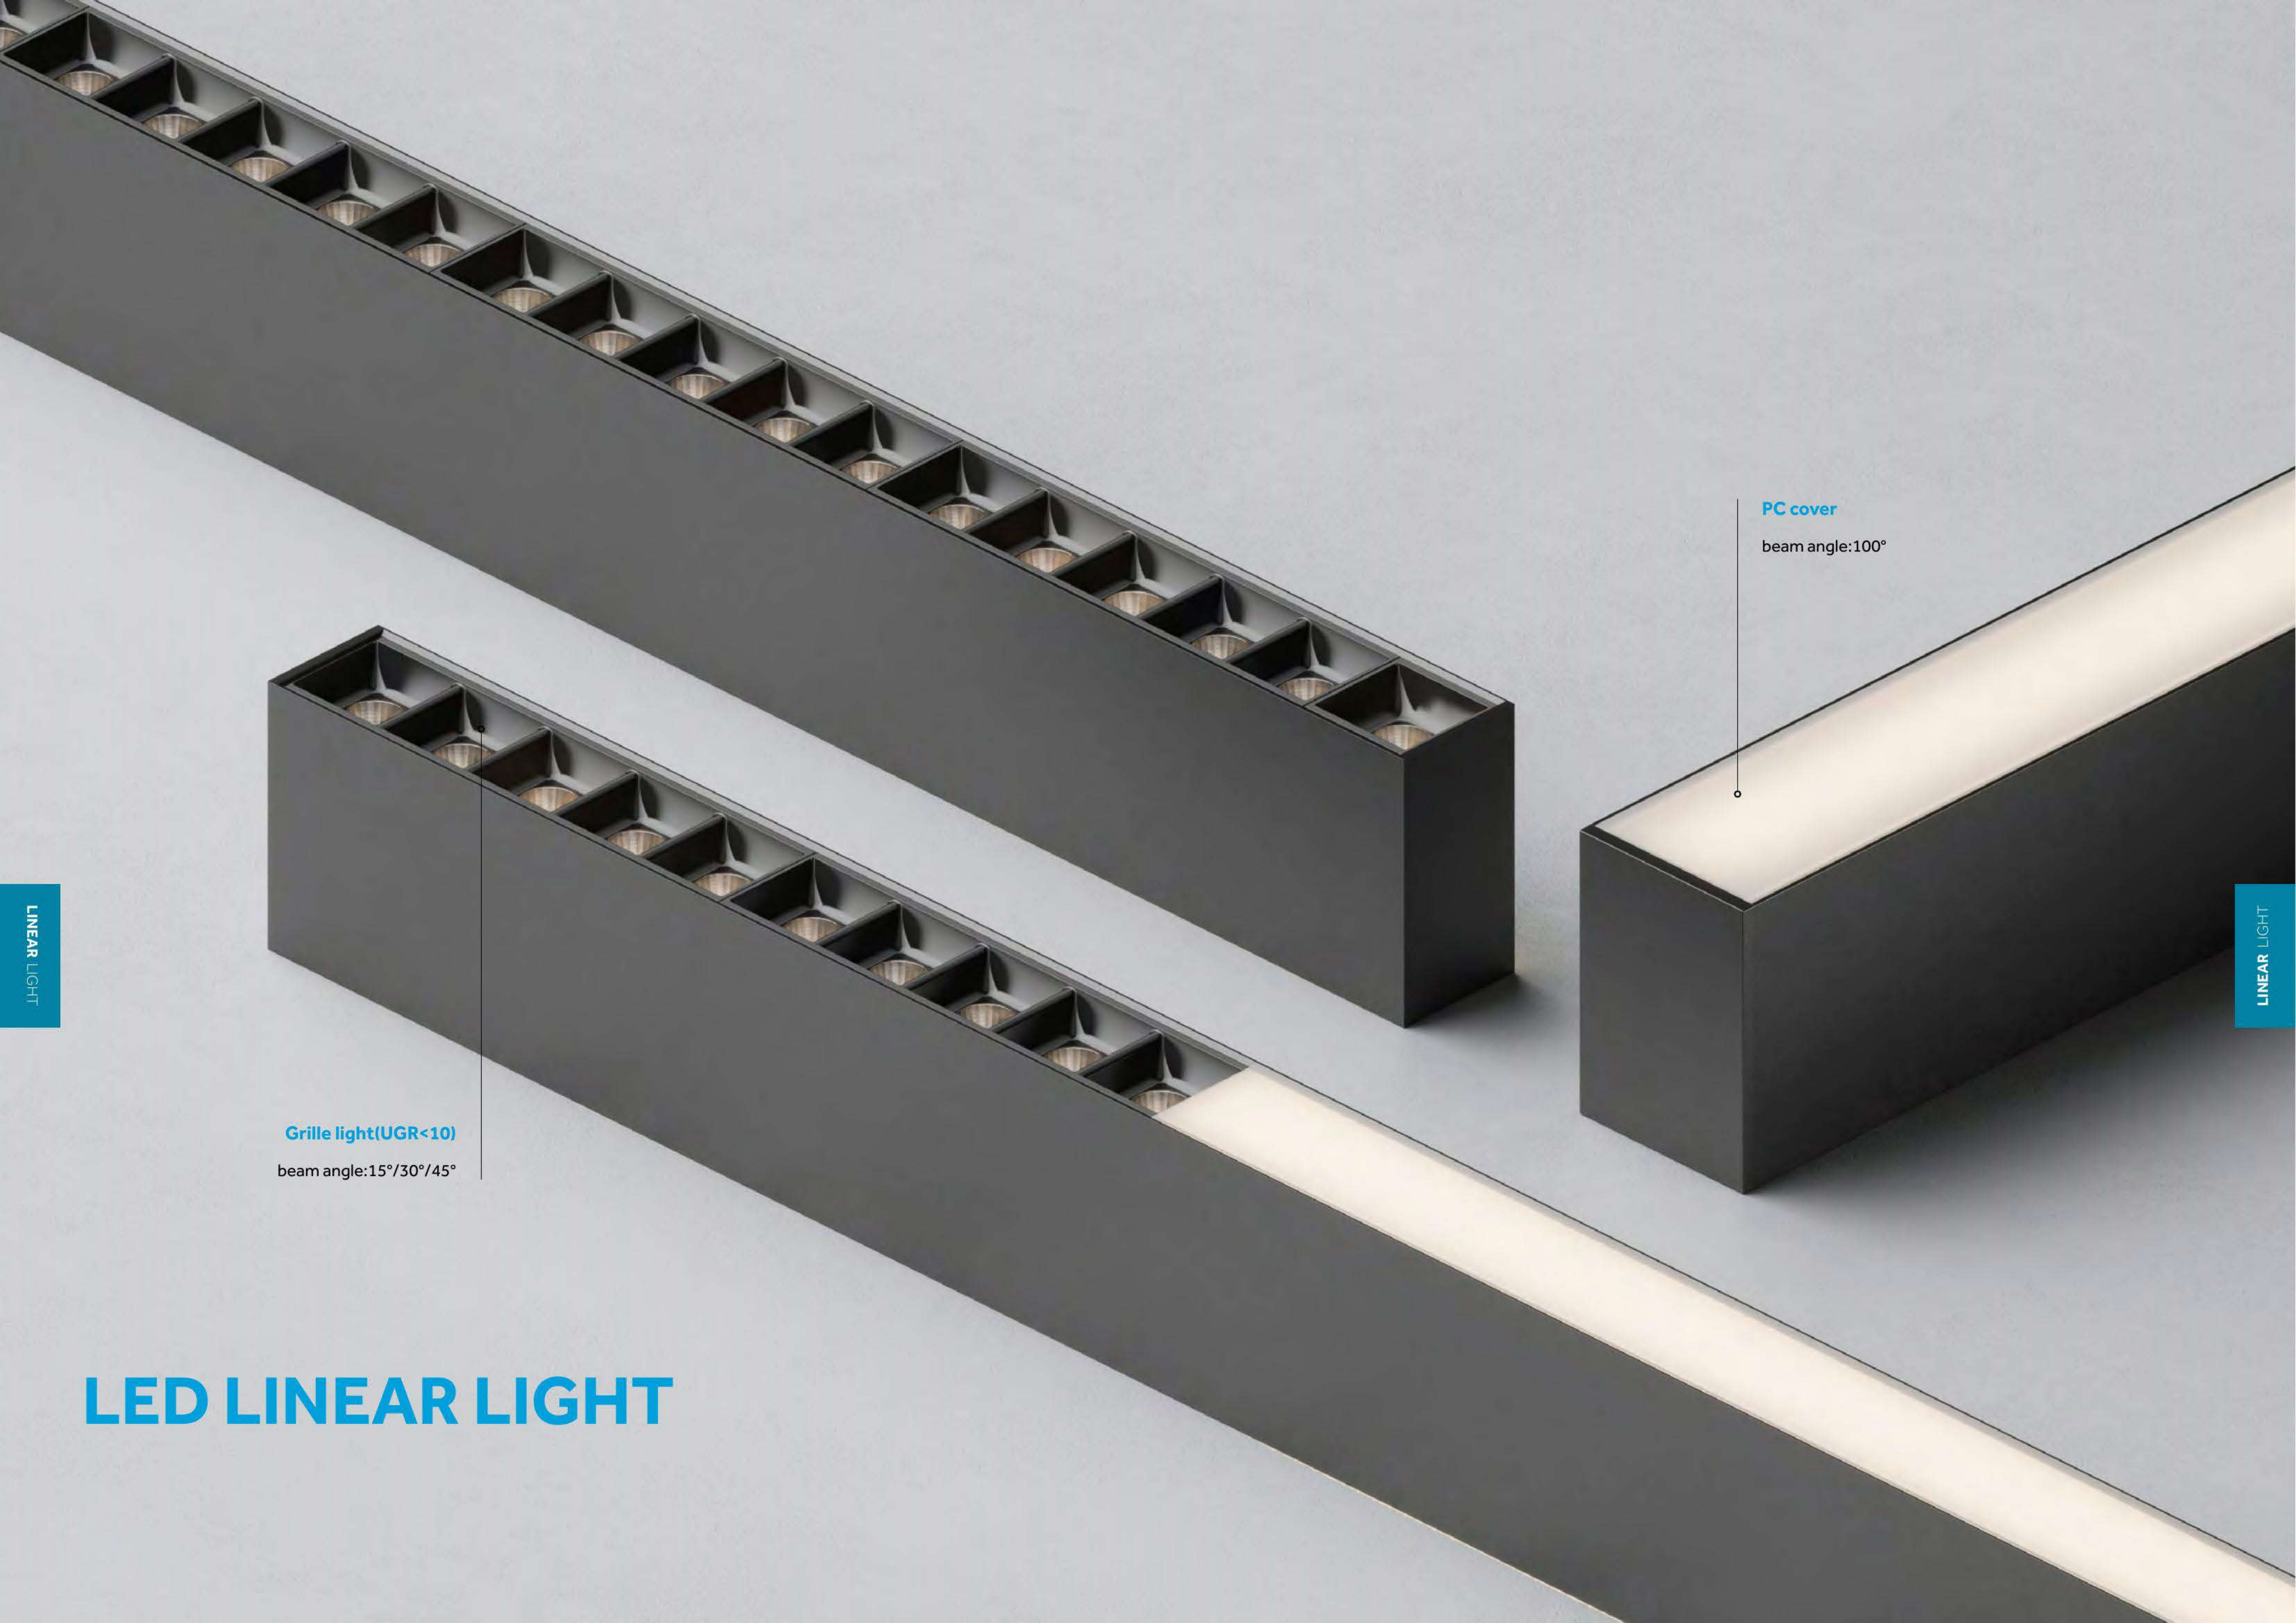

PC cover

beam angle:100°

Grille light(UGR<10)


beam angle:15°/30°/45°

LINEAR LIGHT

LINEAR LIGHT


LED LINEAR LIGHT

LED LINEAR LIGHT

PENDANT 




	LINE-SL1204S	LINE-SL1205S
Type	Fixed	Fixed
Wattage	30W/40W/60W	30W/40W/60W
Beam Angle	15°/30°/45°	15°+100°/30°+100°/45°+100°
Lumen (lm)	2933/3910/5865	3278/4370/6555
Cut-out (mm) ⓘ	/	/
Size (WxLxHmm)	1128x34x1500	1128x34x1500
N.W/PC (kgs)	1.97	1.97
Q'ty/CTN (pcs)	8	8

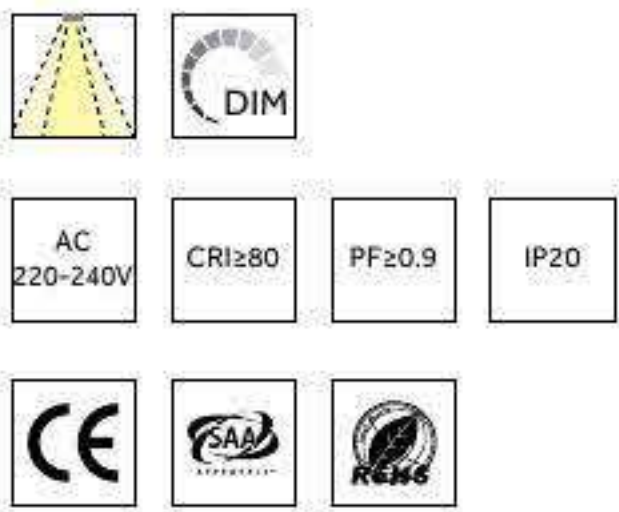


FINISH: ☐ White ☒ Silver ☒ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

LED LINEAR LIGHT High quality aluminum case with white or black coating. Black highlight grille, perfect anti-glare. Two installation methods: Suspending and surface mounted. Three light output modes: grille, floodlight, grille+floodlight module. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.

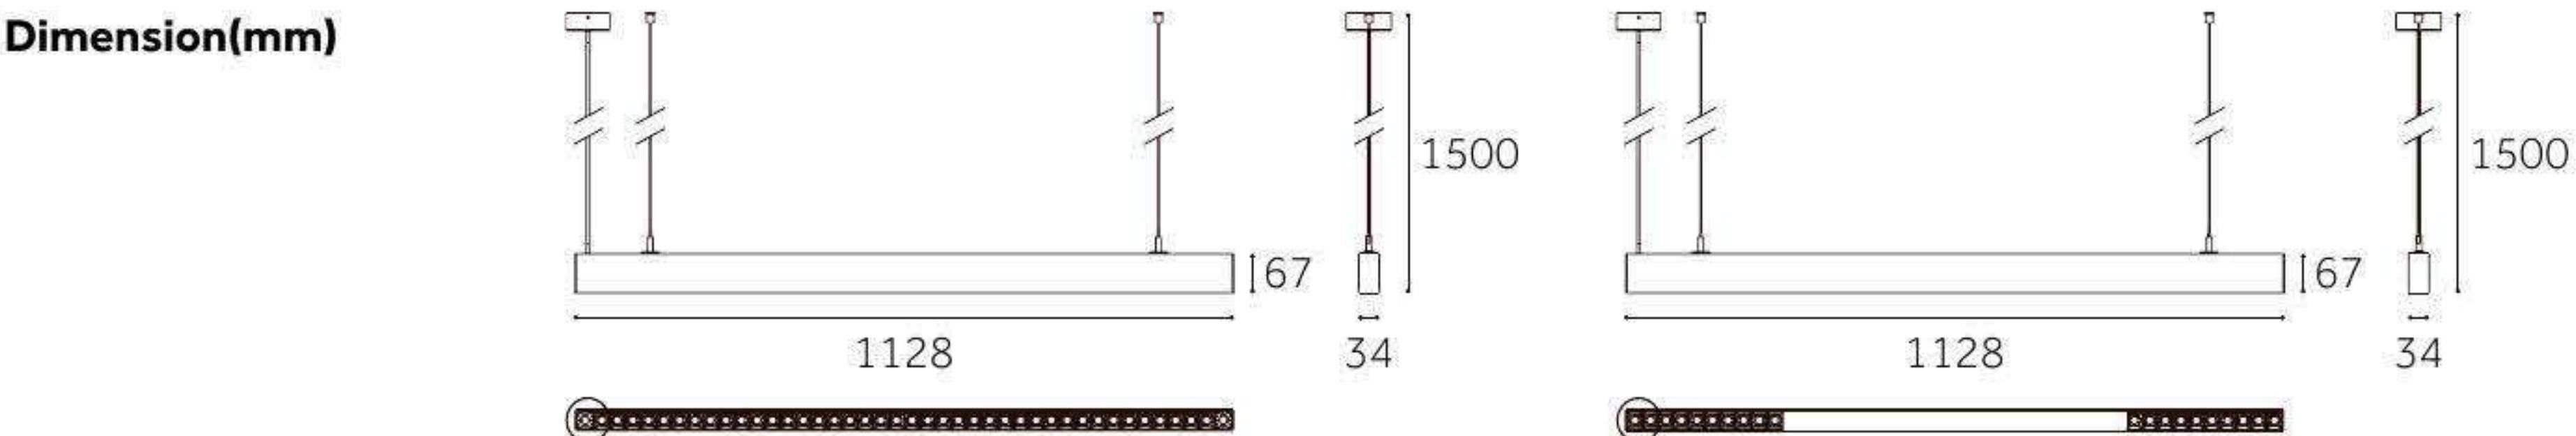


LED LINEAR LIGHT

SURFACE 




	LINE-EX1204S	LINE-EX1205S
Type	Fixed	Fixed
Wattage	30W/40W/60W	30W/40W/60W
Beam Angle	15°/30°/45°	15°+100°/30°+100°/45°+100°
Lumen (lm)	2933/3910/5865	3278/4370/6555
Cut-out (mm) ⓘ	/	/
Size (WxLxHmm)	1128x34x67	1128x34x67
N.W/PC (kgs)	1.85	1.85
Q'ty/CTN (pcs)	8	8

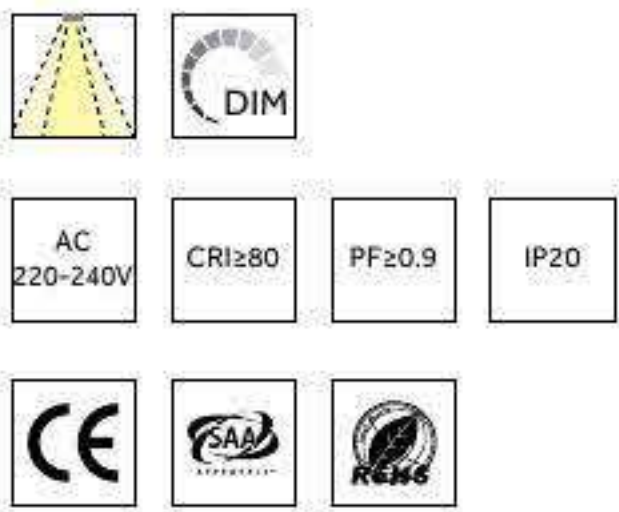

FINISH: ☐ White ☐ Silver ☒ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

LED LINEAR LIGHT High quality aluminum case with white or black coating. Black highlight grille, perfect anti-glare. Two installation methods: Suspending and surface mounted. Three light output modes: grille, floodlight, grille+floodlight module. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.

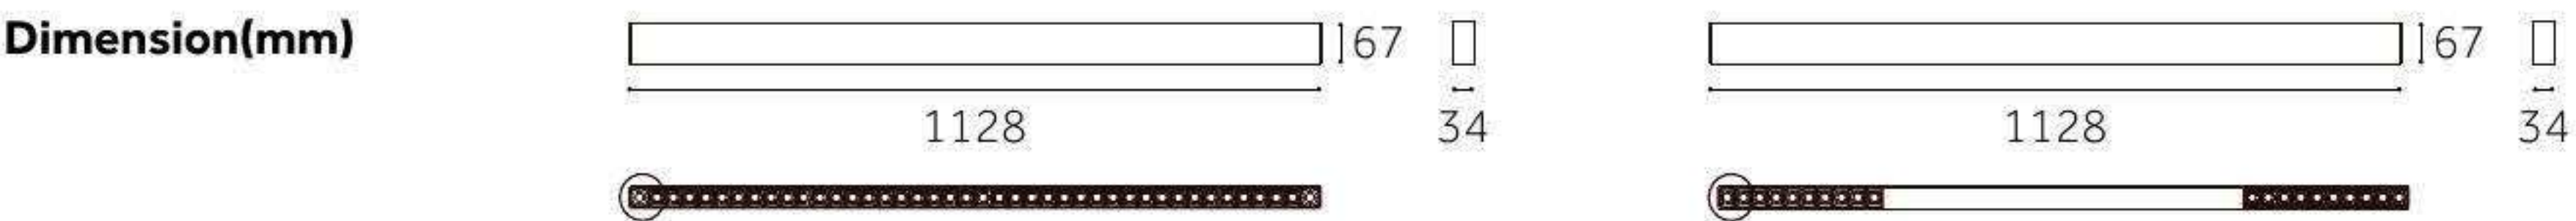

LINEAR LIGHT

LINEAR LIGHT

LED LINEAR LIGHT




LINE-TR1205

Type	Fixed
Wattage	30W/40W/60W
Beam Angle	100°
Lumen (lm)	3450/4600/6900
Cut-out (mm) ⓘ	/
Size (WxLxHmm)	1200x50x71
N.W/PC (kgs)	2.35
Q'ty/CTN (pcs)	4

LINEAR LIGHT

LINEAR LIGHT

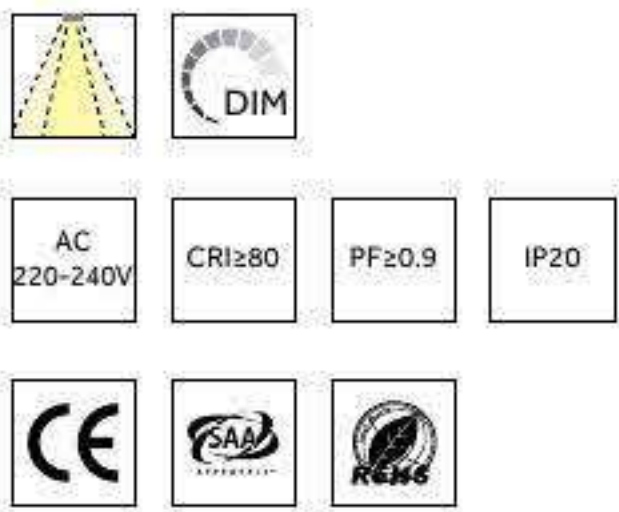


FINISH: ☐ White ☐ Silver ☒ Black **CCT:** 3000K 6000K


DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting

LED LINEAR LIGHT High transmittance PC COVER, ageing resistance, non-yellowing. 0~355° degree rotatable, high qualityl Aumnium shell. Widely used in hotels, restaurants, shops, offices and so on.

Dimension(mm)

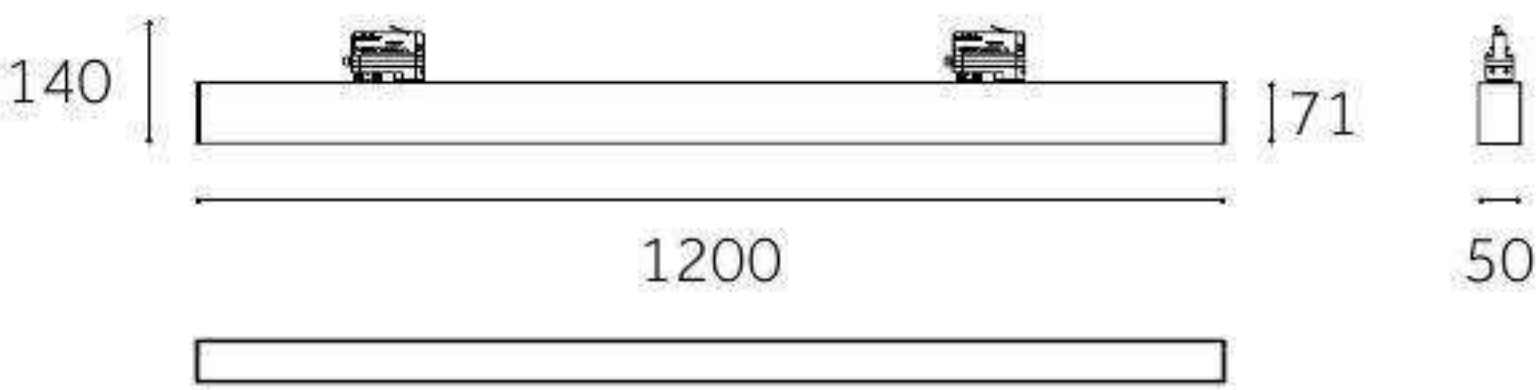


LED LINEAR LIGHT

PENDANT 

150lm/W

LINEAR LIGHT

LINEAR LIGHT

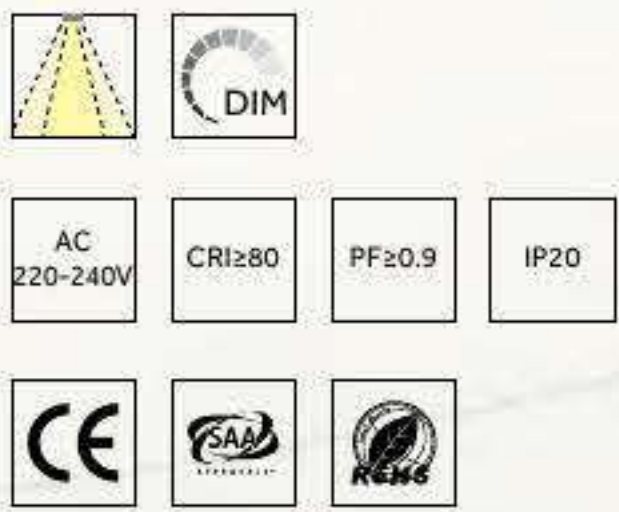

FINISH: ☐ White ☒ Silver ☐ Black **CCT:** 3000K 6000K

DIMMING: ☒ Triac ☒ 1-10V ☒ DALI ☒ Smart lighting


LED LINEAR LIGHT High quality aluminum case with white, black or gray coating.high light transmittance PMMA cover, anti-aging, non-yellowing. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.

LINE-SL1206S

LINE-SL1207S

Type	Fixed	Fixed
Wattage	30W/40W/60W	30W/40W/60W
Beam Angle	100°	100°
Lumen (lm)	3450/4600/6900	3450/4600/6900
Cut-out (mm) ⓘ	/	/
Size (WxLxHmm)	1200x50x1500	1200x50x71
N.W/PC (kgs)	2.4	2.3
Q'ty/CTN (pcs)	6	6

Dimension(mm)

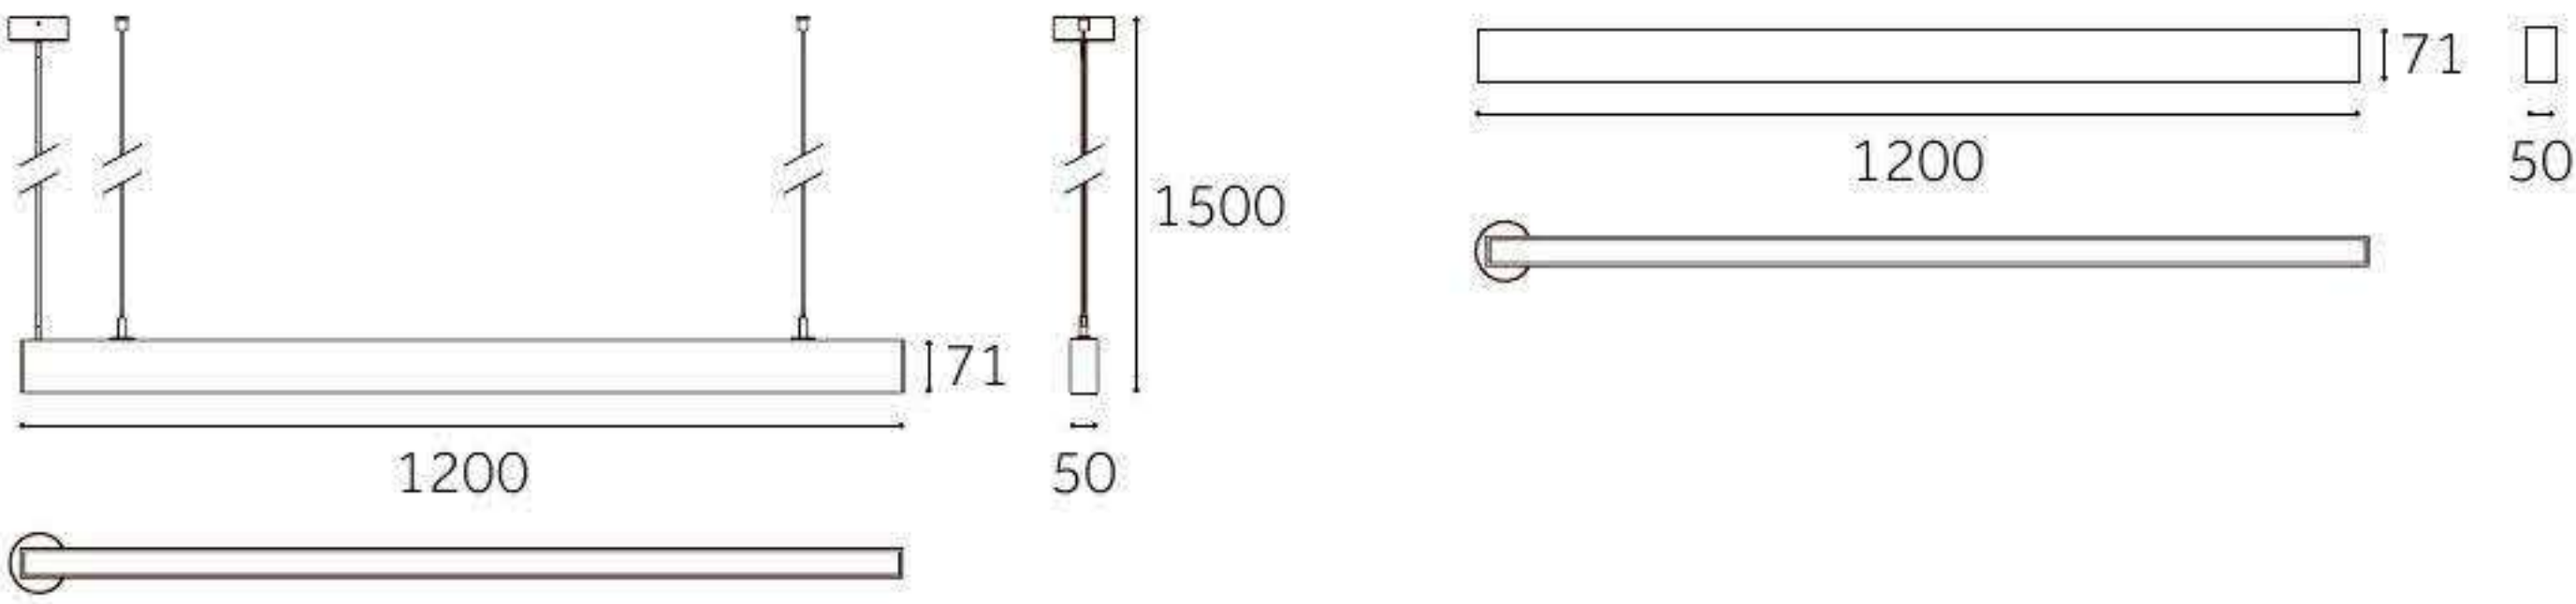




MAGNET

LED Track System

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET

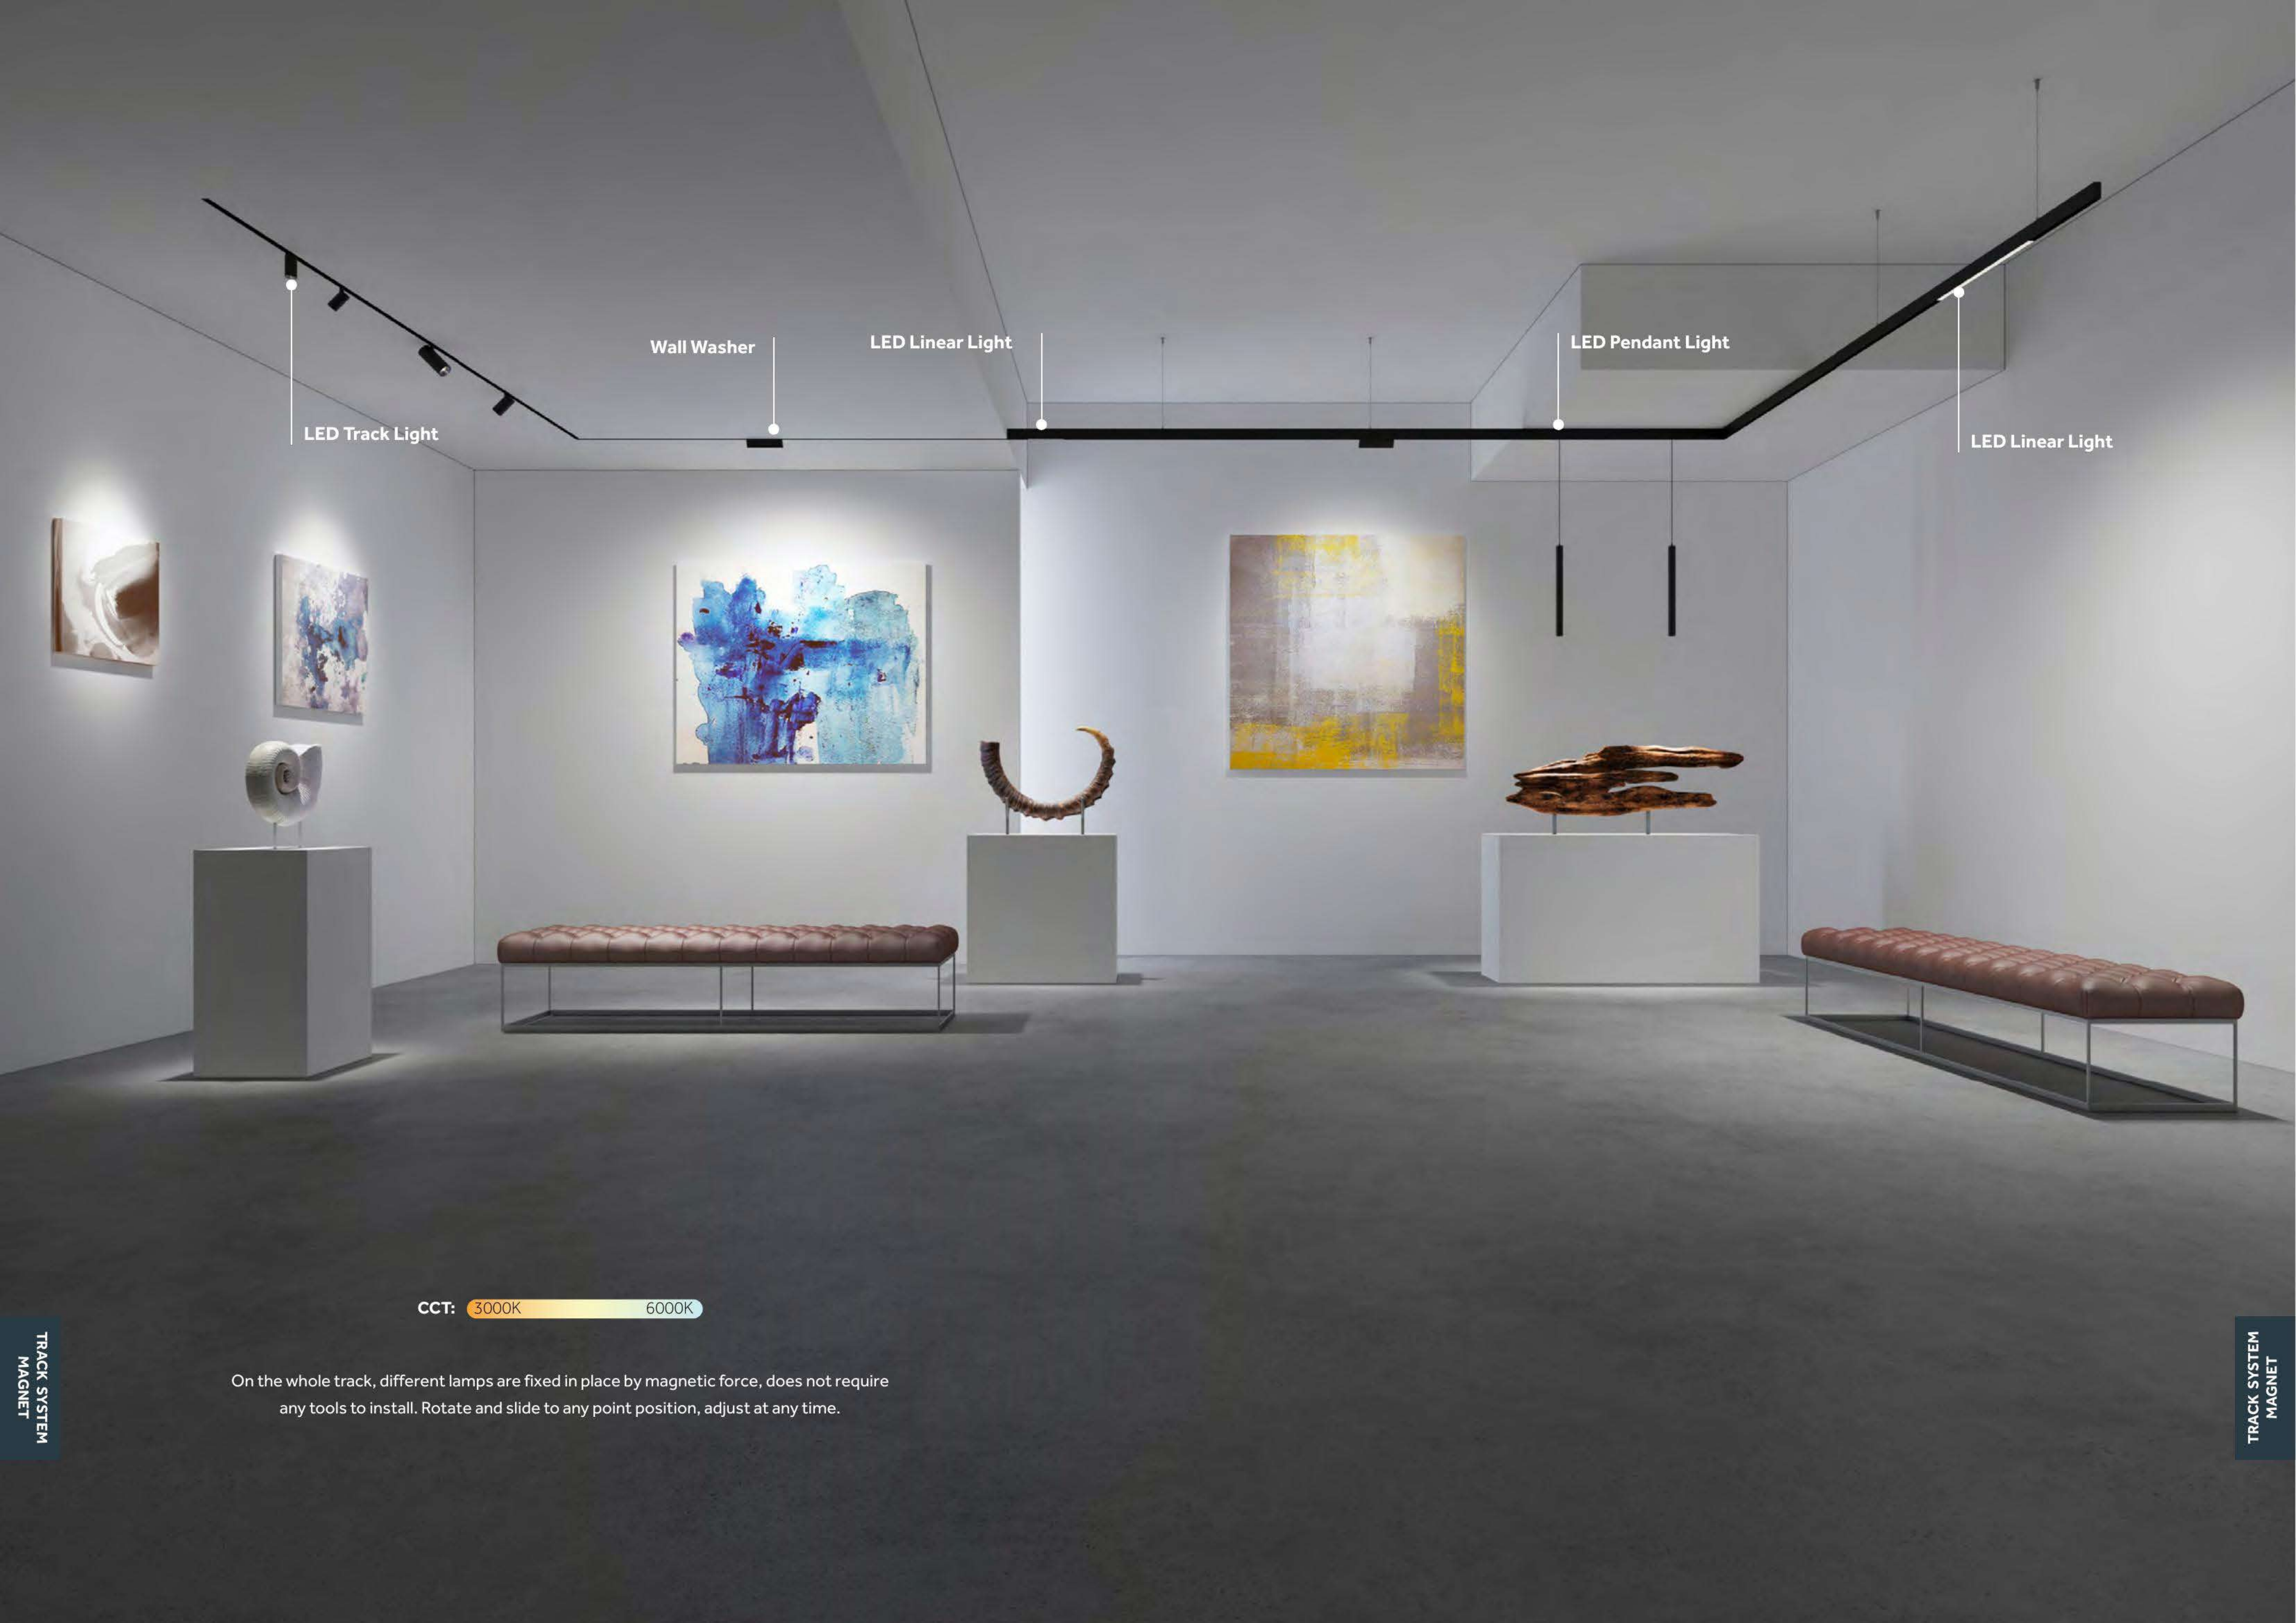

LED Track Light

Wall Washer

LED Linear Light

LED Pendant Light

LED Linear Light

CCT: 3000K 6000K

On the whole track, different lamps are fixed in place by magnetic force, does not require any tools to install. Rotate and slide to any point position, adjust at any time.

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET


Die-casting aluminium profile with 25mm/50mm width groove; for recessed/ceiling surface mounting or suspended mounting; Track Rail available with standard lengths 1000mm and 2000mm.

1000mm2000mm

Different insets are held in place by magnetic force along the entire track. No tools are needed to install them. Rotate, slide into any position, and adjust at any time – all it takes is one hand movement to highlight objects according to requirements.




OBS-601
DC24V Magnetic

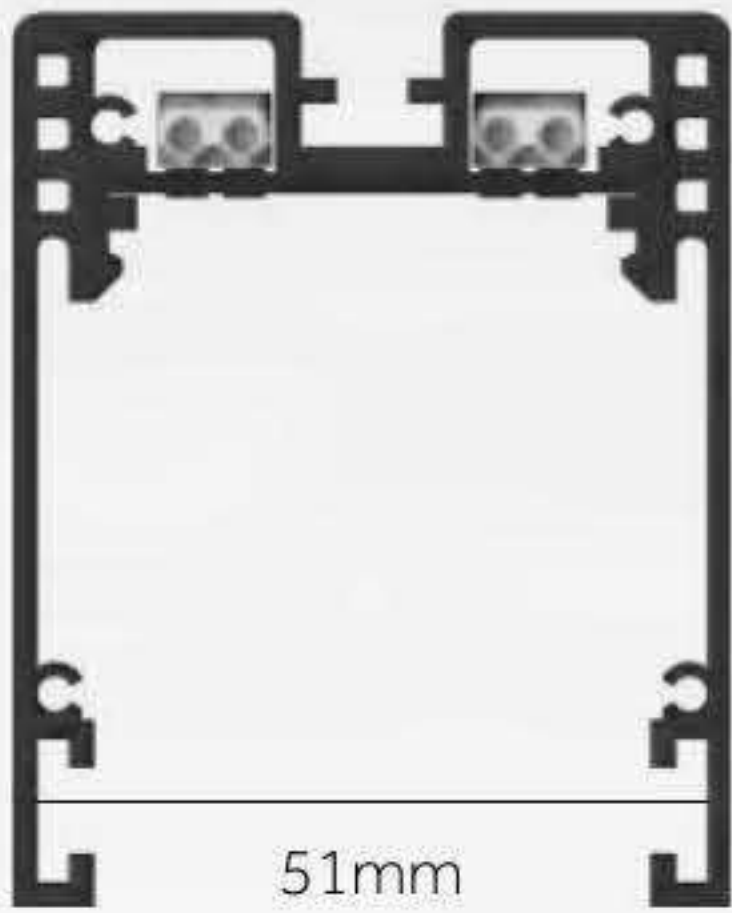

OBS-603
DC48V Magnetic



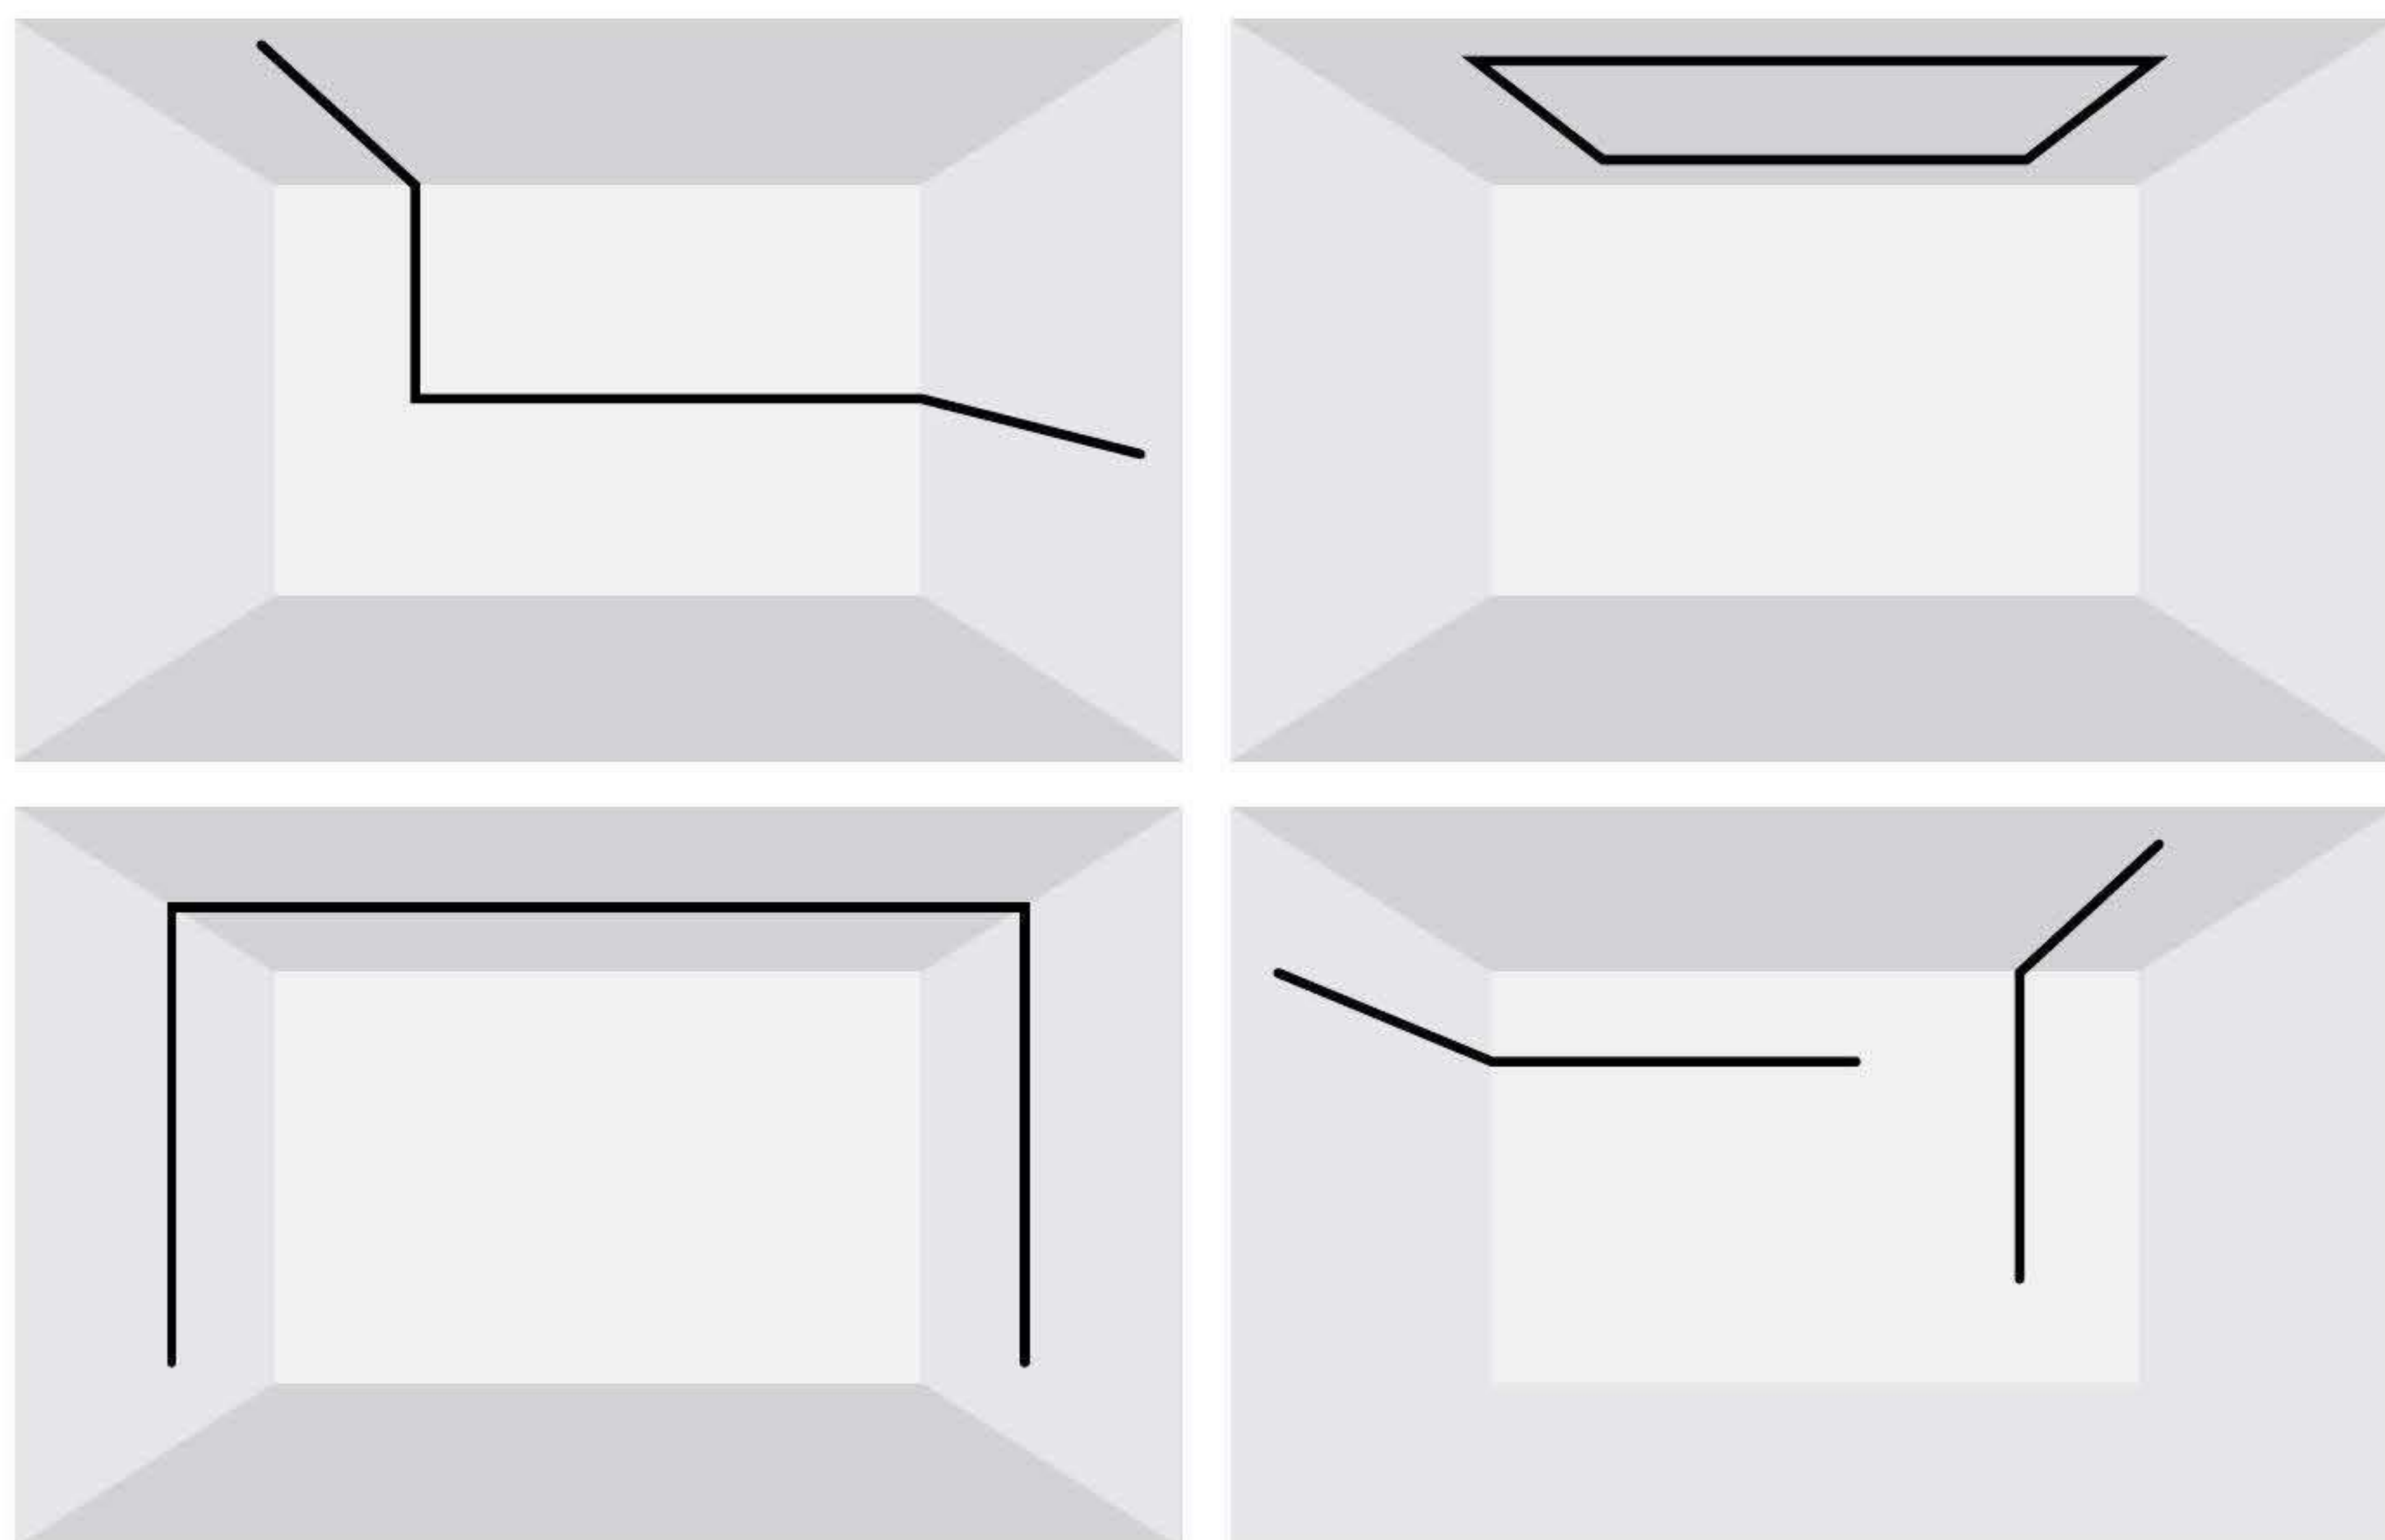


Flexibility meets elegance

2.4G dimming available

Smart solution

wireless dimming

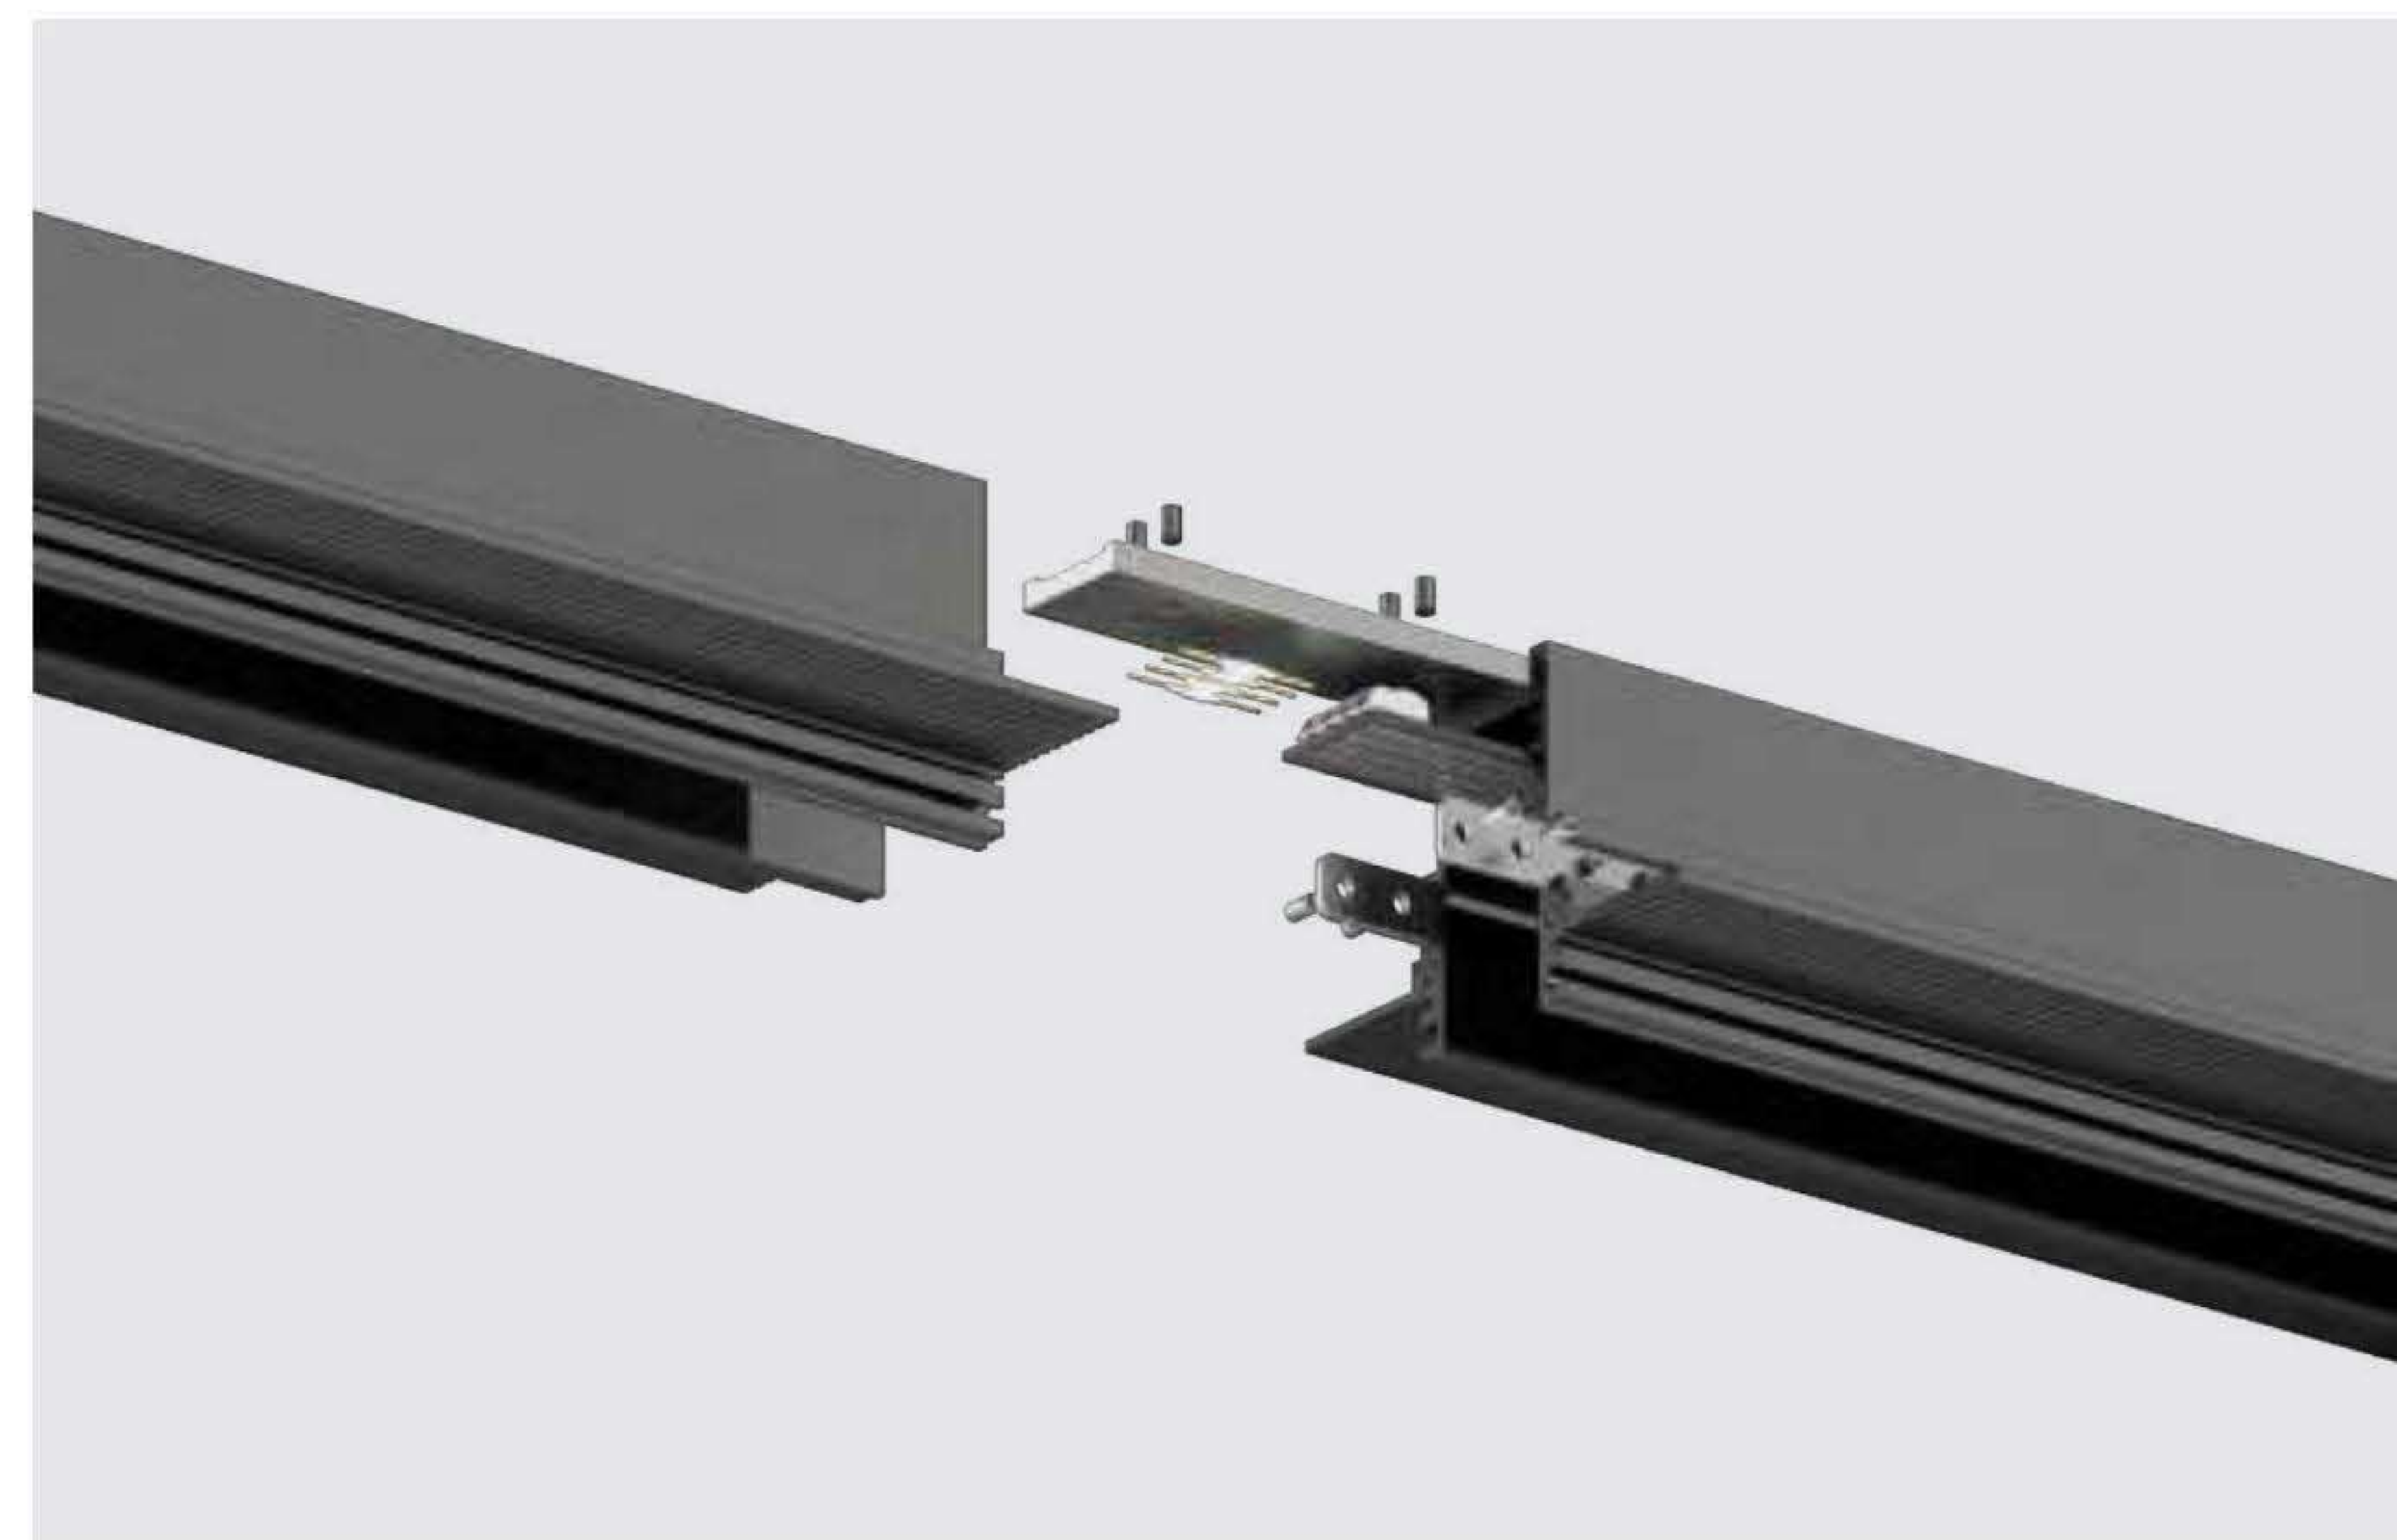

Maintain a stable connection

The copper wire is energized through the connector, which is not easy to fall off or poor contact



The rail magnet and the iron plate of the lamp body attract each other, and the installation can be stable with a click





DC24V
magnetic
track system

DS-6010
Trimless Recessed



1000x51x63

N.W (kgs): 1.9 Q'ty (pcs): 8

DS-6011
Surface mounted



1000x51x63

N.W (kgs): 1.9 Q'ty (pcs): 8

DS-6013
Suspended



1000x51x63

N.W (kgs): 1.9 Q'ty (pcs): 8

● Black

2000x51x63

N.W (kgs): 3.8 Q'ty (pcs): 4

2000x51x63

N.W (kgs): 3.8 Q'ty (pcs): 4

2000x51x63

N.W (kgs): 3.8 Q'ty (pcs): 4

● Black

DS-6019
90° (Corner)



200x200

N.W (kgs): 0.5 Q'ty (pcs): 20

DS-6019
90° (Inner corner)




200x200


N.W (kgs): 0.6 Q'ty (pcs): 20

● Black

DS-600 Magnetic track system

MAGNETIC TRACK 





DC24V

CRI≥80
CRI≥90

PF≥0.85

IP20

UGR<19



FINISH: ● Black


CCT: 3000K 4000K 5000K 6000K

DIMMING: ✔ Triac ✔ 1-10V ✔ DALI ✔ 2.4G

DS-600 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

	DS-6012C	DS-6013C	DS-6014C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	7W	12W	20W
Beam Angle	24°/36°	16°/24°/36°	16°/24°/36°
Lumen (lm)	322	920	1058
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	100xØ38x75	100xØ60x110	100xØ75x140
N.W/PC (kgs)	0.2	0.4	0.7
Q'ty/CTN (pcs)	32	16	32

Dimension(mm)

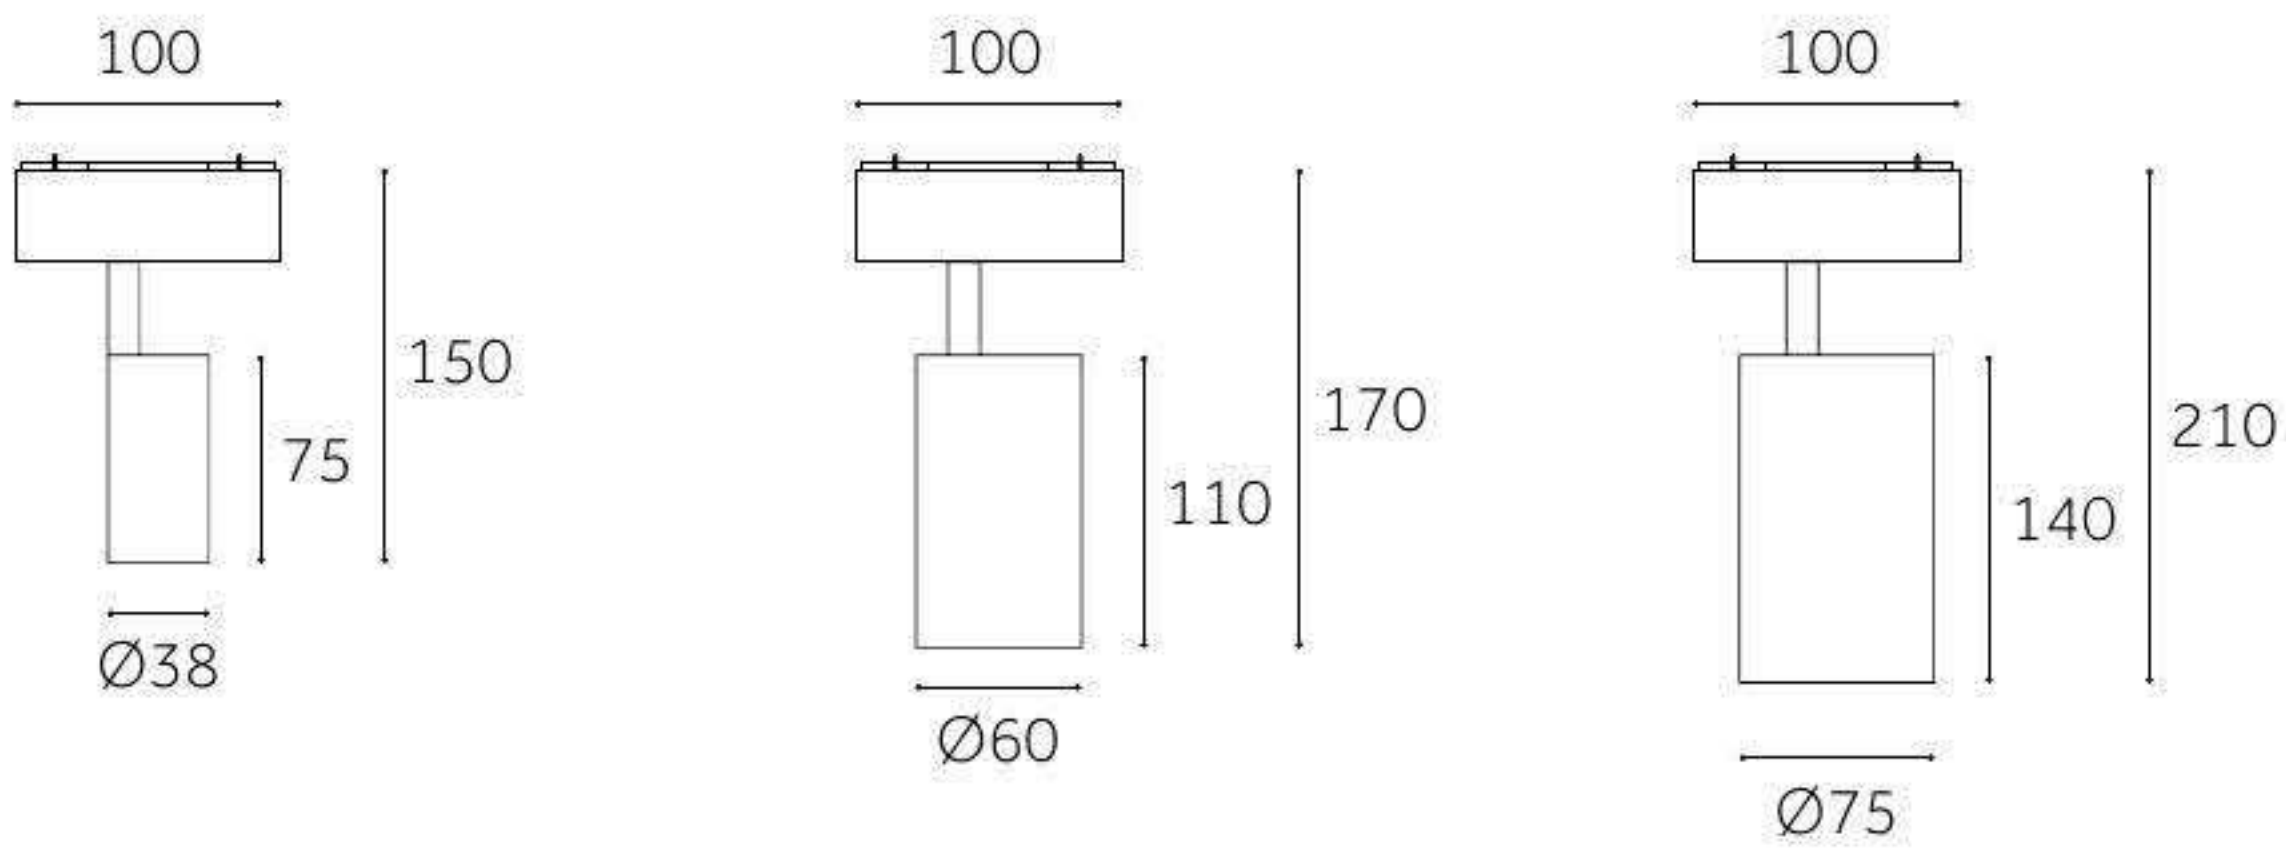


TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET

DS-600



Magnetic track system

MAGNETIC TRACK





	DS-6021C	DS-6022C	DS-6023C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	10W	20W	30W
Beam Angle	16°/26°/36°	16°/26°/36°	16°/26°/36°
Lumen (lm)	931.5	2002	2275
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	100xØ50x214.5	100xØ60x214.5	100xØ70x214.5
N.W/PC (kgs)	0.25	0.4	0.53
Q'ty/CTN (pcs)	30	16	12



DC24V

CRI≥80
CRI≥90

PF≥0.85

IP20

UGR<19



FINISH:

●

Black

CCT:

3000K

6000K

DIMMING:

 Triac

 1-10V


 DALI

 2.4G

DS-600 Series

is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

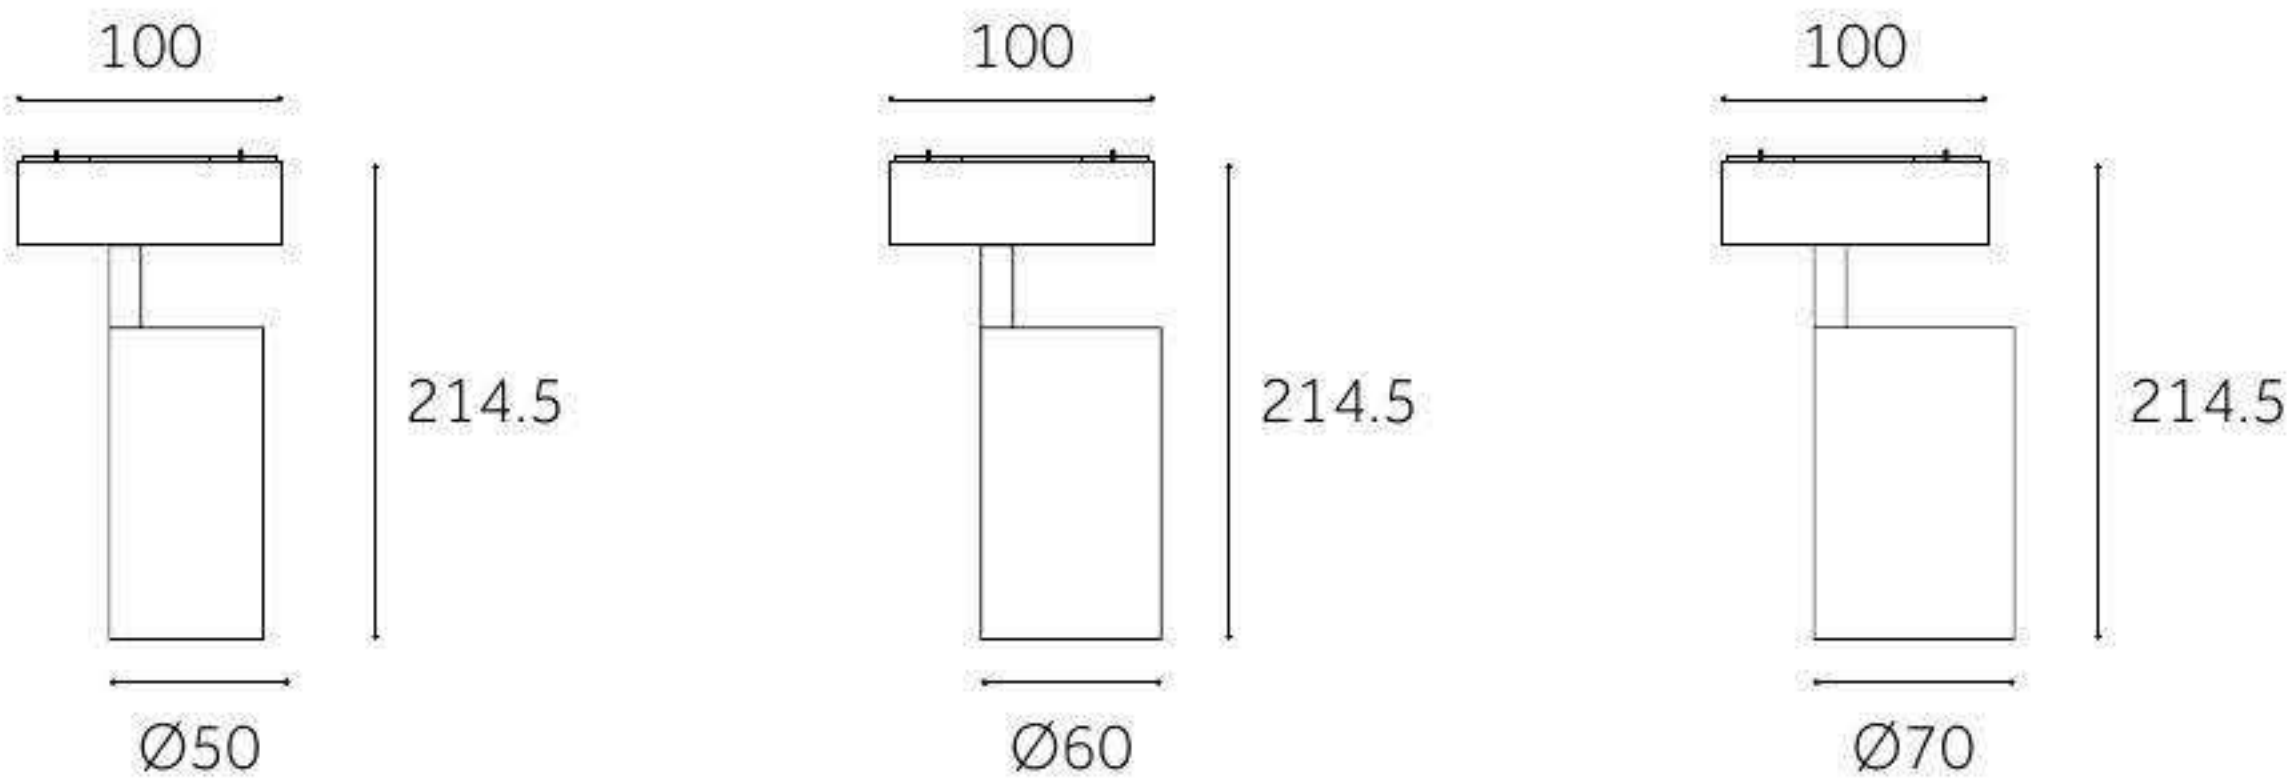

TRACK SYSTEM

MAGNET


TRACK SYSTEM

MAGNET


DS-600

Magnetic track system

MAGNETIC TRACK



	DS-6031C	DS-6032C	DS-6033C
Type	Fixed	Fixed	Fixed
Wattage	12W	24W	36W
Beam Angle	120°	120°	120°
Lumen (lm)	955	1909	2806
Cut-out (mm)	/	/	/
Size (WxLxHmm)	337x38.5x50	667x38.5x50	997x38.5x50
N.W/PC (kgs)	0.3	0.7	1
Q'ty/CTN (pcs)	32	16	9

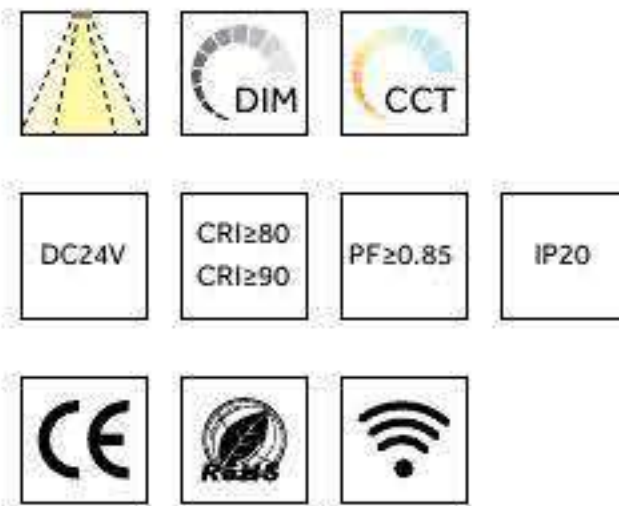


FINISH: ● Black

CCT: 3000K 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ 2.4G

DS-600 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

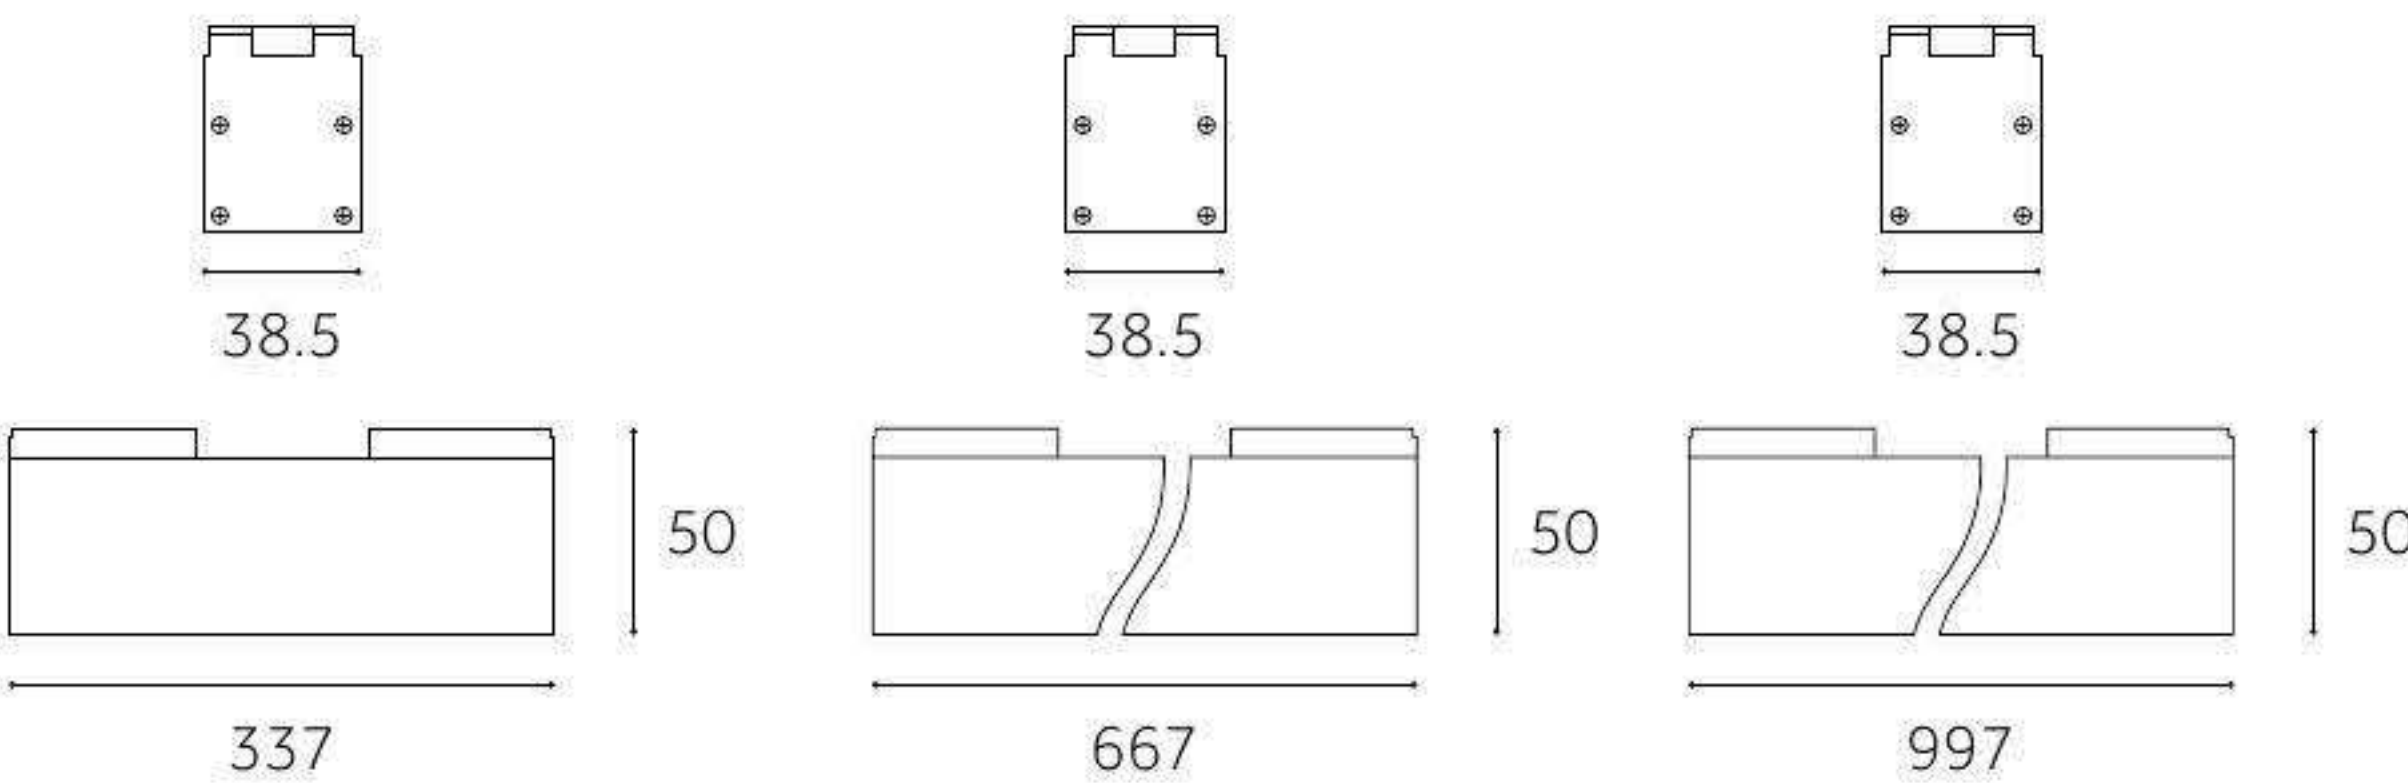


TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET

DS-600

Magnetic track system

MAGNETIC TRACK





	DS-6041C	DS-6042C	DS-6043C	DS-6044C
Type	Fixed	Fixed	Fixed	Fixed
Wattage	10W	25W	40W	3W
Beam Angle	15°/30°/45°	15°/30°/45°	15°/30°/45°	15°/30°/45°
Lumen (lm)	460	1426	2243	127
Cut-out (mm) ⓘ	/	/	/	/
Size (WxLxHmm)	137x38.5x50	402x38.5x50	667x38.5x50	39x39x50
N.W/PC (kgs)	0.2	0.5	0.8	0.05
Q'ty/CTN (pcs)	48	16	16	160



FINISH:

● Black

CCT:

3000K

6000K

DIMMING:

✔ Triac


✔ 1-10V

✔ DALI

✔ 2.4G

DS-600 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)

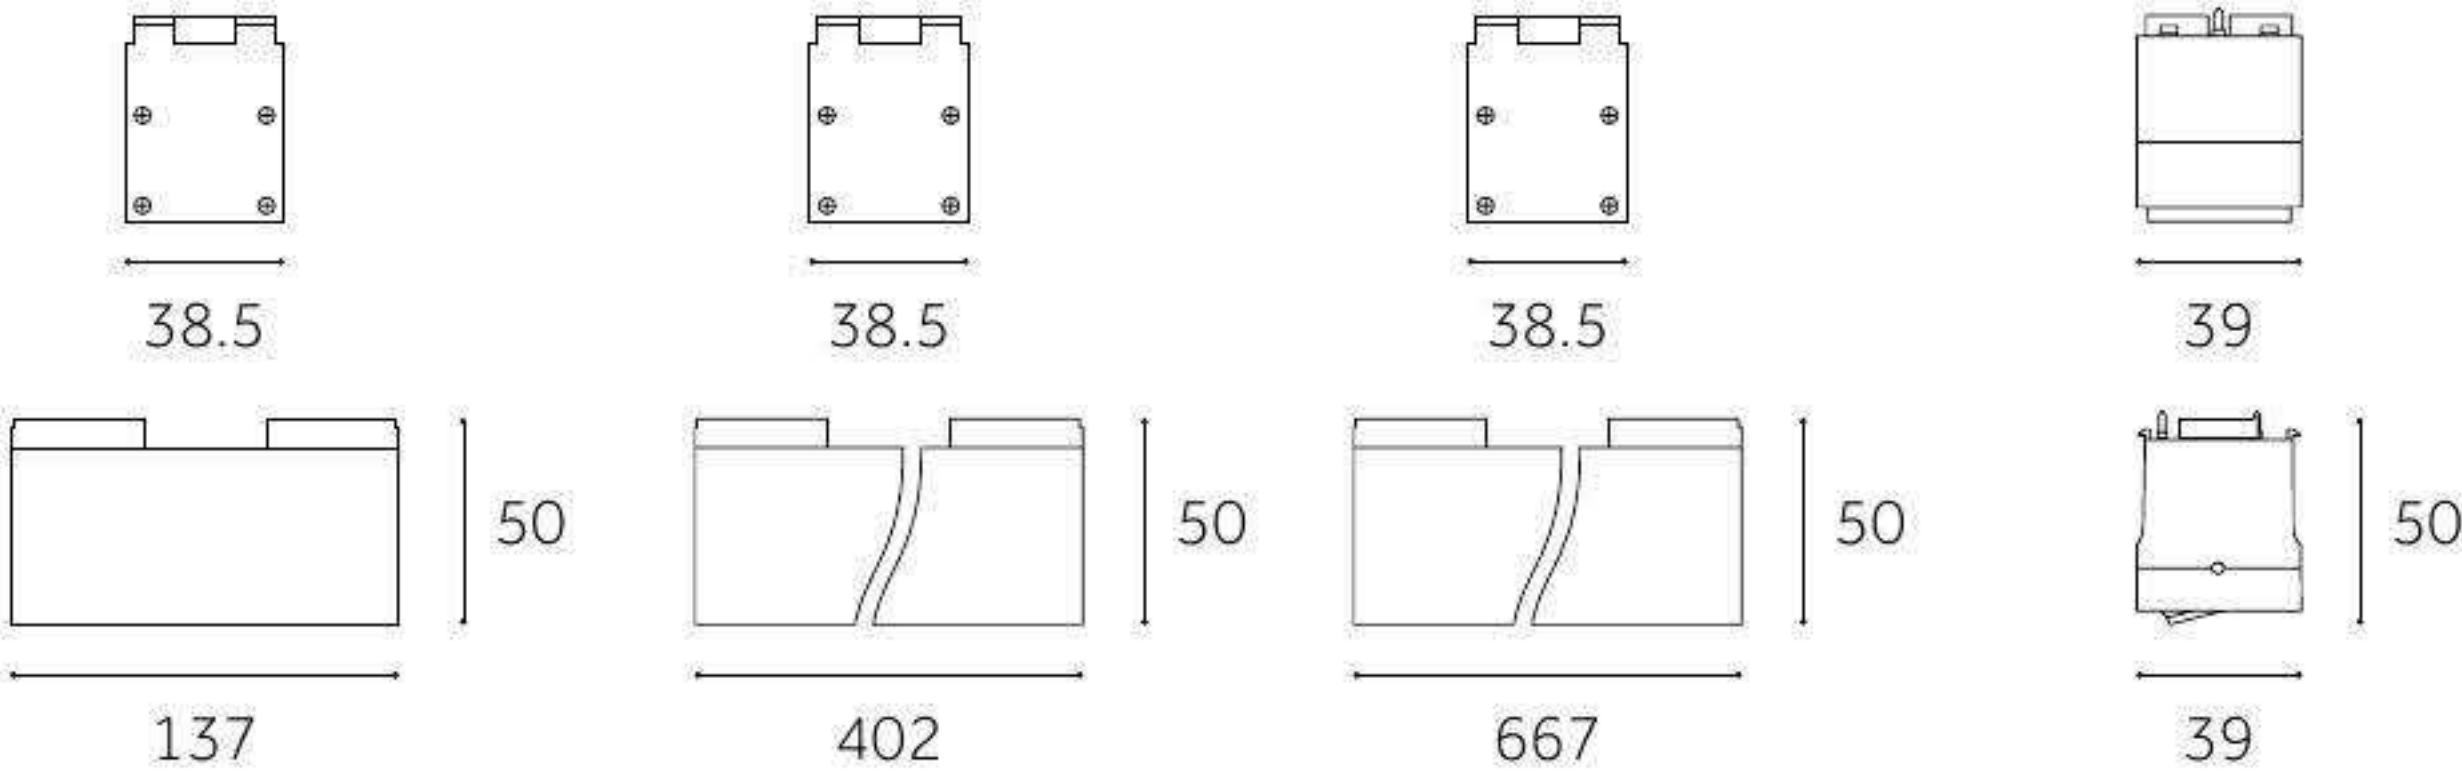


TRACK SYSTEM


MAGNET

DS-600 Magnetic track system

MAGNETIC TRACK 

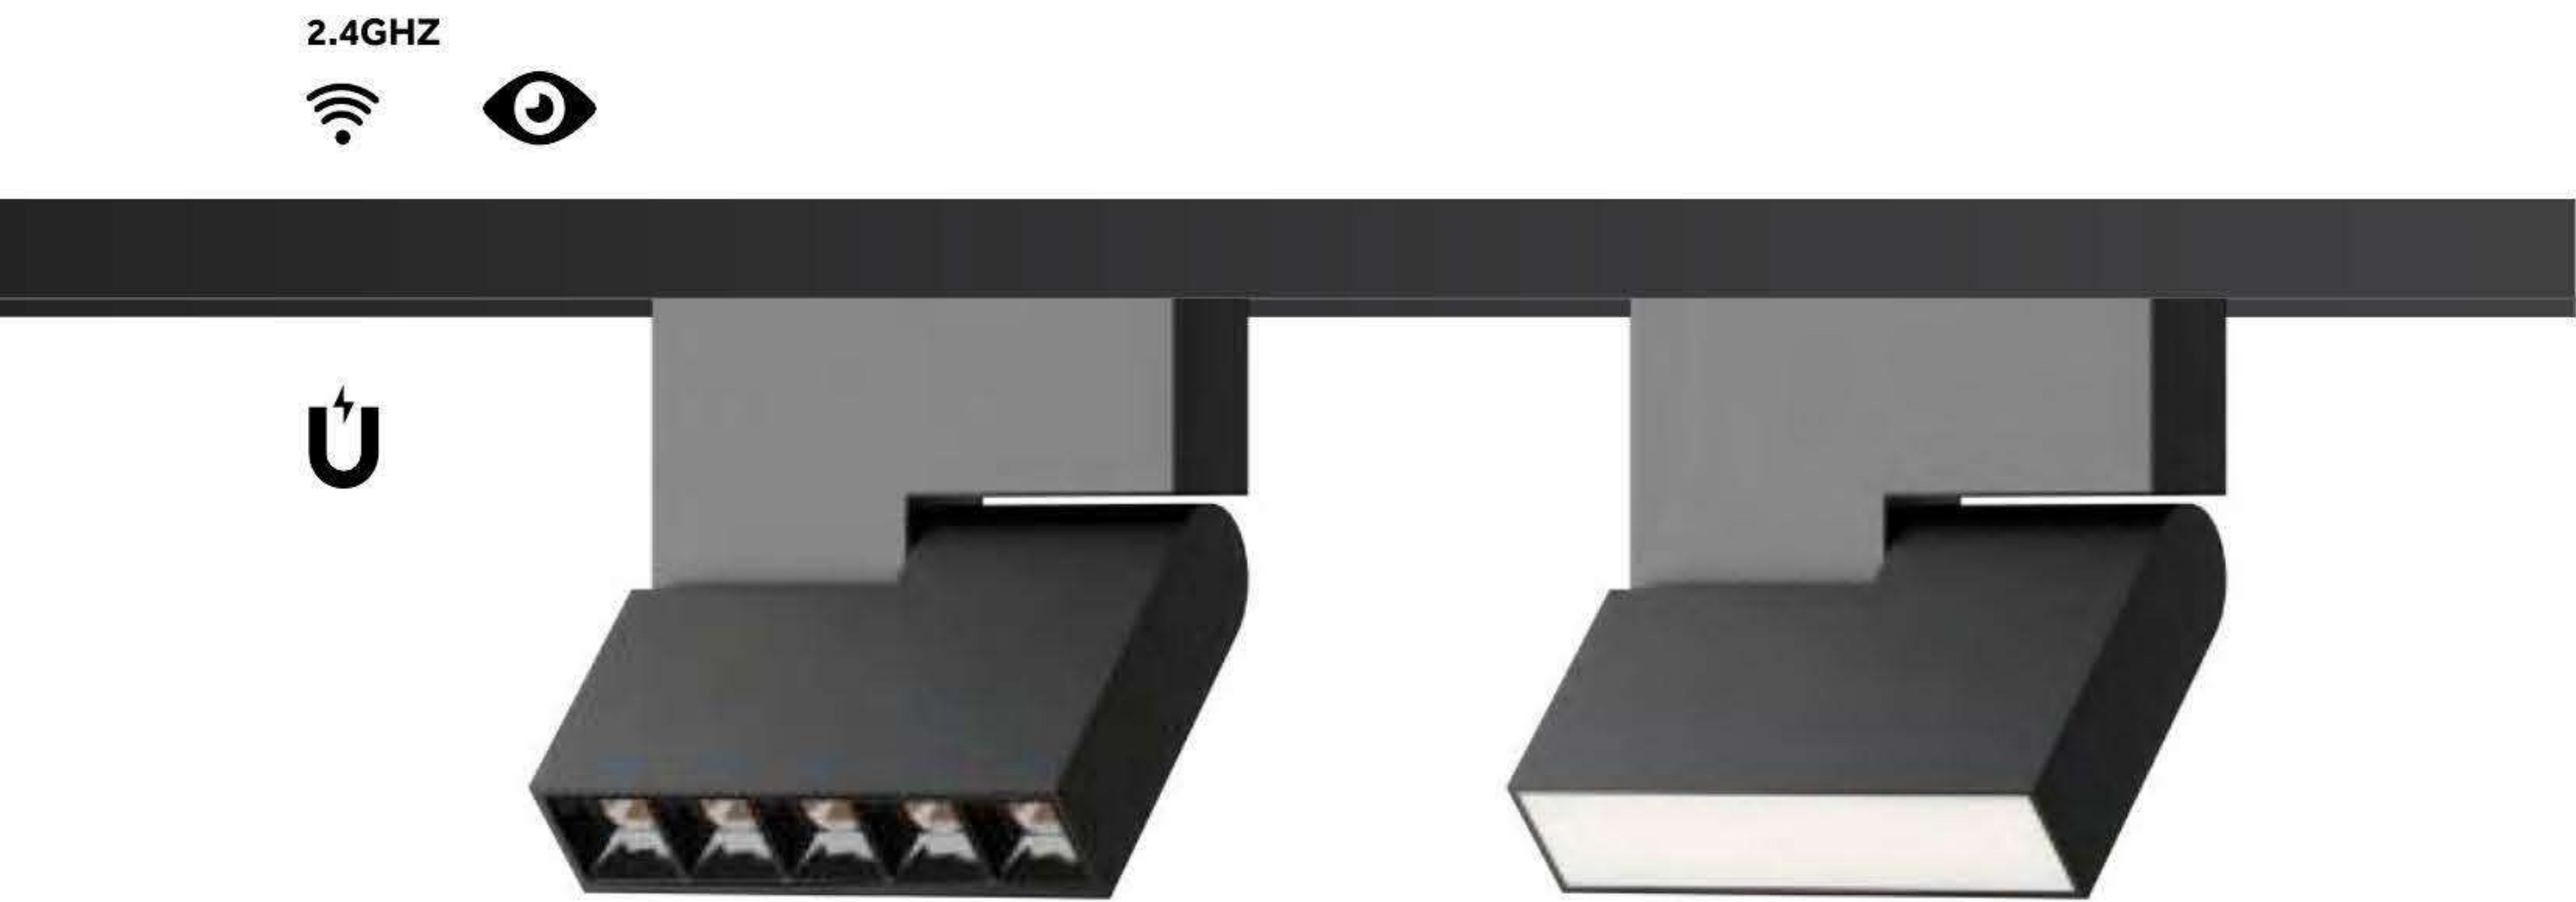

	DS-6051C	DS-6052C
Type	Adjustable 90°	Adjustable 90°
Wattage	10W	10W
Beam Angle	15°/30°/45°	120°
Lumen (lm)	397	531
Cut-out (mm) ⓘ	/	/
Size (WxLxHmm)	136.5x34x167	136.5x34x167
N.W/PC (kgs)	0.17	0.17
Q'ty/CTN (pcs)	20	20

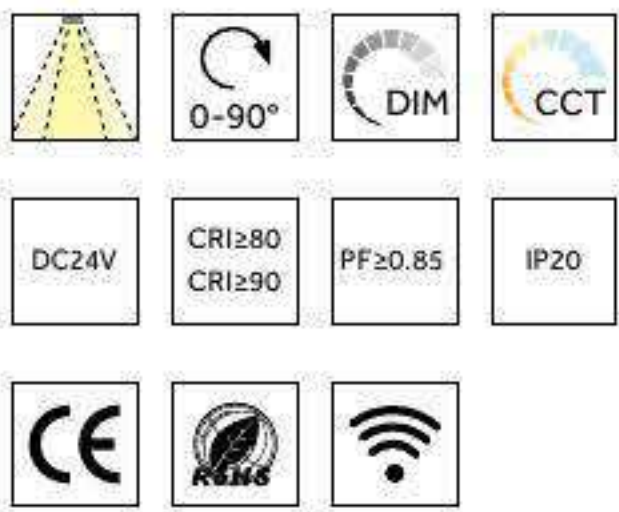


FINISH: ● Black

CCT: 3000K 4000K 5000K 6000K

DIMMING: ✔ Triac ✔ 1-10V ✔ DALI ✔ 2.4G

DS-600 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)

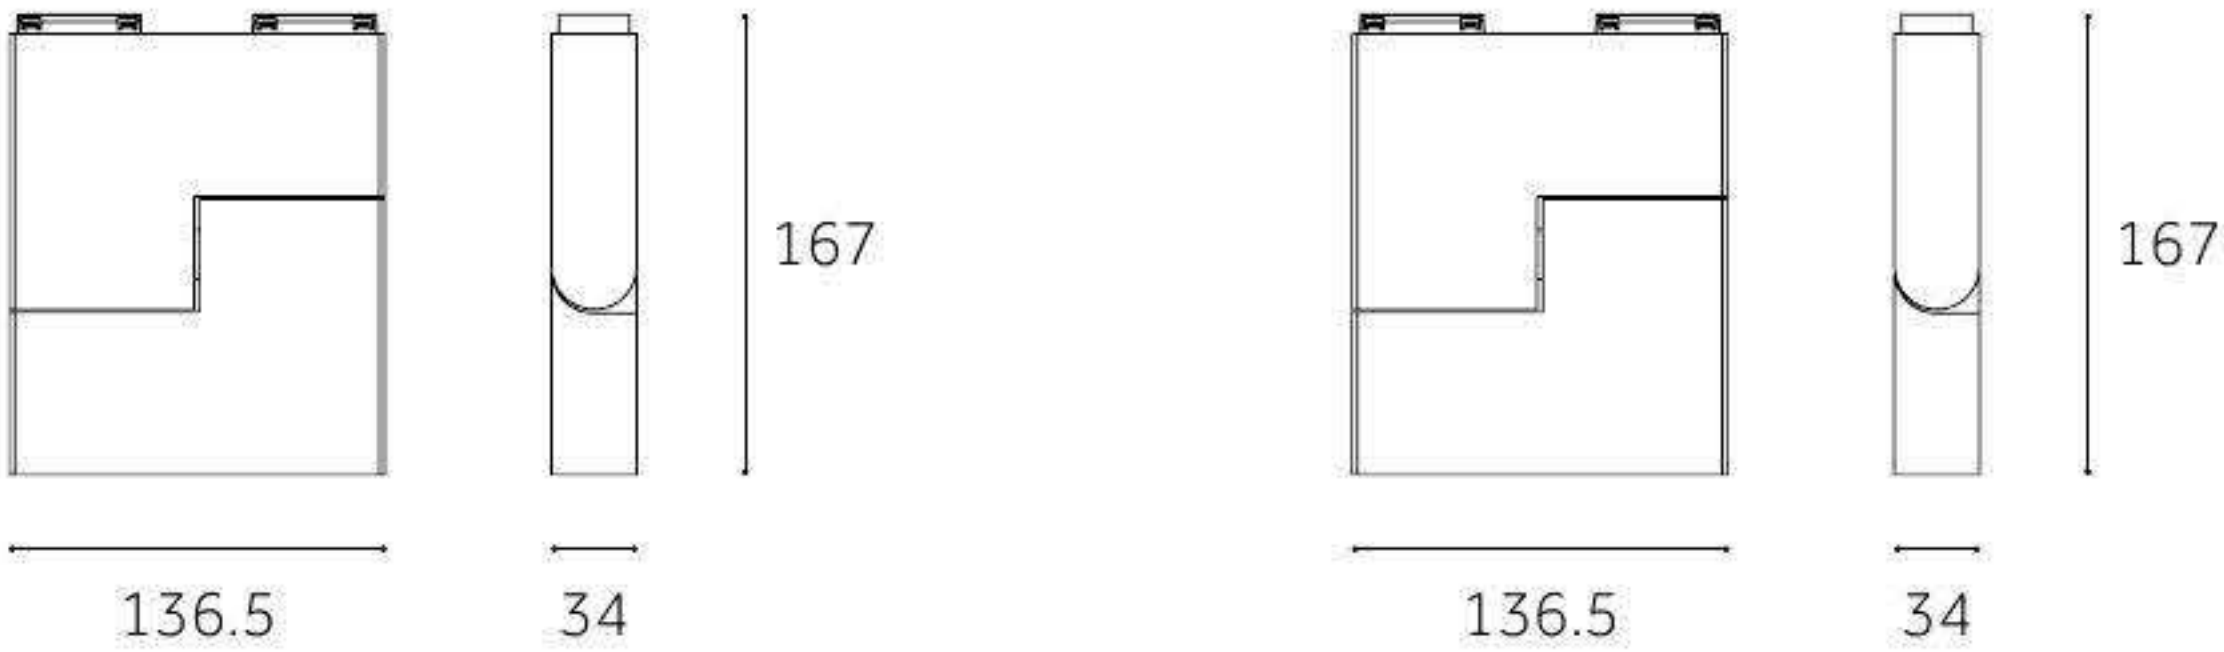

TRACK SYSTEM
MAGNET


TRACK SYSTEM
MAGNET

DS-600Magnetic track system


MAGNETIC TRACK




	DS-6061C	DS-6062C
Type	Fixed	Fixed
Wattage	10W	20W
Beam Angle	20°-50°	20°-50°
Lumen (lm)	428	1257
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	100xØ55x375	100xØ75x375
N.W/PC (kgs)	0.8	2.1
Q'ty/CTN (pcs)	16	9

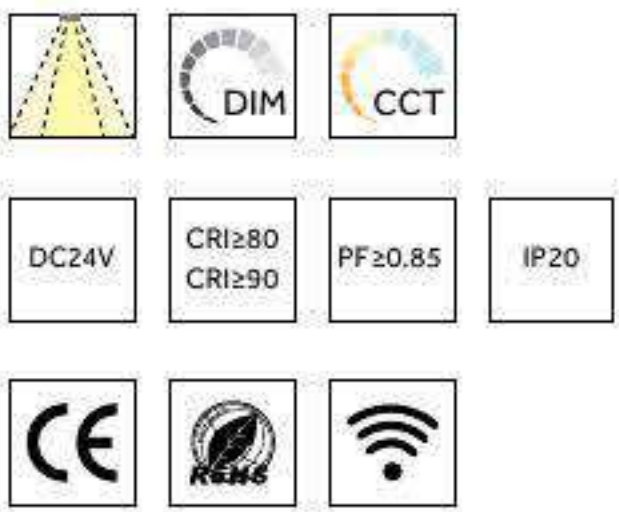



FINISH:  Black

CCT: 

DIMMING:  Triac  1-10V  DALI  2.4G

DS-600 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

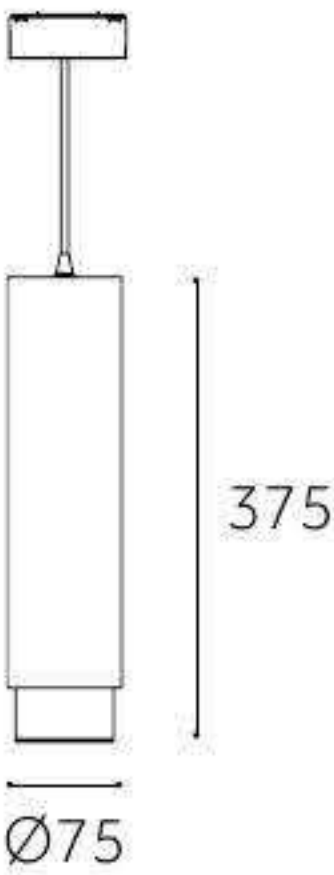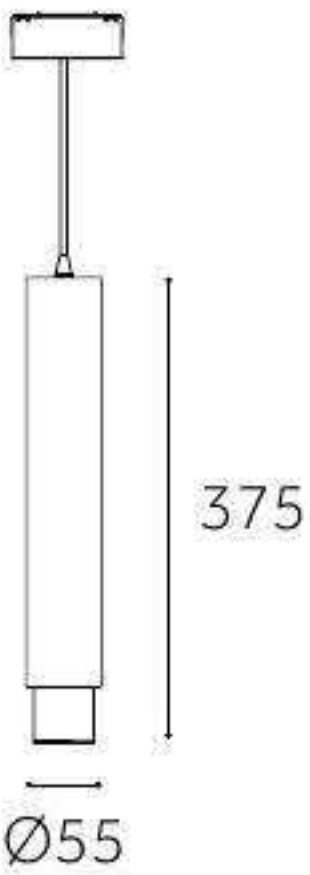


TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET



DC48V
magnetic
track system

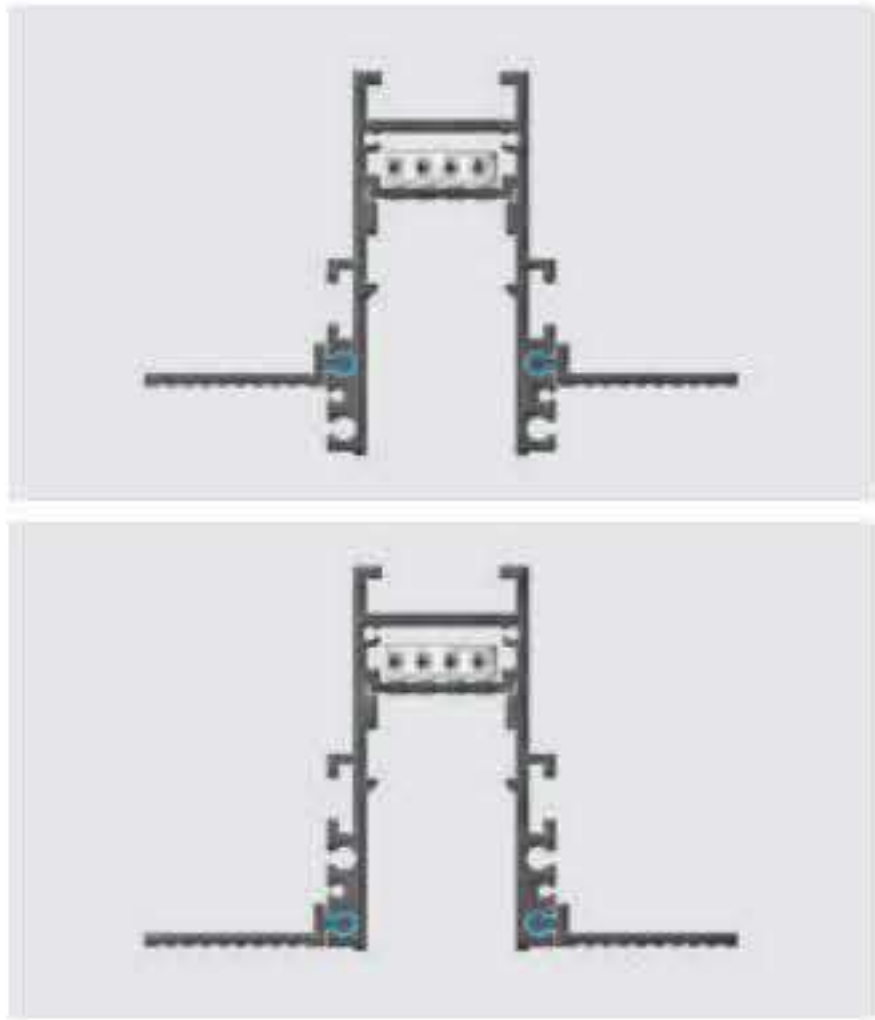

DS-7030
Trimless Recessed

DS-7031
Trimless Recessed
(pre-embedded)

DS-7032
Surface mounted

DS-7033
Suspended



1000x85x55
N.W (kgs): 1.6 Q'ty (pcs): 9
Cut-out: 48x>65mm

1000x25x55
N.W (kgs): 1.2 Q'ty (pcs): 9
Cut-out: 48x>65mm

1000x25x55
N.W (kgs): 1.2 Q'ty (pcs): 9

1000x25x55 ● Black
N.W (kgs): 1.2 Q'ty (pcs): 9

2000x85x55
N.W (kgs): 3.1 Q'ty (pcs): 6
Cut-out: 48x>65mm

2000x25x55
N.W (kgs): 2.4 Q'ty (pcs): 6
Cut-out: 48x>65mm

2000x25x55
N.W (kgs): 2.4 Q'ty (pcs): 6

2000x25x55 ● Black
N.W (kgs): 2.4 Q'ty (pcs): 6

DS-7039
90° (Recessed corner)

DS-7040
90° (Recessed inner corner)

DS-7041
90° (Surface corner)

DS-7042
90° (Surface inner corner)




100x100
N.W (kgs): 0.4 Q'ty (pcs): 30
Cut-out: 48x>65mm

100x100
N.W (kgs): 0.3 Q'ty (pcs): 50
Cut-out: 48x>65mm

100x100
N.W (kgs): 0.3 Q'ty (pcs): 50


100x100 ● Black
N.W (kgs): 0.3 Q'ty (pcs): 50

DS-700Magnetic track system


MAGNETIC TRACK



	DS-7032C	DS-7033C	DS-7034C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	6W	9W	12W
Beam Angle	16°/24°/36°	16°/24°/36°	16°/24°/36°
Lumen (lm)	448	690	1150
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	186xØ38.5x103.4	186xØ50x114.5	186xØ60x125
N.W/PC (kgs)	0.2	0.3	0.4
Q'ty/CTN (pcs)	24	24	24

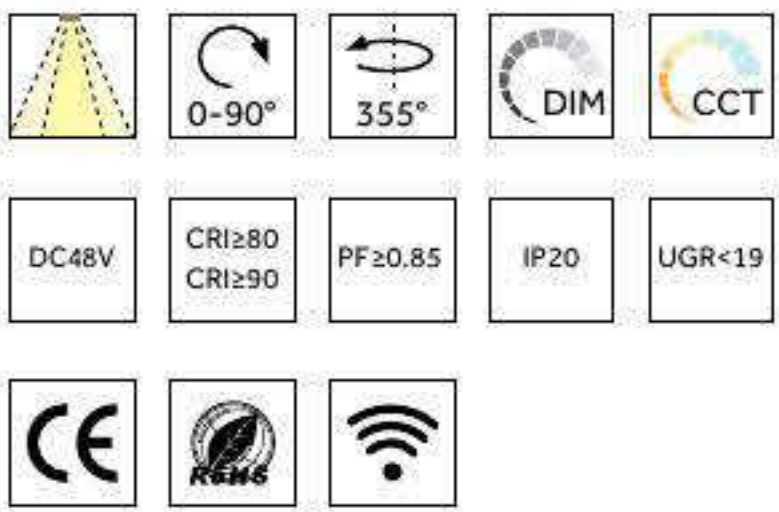


FINISH:  Black

CCT: 

DIMMING:  Triac  1-10V  DALI  2.4G

DS-700 Series is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)

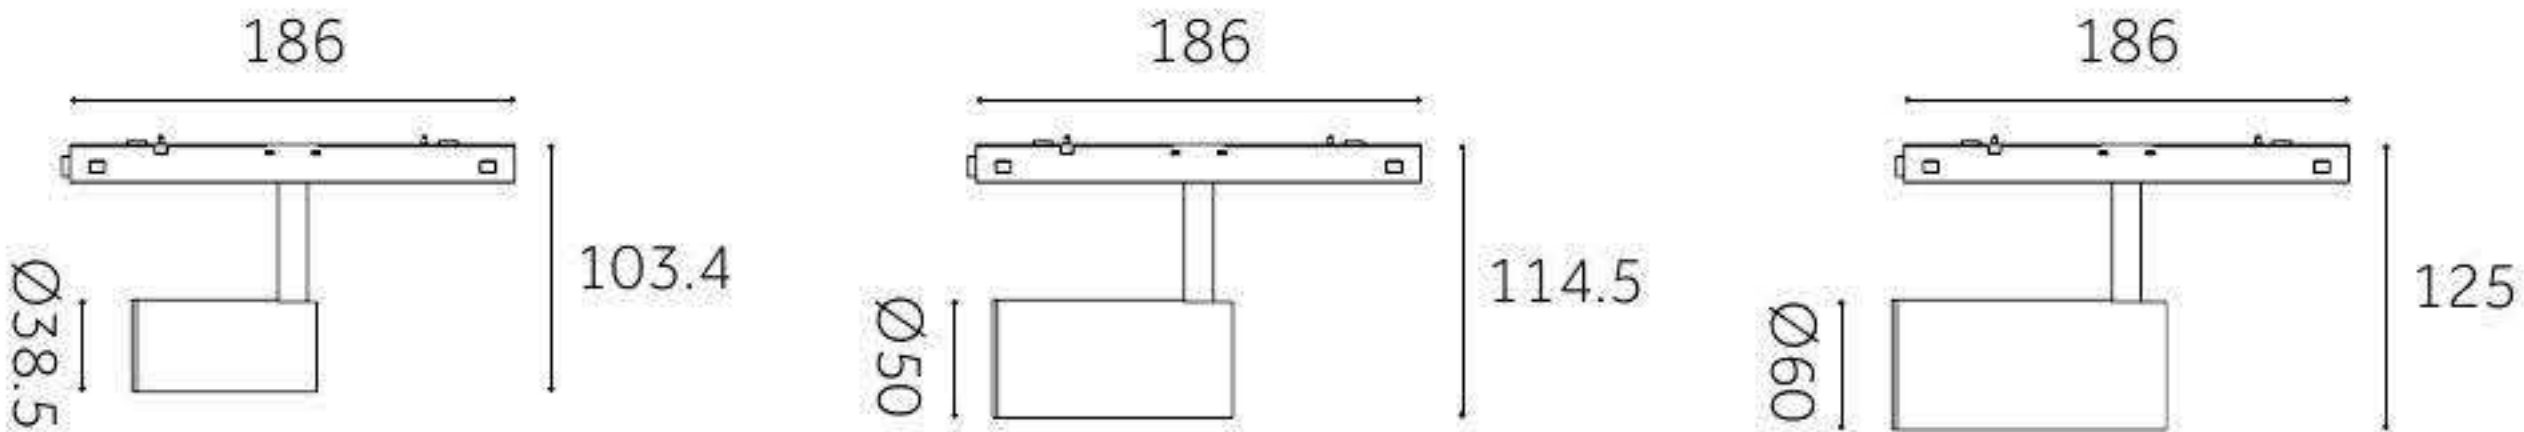


TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET

DS-700 Magnetic track system

MAGNETIC TRACK 






DC48V

CRI≥80
CRI≥90

PF≥0.85

IP20

UGR<19



FINISH:  Black


CCT:  3000K 6000K

DIMMING:  Triac  1-10V  DALI  2.4G

DS-700 Series is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

	DS-7042C	DS-7043C	DS-7044C
Type	Fixed	Fixed	Fixed
Wattage	6W	12W	18W
Beam Angle	120°	120°	120°
Lumen (lm)	253	495	782
Cut-out (mm) ⓘ	/	/	/
Size (WxLxHmm)	387x20x40	579x20x40	963x20x40
N.W/PC (kgs)	0.3	0.5	0.8
Q'ty/CTN (pcs)	25	25	25

Dimension(mm)

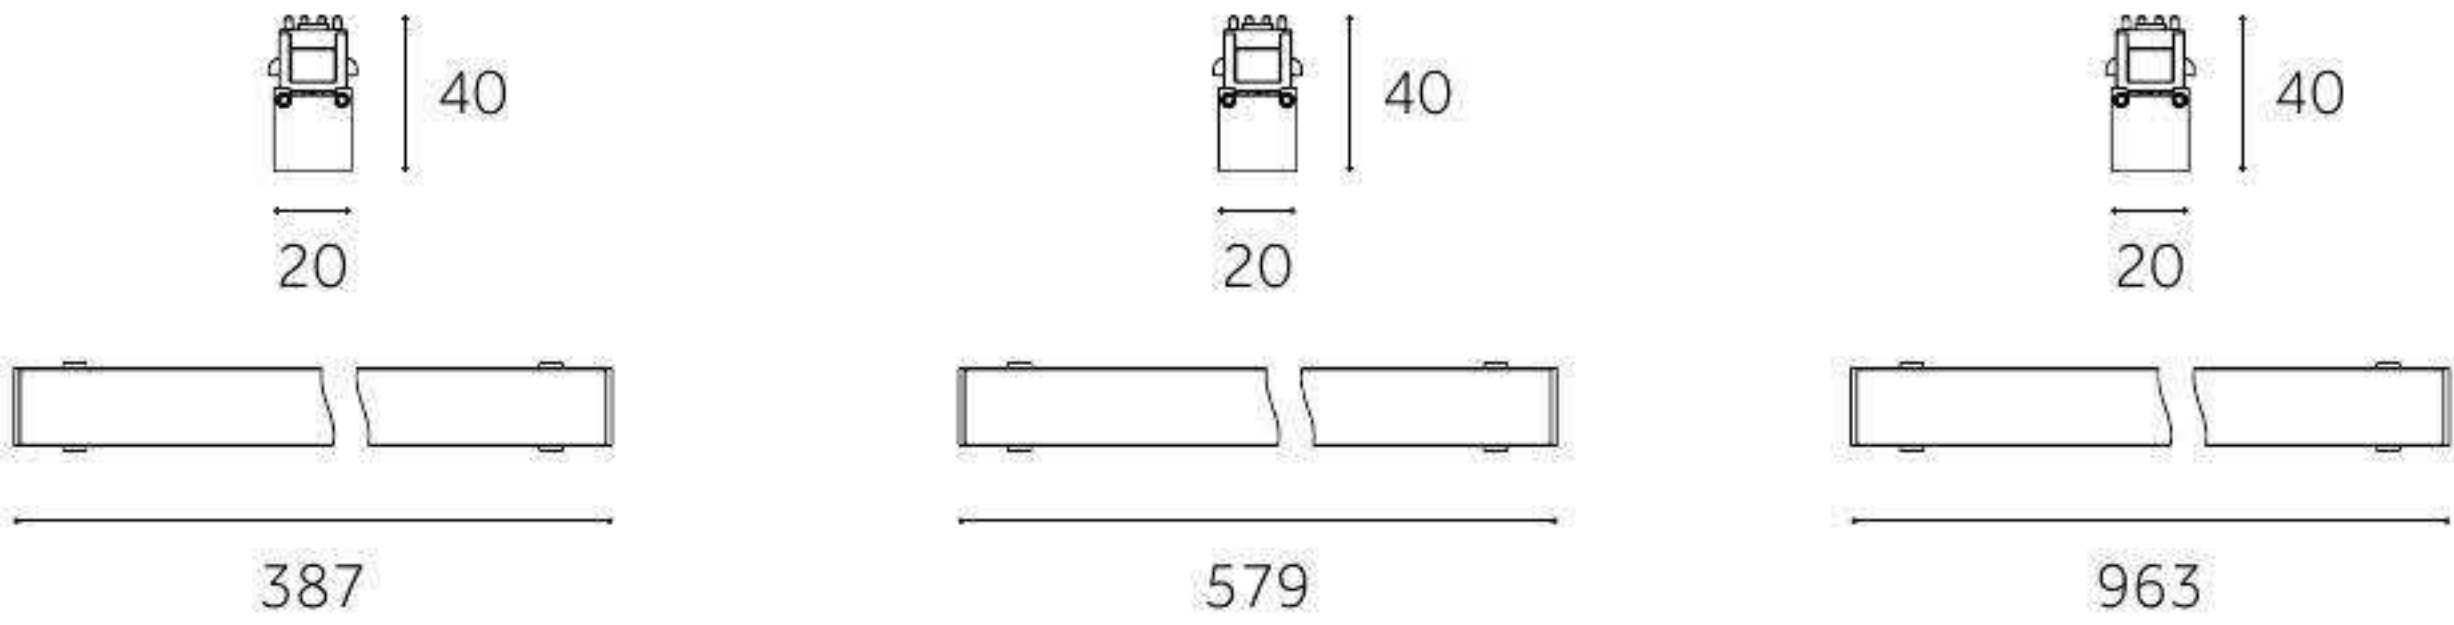


TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET

DS-700


Magnetic track system

MAGNETIC TRACK





	DS-7052C	DS-7053C
Type	Fixed	Fixed
Wattage	9W	18W
Beam Angle	12°/34°/55°	12°/34°/55°
Lumen (lm)	794	1300
Cut-out (mm)	/	/
Size (WxLxHmm)	192x20x40	387x20x40
N.W/PC (kgs)	0.1	0.2
Q'ty/CTN (pcs)	40	25



DC48V

CRI≥80
CRI≥90

PF≥0.85

IP20

UGR<19

CE





FINISH:

●

Black

CCT:

3000K

6000K

DIMMING:

Triac

1-10V



DALI

2.4G

DS-700 Series

is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

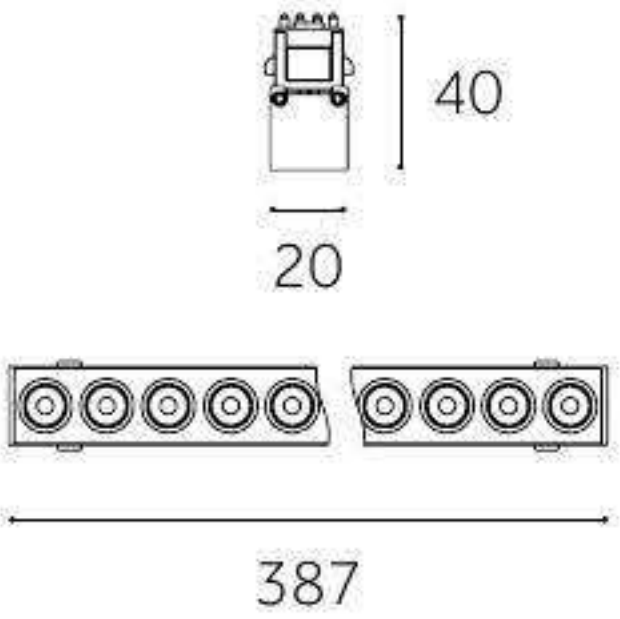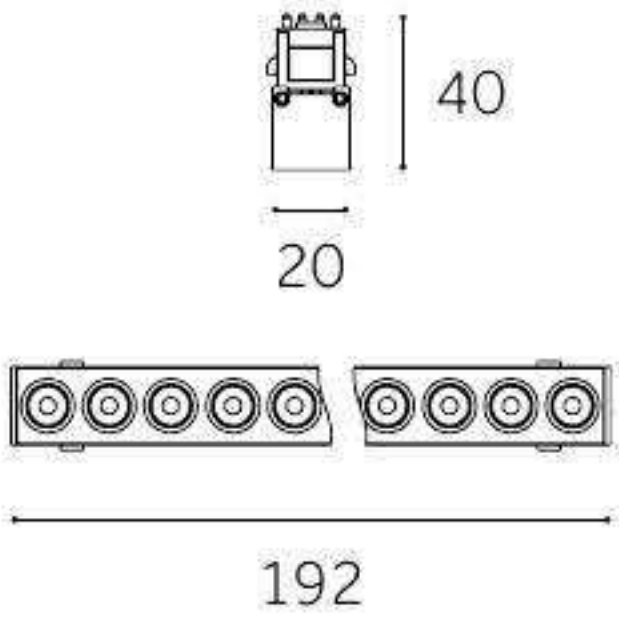

TRACK SYSTEM

MAGNET


TRACK SYSTEM

MAGNET

DS-700


Magnetic track system

MAGNETIC TRACK





	DS-7062C	DS-7063C
Type	Adjustable 90°	Adjustable 90°
Wattage	9W	9W
Beam Angle	12°/34°/55°	120°
Lumen (lm)	552	610
Cut-out (mm)	/	/
Size (WxLxHmm)	195x20x82	195x20x82
N.W/PC (kgs)	0.4	0.4
Q'ty/CTN (pcs)	25	25

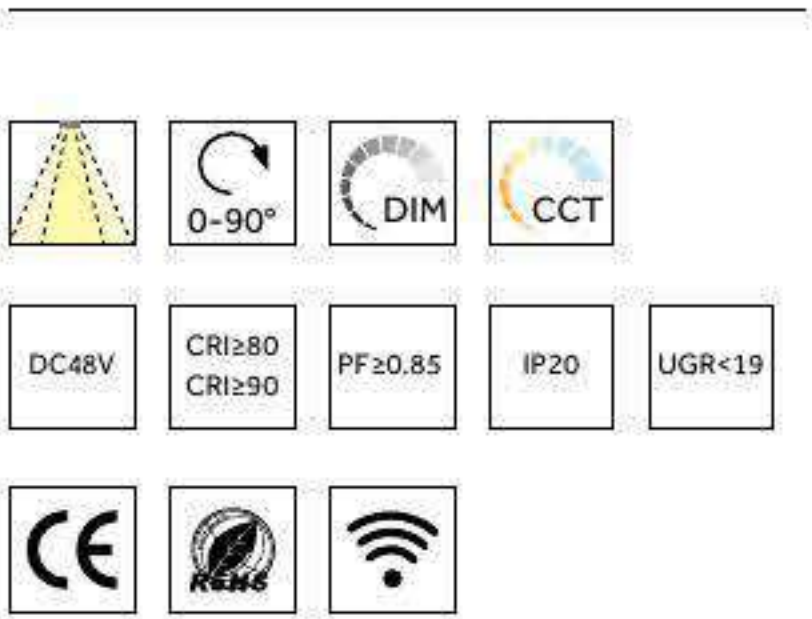

FINISH:

●

Black

CCT:

3000K

6000K

DIMMING:

Triac

1-10V



DALI

2.4G

DS-700 Series

is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

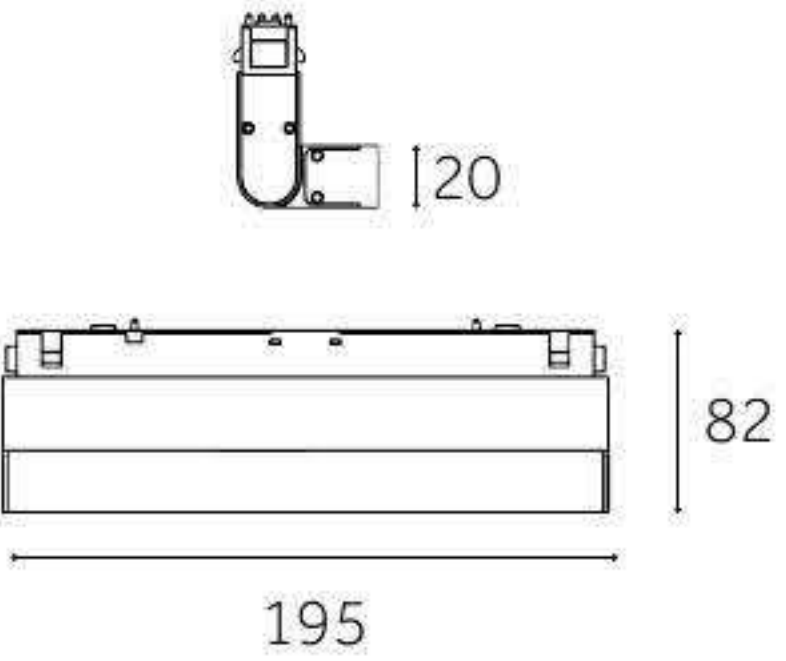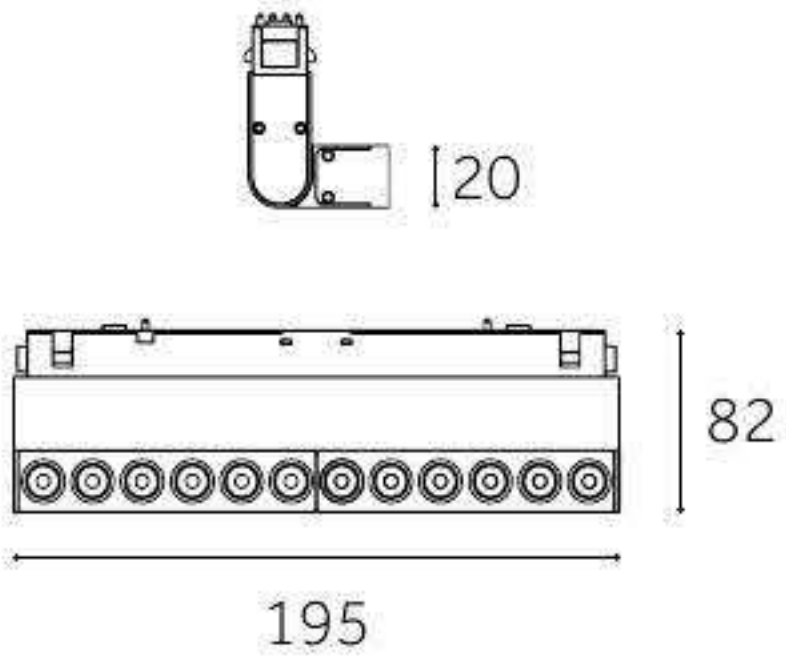


TRACK SYSTEM
MAGNET


TRACK SYSTEM
MAGNET

DS-700

Magnetic track system

MAGNETIC TRACK



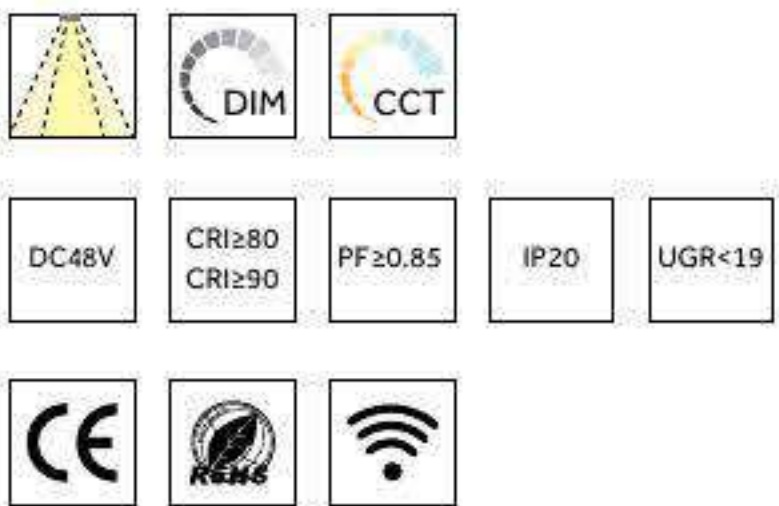

FINISH:

●

Black

CCT:

3000K

6000K

DIMMING:

✔ Triac

✔ 1-10V

✔ DALI

✔ 2.4G


DS-700 Series

is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Type

	Fixed
Wattage	6W
Beam Angle	16°/24°/36°
Lumen (lm)	481
Cut-out (mm) ⓘ	/
Size (DxHmm)	186xØ38x495
N.W/PC (kgs)	0.8
Q'ty/CTN (pcs)	25

Dimension(mm)

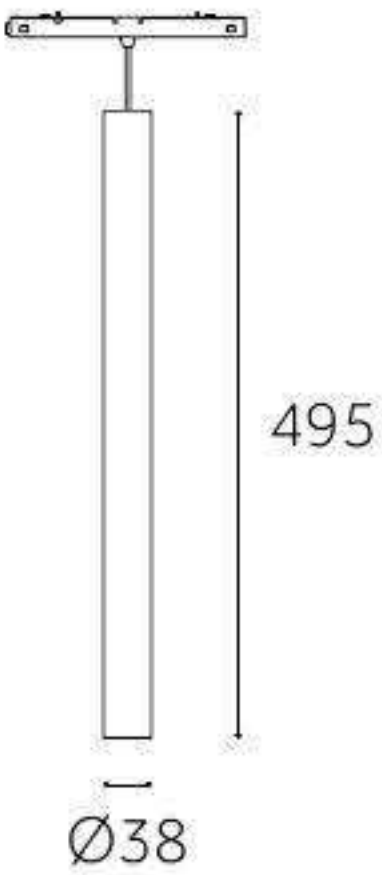


TRACK SYSTEM

MAGNET


SL-T25

ULTRA THIN MAGNETIC TRACK


5.5MM RAIL

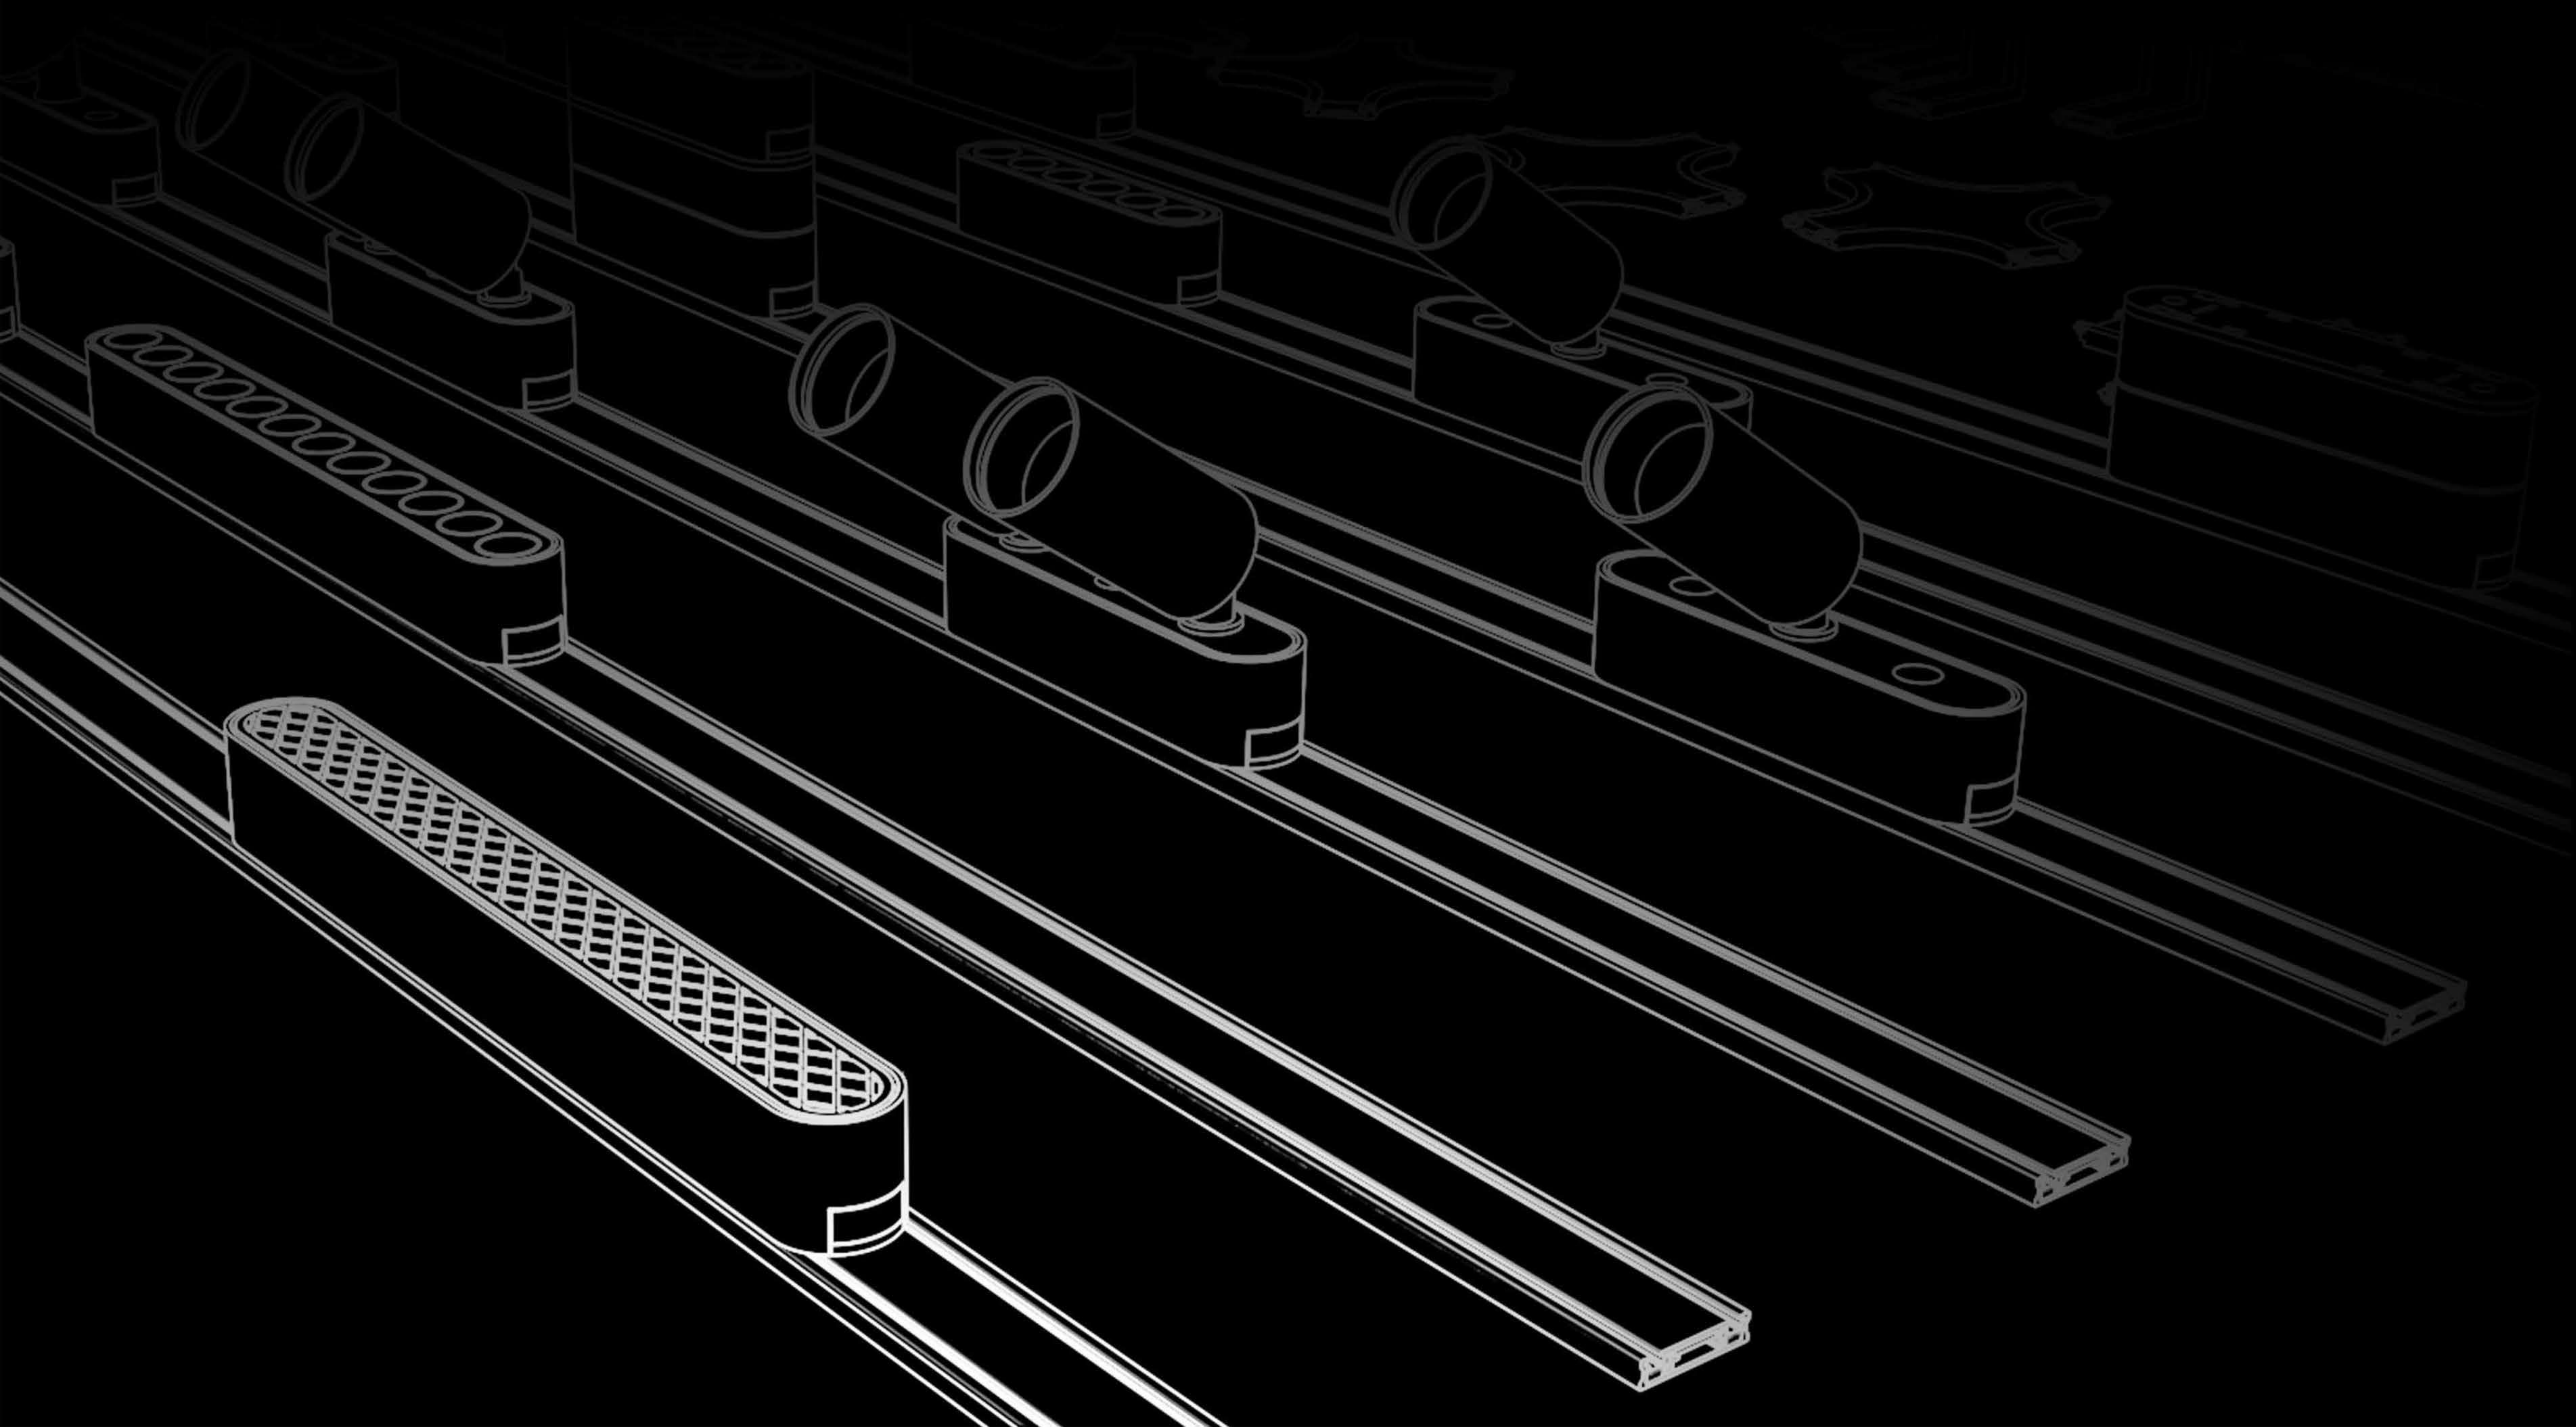


FREE COLLOCATION

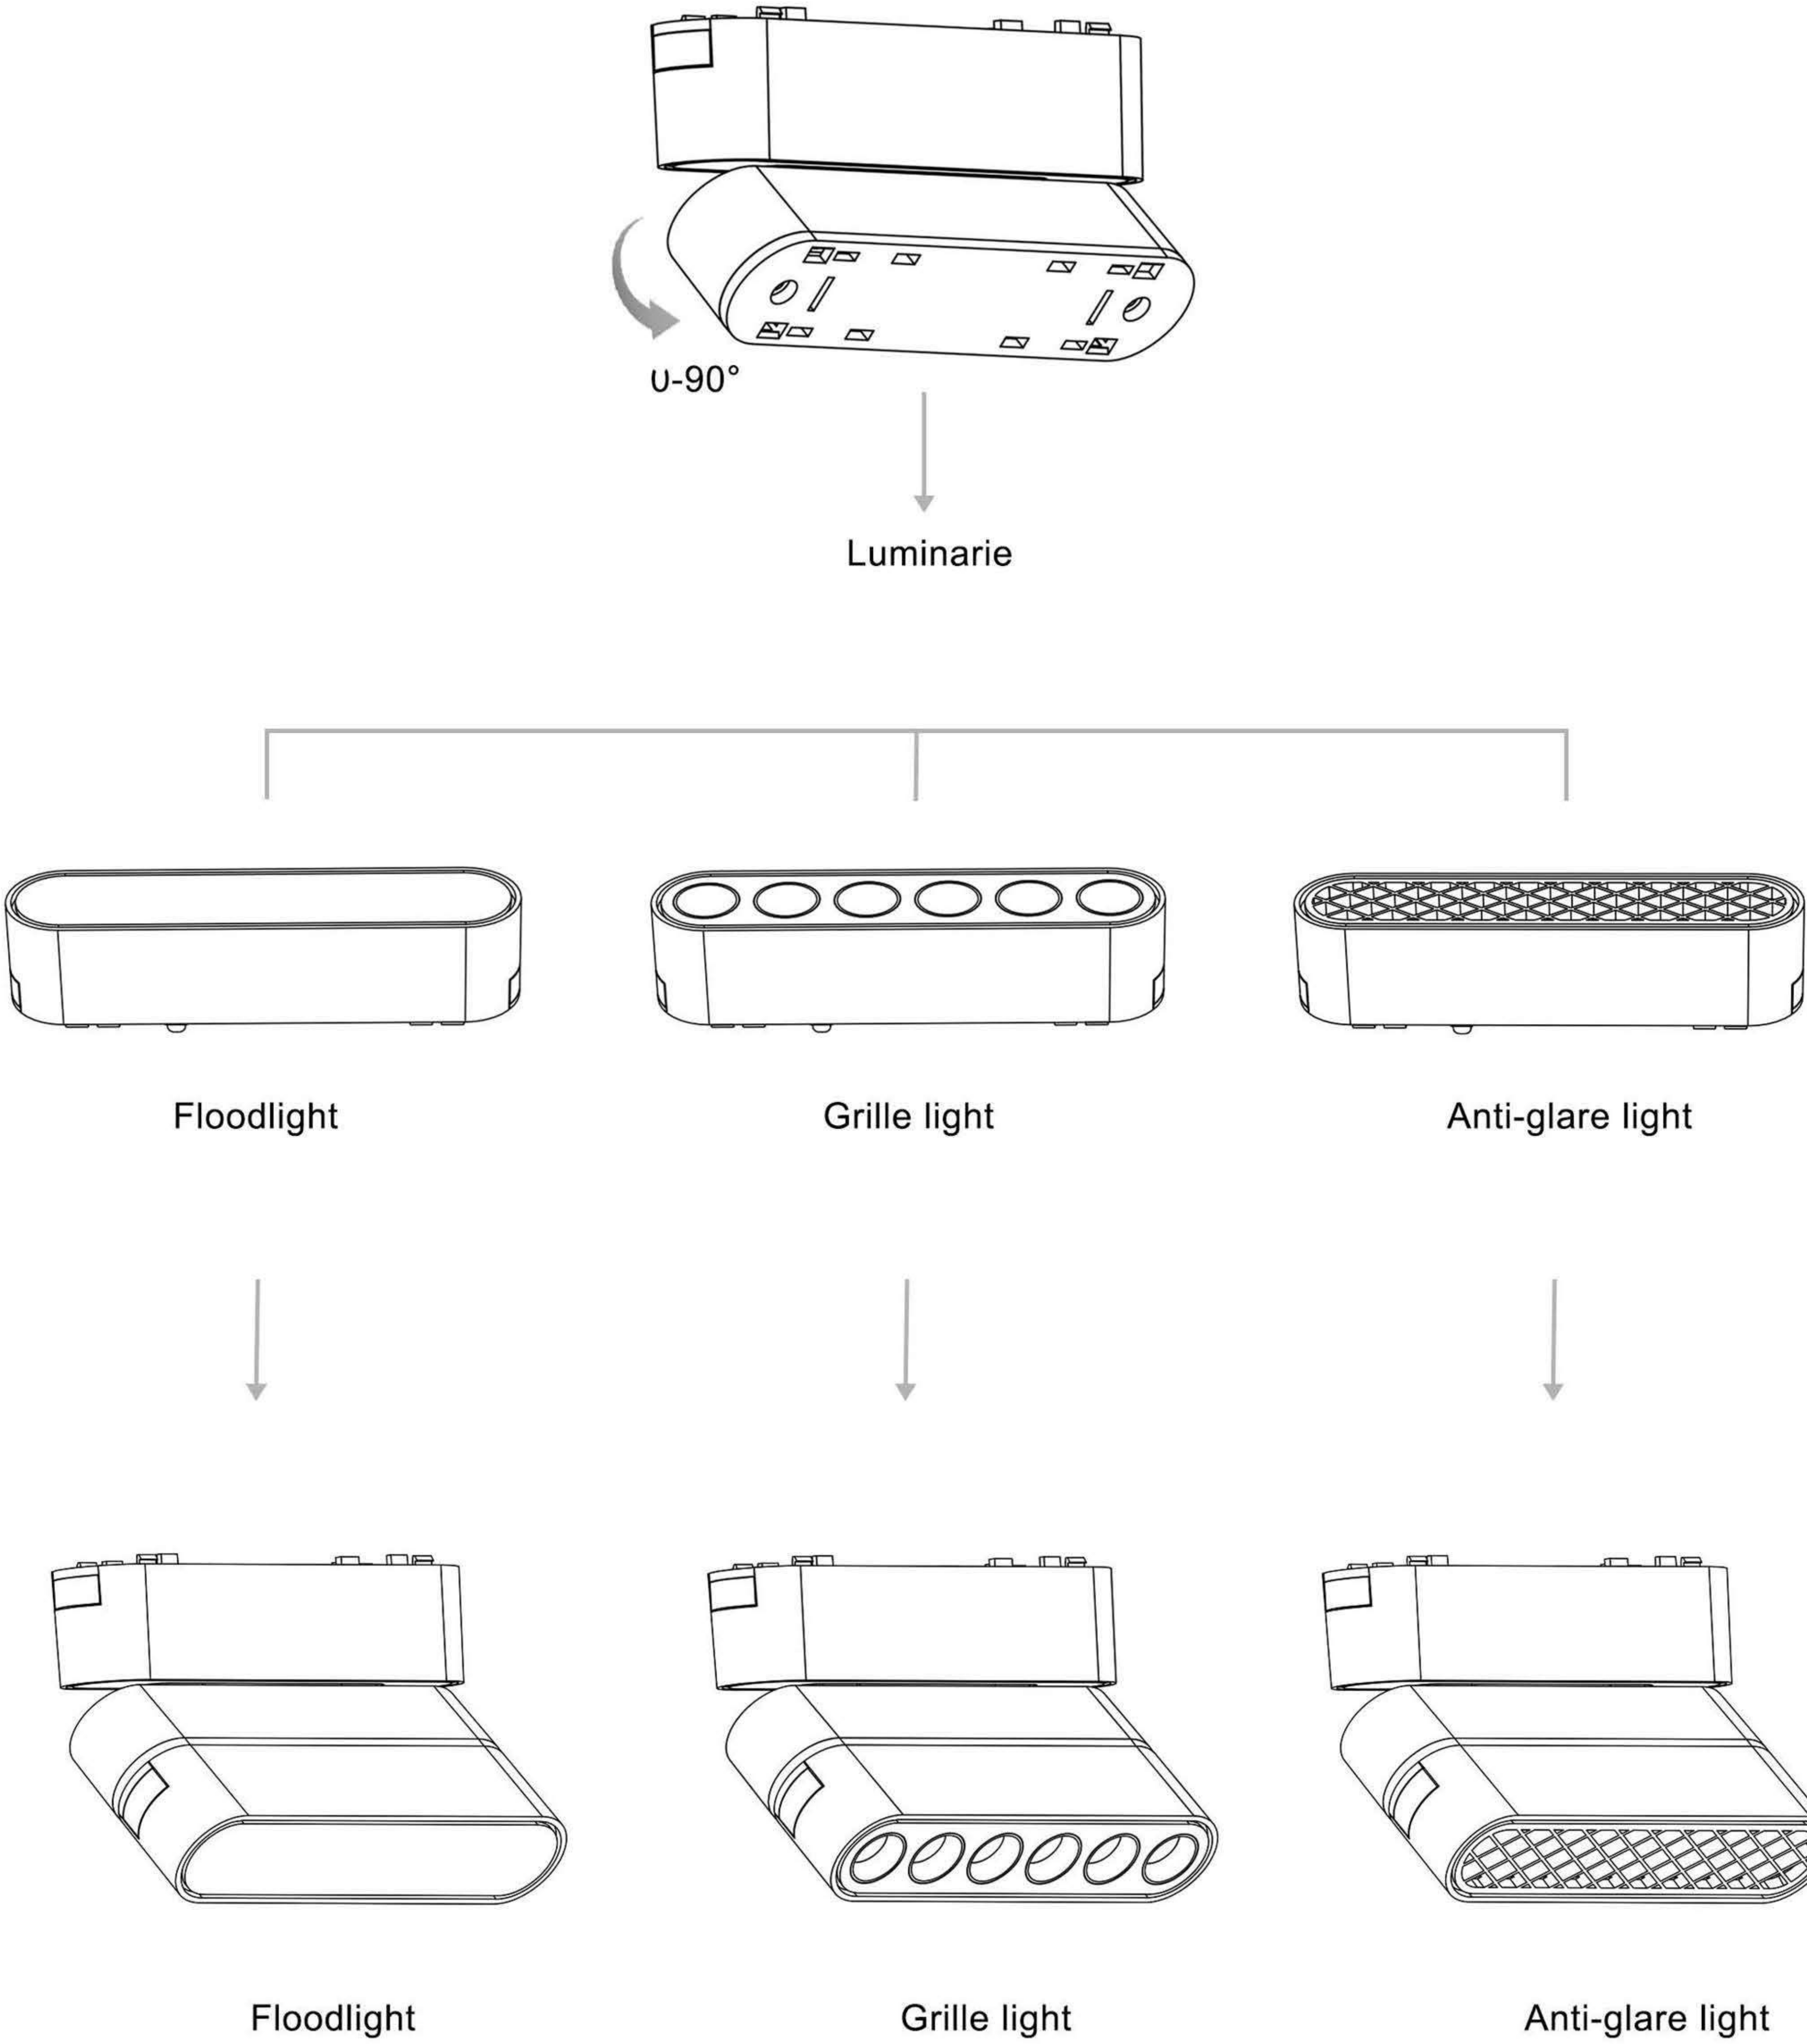


Accessories

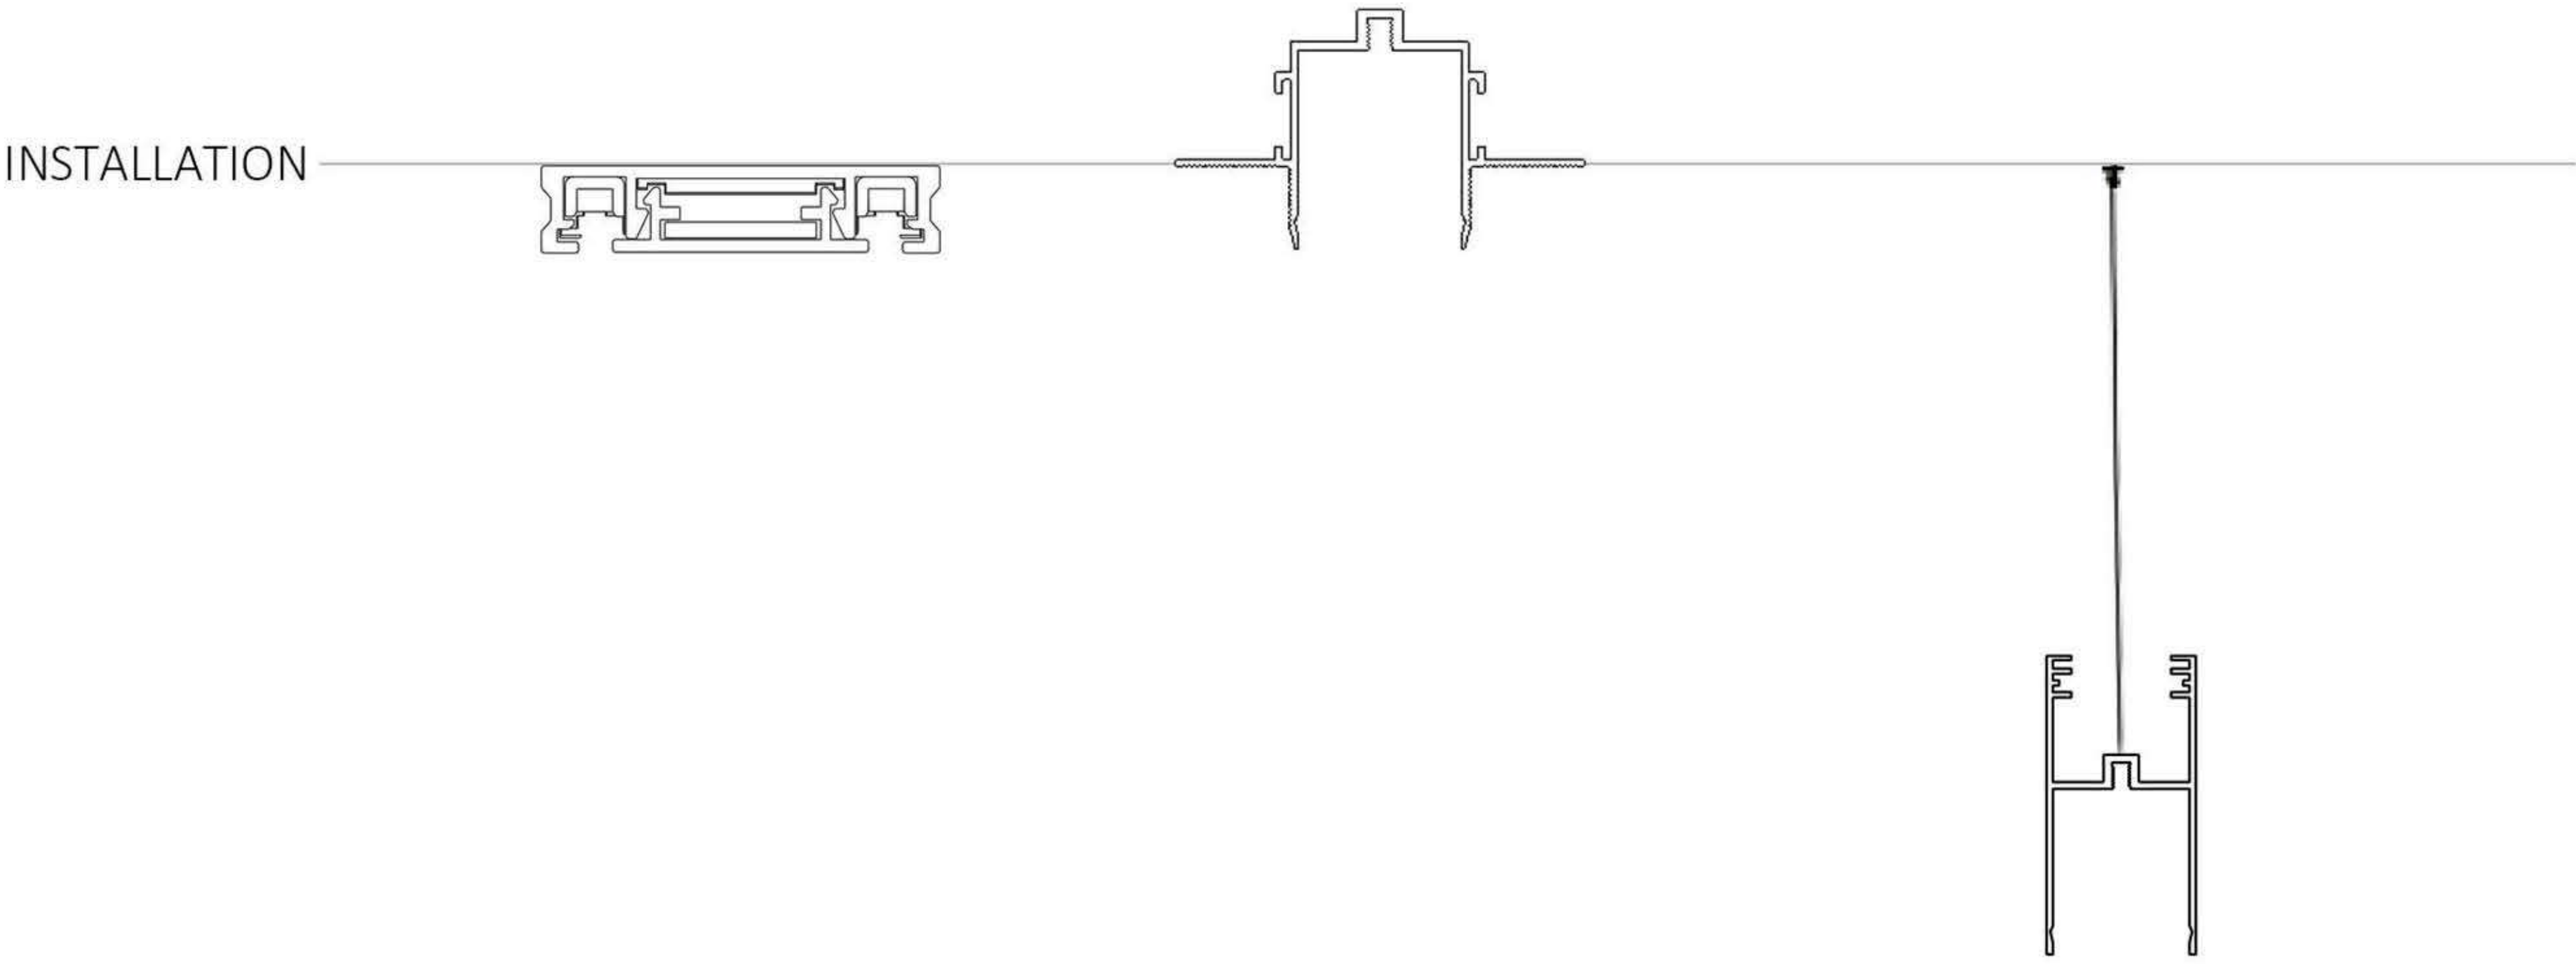

TRANSFER MODULE

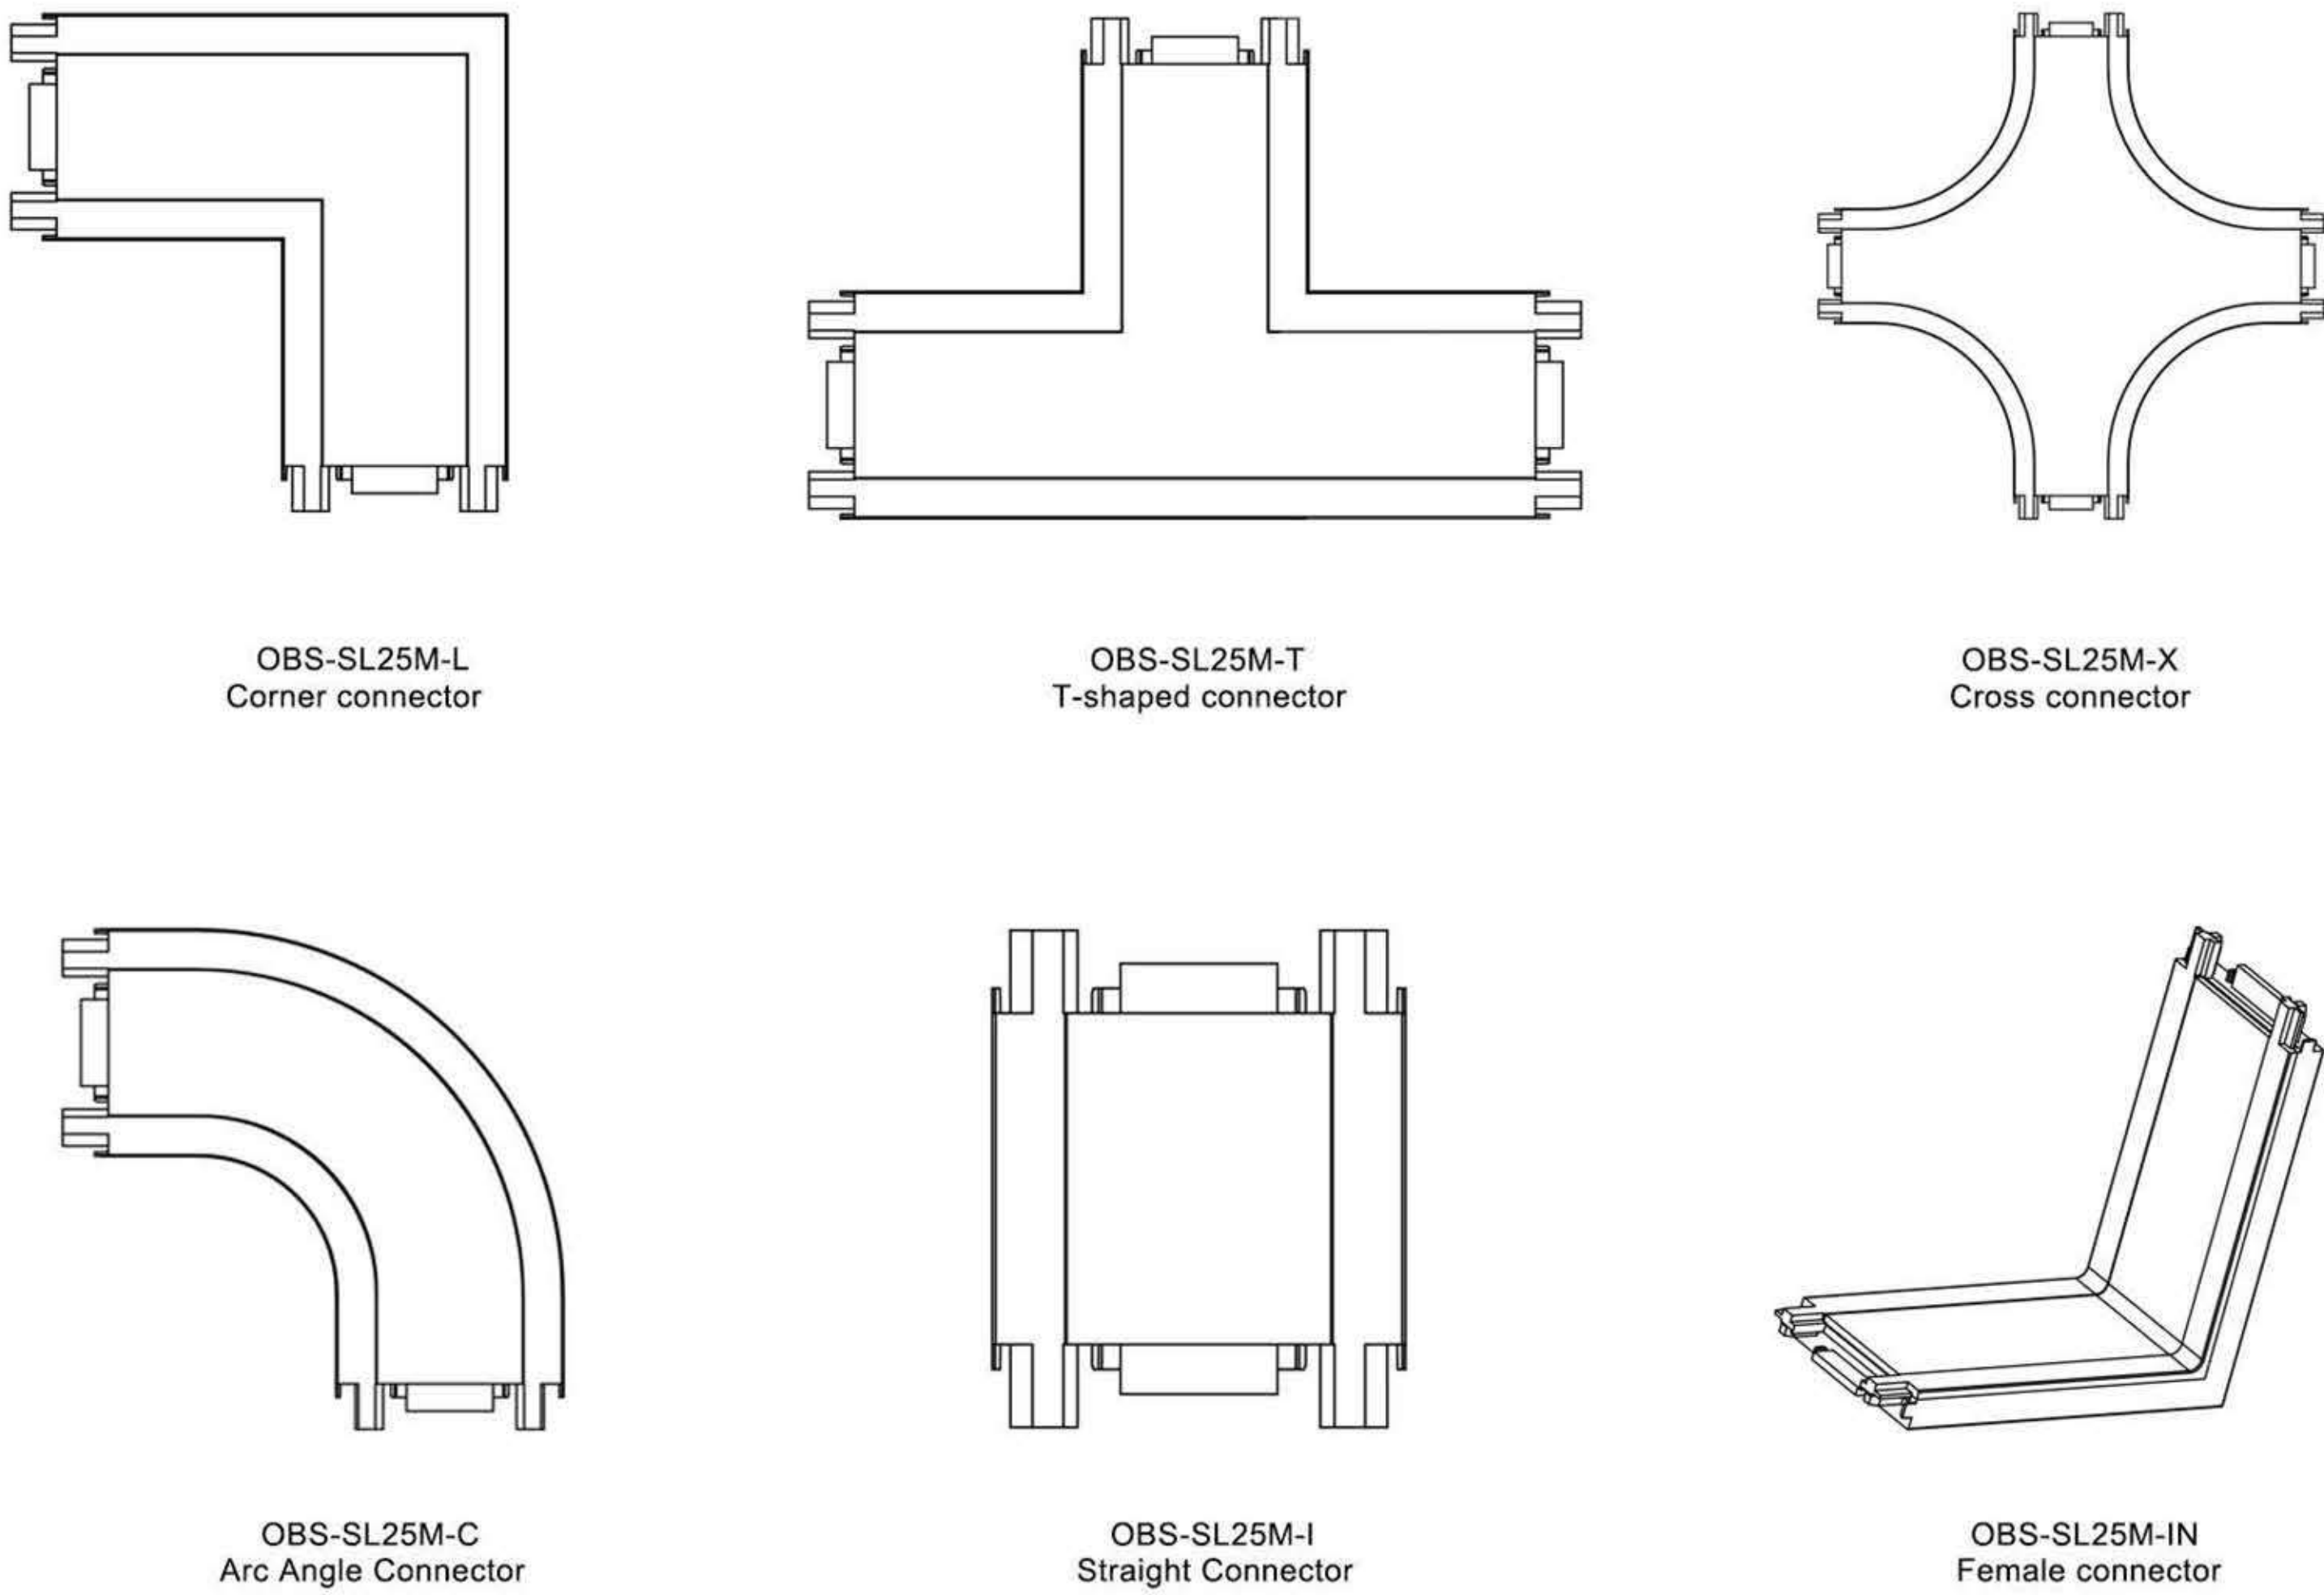

Track Accessories

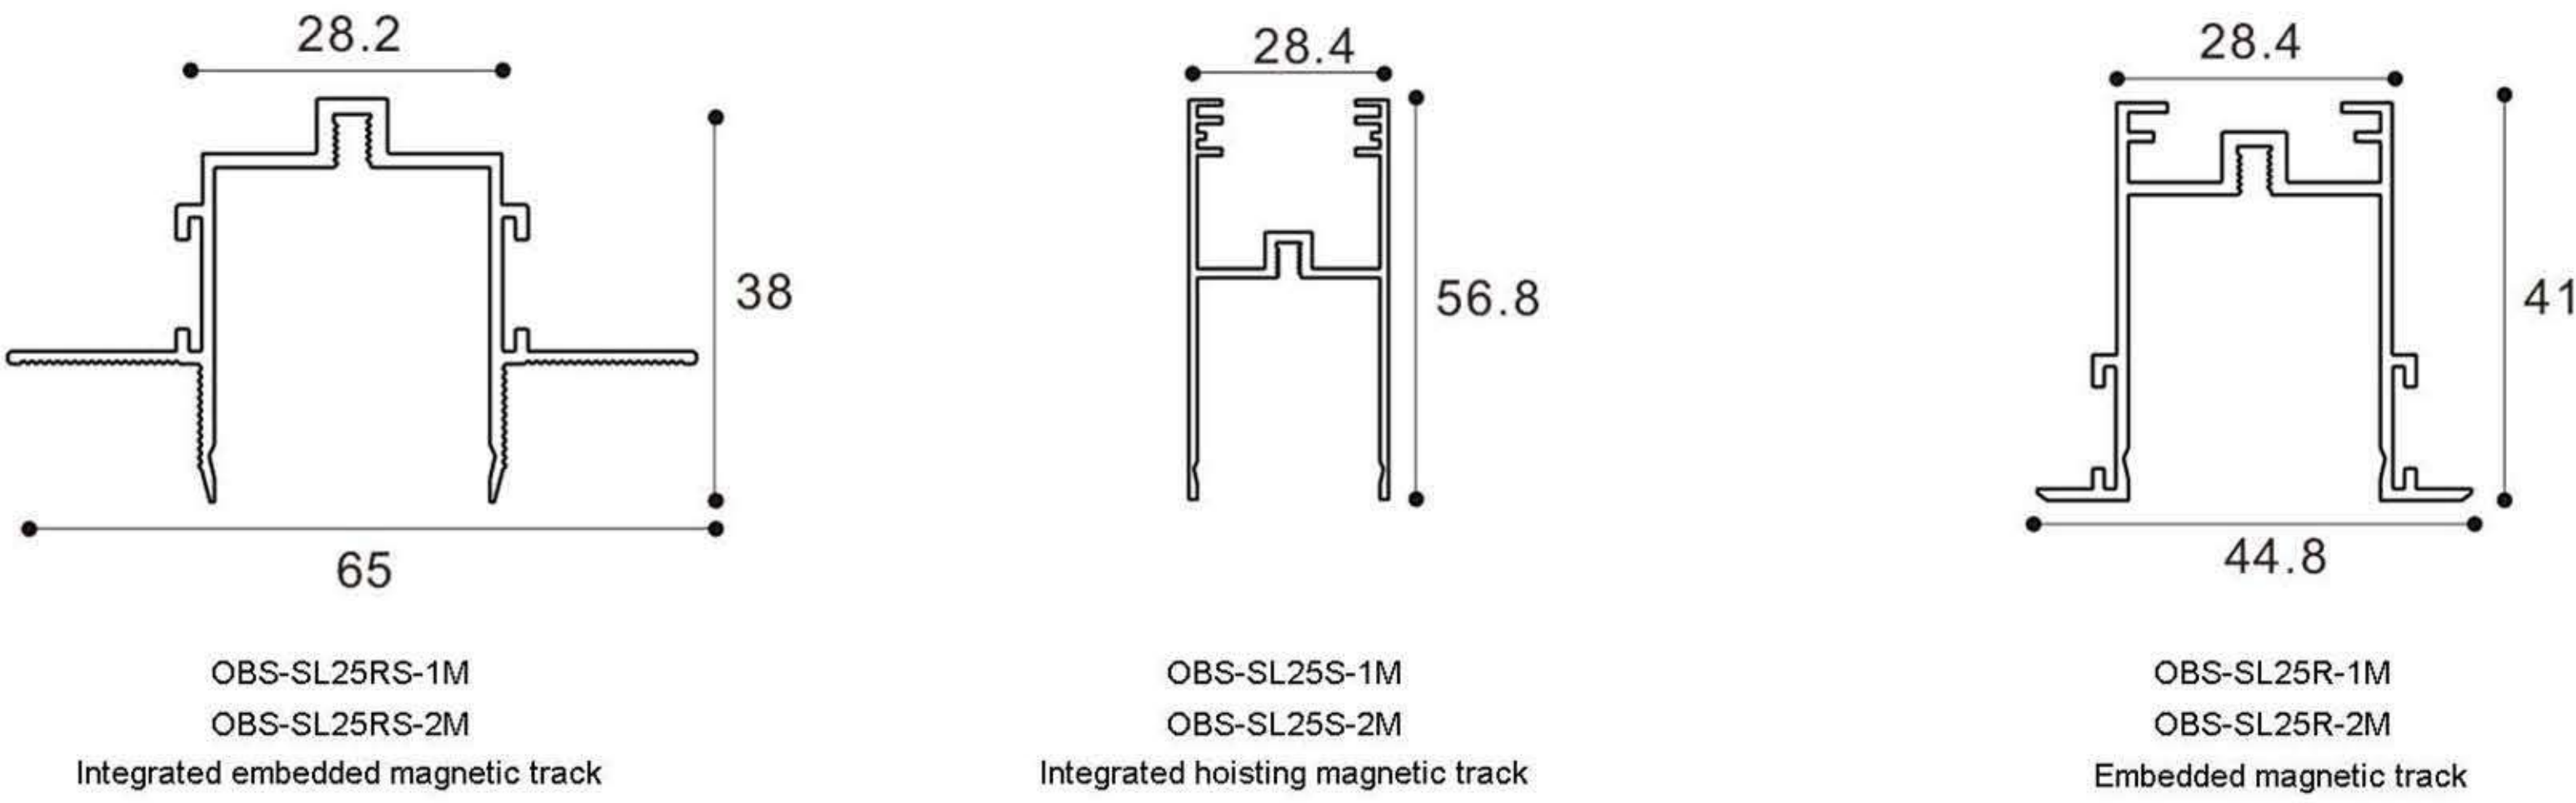

DS-SL25-FLD6W



120°

DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

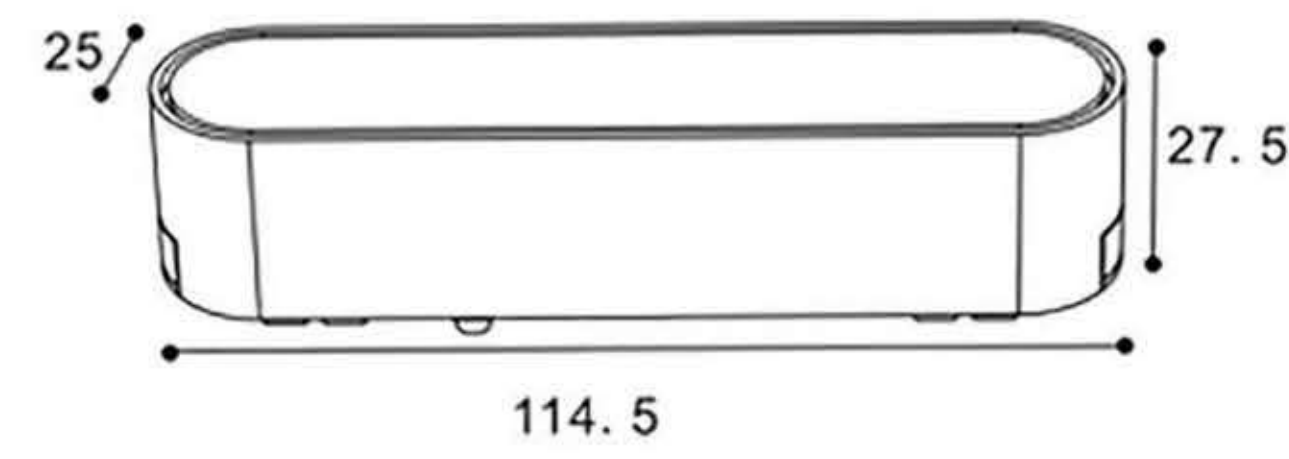

Specifications

Code No	DS-SL25-FLD6W			
Watt(W)	6W			
Dimension(mm)	L114.5*W25*H27.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	320			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	120°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.075KG	50pcs	6.1*3.2*15mm	34*17*33mm

CCT



Color



DS-SL25-FLD12W



120°

DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

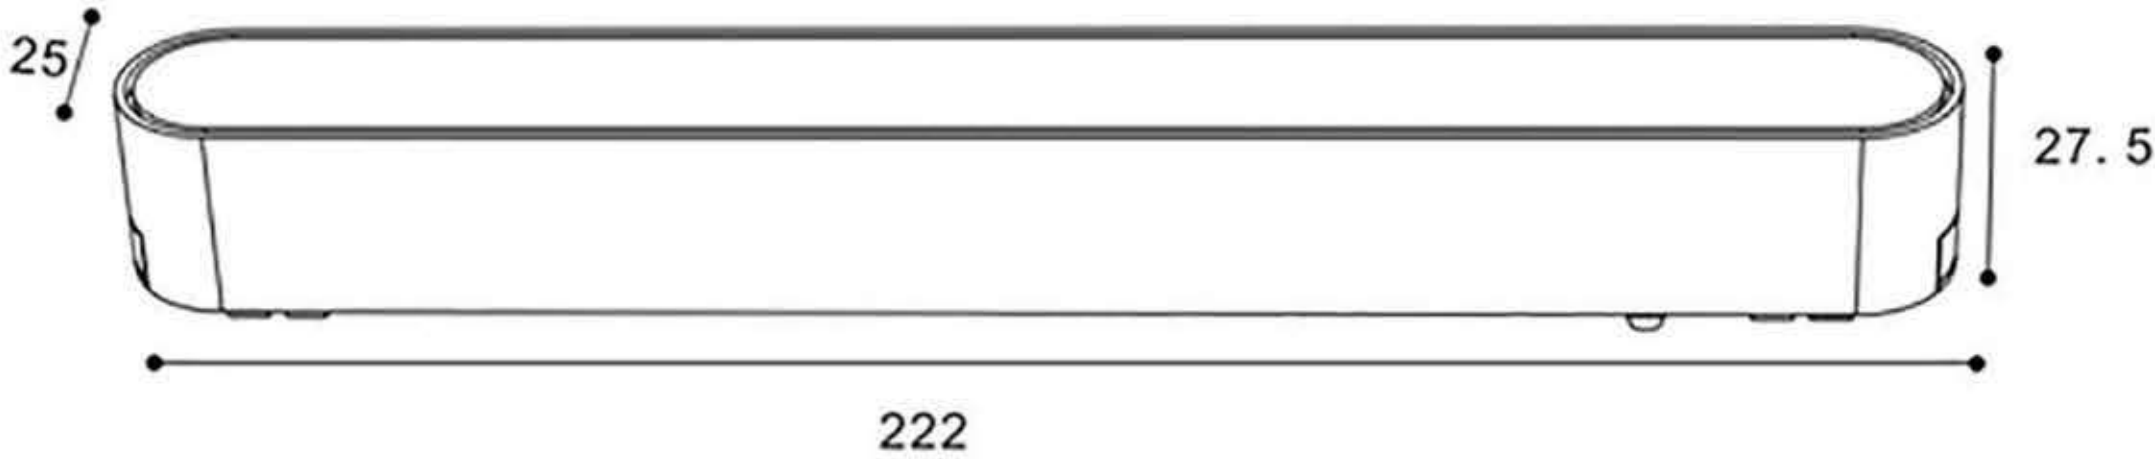

Specifications

Code No	DS-SL25-FLD12W			
Watt(W)	12W			
Dimension(mm)	L222.3*W25*H27.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	683			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	120°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.145KG	50pcs	6.1*3.2*26.1mm	34*27.5*33mm

CCT



Color



DS-SL25-AGR6W



DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

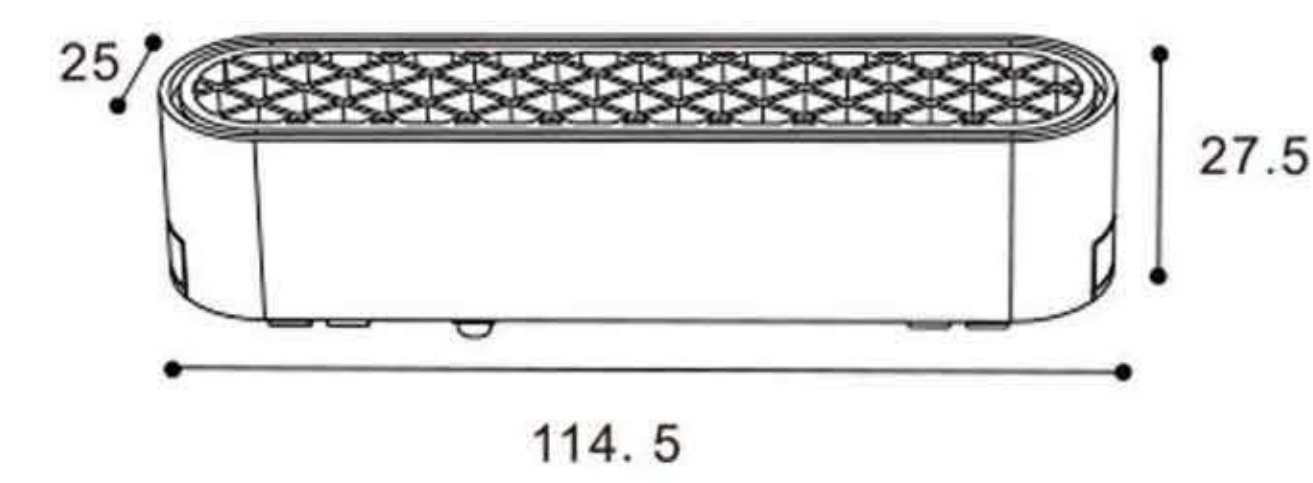

Specifications

Code No	DS-SL25-AGR6W			
Watt(W)	6W			
Dimension(mm)	L114.5*W25*H27.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K 2700K-6000K			
Lumen(±5%)	White:258 / Black:119			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.075KG	50pcs	6.1*3.2*15mm	34*17*33mm

CCT



Color



DS-SL25-AGR12W



DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

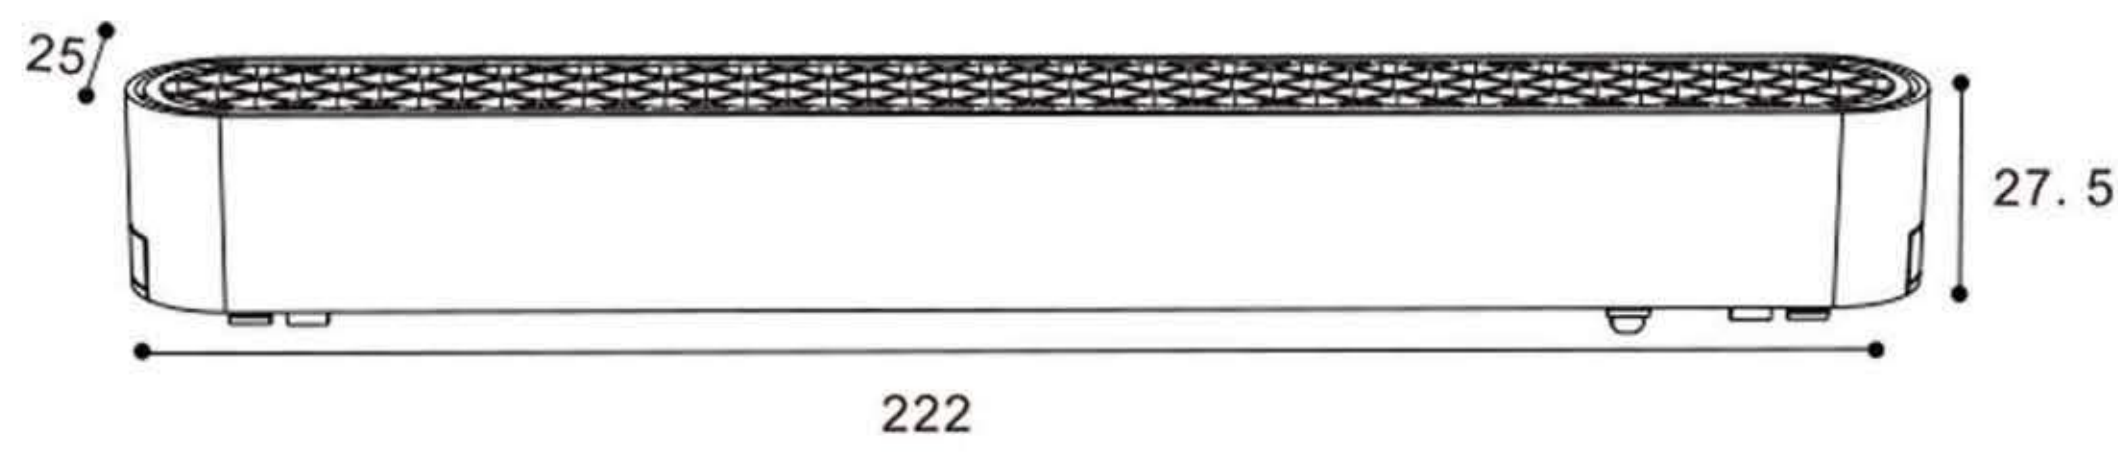

Specifications

Code No	DS-SL25-AGR12W			
Watt(W)	12W			
Dimension(mm)	L222.3*W25*H27.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K 2700K-6000K			
Lumen(±5%)	White:562 / Black:256			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	36°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.137KG	50pcs	6.1*3.2*26.1mm	34*27.5*33mm

CCT



Color



DS-SL25-GLR6W



DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

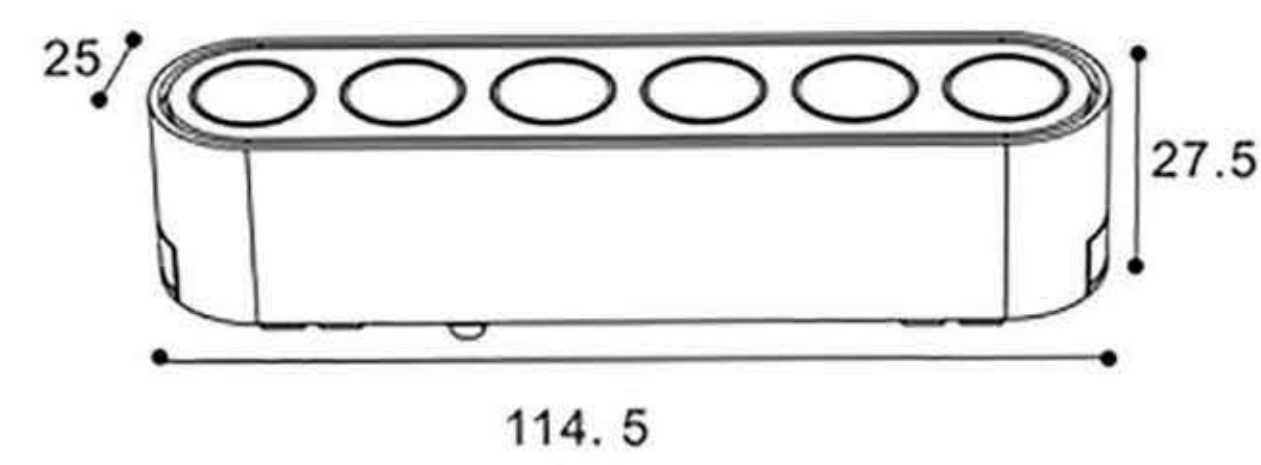

Specifications

Code No	DS-SL25-GLR6W			
Watt(W)	6W			
Dimension(mm)	L114.5*W25*H27.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K 2700K-6000K			
Lumen(±5%)	599			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	36°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.077KG	50pcs	6.1*3.2*15mm	34*17*33mm

CCT



Color



DS-SL25-GLR12W



DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

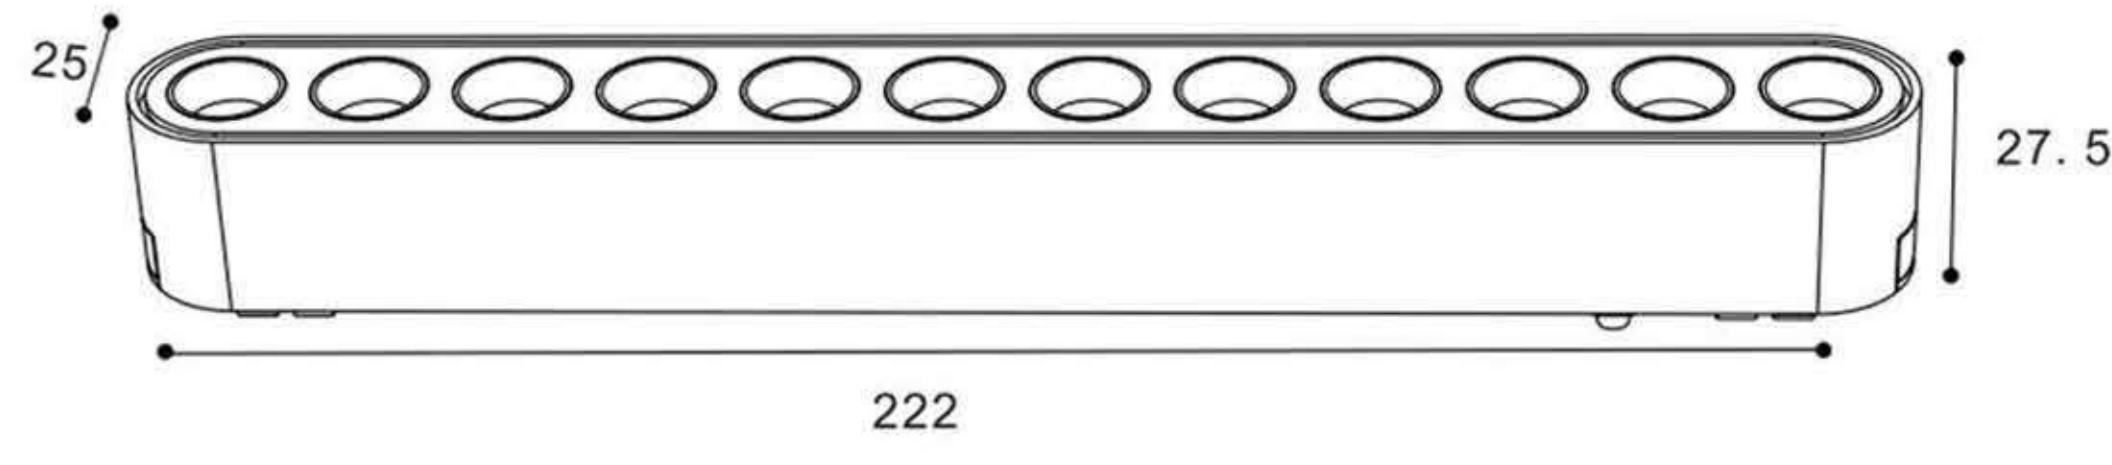

Specifications

Code No	DS-SL25-GLR12W			
Watt(W)	12W			
Dimension(mm)	L222.3*W25*H27.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K 2700K-6000K			
Lumen(±5%)	1123			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	120°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.18KG	50pcs	6.1*3.2*26.1mm	34*27.5*33mm


CCT



Color



DS-SL25-TRK5W

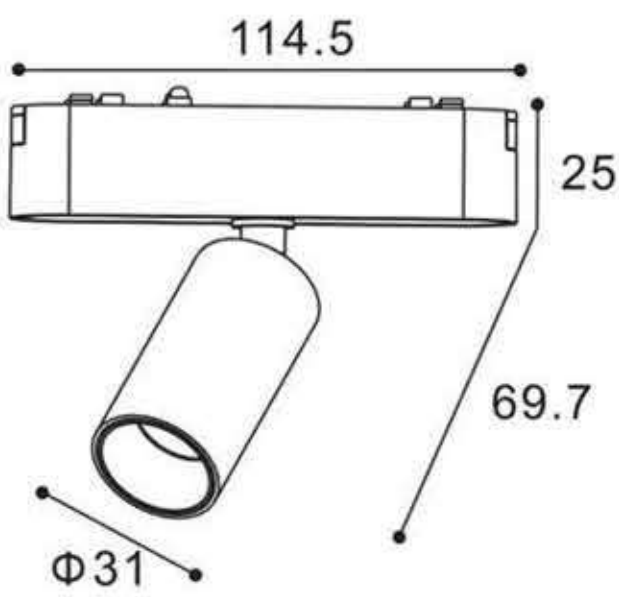

Specifications

Code No	DS-SL25-TRK5W			
Watt(W)	5W			
Dimension(mm)	Φ31*94.7*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	504			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.94KG	30pcs	14.6*3.4*13.5mm	36*15*46mm


CCT



Color



DS-SL25-TRK5W*2

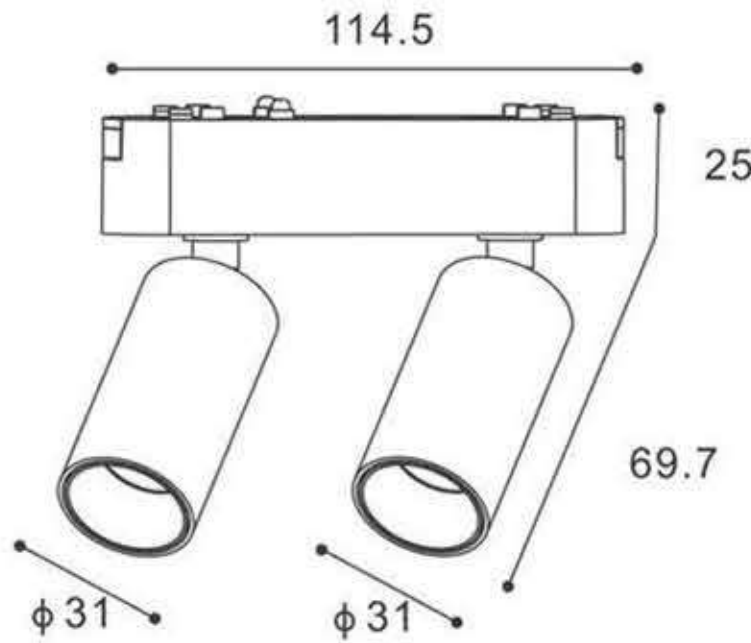

Specifications

Code No	DS-SL25-TRK5W*2			
Watt(W)	5W*2			
Dimension(mm)	Φ31*94.7*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	814			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.147KG	30pcs	14.6*3.4*13.5mm	36*15*46mm


CCT



Color



DS-SL25-TRK7W

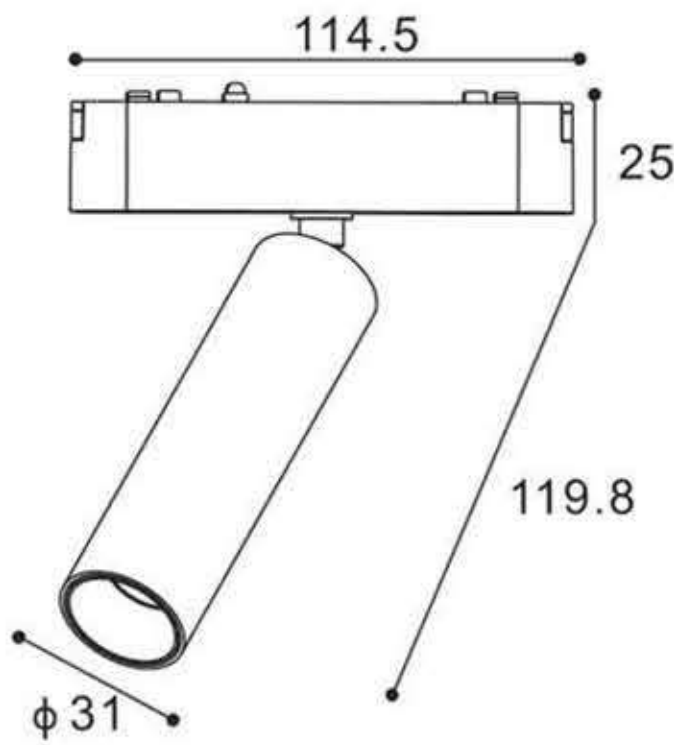

Specifications

Code No	DS-SL25-TRK7W			
Watt(W)	7W			
Dimension(mm)	Φ31*144.8*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	596			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.159KG	30pcs	14.6*3.4*18.4mm	36*20*46mm


CCT



Color



DS-SL25-TRK7W*2

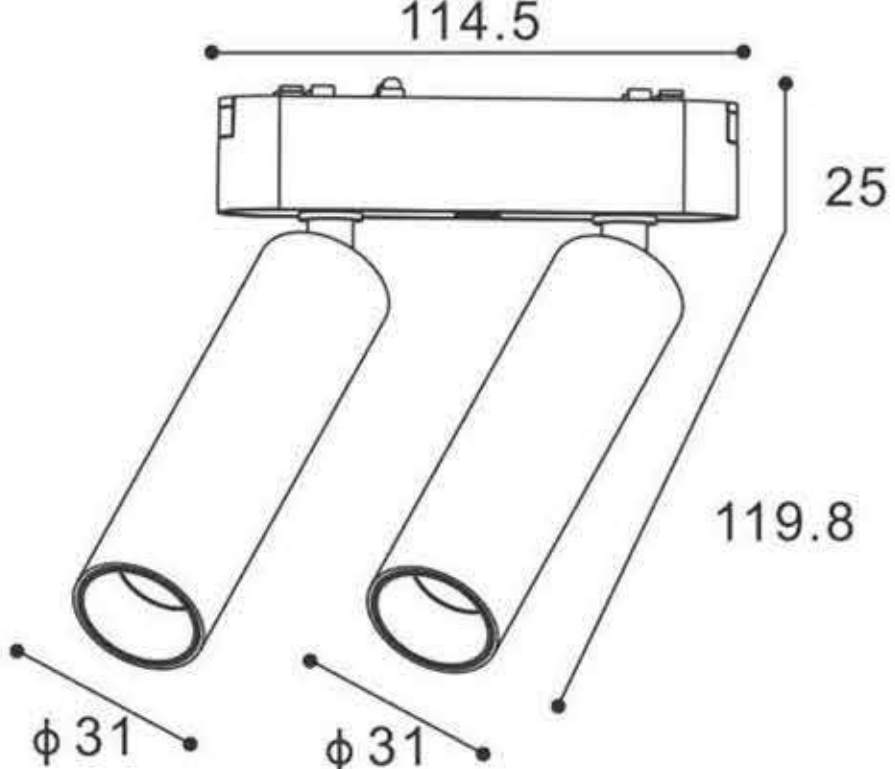

Specifications

Code No	DS-SL25-TRK7W*2			
Watt(W)	7W*2			
Dimension(mm)	Φ31*144.8*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	1247			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.274KG	30pcs	14.6*3.4*18.4mm	36*20*46mm


CCT



Color



DS-SL25-TRK12W

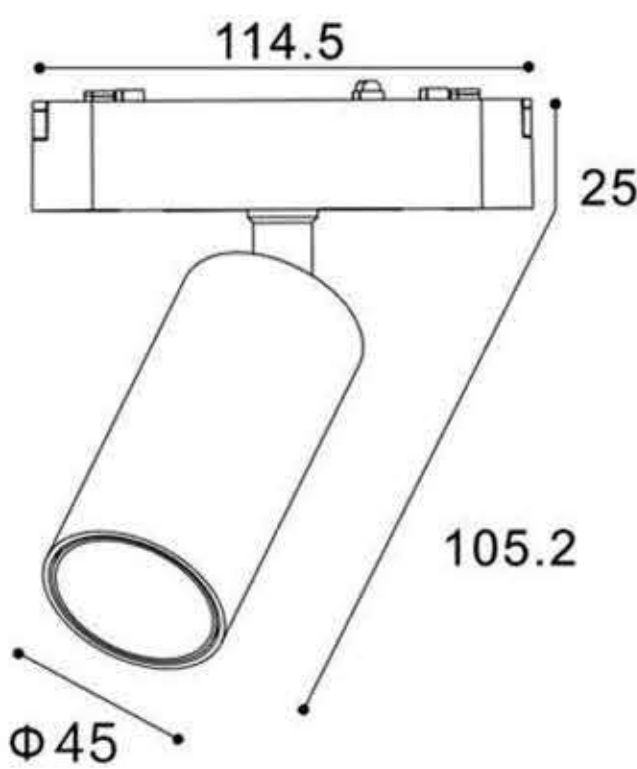

Specifications

Code No	DS-SL25-TRK12W			
Watt(W)	12W			
Dimension(mm)	Φ45*130.2*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	1075			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.175KG	30pcs	14.6*4.5*17.3mm	47*19*46mm


CCT



Color



DS-SL25-TRK15W

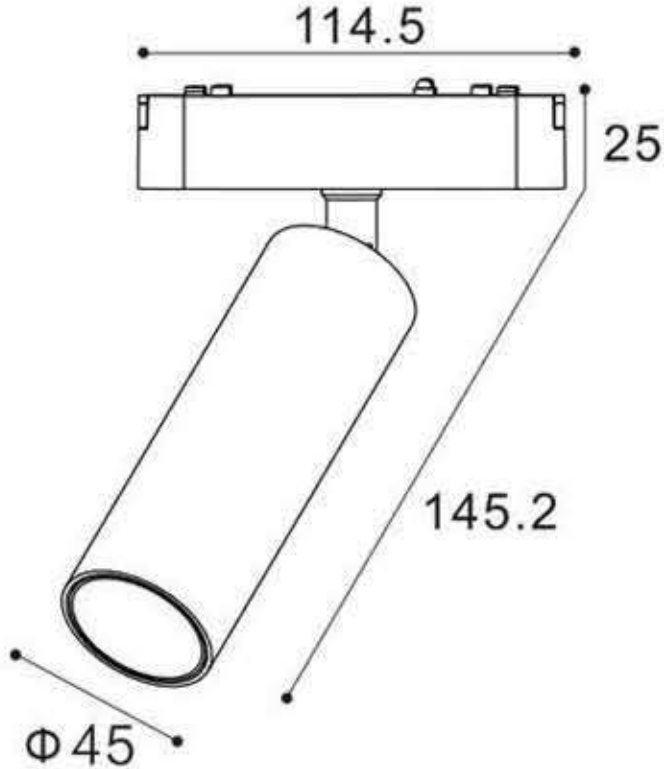

Specifications

Code No	DS-SL25-TRK15W			
Watt(W)	15W			
Dimension(mm)	Φ45*170.2*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	1153			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.25KG	30pcs	14.6*5.2*20.6mm	54*22.5*47mm


CCT



Color



DS-SL25-HD12W

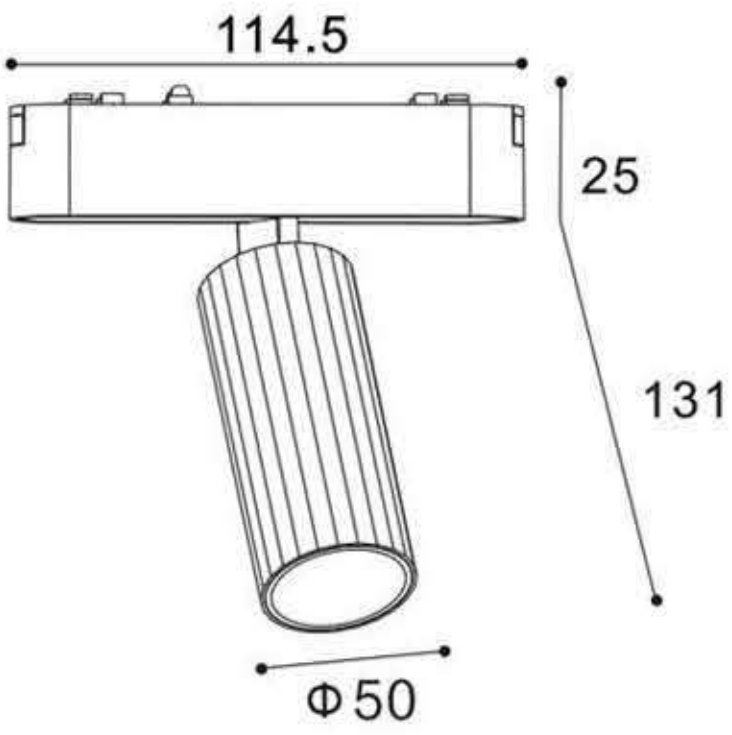

Specifications

Code No	DS-SL25-HD12W			
Watt(W)	12W			
Dimension(mm)	Φ50*156*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	485			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.32KG	30pcs	14.6*5.2*20.6mm	47*19*46mm


CCT



Color



DS-SL25-SL8W*2-A

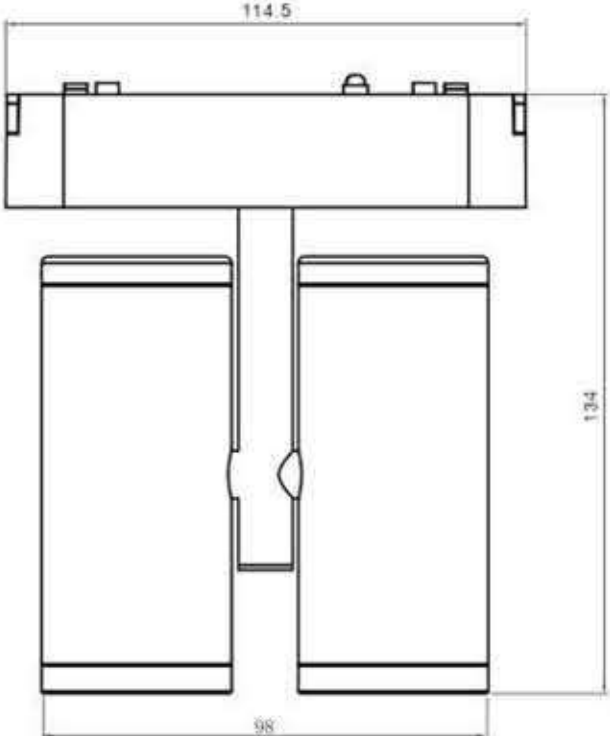

Specifications

Code No	DS-SL25-SL8W*2-A			
Watt(W)	8W*2			
Dimension(mm)	Φ42*134*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	1305			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.348KG	30pcs	14.6*4.5*17.3mm	47*19*46mm


CCT



Color



DS-SL25-SLC8W

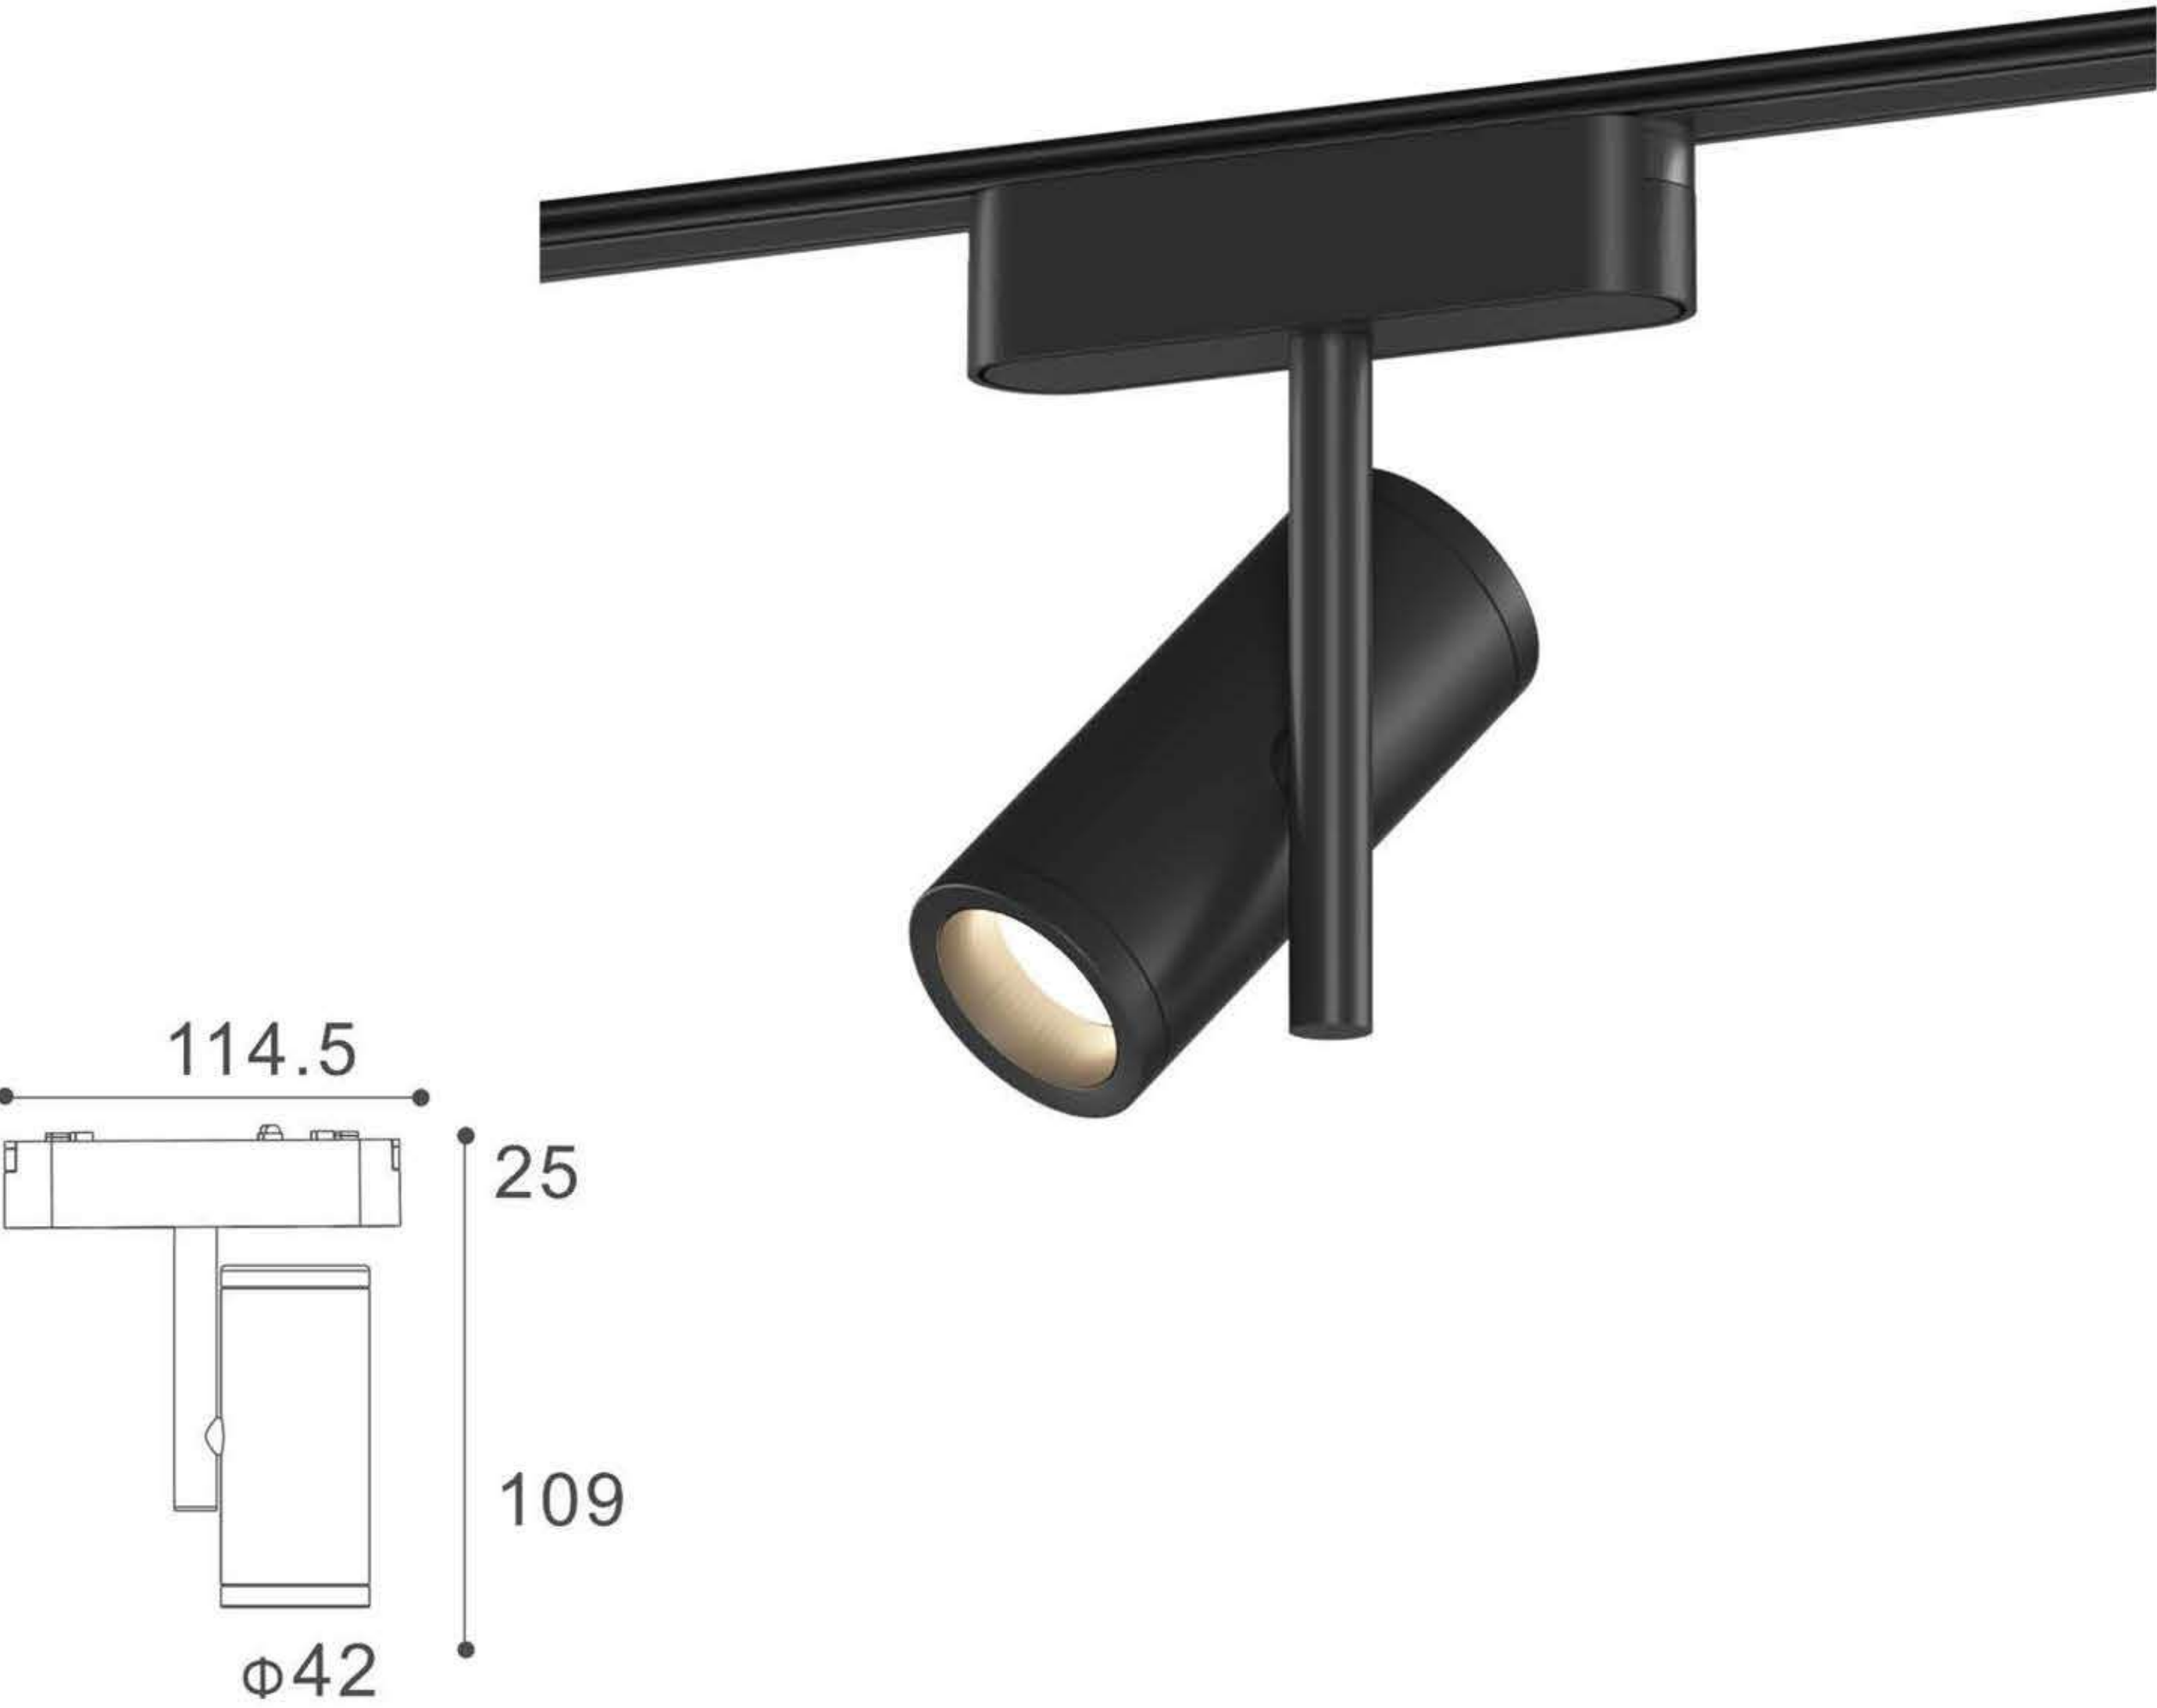

Specifications

Code No	DS-SL25-SLC8W			
Watt(W)	8W			
Dimension(mm)	Φ42*134*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	618			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.185KG	30pcs	14.6*4.5*17.3mm	47*19*46mm


CCT



Color



DS-SL25-SL8W*2-B

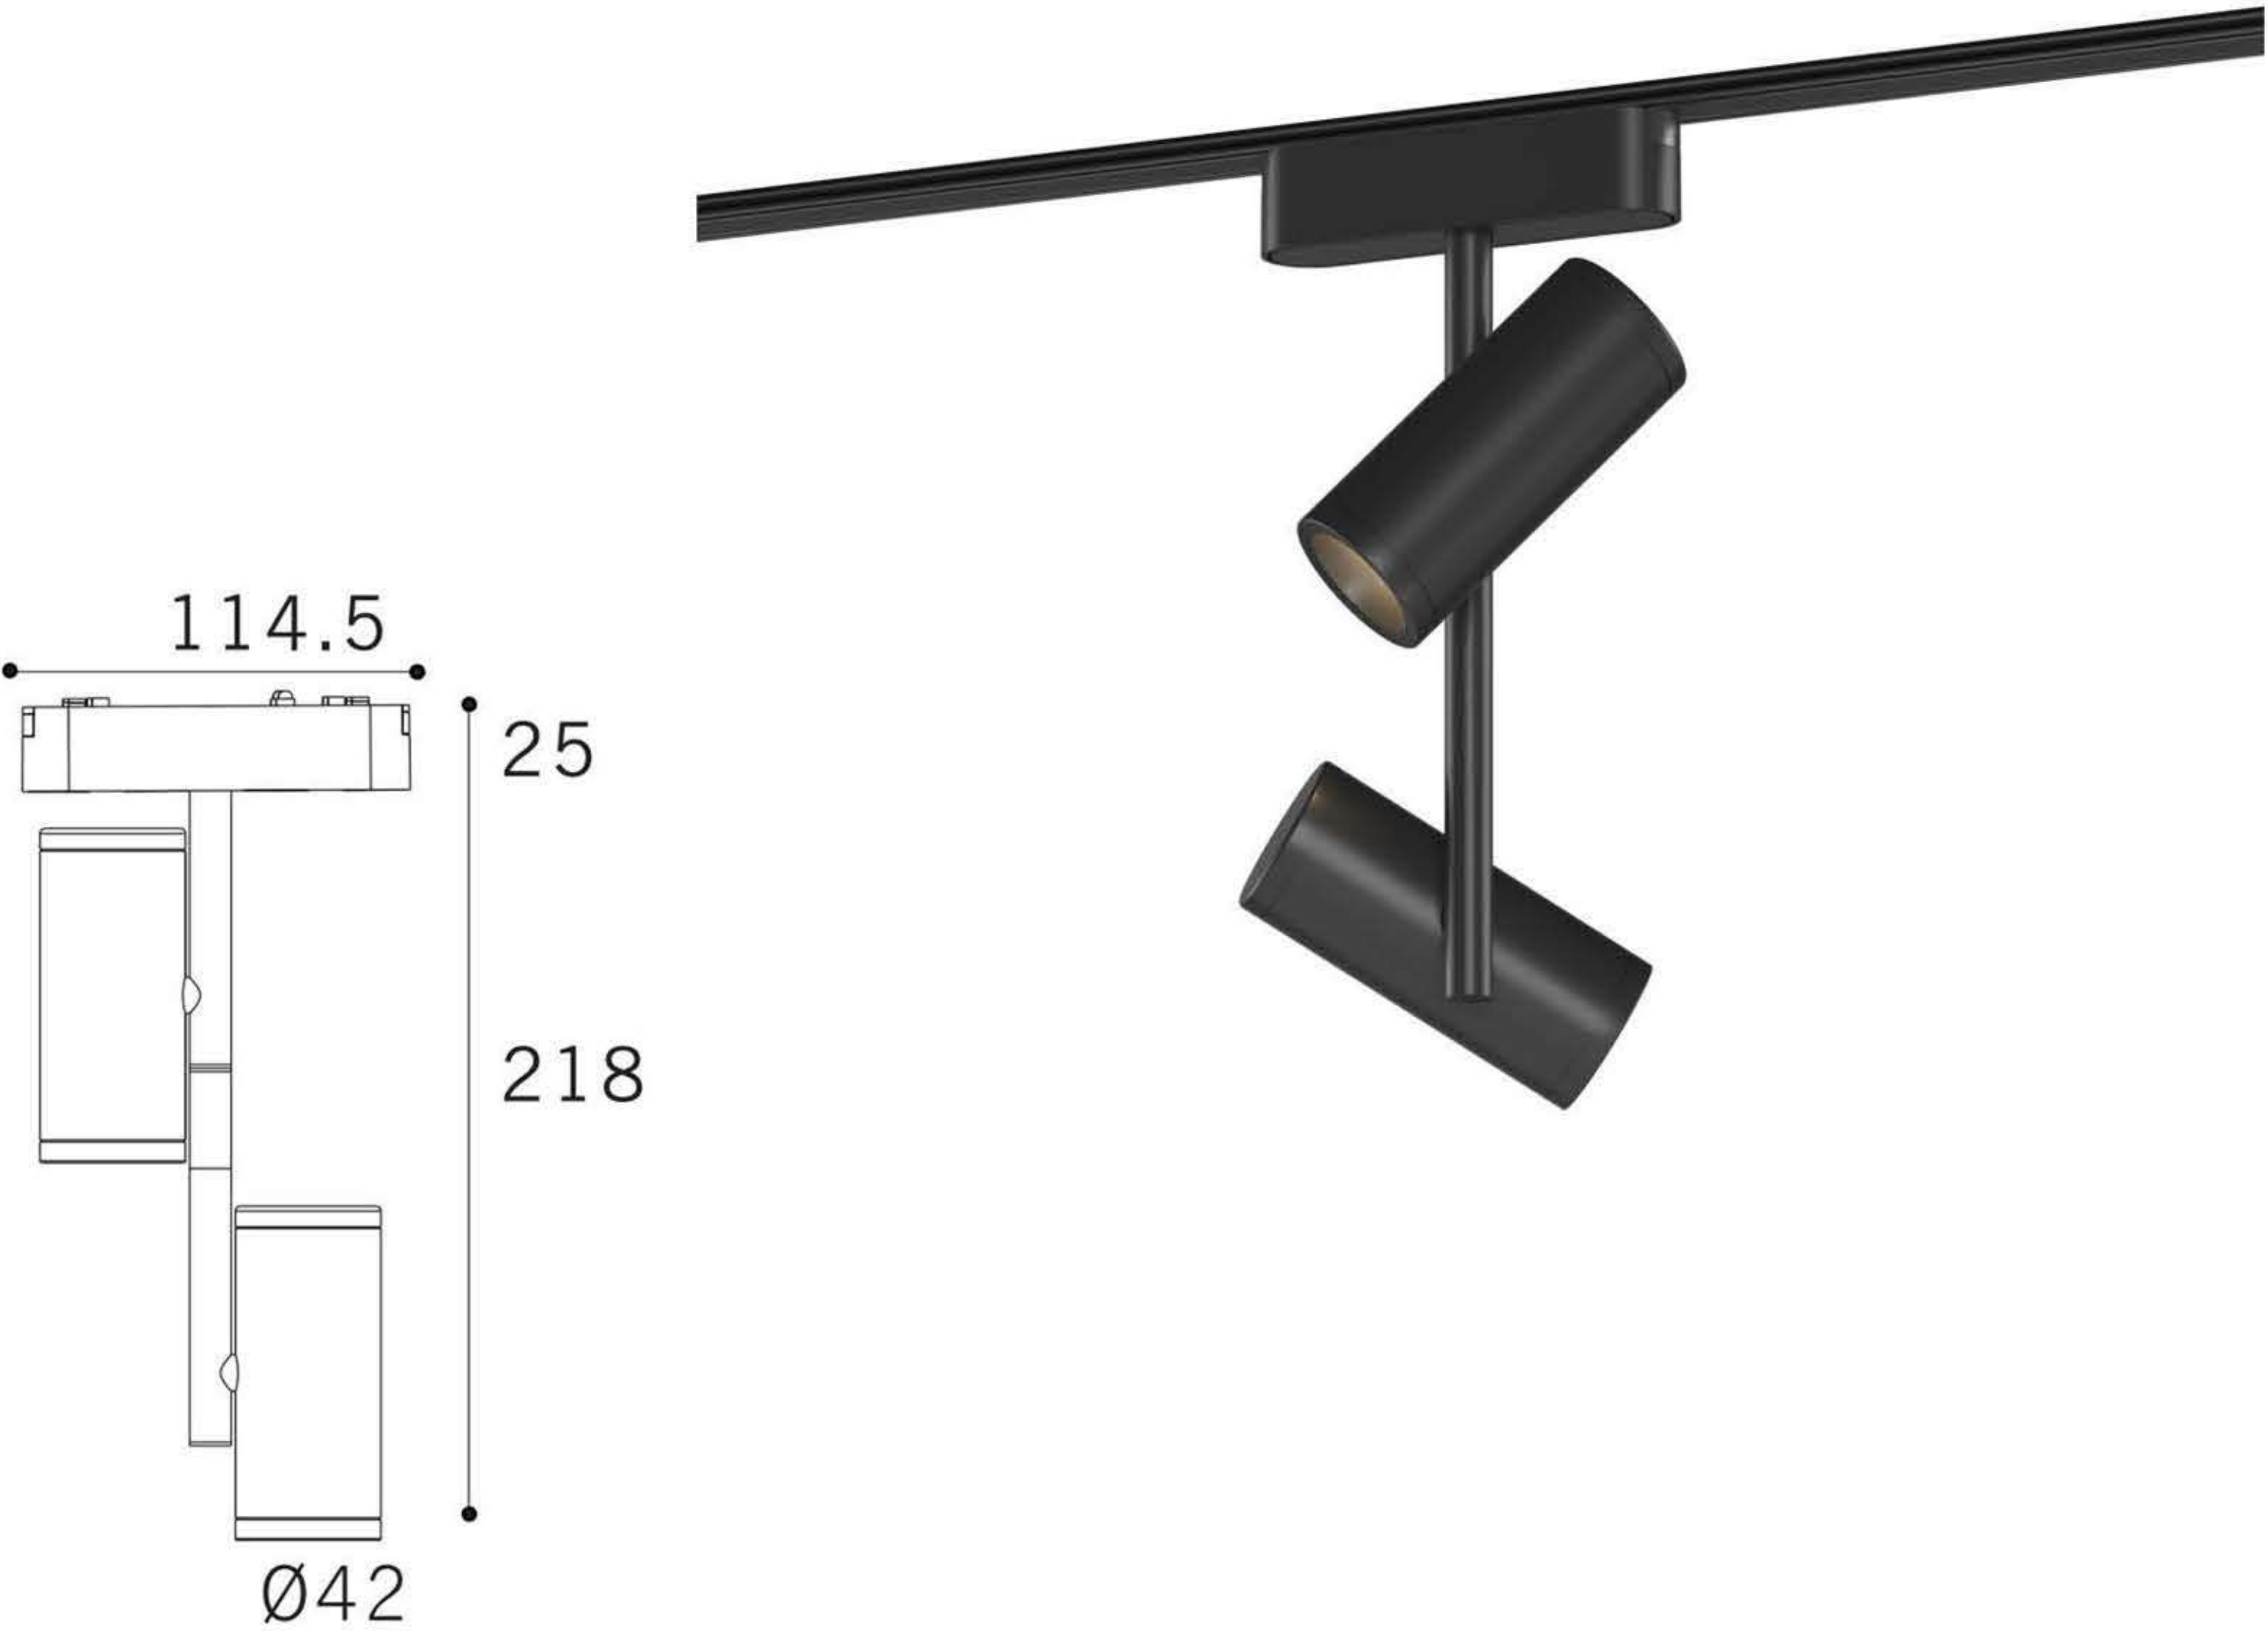

Specifications

Code No	DS-SL25-SL8W*2-B			
Watt(W)	8W*2			
Dimension(mm)	Φ31*94.7*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	1305			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.348KG	30pcs	14.6*4.5*17.3mm	47*19*46mm

CCT



Color



DS-SL25-MBL10W-A



DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

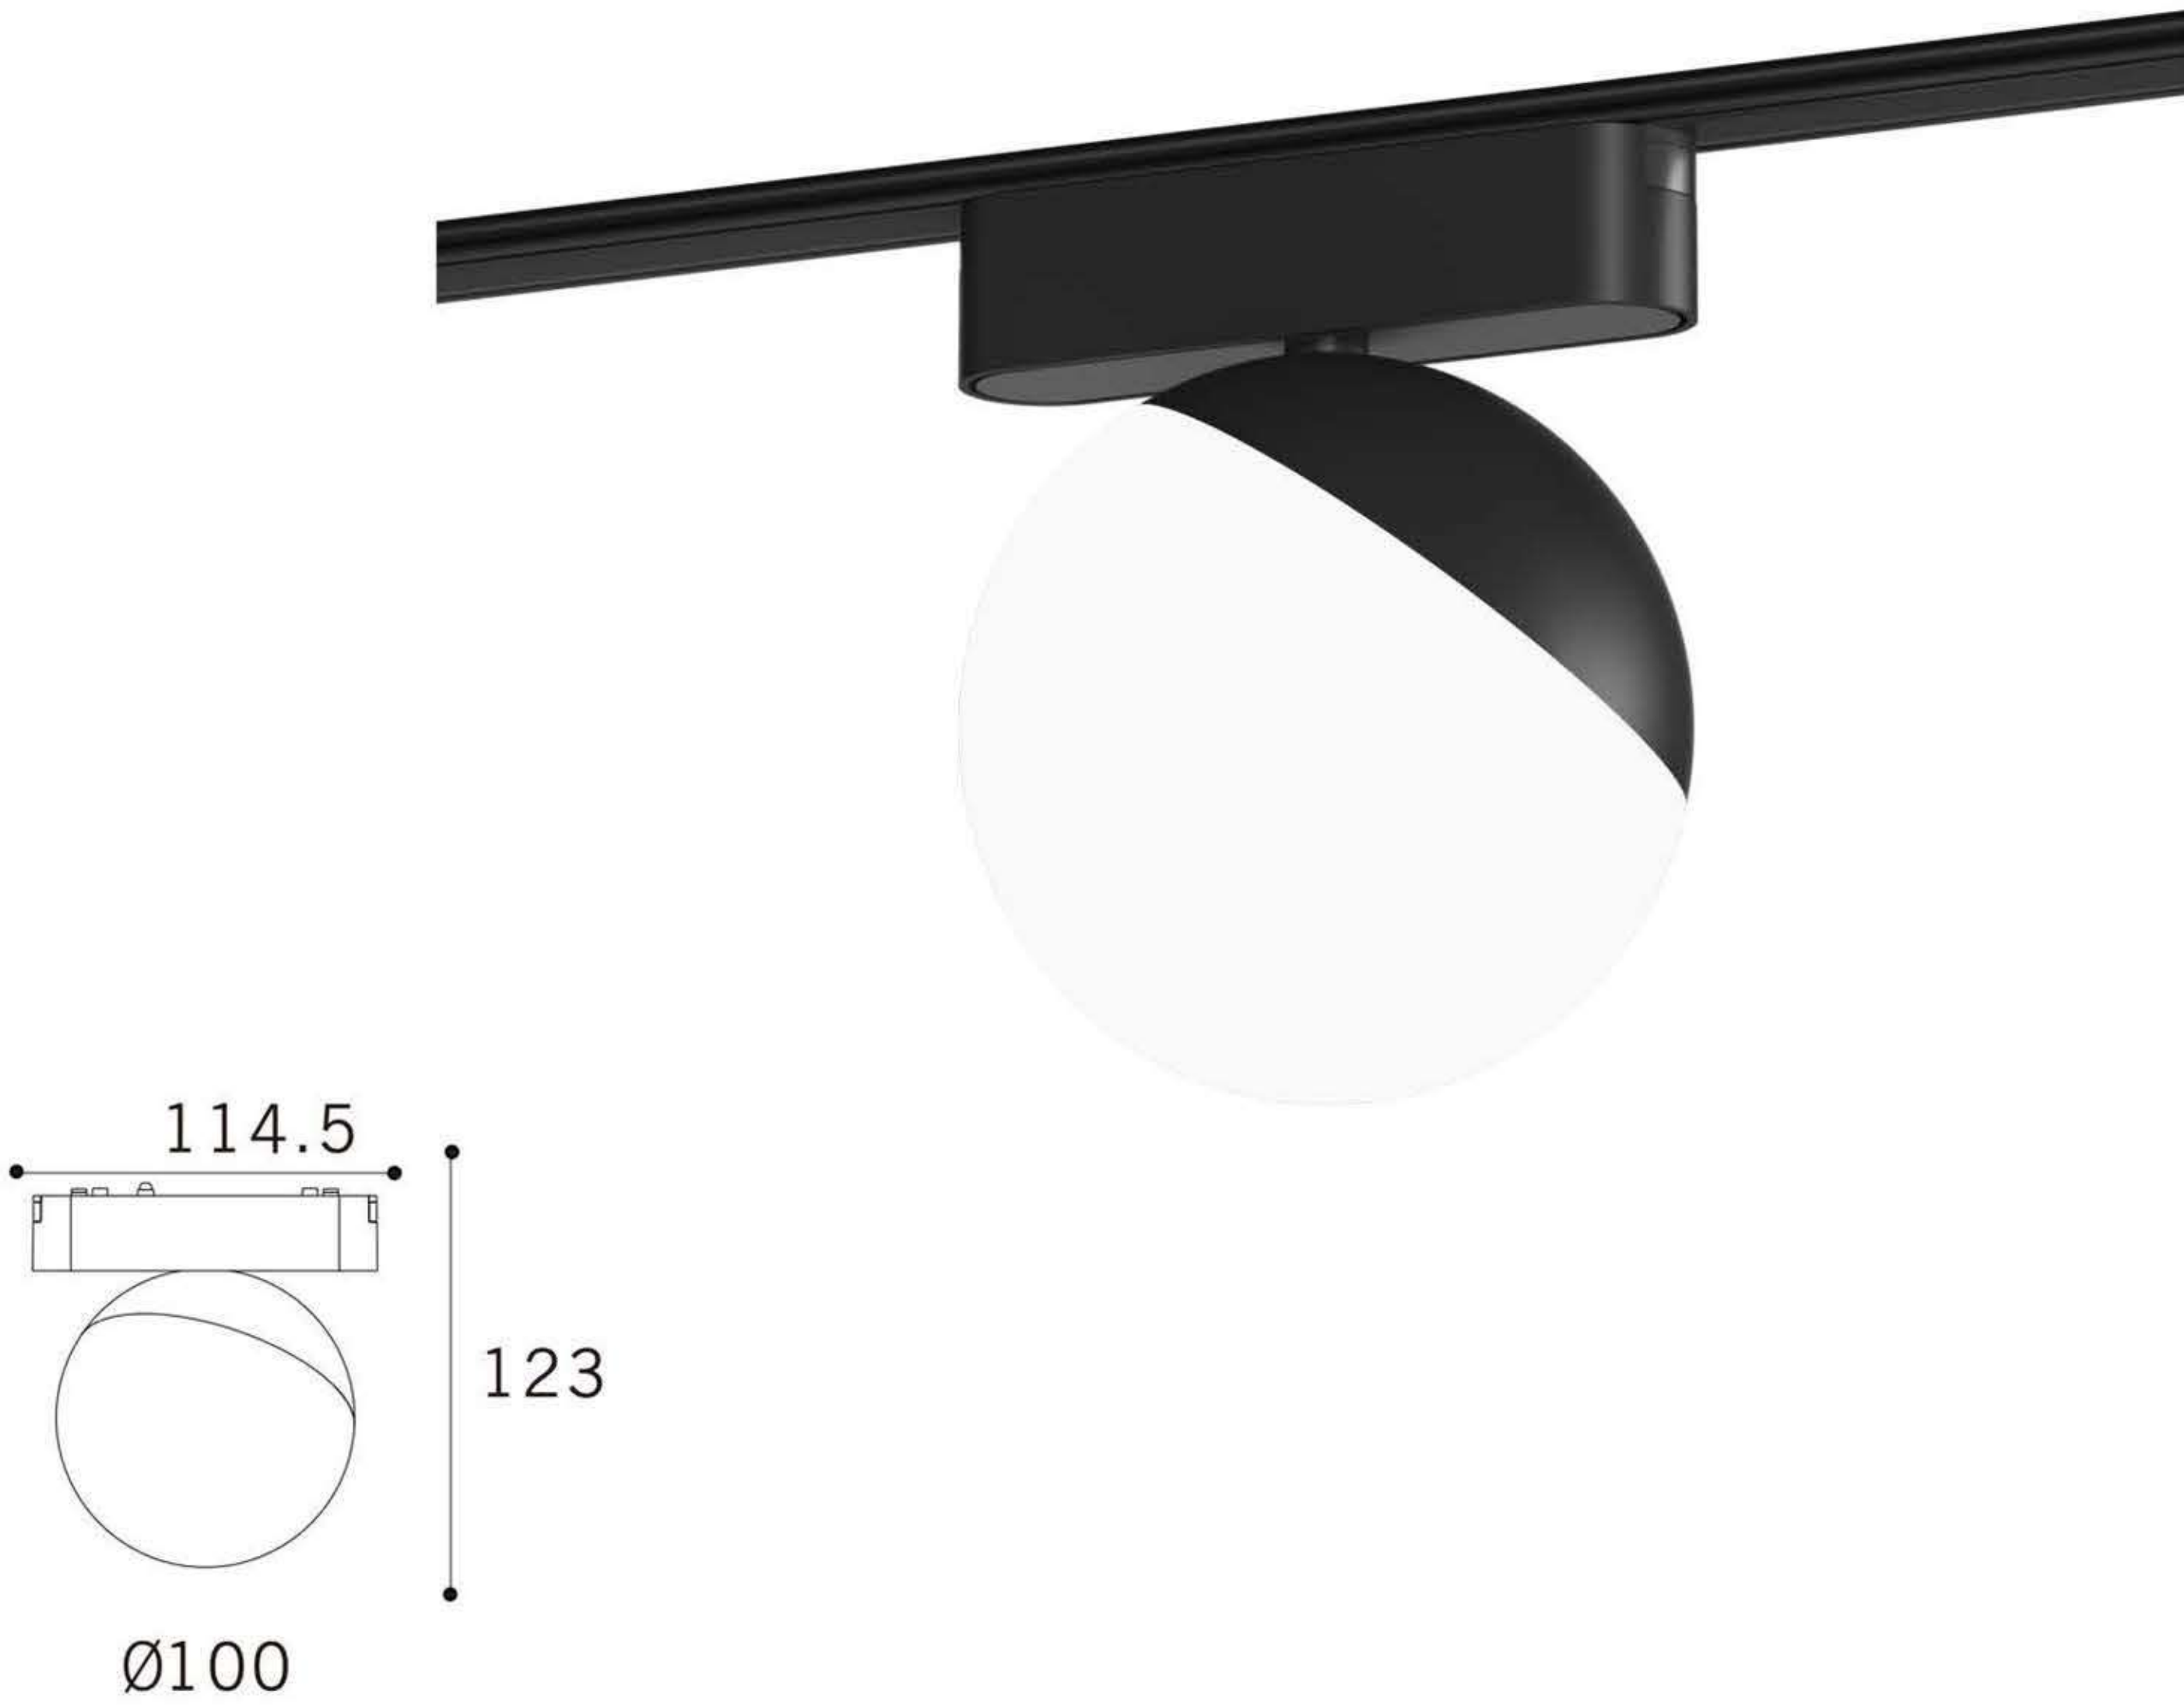

Specifications

Code No	DS-SL25-MBL10W-A			
Watt(W)	10W			
Dimension(mm)	Φ100*123*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	766			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	36°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.53KG	20pcs	19*15.5*10.5mm	80*39.5*22.5mm

CCT



Color



DS-SL25-PBL10W-A



DC

40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

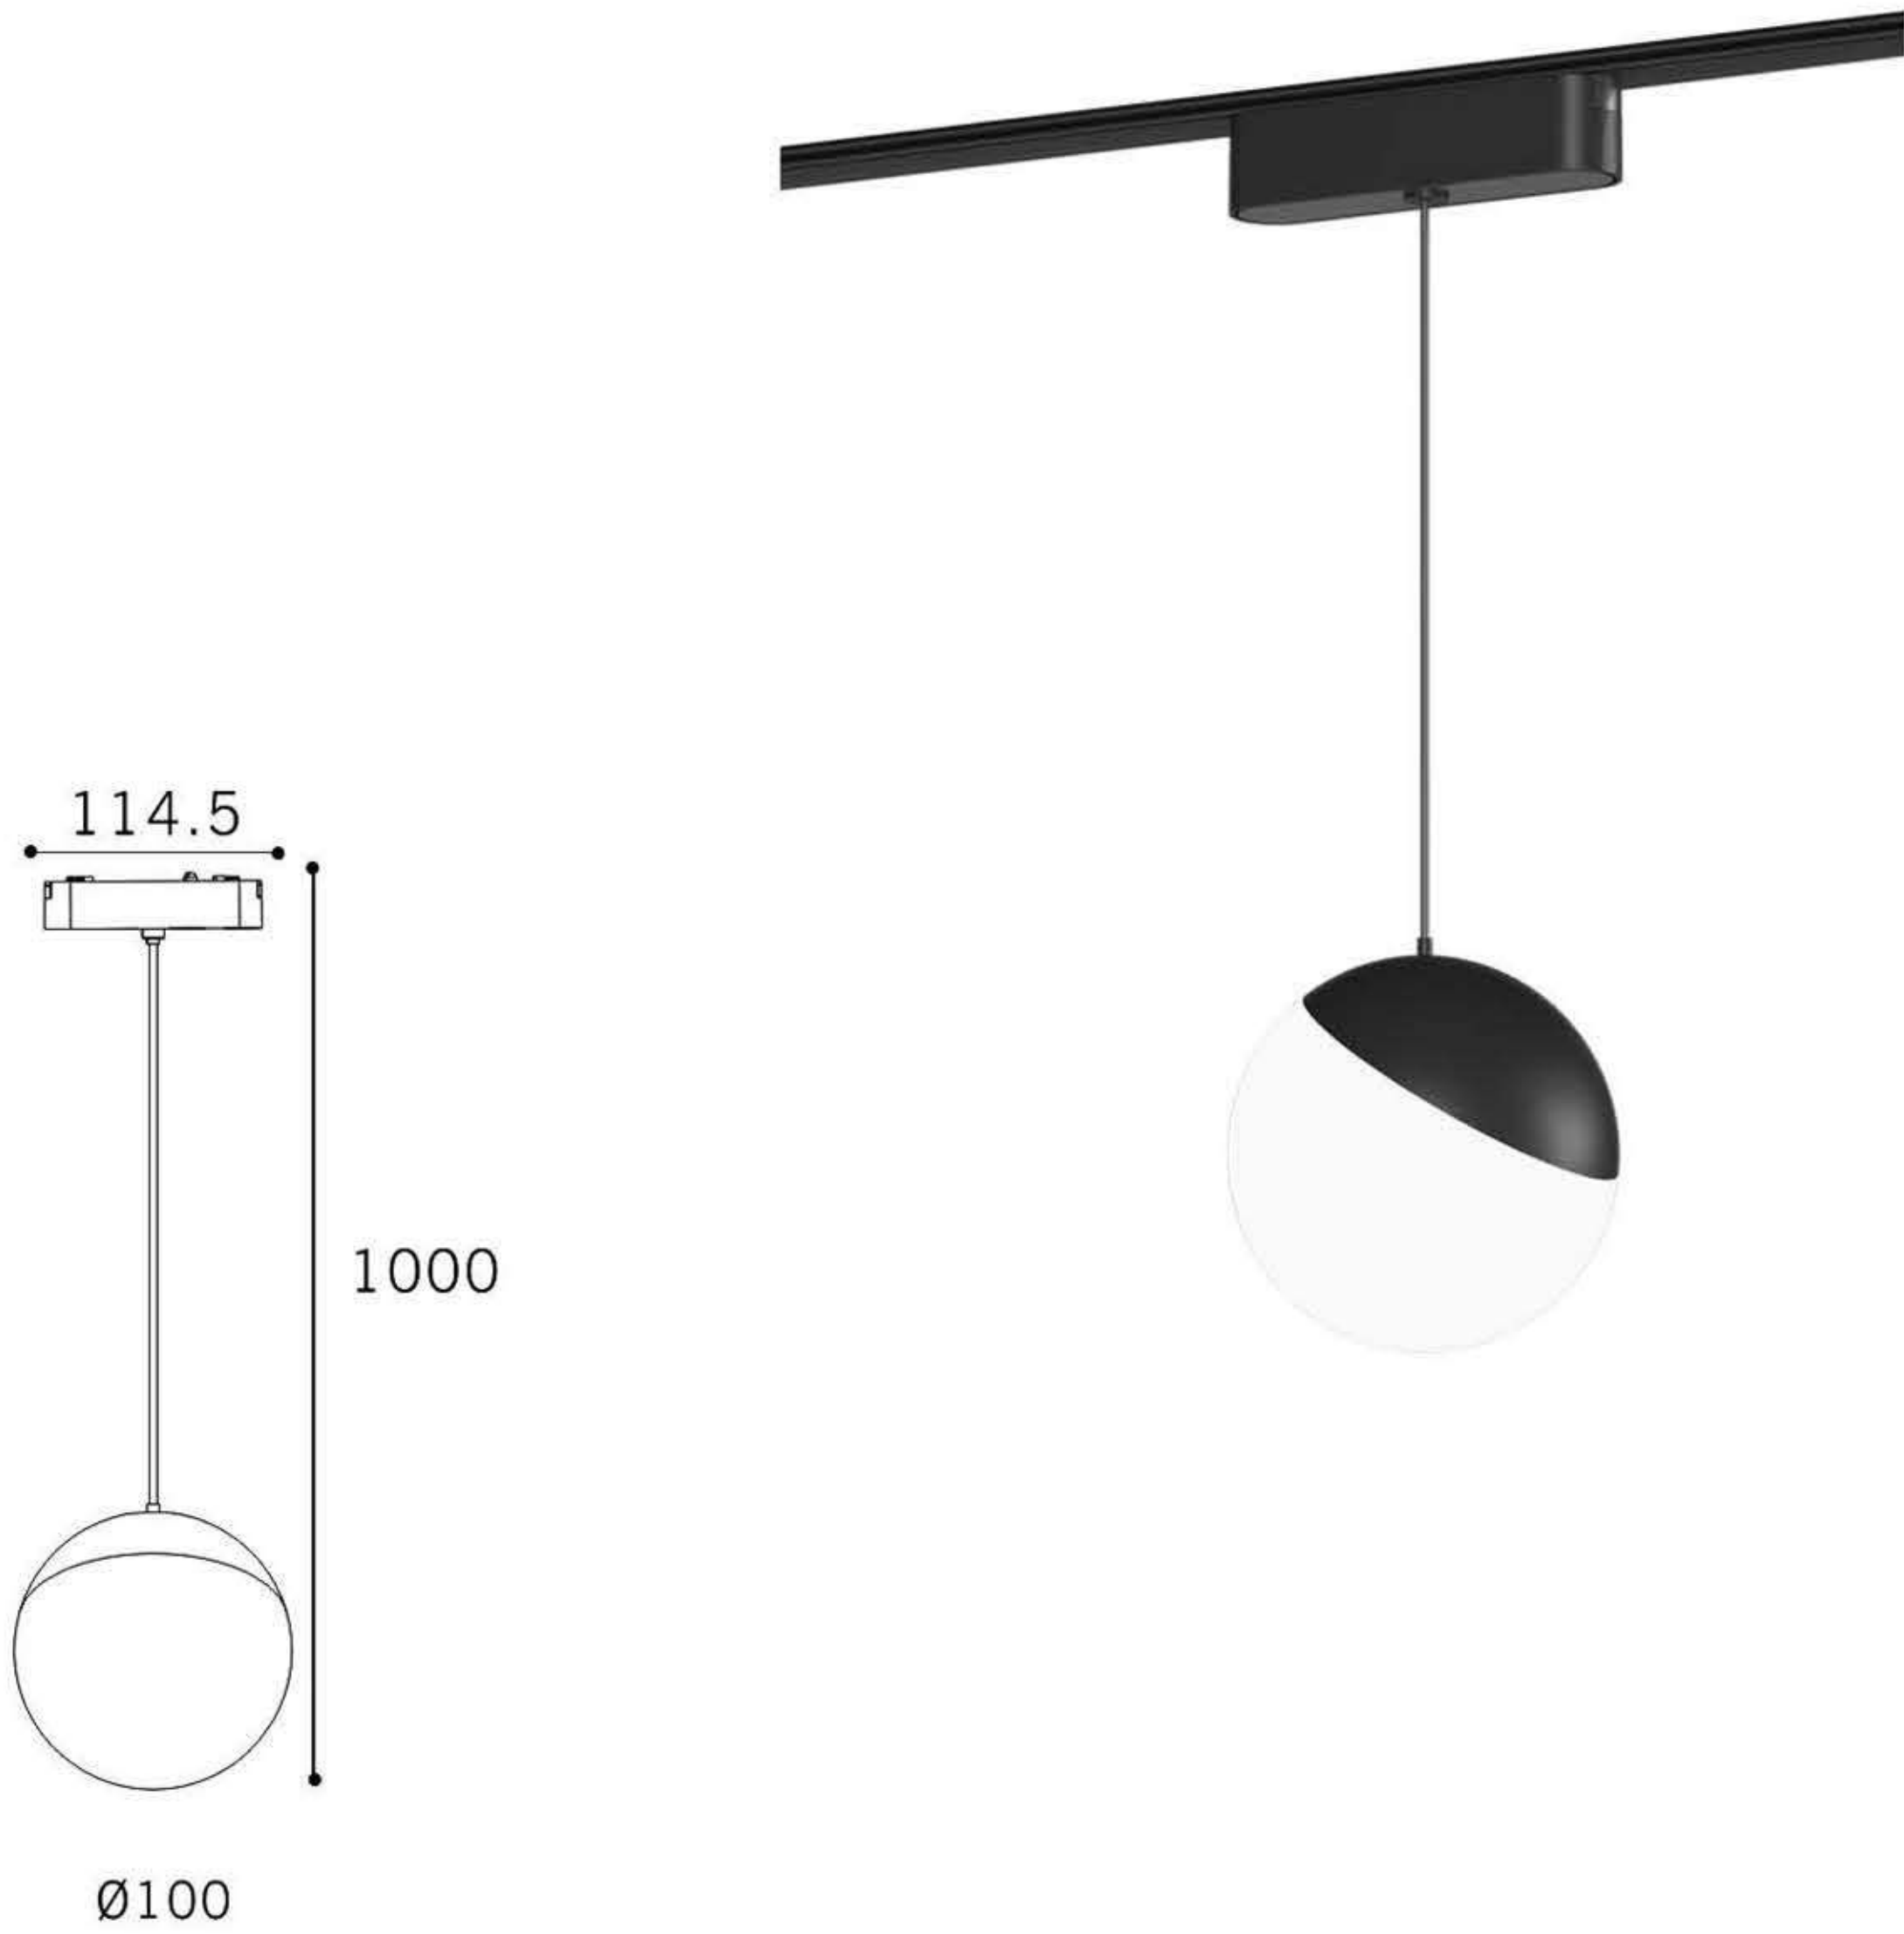

Specifications

Code No	DS-SL25-PBL10W-A			
Watt(W)	10W			
Dimension(mm)	Φ100*1000*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	724			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	120°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.547KG	20pcs	19*15.5*10.5mm	80*39.5*22.5mm


CCT



Color



DS-SL25-MBL12W-B

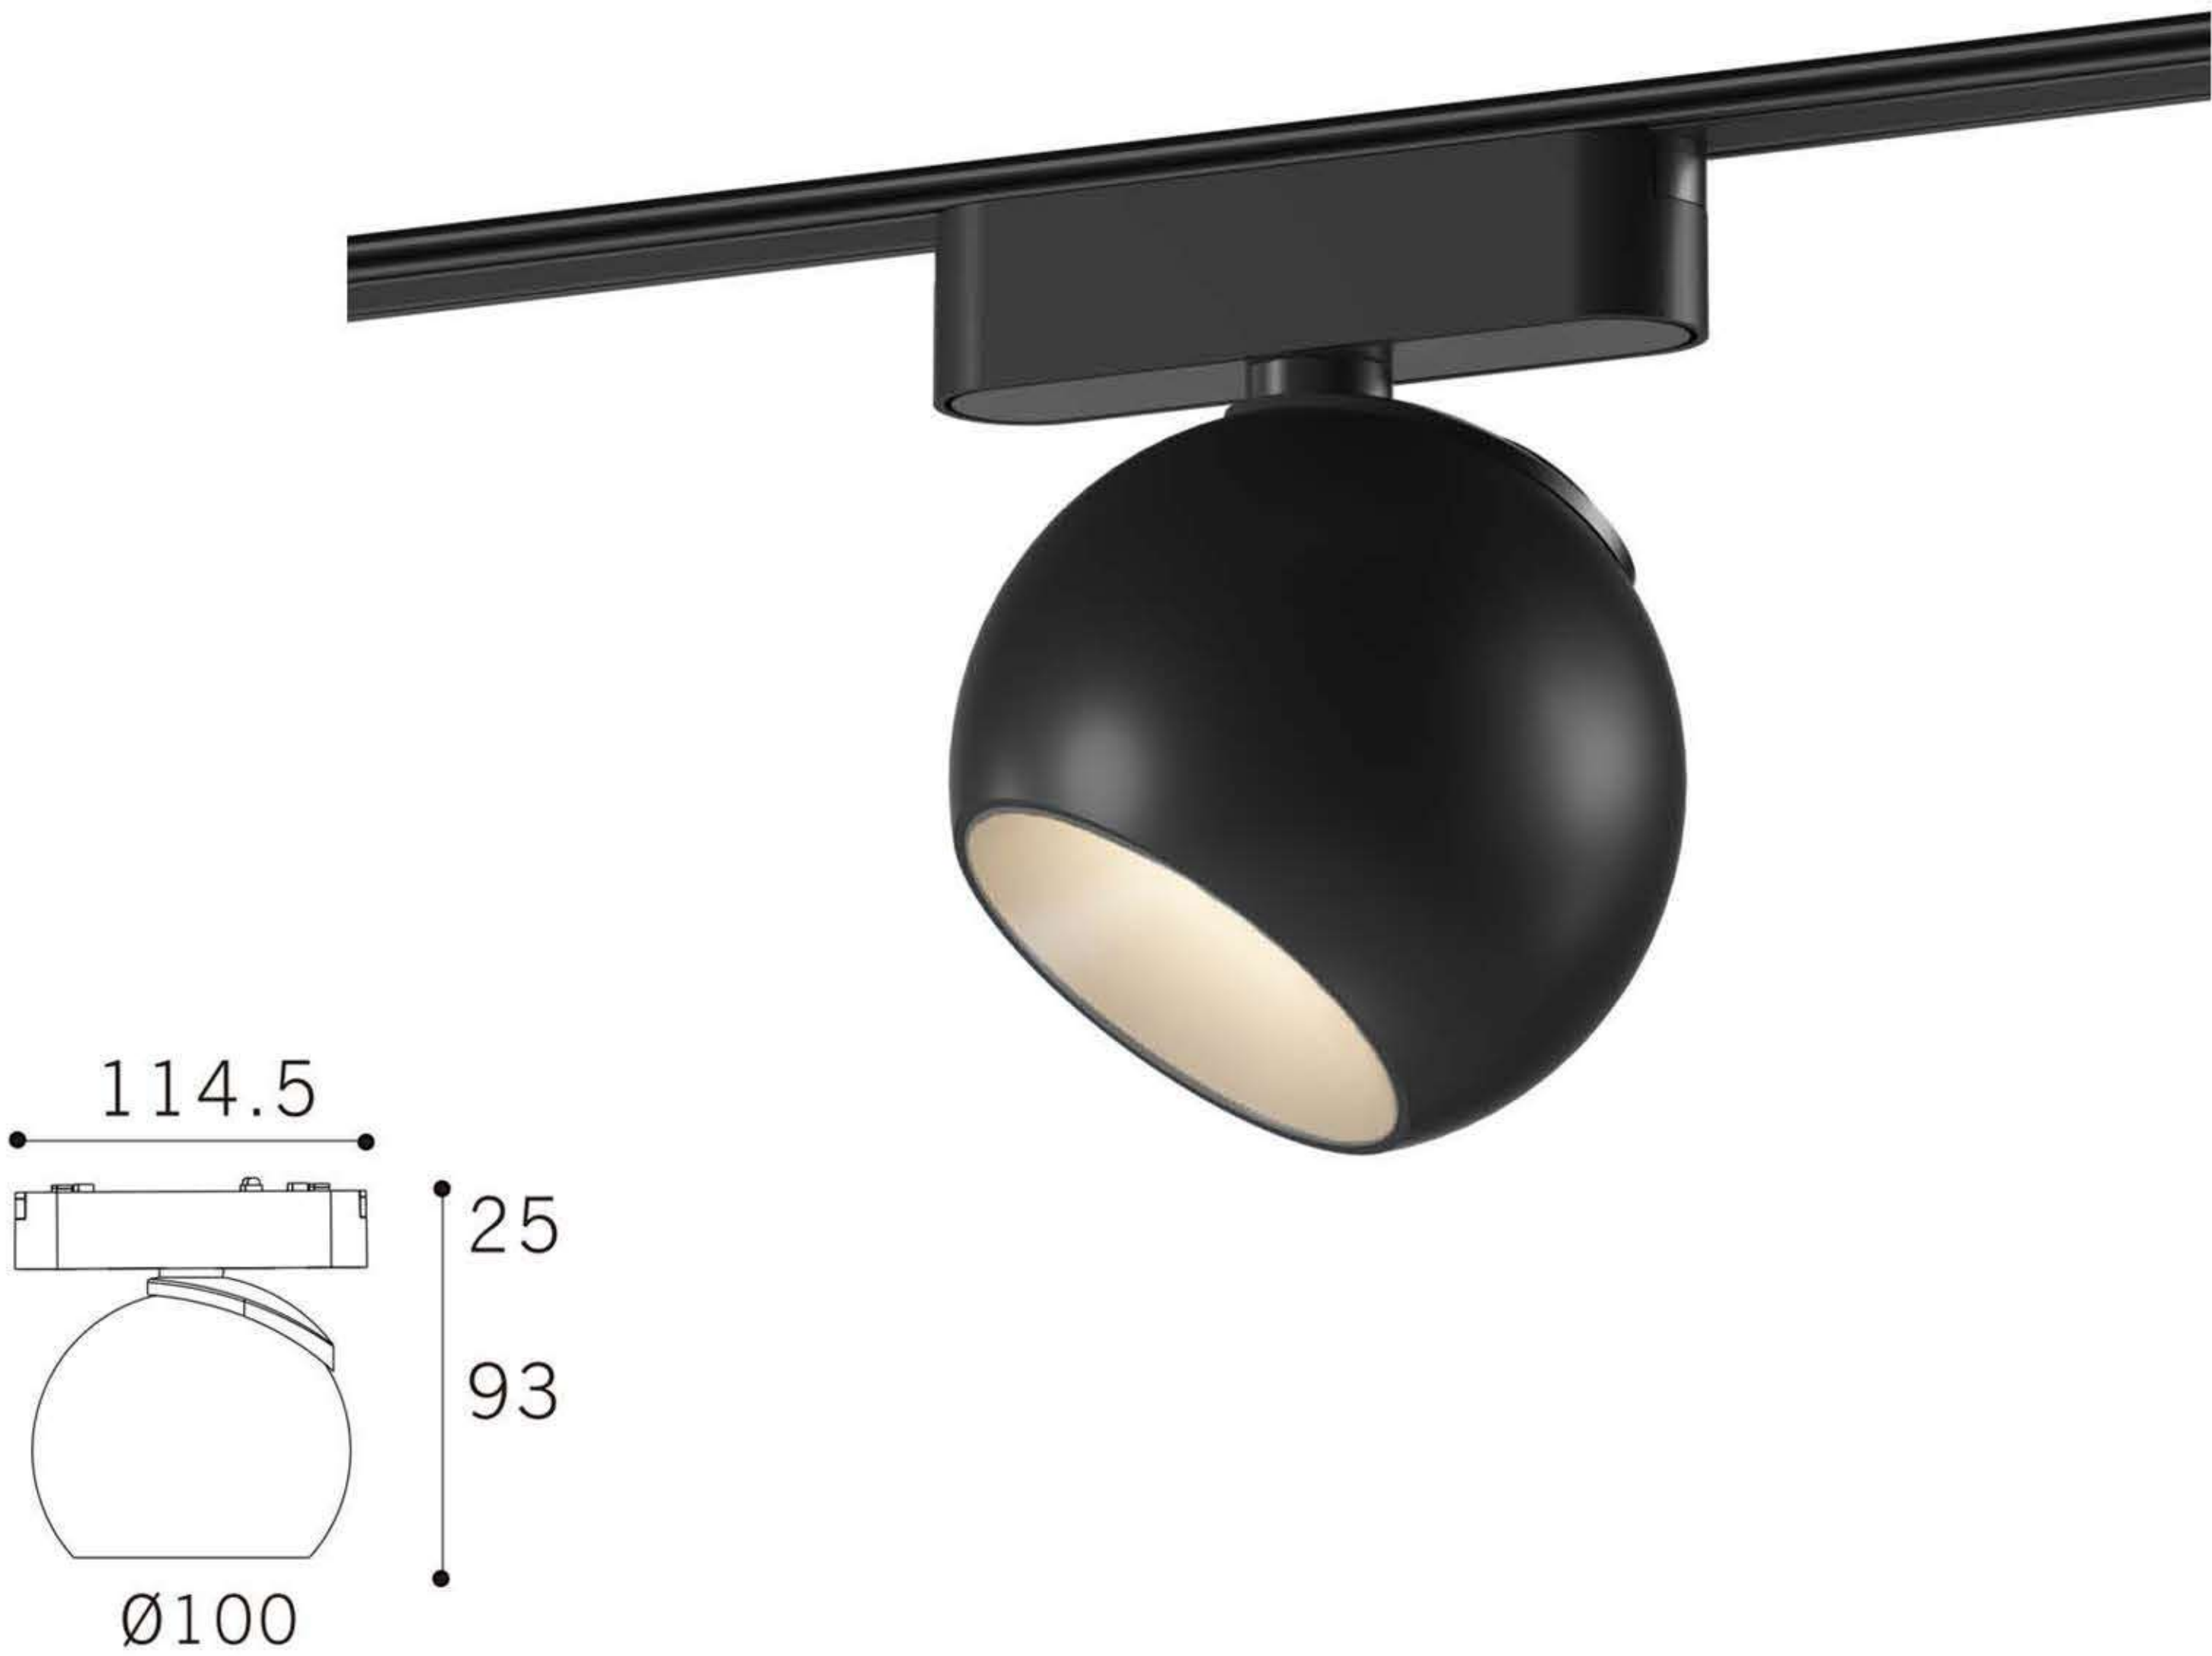

Specifications

Code No	DS-SL25-MBL12W-B			
Watt(W)	12W			
Dimension(mm)	Φ100*118*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	938			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	24°/36°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.66KG	20pcs	19*15.5*10.5mm	80*39.5*22.5mm


CCT



Color



DS-SL25-PBL12W-B

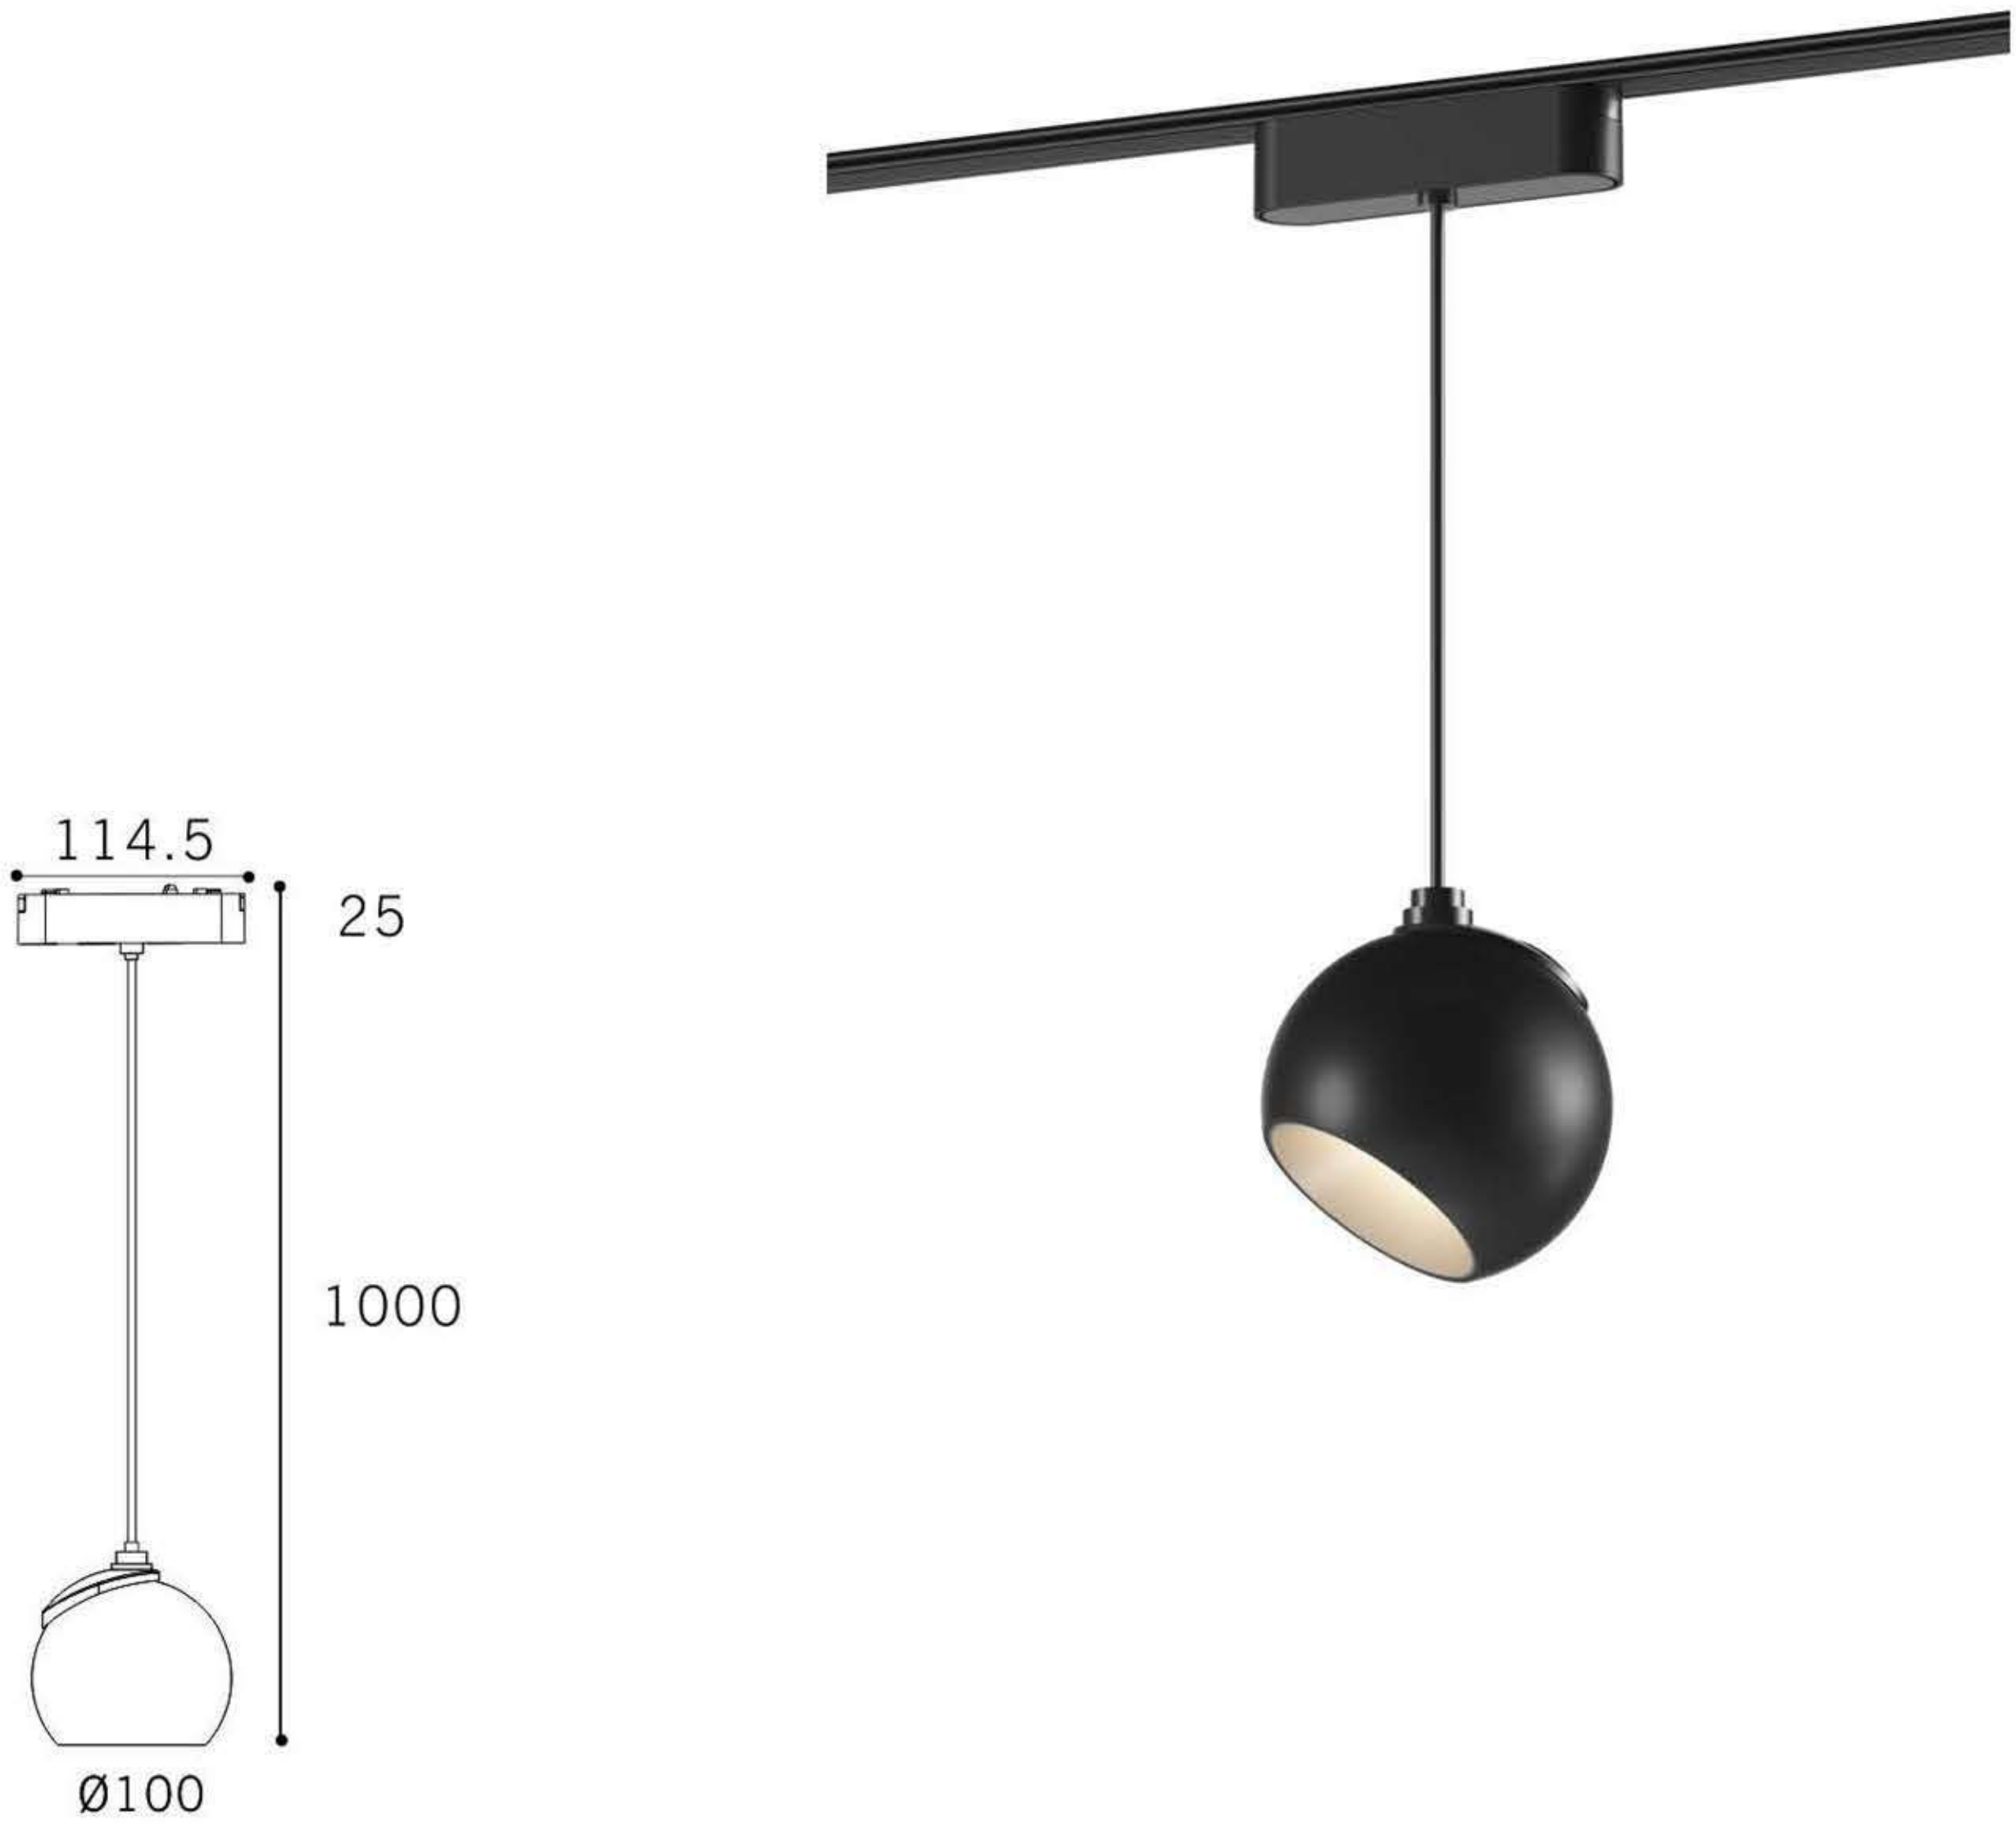

Specifications

Code No	DS-SL25-PBL12-B			
Watt(W)	12W			
Dimension(mm)	Φ100*1025*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	982			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	24°/36°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.71KG	20pcs	19*15.5*10.5mm	80*39.5*22.5mm

CCT



Color



DS-SL25-PL7W



Specifications

Code No	DS-SL25-PL7W			
Watt(W)	7W			
Dimension(mm)	Φ32*1000*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	720			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.333KG	20pcs	10*6.5*36.8mm	52*38*24mm

CCT



Color



DS-SL25-PL15W



Specifications

Code No	DS-SL25-PL15W			
Watt(W)	15W			
Dimension(mm)	Φ45*1000*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	1503			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	15°/24°/36°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.392KG	20pcs	10*6.5*36.8mm	52*38*24mm

CCT



Color



DS-SL25-PL9W

20°

40°

60°

DC
40-48V

PF≥0.9

CRI≥90


tuya

zigbee

CB

CE

FC

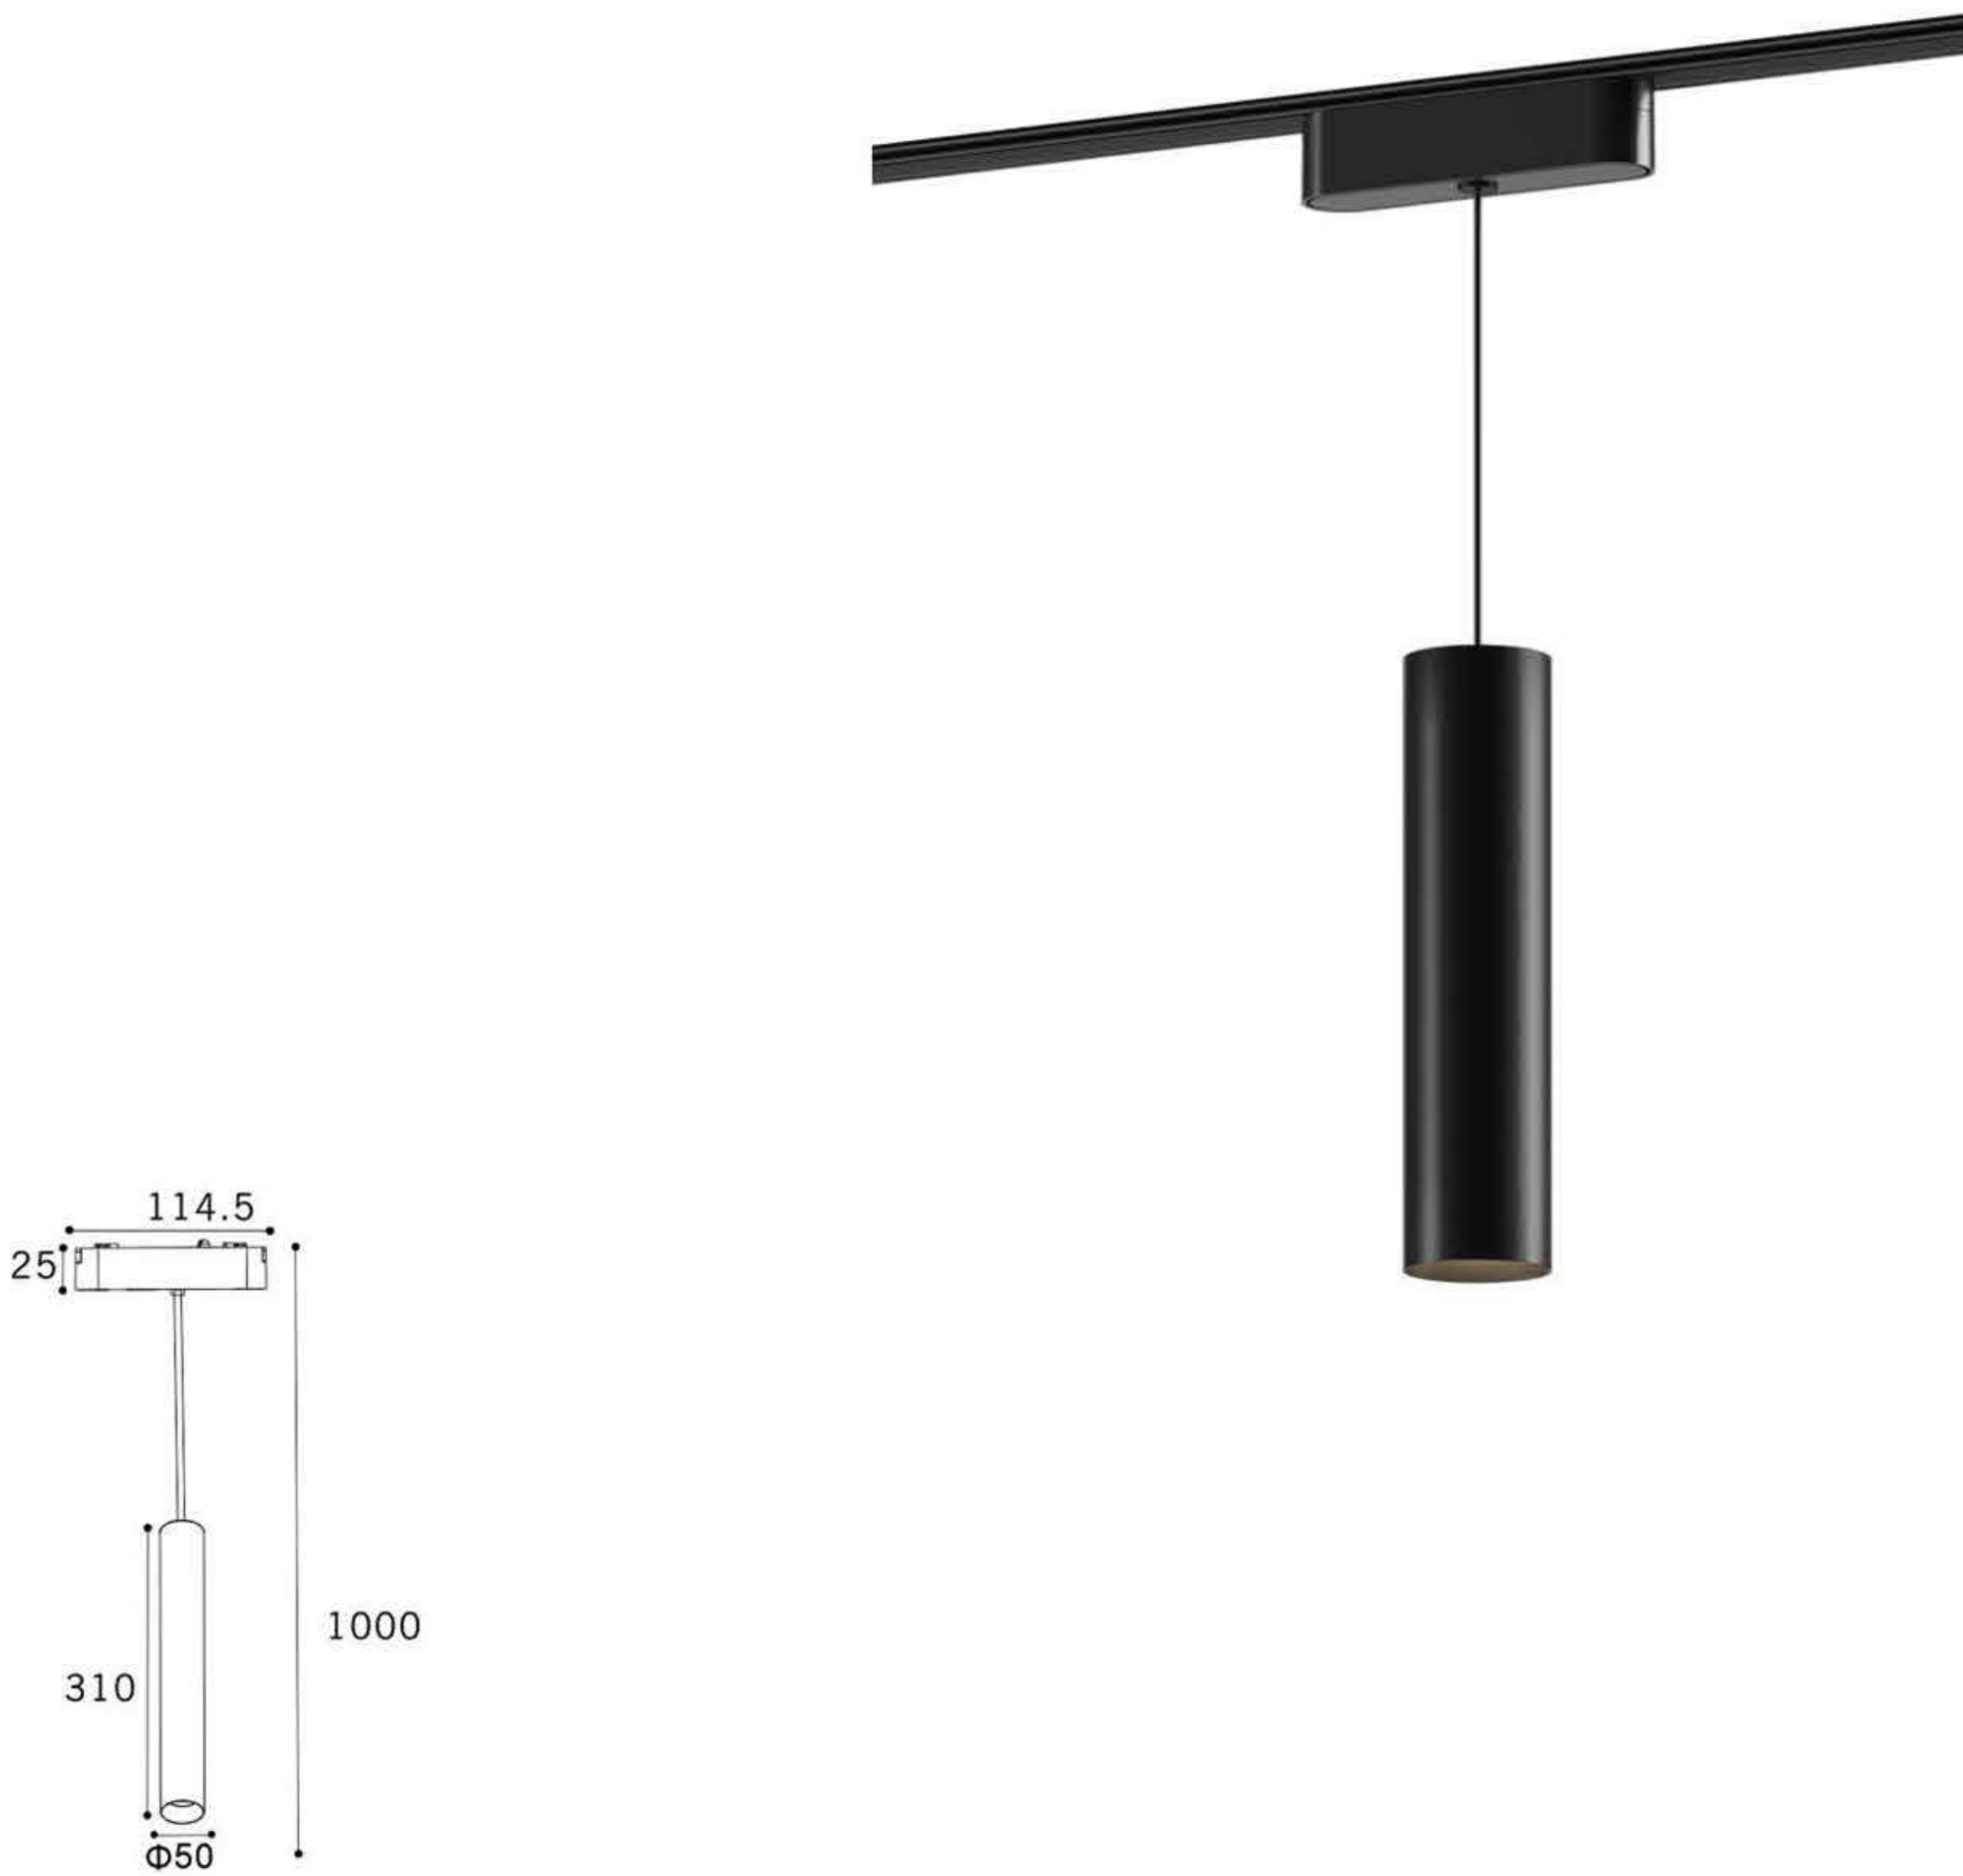

Specifications

Code No	DS-SL25-PL9W			
Watt(W)	9W			
Dimension(mm)	Φ50*1000*114.5mm			
CCT(K)	1-CCT:3000K/3500K/4000K/5000K II 2700K-6000K			
Lumen(±5%)	833			
Input Voltage(V)	DC40-48V			
CRI	≥90			
Beam Angle (°)	20°/40°/60°			
Lifetime (hr)	30,000H			
IP Rating	IP20			
Operating Temp.(°C)	-20°C~40°C			
Storage Temp.(°C)	-10°C~30°C			
Installation	Surface mount / Recessed / Pendants			
Packing	Unit Net Weight	Qty. / Carton	Inner Box Size	Carton Size
Parameter	0.34KG	20pcs	10.8*6.8*27.3mm	45.5*30*36mm


CCT



Color



Choose from
a wide range
of color temperatures,
CRI values
and dimming
protocols.

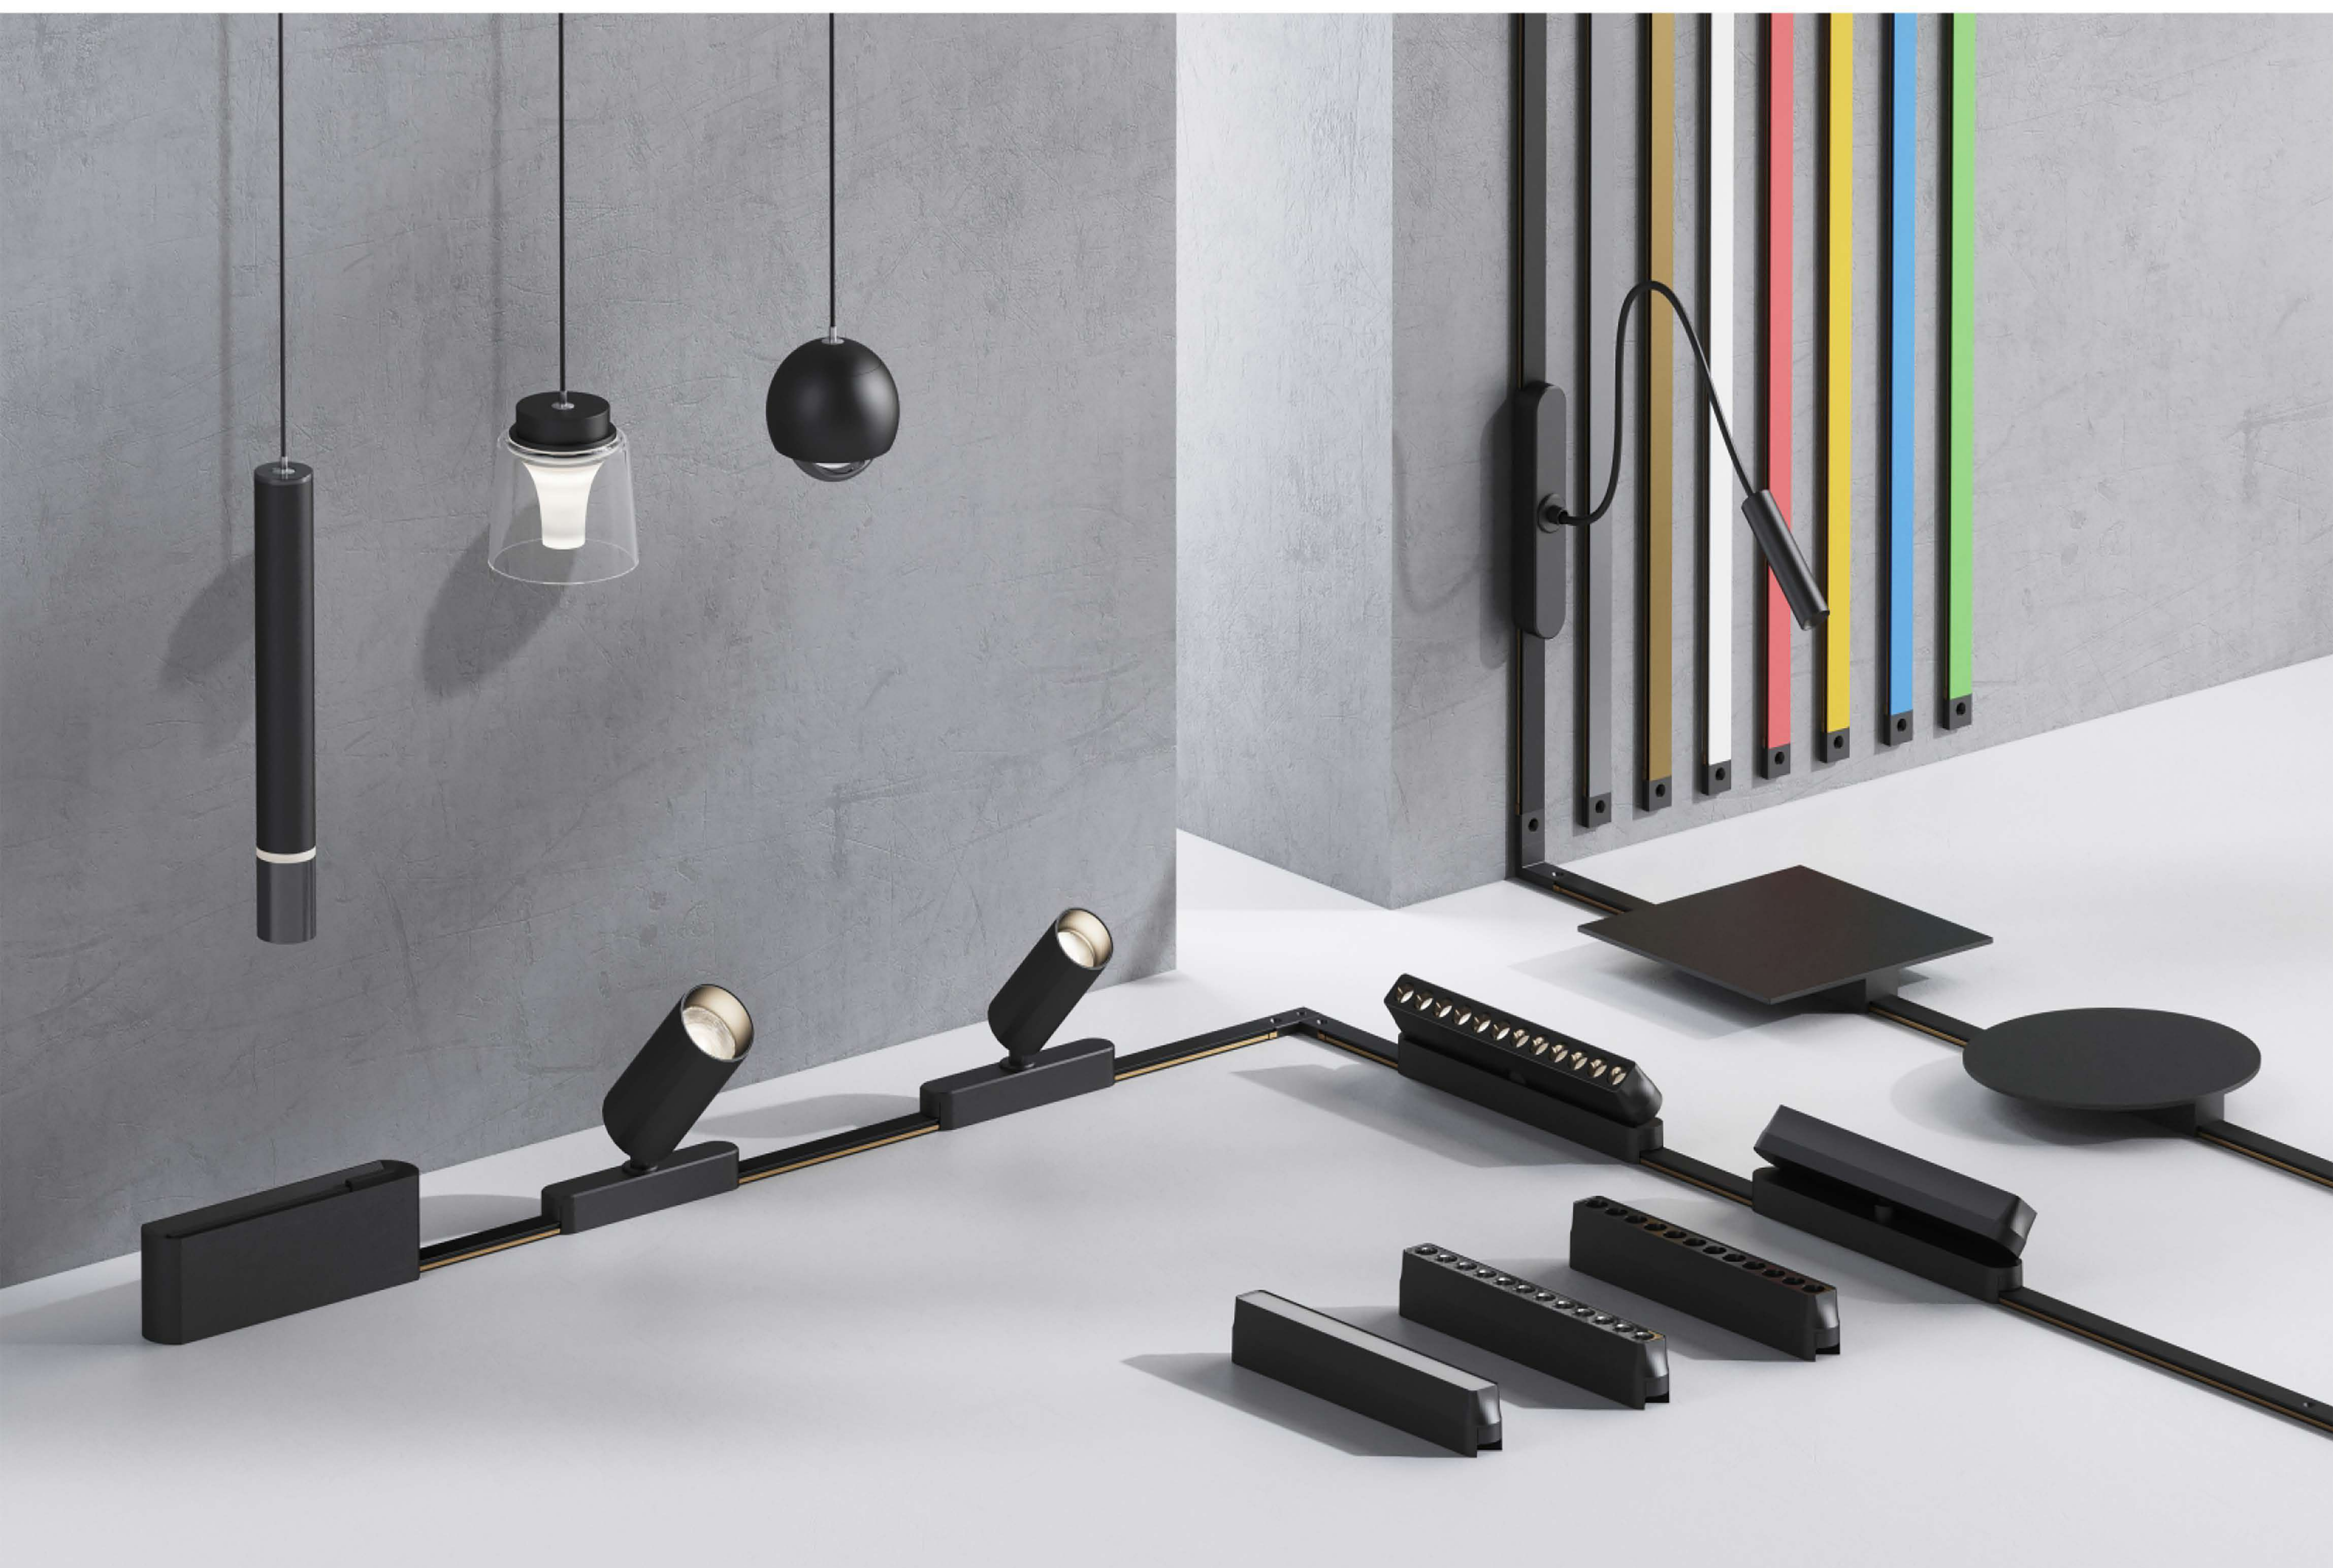


ULTRA-THIN MAGNETIC TRACK LIGHT




COLORFUL TRACK

Ultra-thin magnetic rail, ultra-thin line design,
thickness of only 6.7mm, smart solution,
installation can be completed in
just 19 minutes.

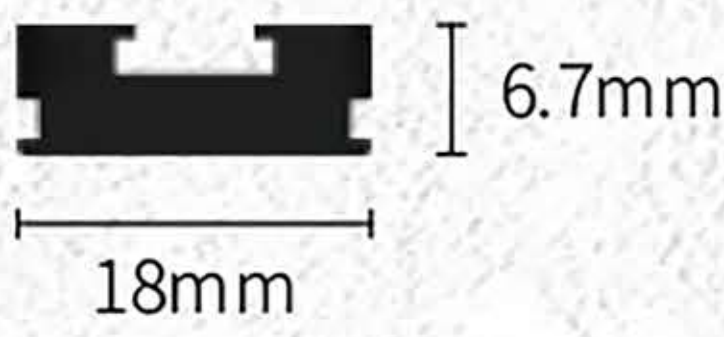


- Black
- Dark gray
- Silver
- Champagne
- White
- Bordeaux red
- Yellow
- Capri blue
- Turquoise



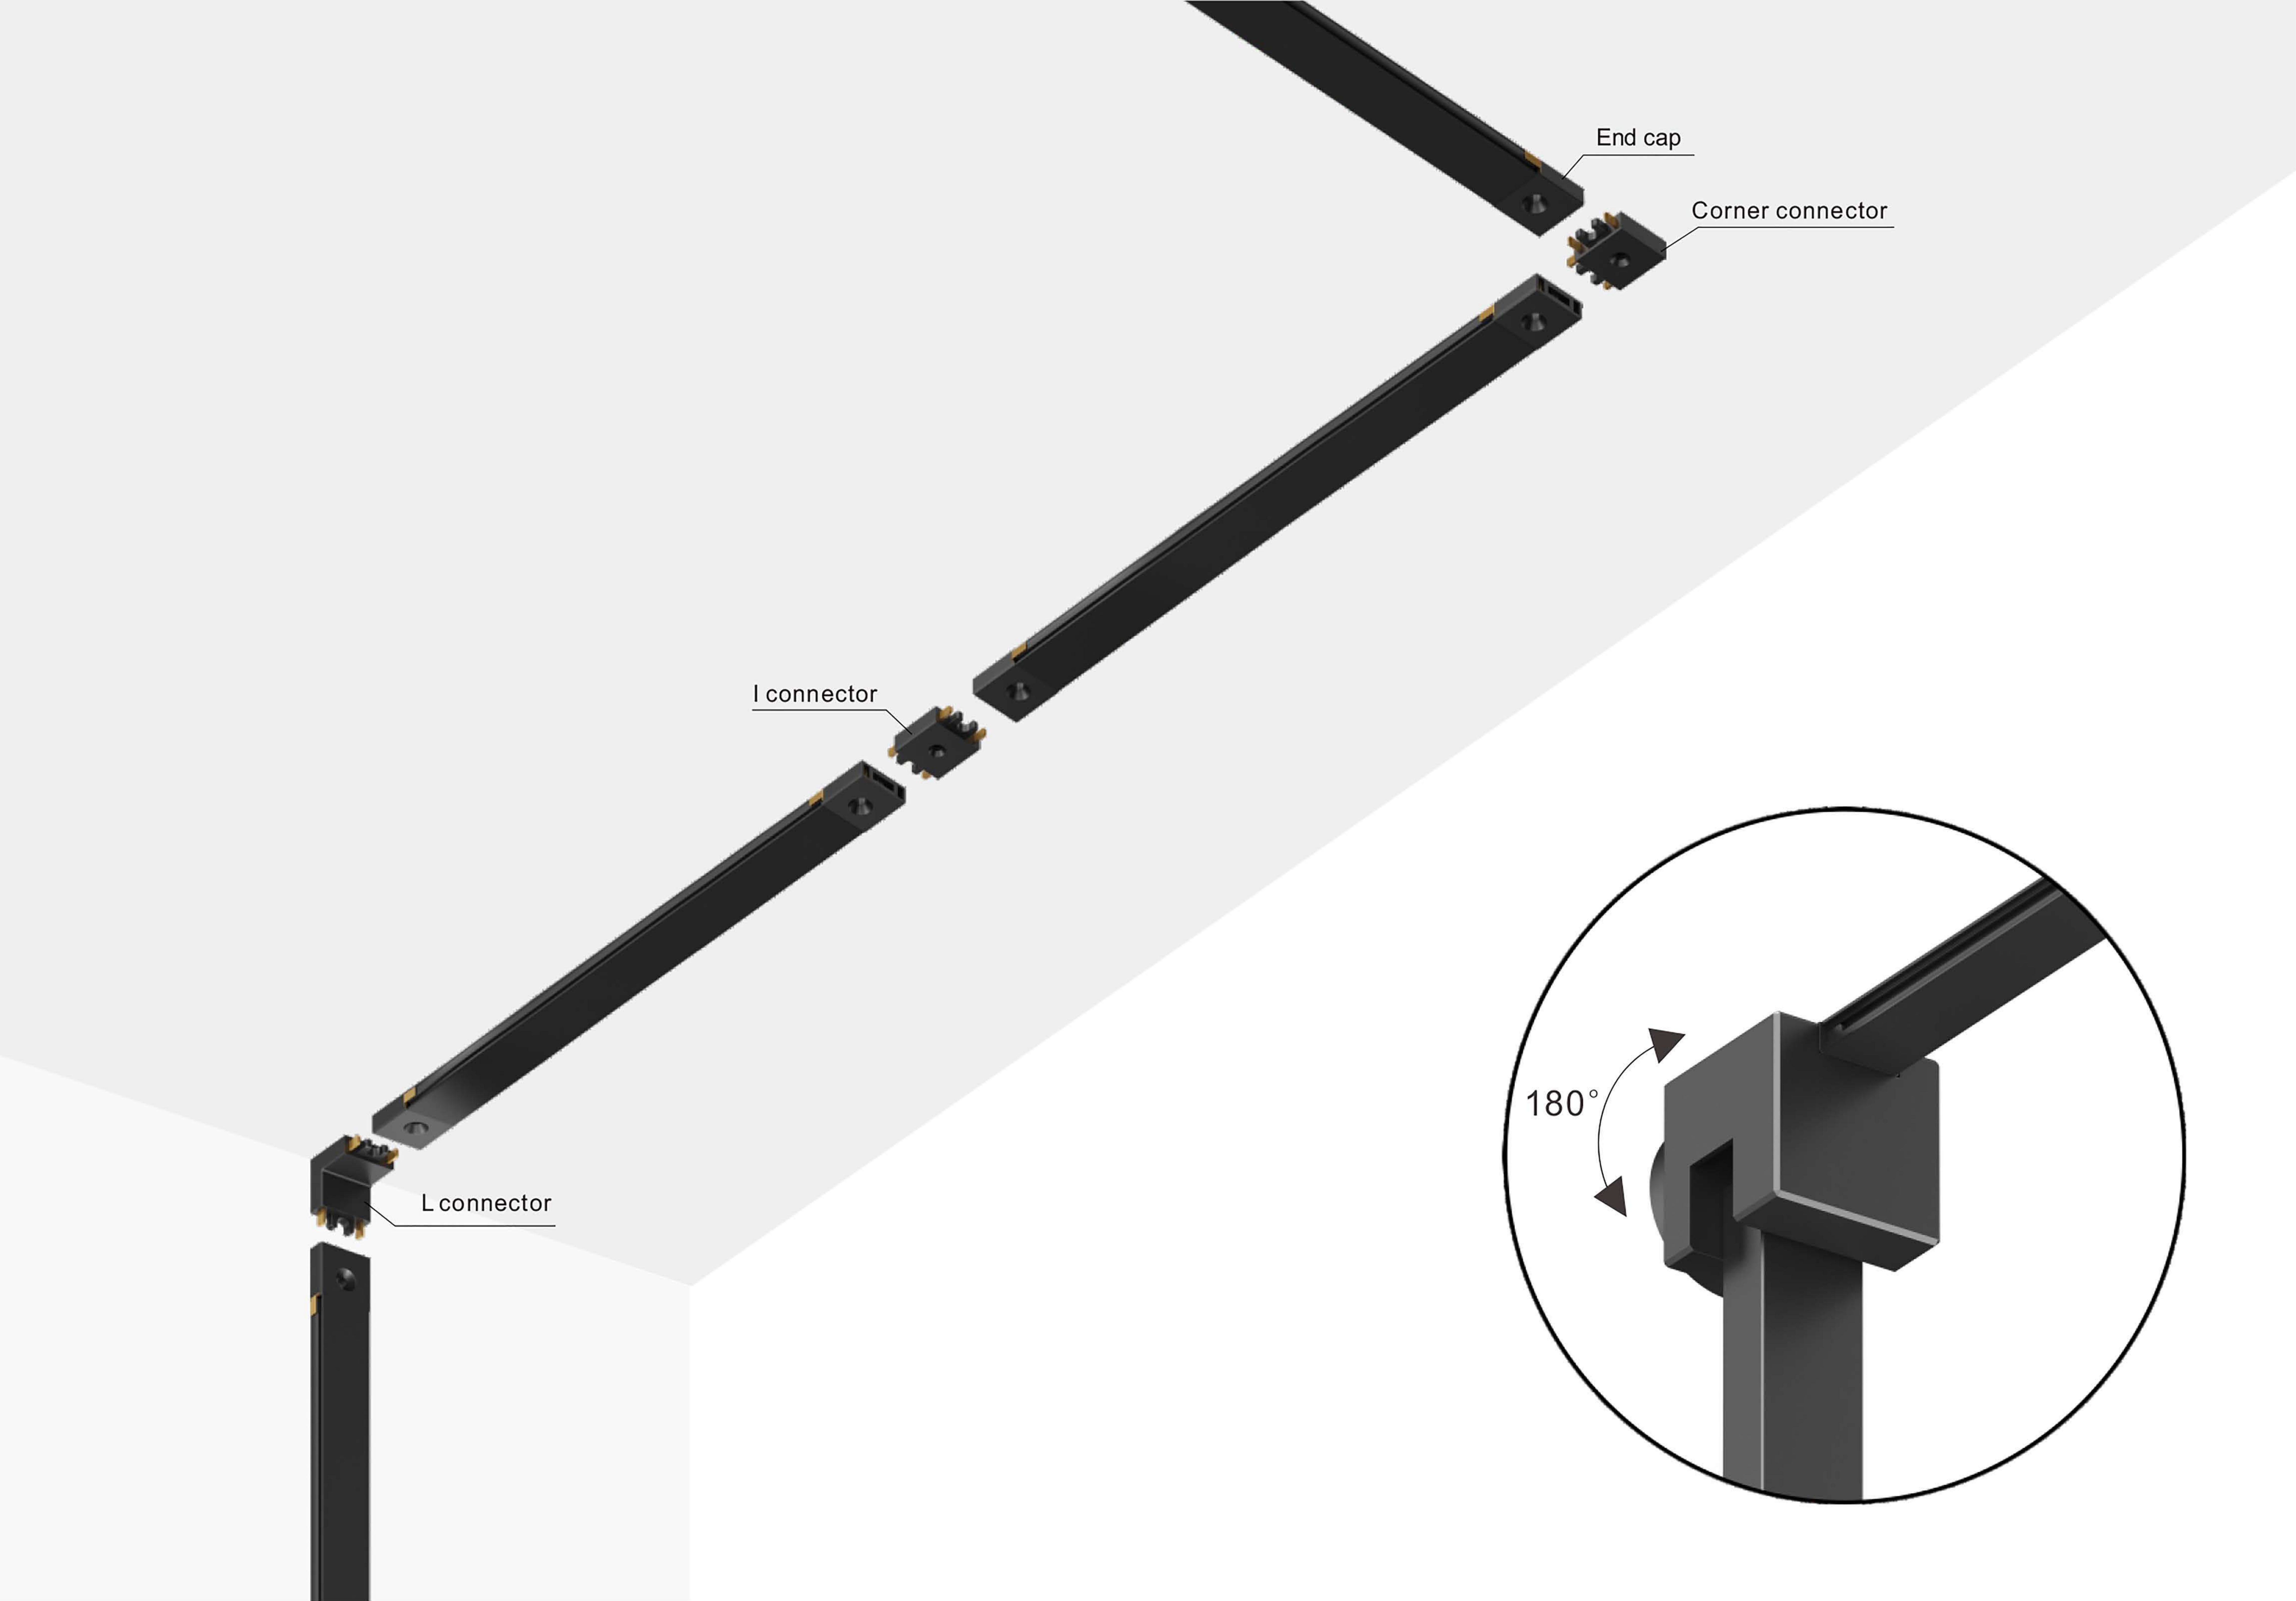

Ultra-thin magnetic track, breaking through the traditional routine, rotating swing arm, and various installation methods to meet your different needs.

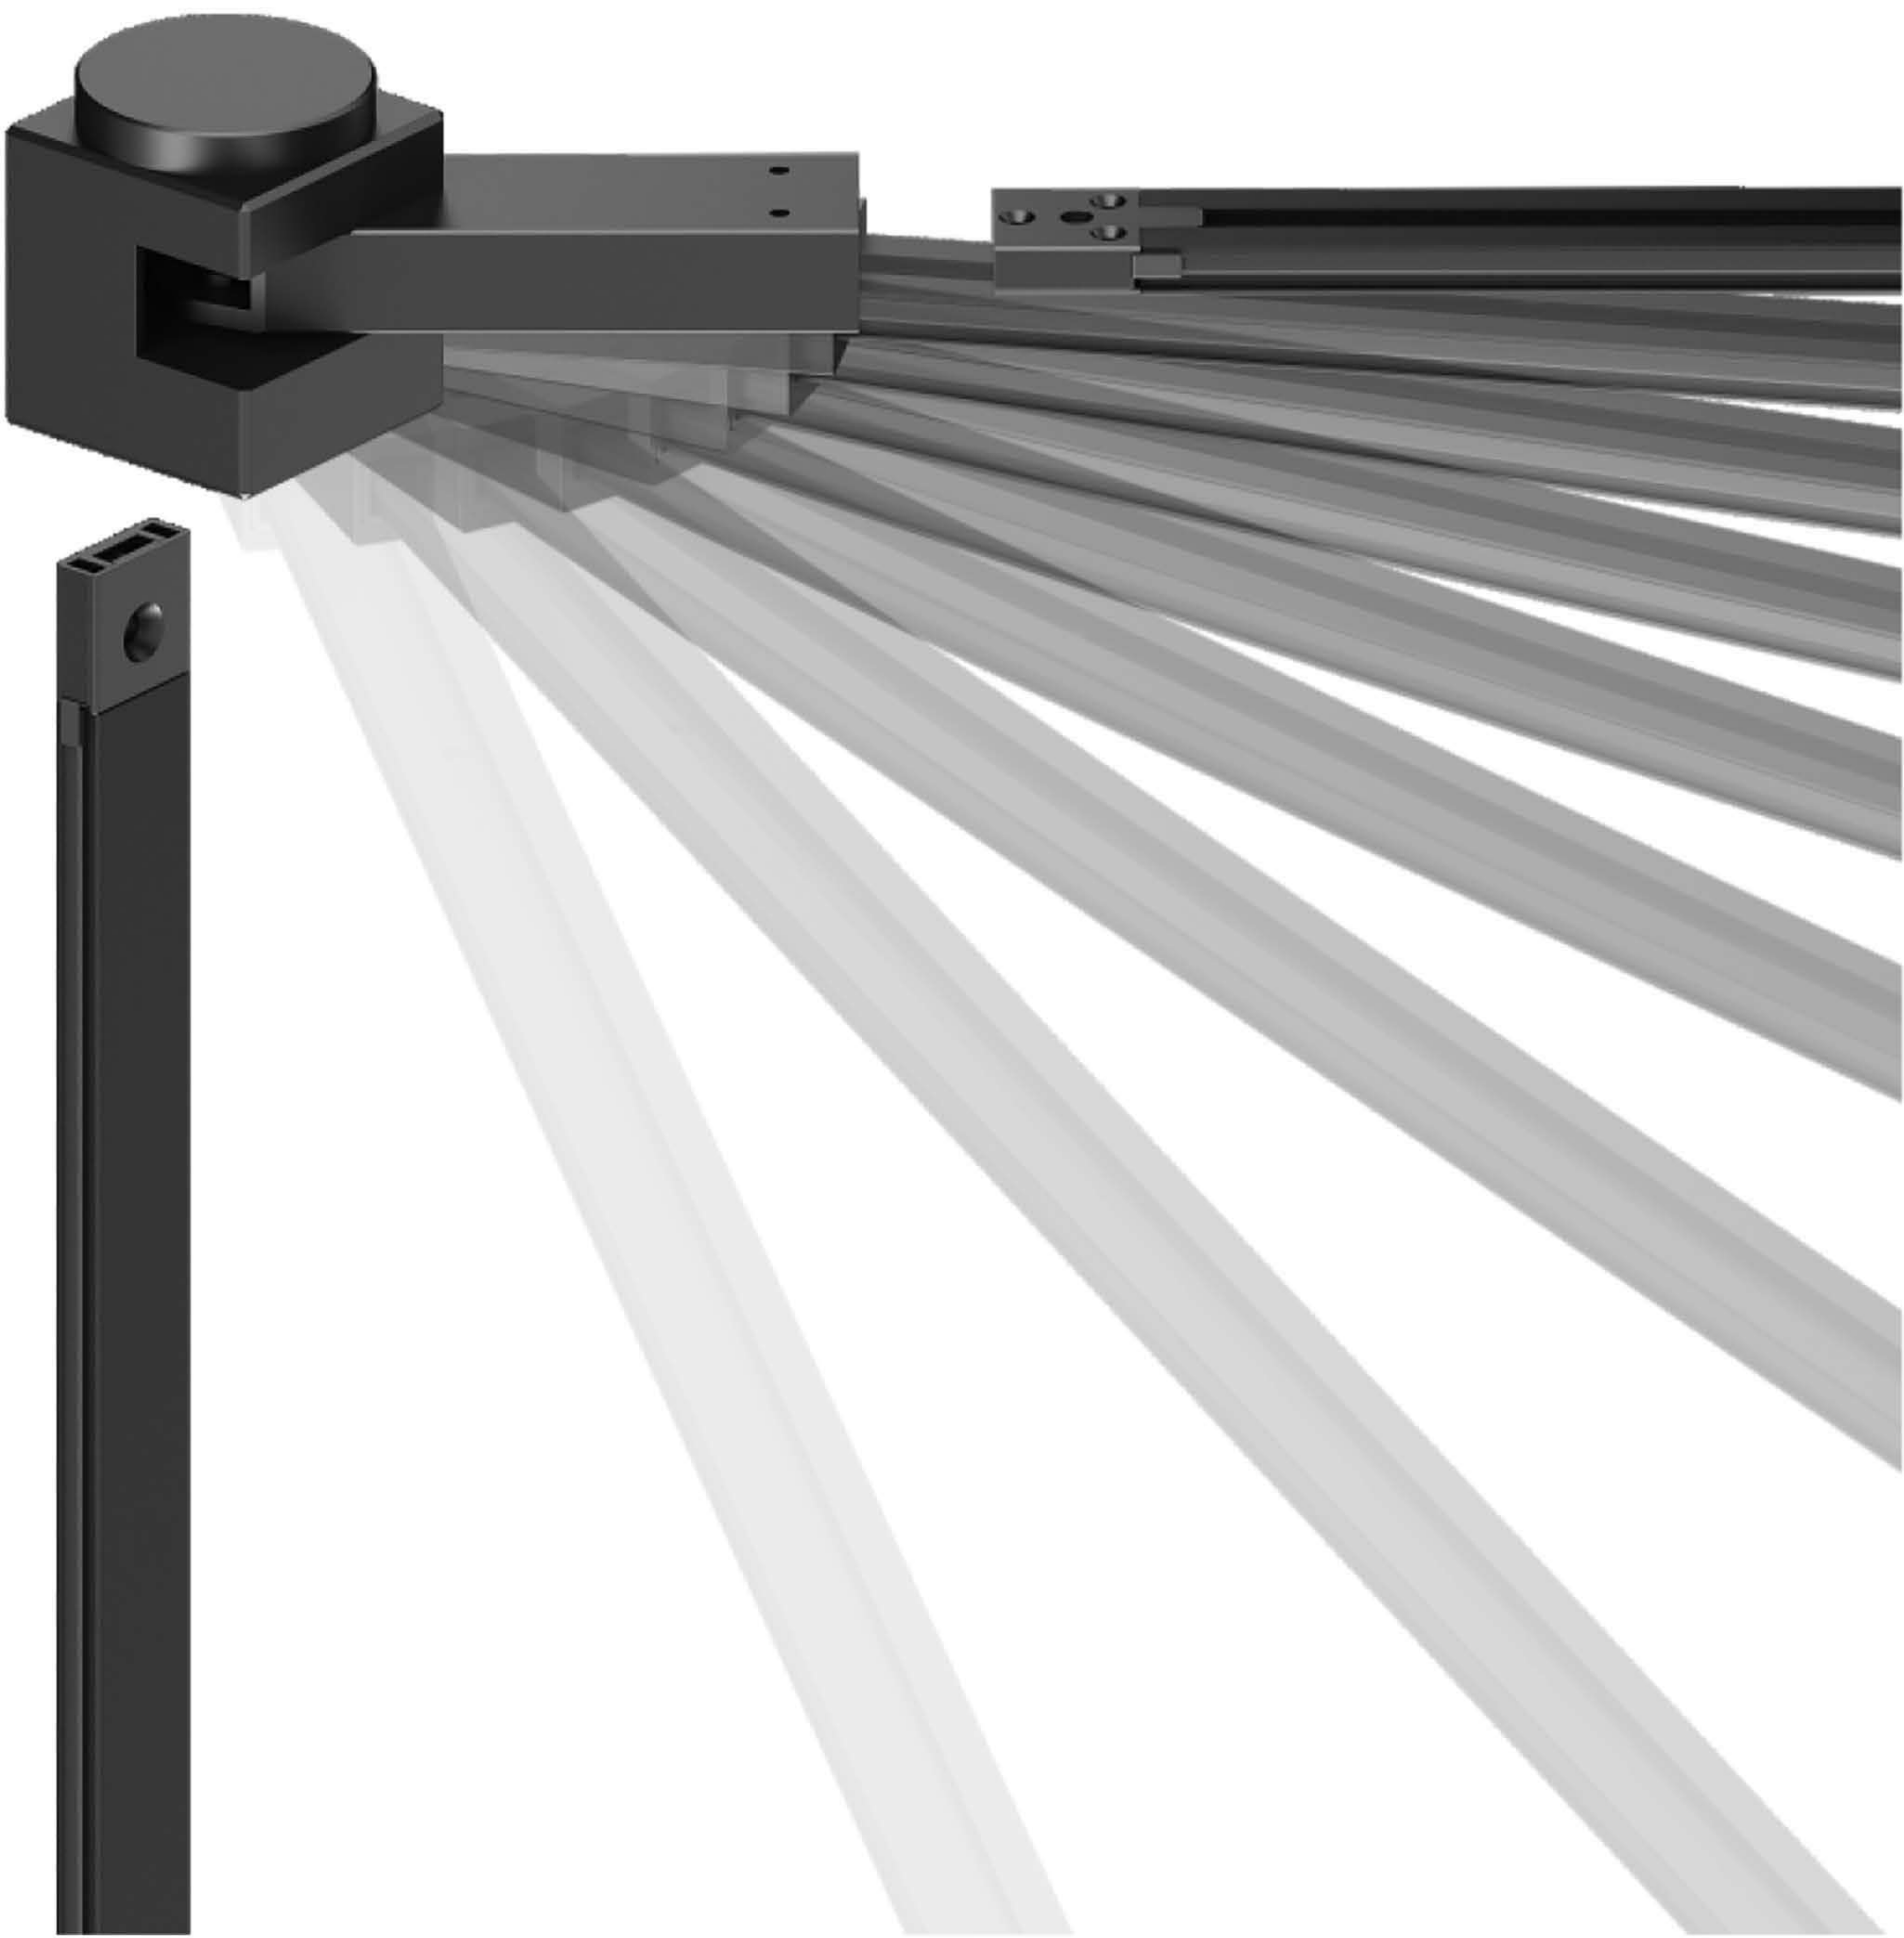

LED BAR FOR MINI RAIL



III

IP20

650°

DIMMABLE

DC
48V

CRI
≥90

3

L80 B20
50 000H



Groupe 0
EN 62 471

EN
60598

THD
< 15

PF0,9

LED: Bridgelux, Osram
Luminous flux:416lm / 872lm
CCT : 3000K/4000K/5000K
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

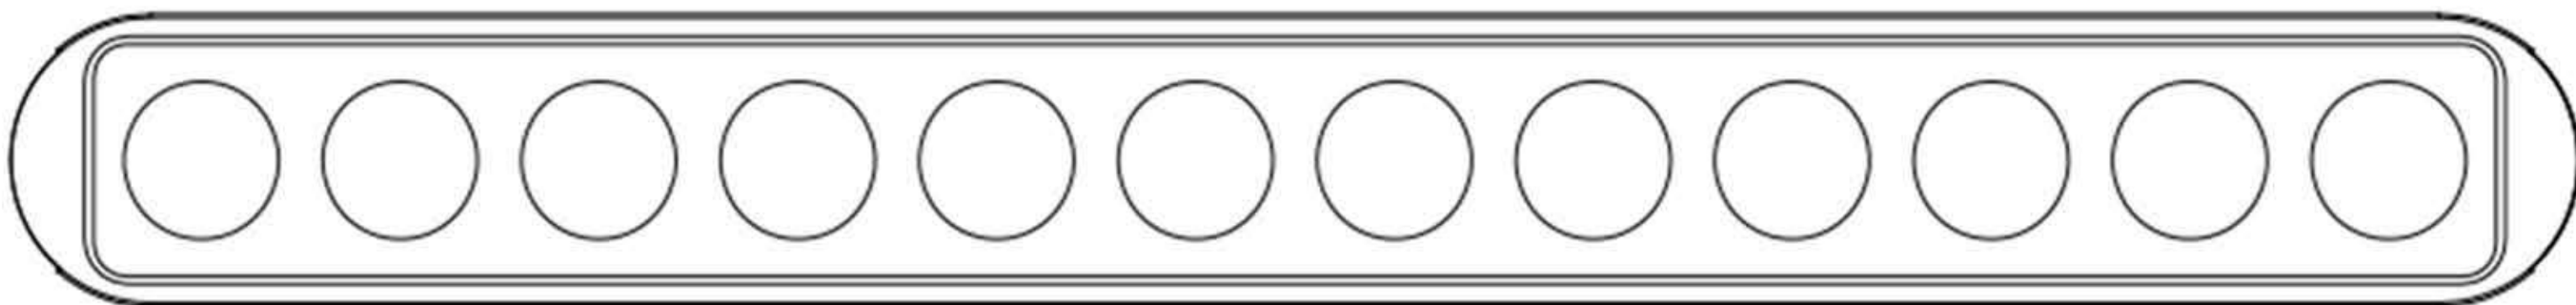
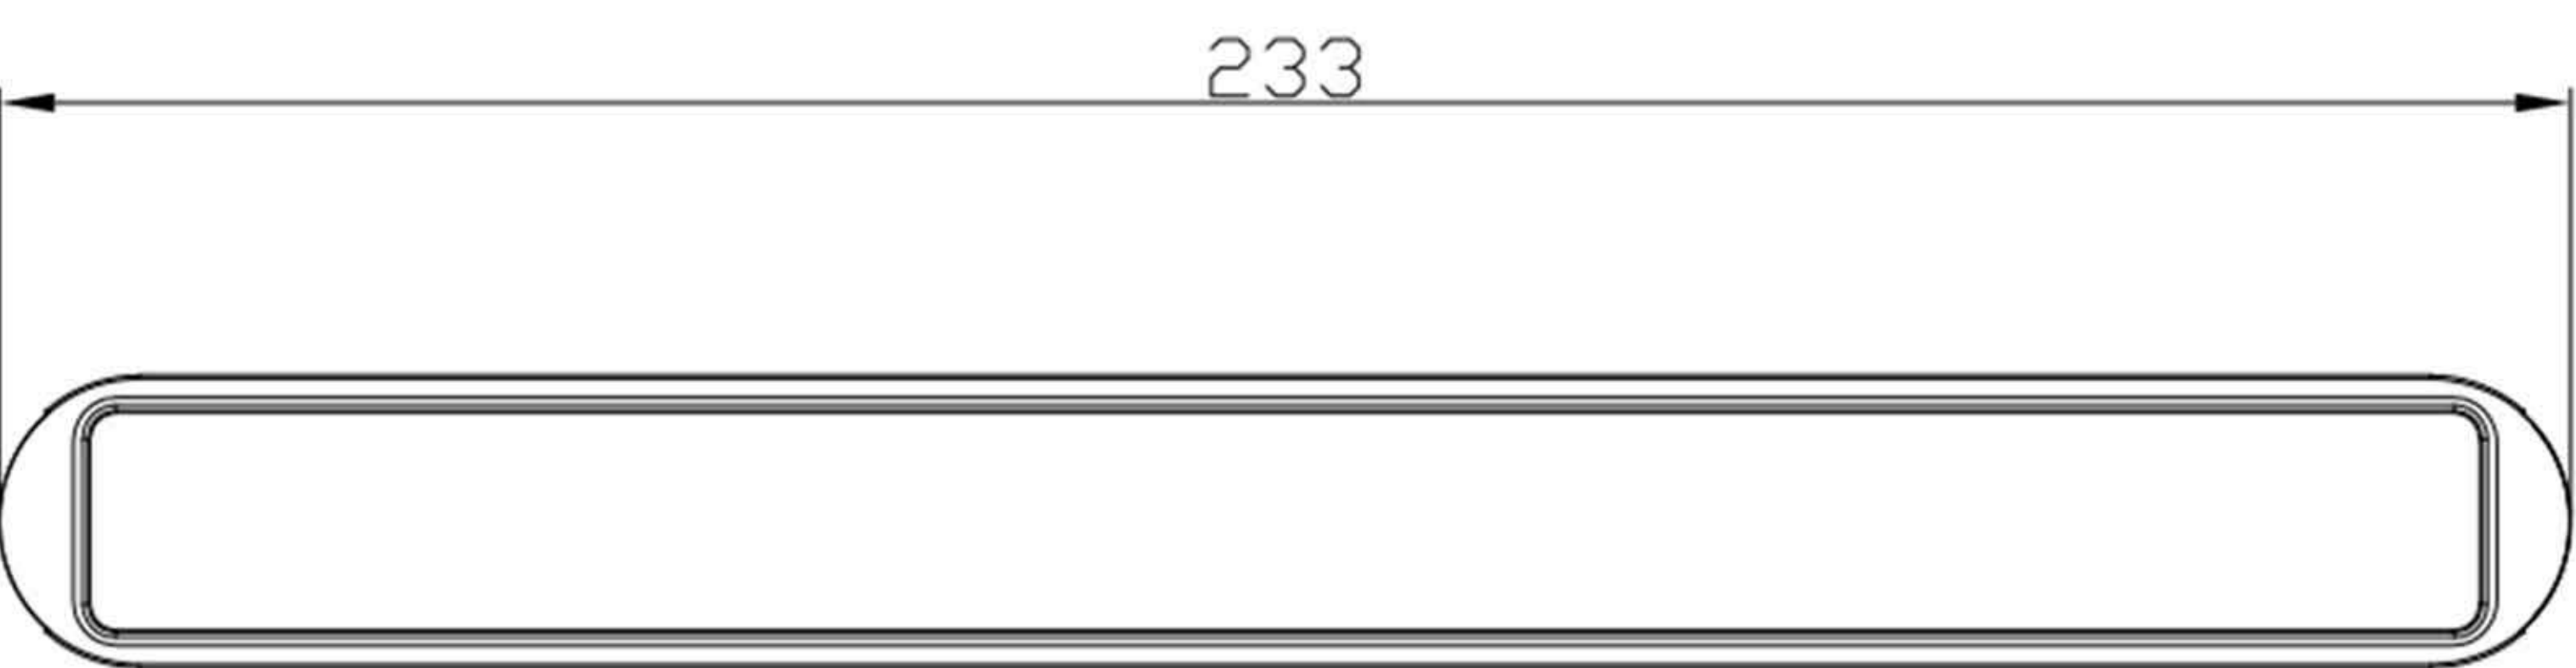


Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-DFS-230-9	black,white	9W	3000K/4000K/5000K	416 lm	120°	L230xW26xH36 mm
DS-EH-LB-12-12	black,white	12W	3000K/4000K/5000K	872 lm	24° /36°	L230xW26xH36 mm

LED BAR FOR MINI RAIL



LED: Bridgelux, Osram
Luminous flux:416lm / 876lm
CCT : 3000K/4000K/5000K
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

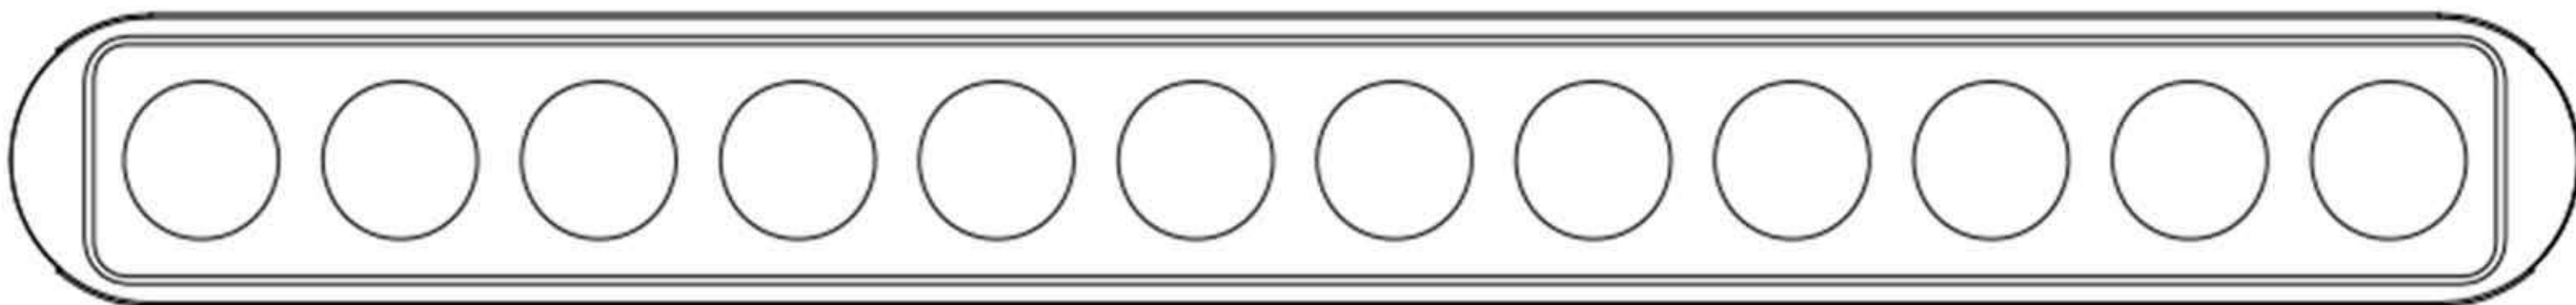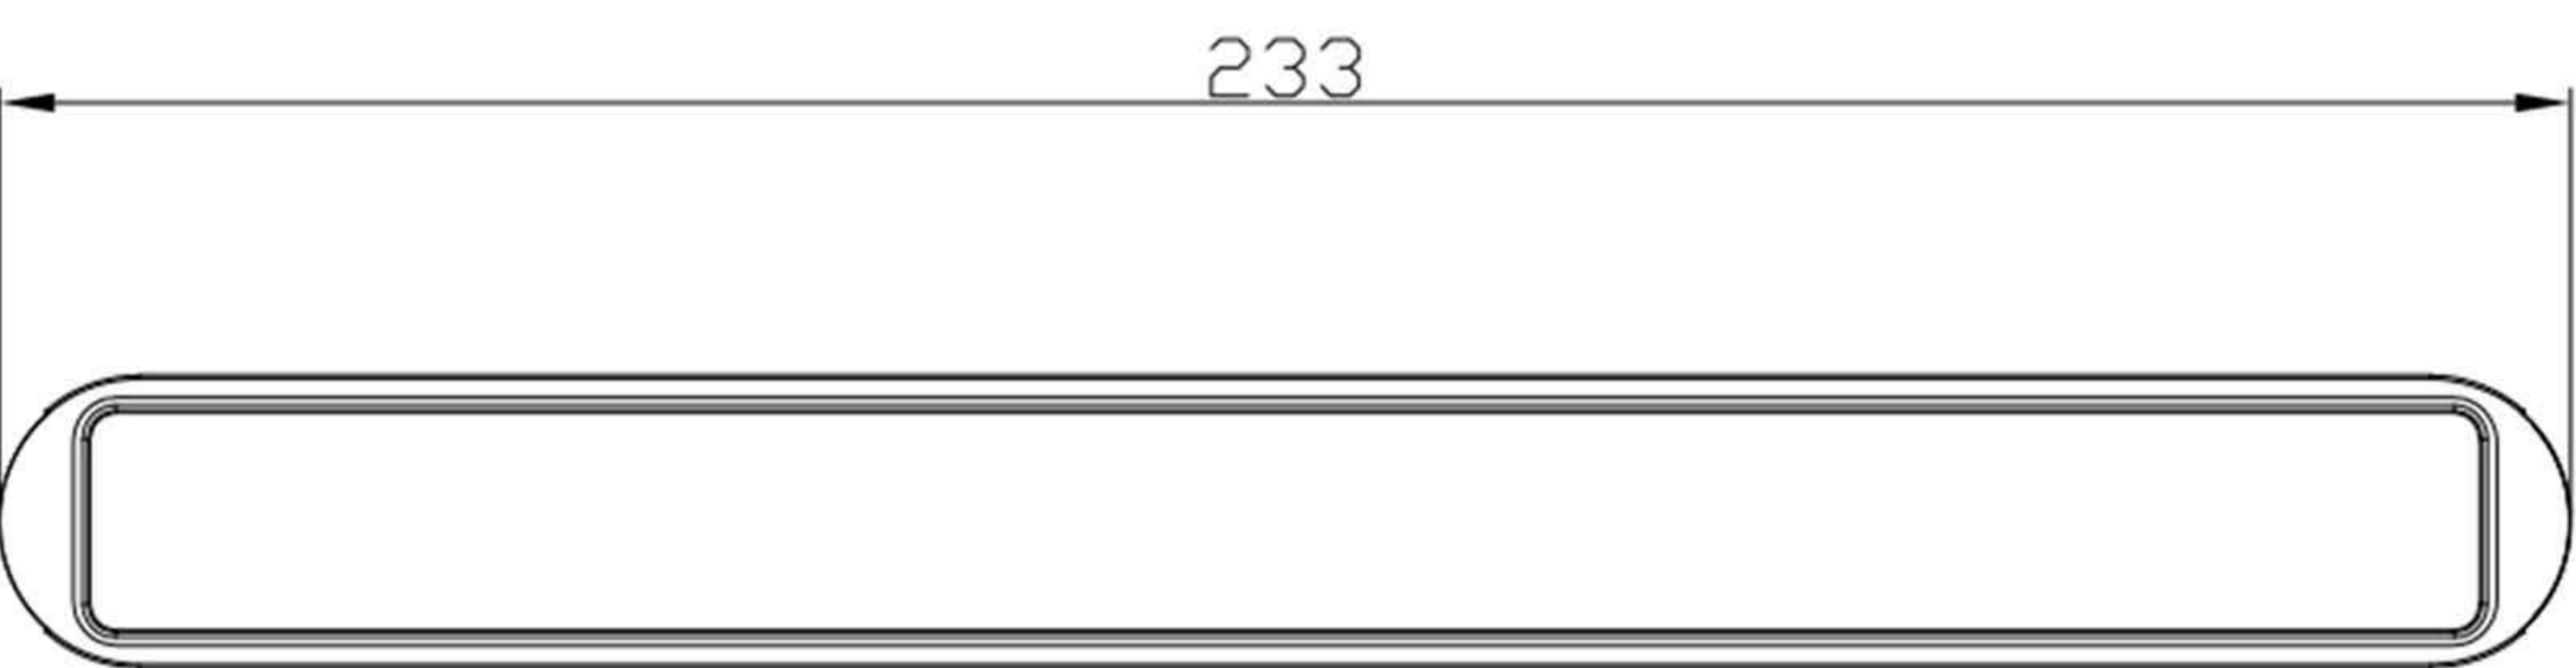

Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-DFSM-230-9	black,white	9W	3000K/4000K/5000K	416 lm	120°	L230xW26xH36 mm
DS-EH-LBM-12-12	black,white	12W	3000K/4000K/5000K	872 lm	24° /36°	L230xW26xH36 mm

TRACK LIGHT FOR MINI RAIL

III

IP20



650°

DIMMABLE



DC
48V

CRI
≥90

3

L80 B20
50 000H

Groupe 0
EN 62 471


EN
60598

THD
< 15

PF0,9



LED: Bridgelux
Luminous flux:446lm / 741lm
CCT : 3000K/4000K/5000K
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

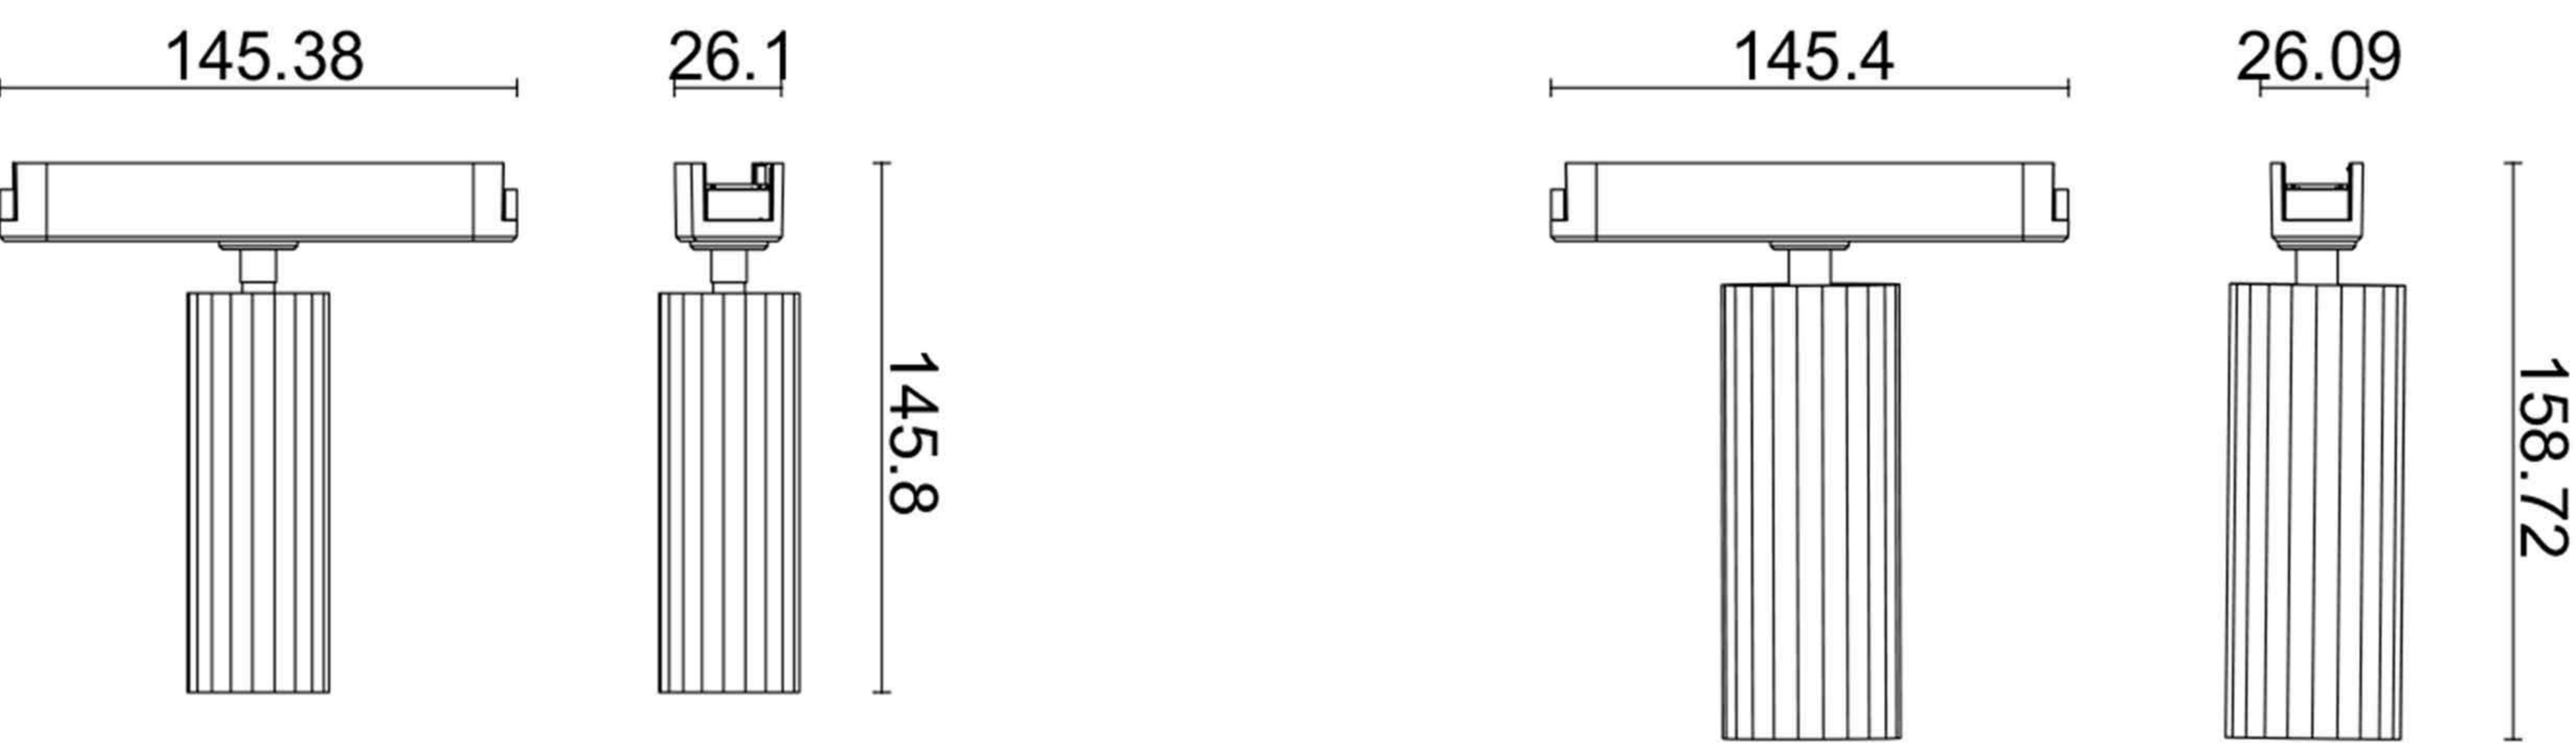


Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-TL-7	black,white	7W	3000K/4000K/5000K	446 lm	15°/24° /36°	Ø40*H147mm
DS-EH-TL-12	black,white	12W	3000K/4000K/5000K	741 lm	15°/24° /36°	Ø50*H160mm

CHANDELIER FOR MINI RAIL



LED: Bridgelux
Luminous flux:270lm / 277lm / 283lm
CCT : 3000K/4000K/5000K
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

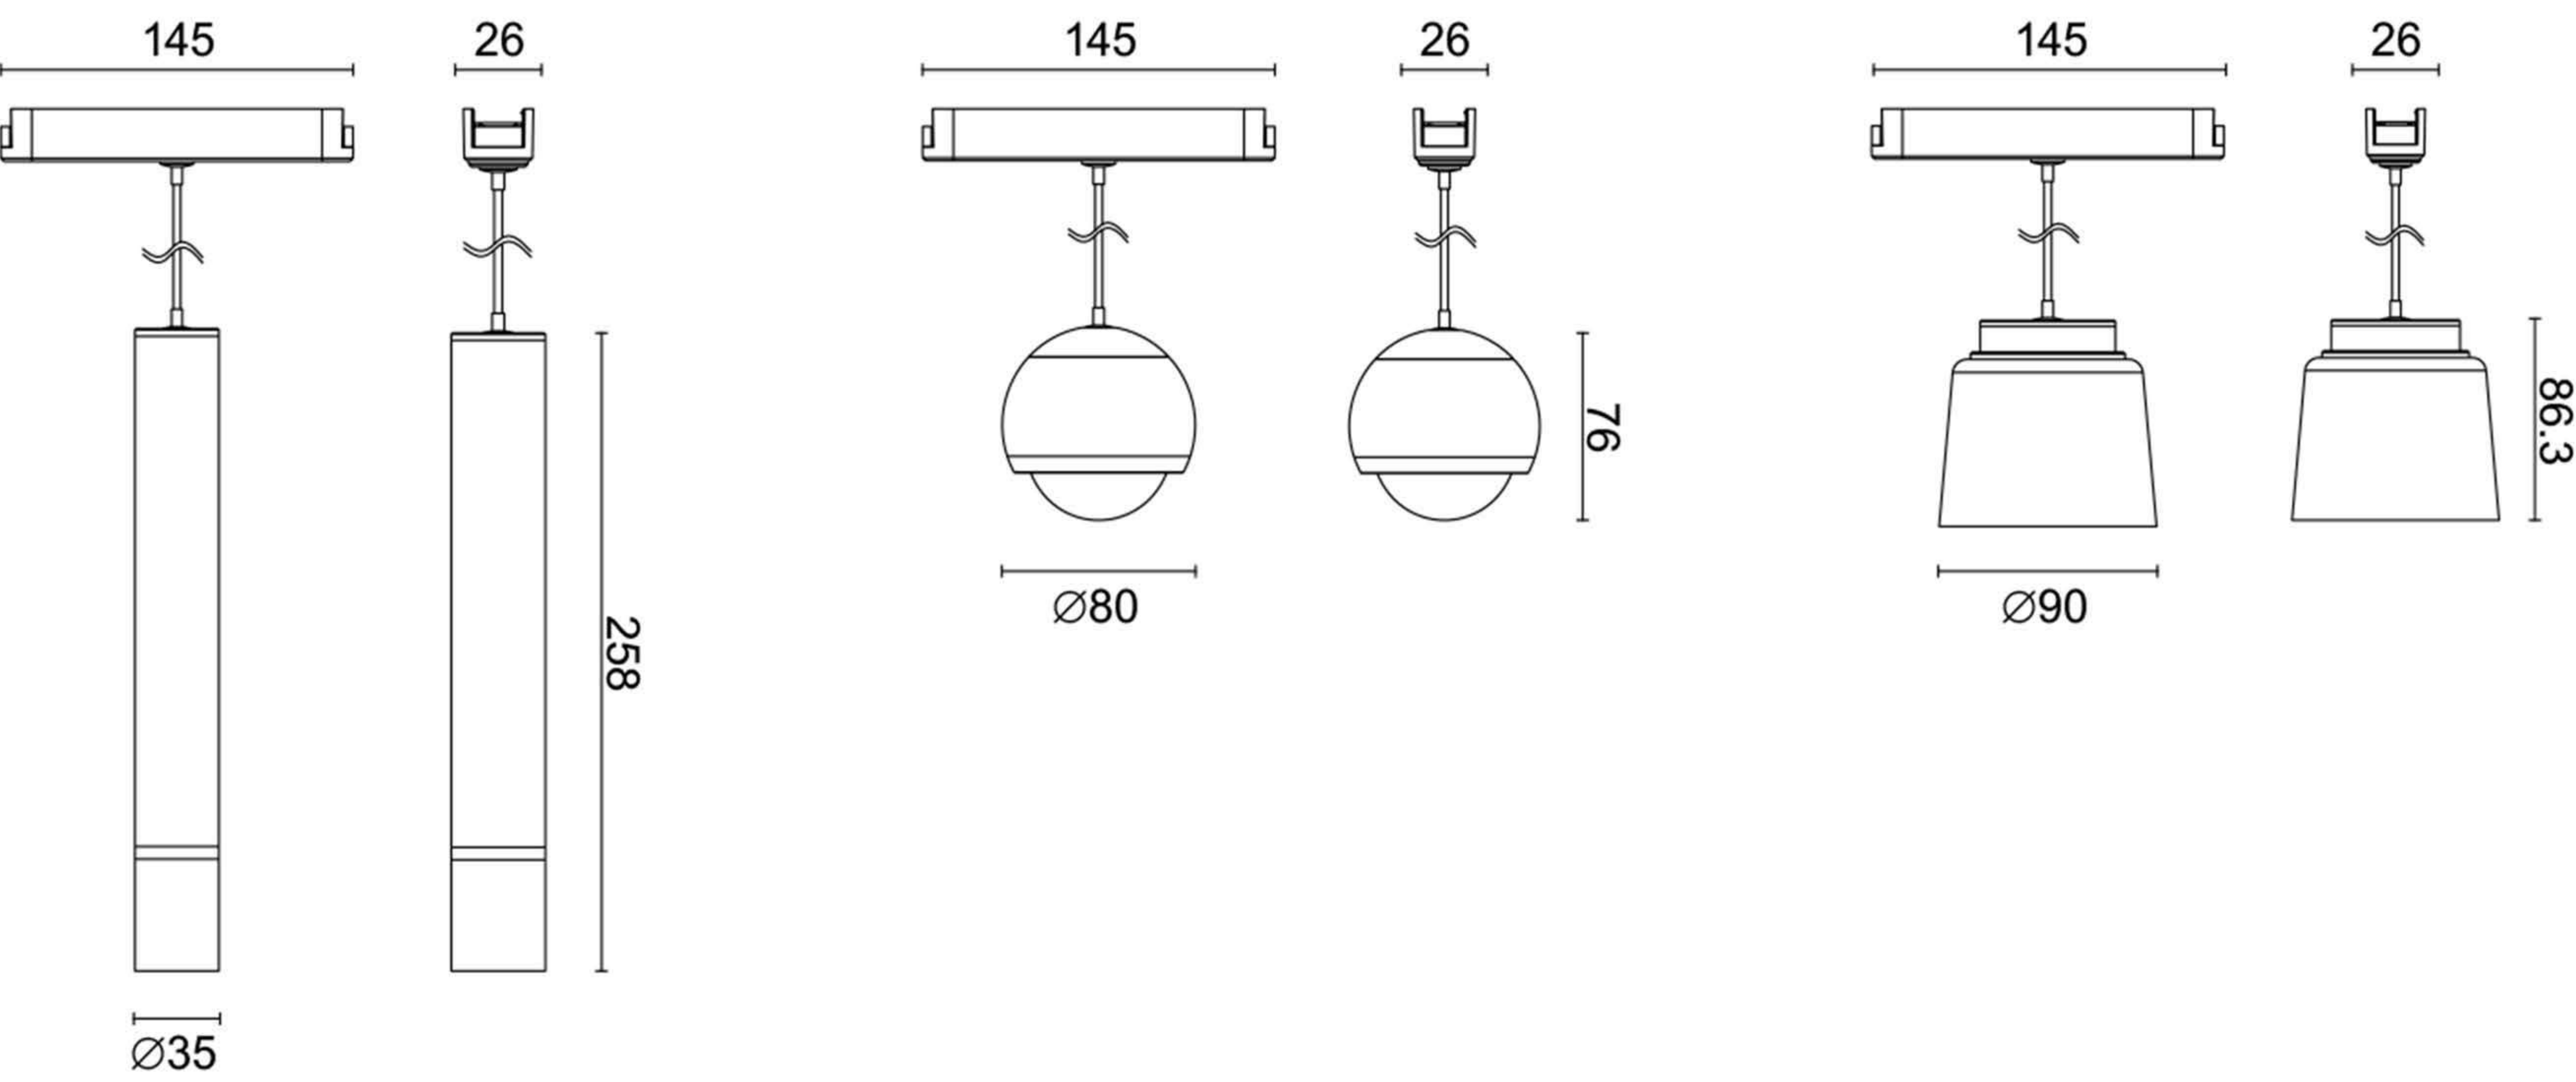

Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-FM-02	black	5W	3000K/4000K/5000K	277 lm	24°	Ø35x257mm
DS-EH-FM-03	black	5W	3000K/4000K/5000K	283 lm	120°	Ø80x76mm
DS-EH-FM-04	black	4W	3000K/4000K/5000K	270 lm	120°	Ø90x86mm

TRACK LIGHT FOR MINI RAIL

III

IP20



L80 B20
50 000H

650°



DIMMABLE



DC
48V

CRI
≥90

3




Groupe 0
EN 62 471


EN
60598

THD
< 15

PF0,9

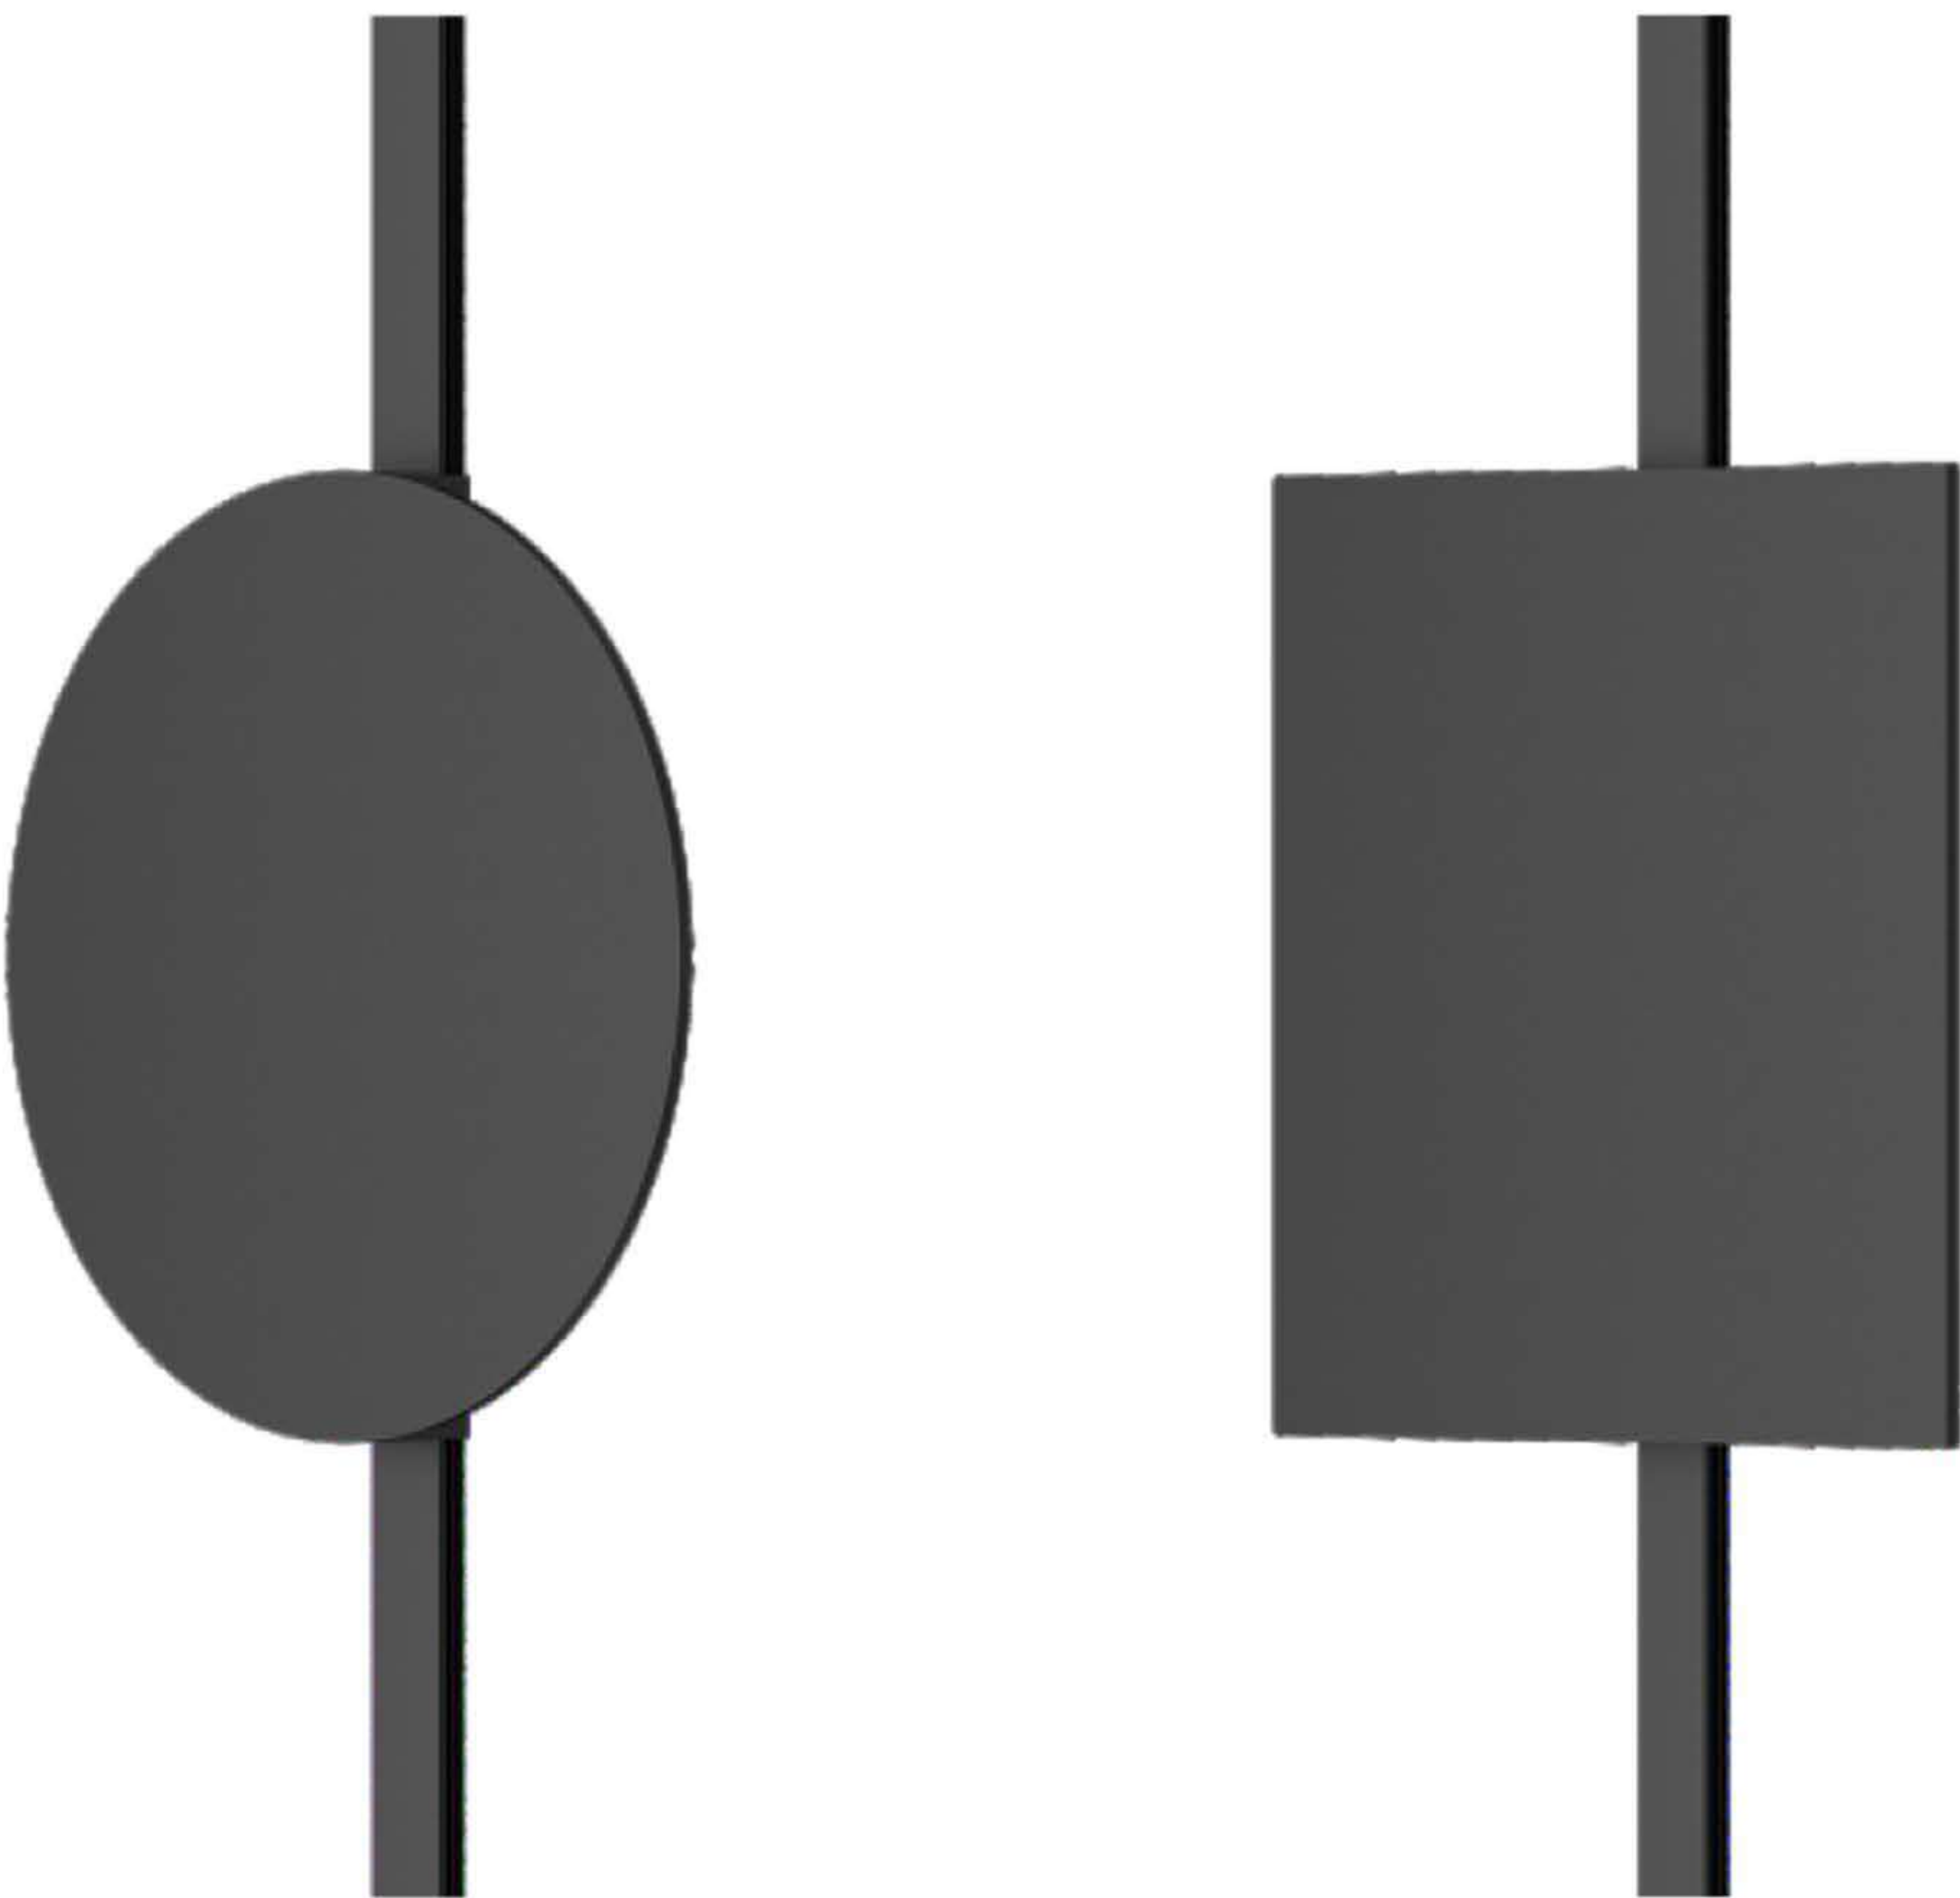

LED: Bridgelux
CCT : 3000K/4000K/5000K
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

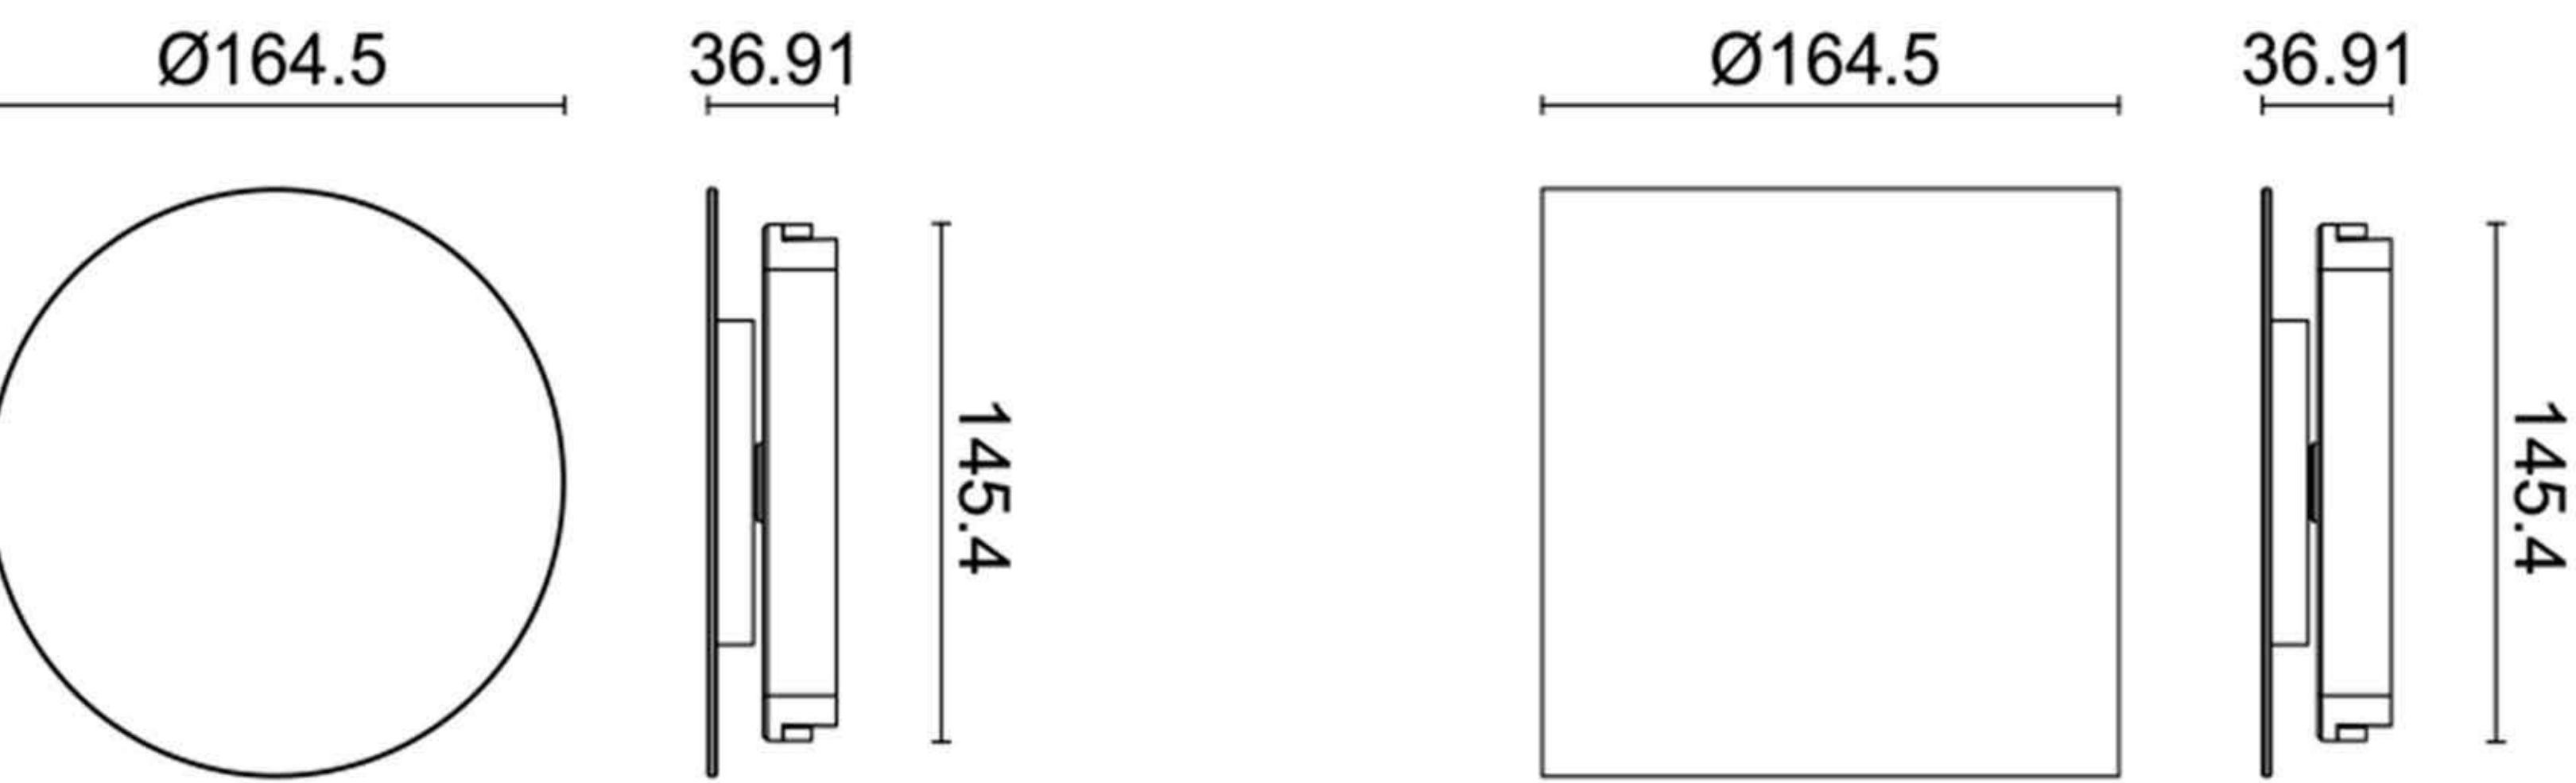

Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-CWL-5	black	5W	3000K/4000K/5000K	/	120°	Ø165xH145mm
DS-EH-RWL-5	black	5W	3000K/4000K/5000K	/	120°	L164xW37xH145mm

TRACK LIGHT FOR MINI RAIL



III

IP20

650°

DC
48V

CRI
≥90

3

L80 B20
50 000H


Groupe 0
EN 62 471

EN
60598

THD
< 15

PF0,9

LED: Bridgelux
Luminous flux:173lm
CCT : 3000K/4000K/5000K
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

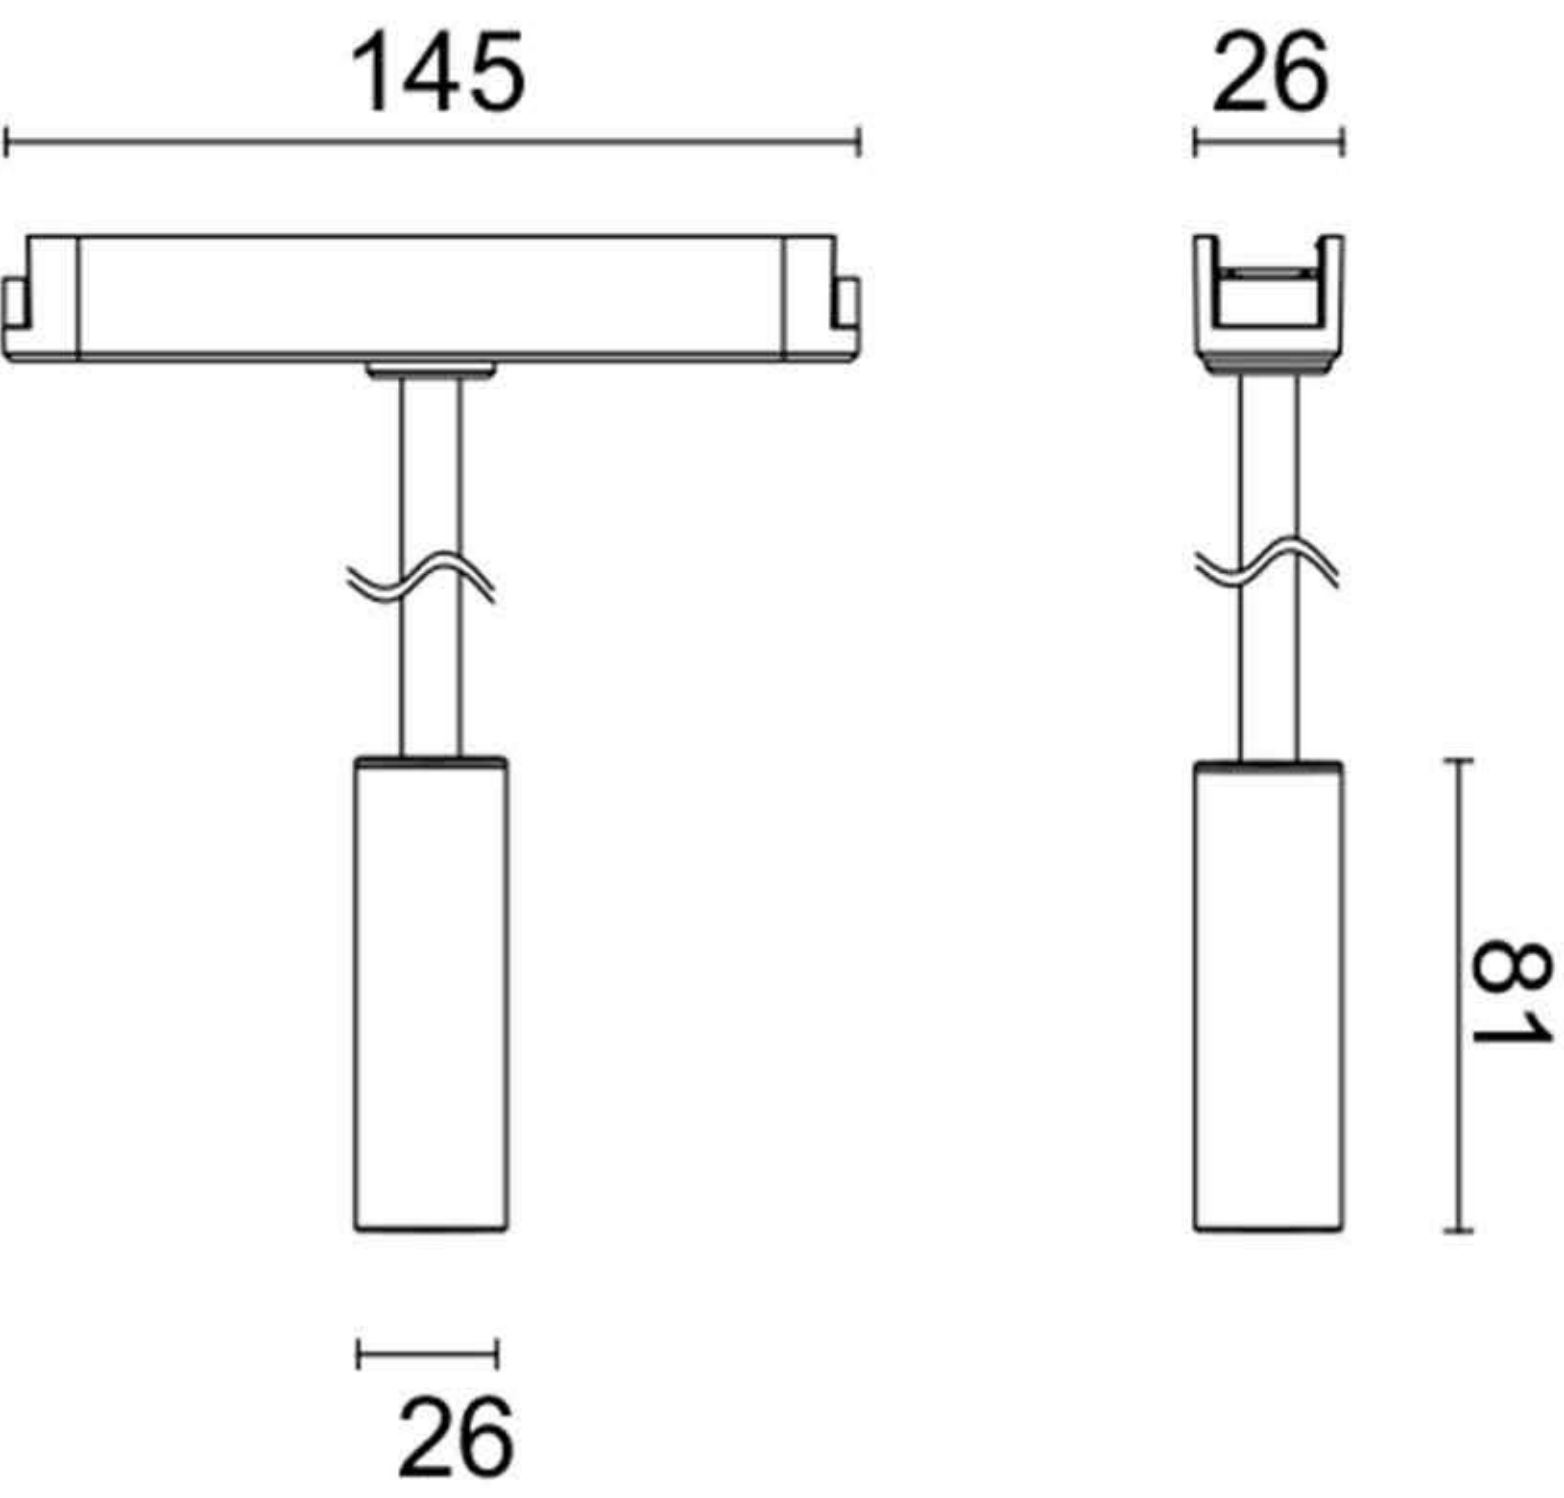

Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-RL-2	black,white	2W	3000K/4000K/5000K	173 lm	24°	Ø26xH81mm

TRACK LIGHT FOR MINI RAIL



III



IP20



650°



DIMMABLE





DC
48V



CRI
≥90



3



L80 B20
50 000H



Groupe 0
EN 62 471




EN
60598




THD
< 15



PF0,9

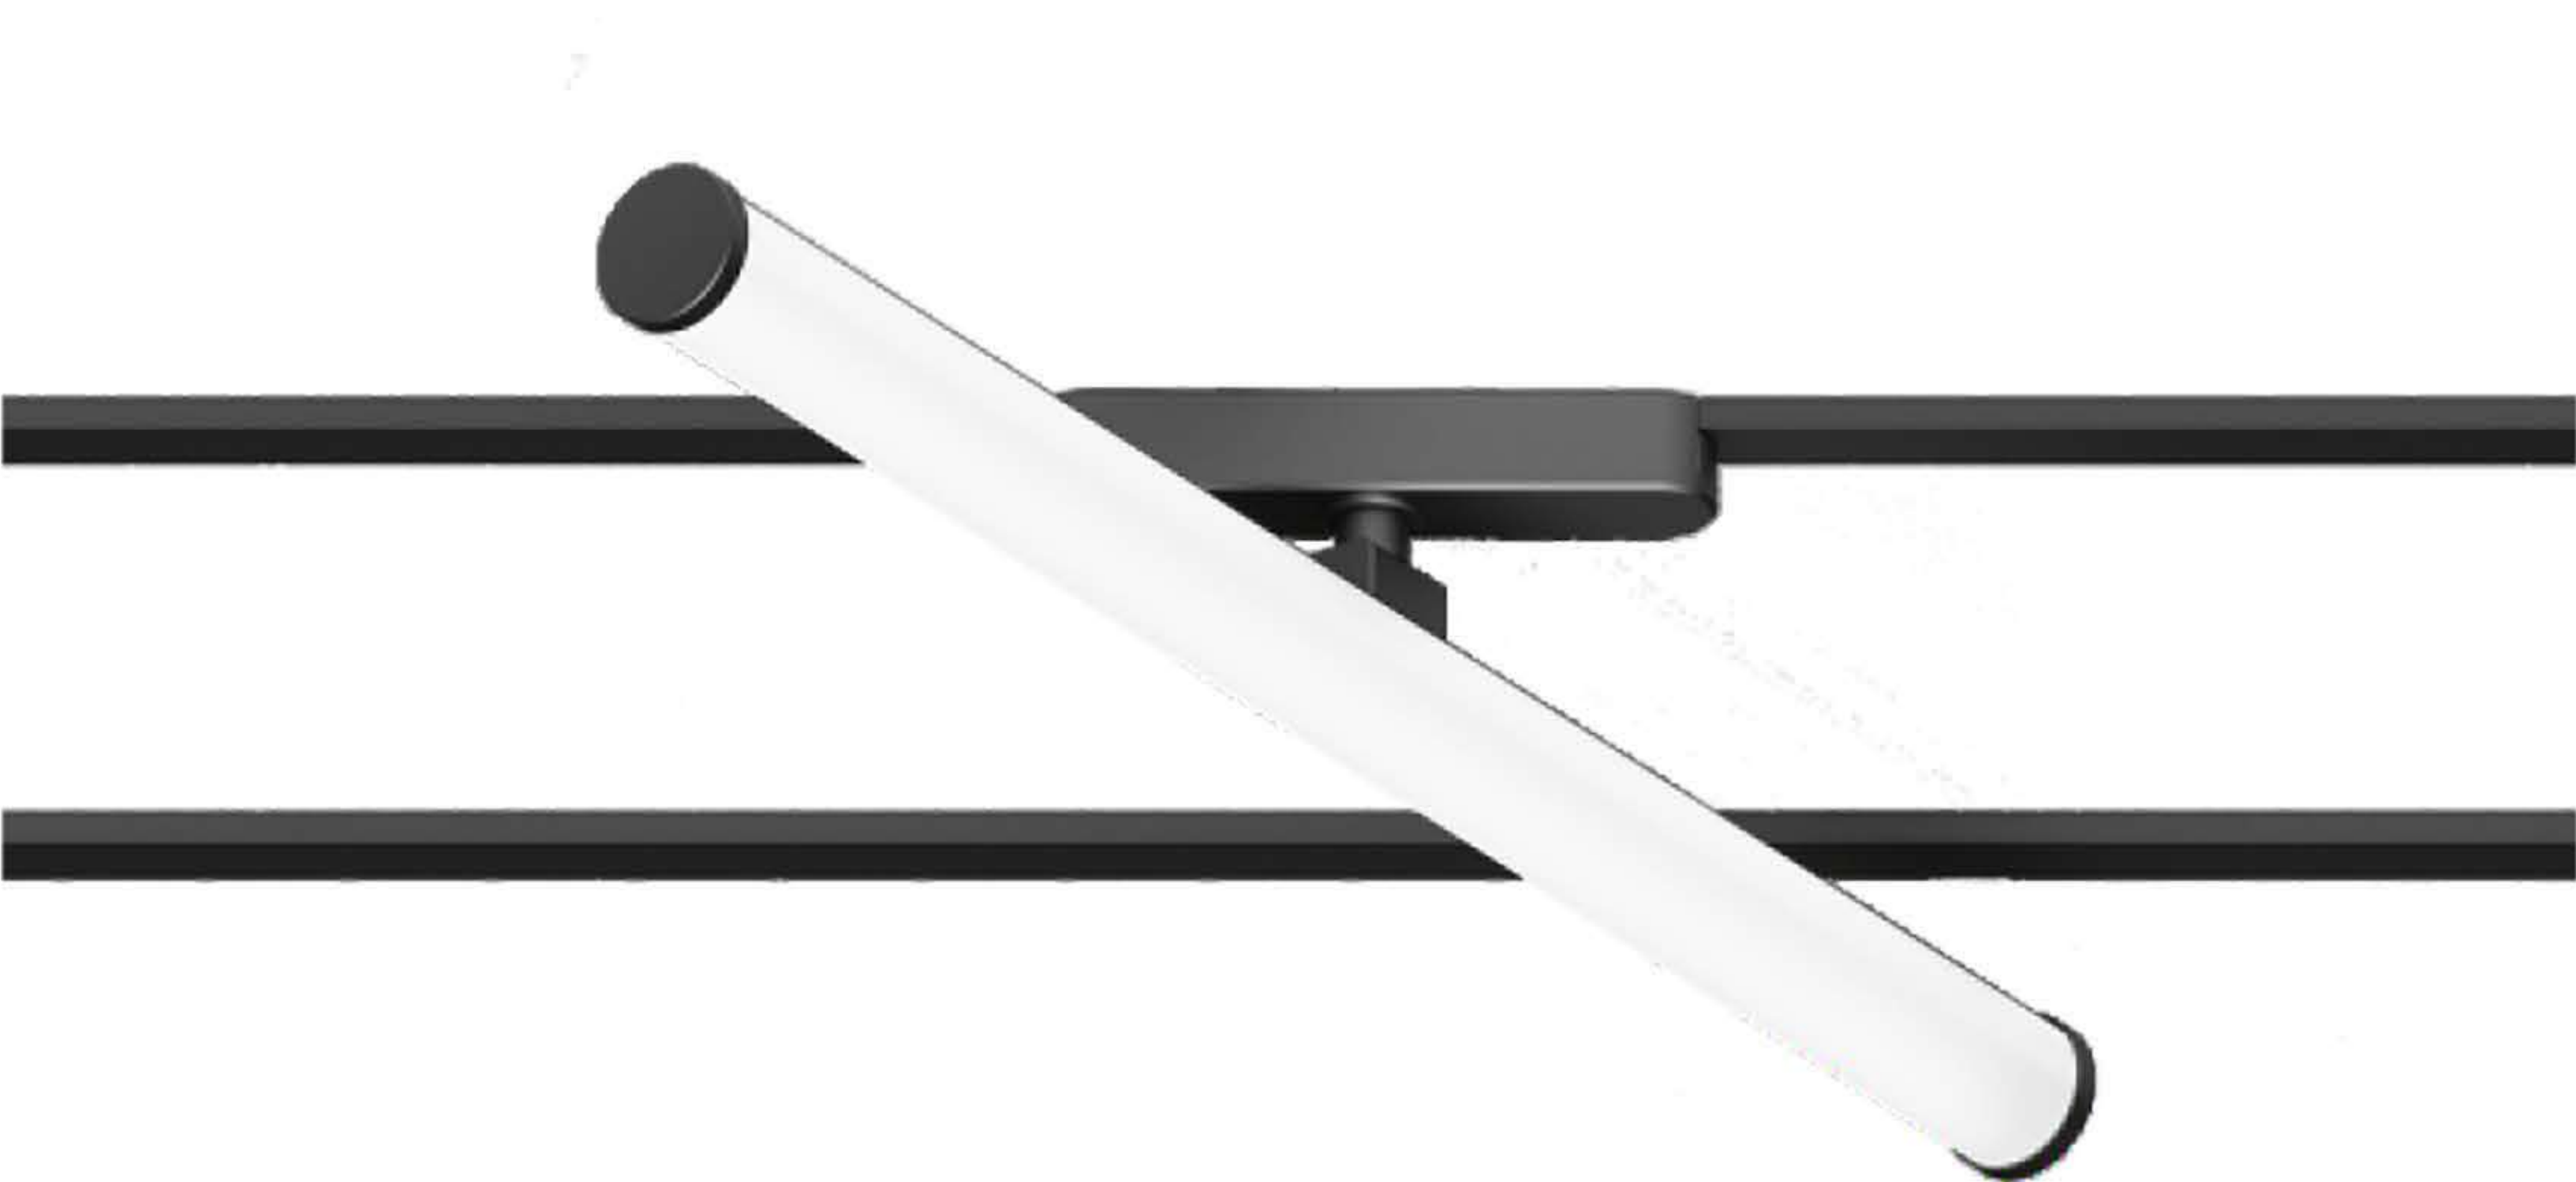

LED: Bridgelux
CCT : 3000K/4000K/5000K
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

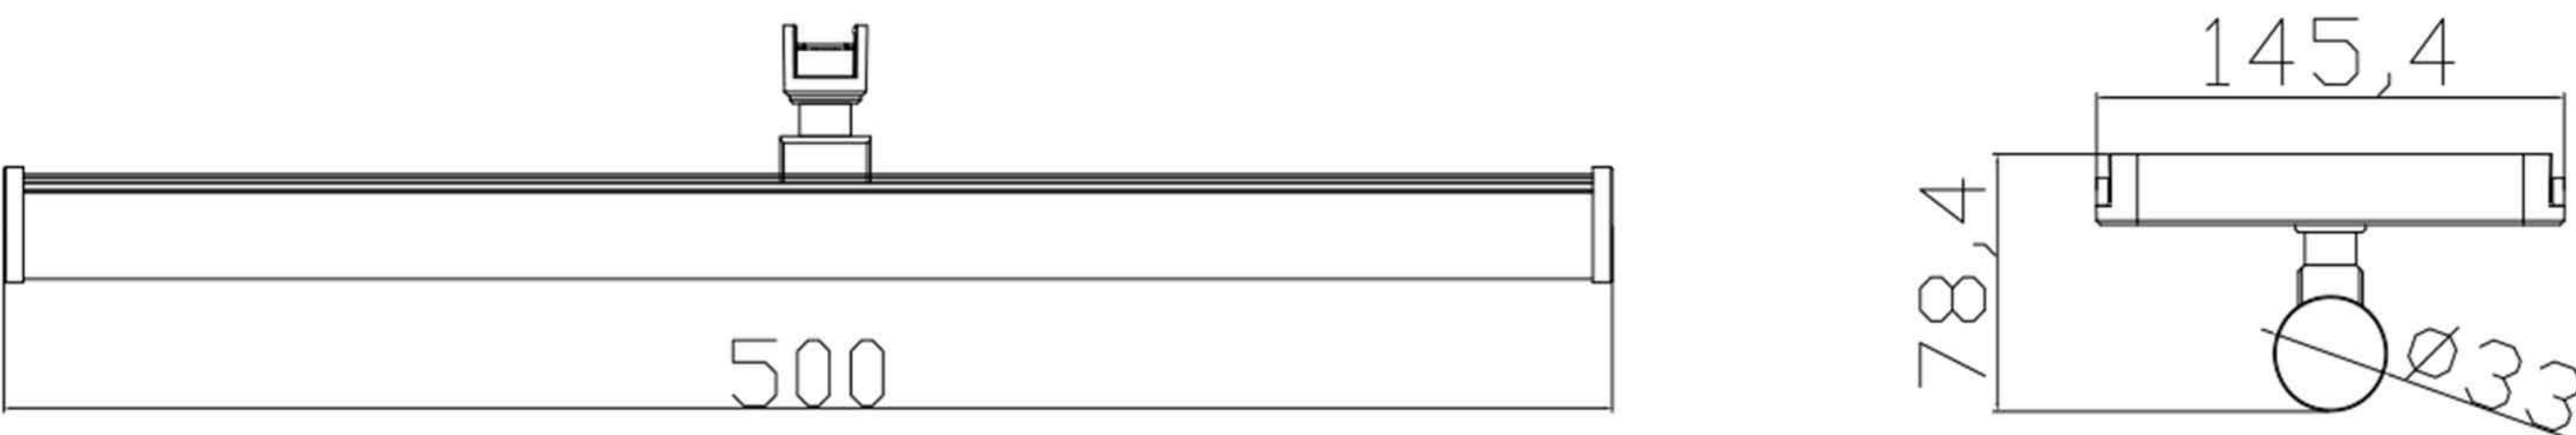

Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-GG-500	black	12W	3000K/4000K/5000K	/	120°	Ø500xH78mm
DS-EH-GG-1000	black	18W	3000K/4000K/5000K	/	120°	Ø1000xH78mm
DS-EH-GG-1500	black	24W	3000K/4000K/5000K	/	120°	Ø1500xH78mm

TRACK LIGHT FOR MINI RAIL

III

IP20



650°

DIMMABLE



DC
48V

CRI
≥90

3

L80 B20
50 000H

Groupe 0
EN 62 471


EN
60598

THD
< 15

PF0,9



LED: Bridgelux
CCT : 3000K-5000K / RGB
Lifetime (hr): 50,000 H (L 80 B20 -> Ta = 25° C)
Input Voltage(V): DC - 48V
Operating Temp. (°C): - 20° ~ + 40°C
Dimmable : Yes
Materials : Aluminium + PC
Colors: Black,White
Installation : Adapter au rail 48V

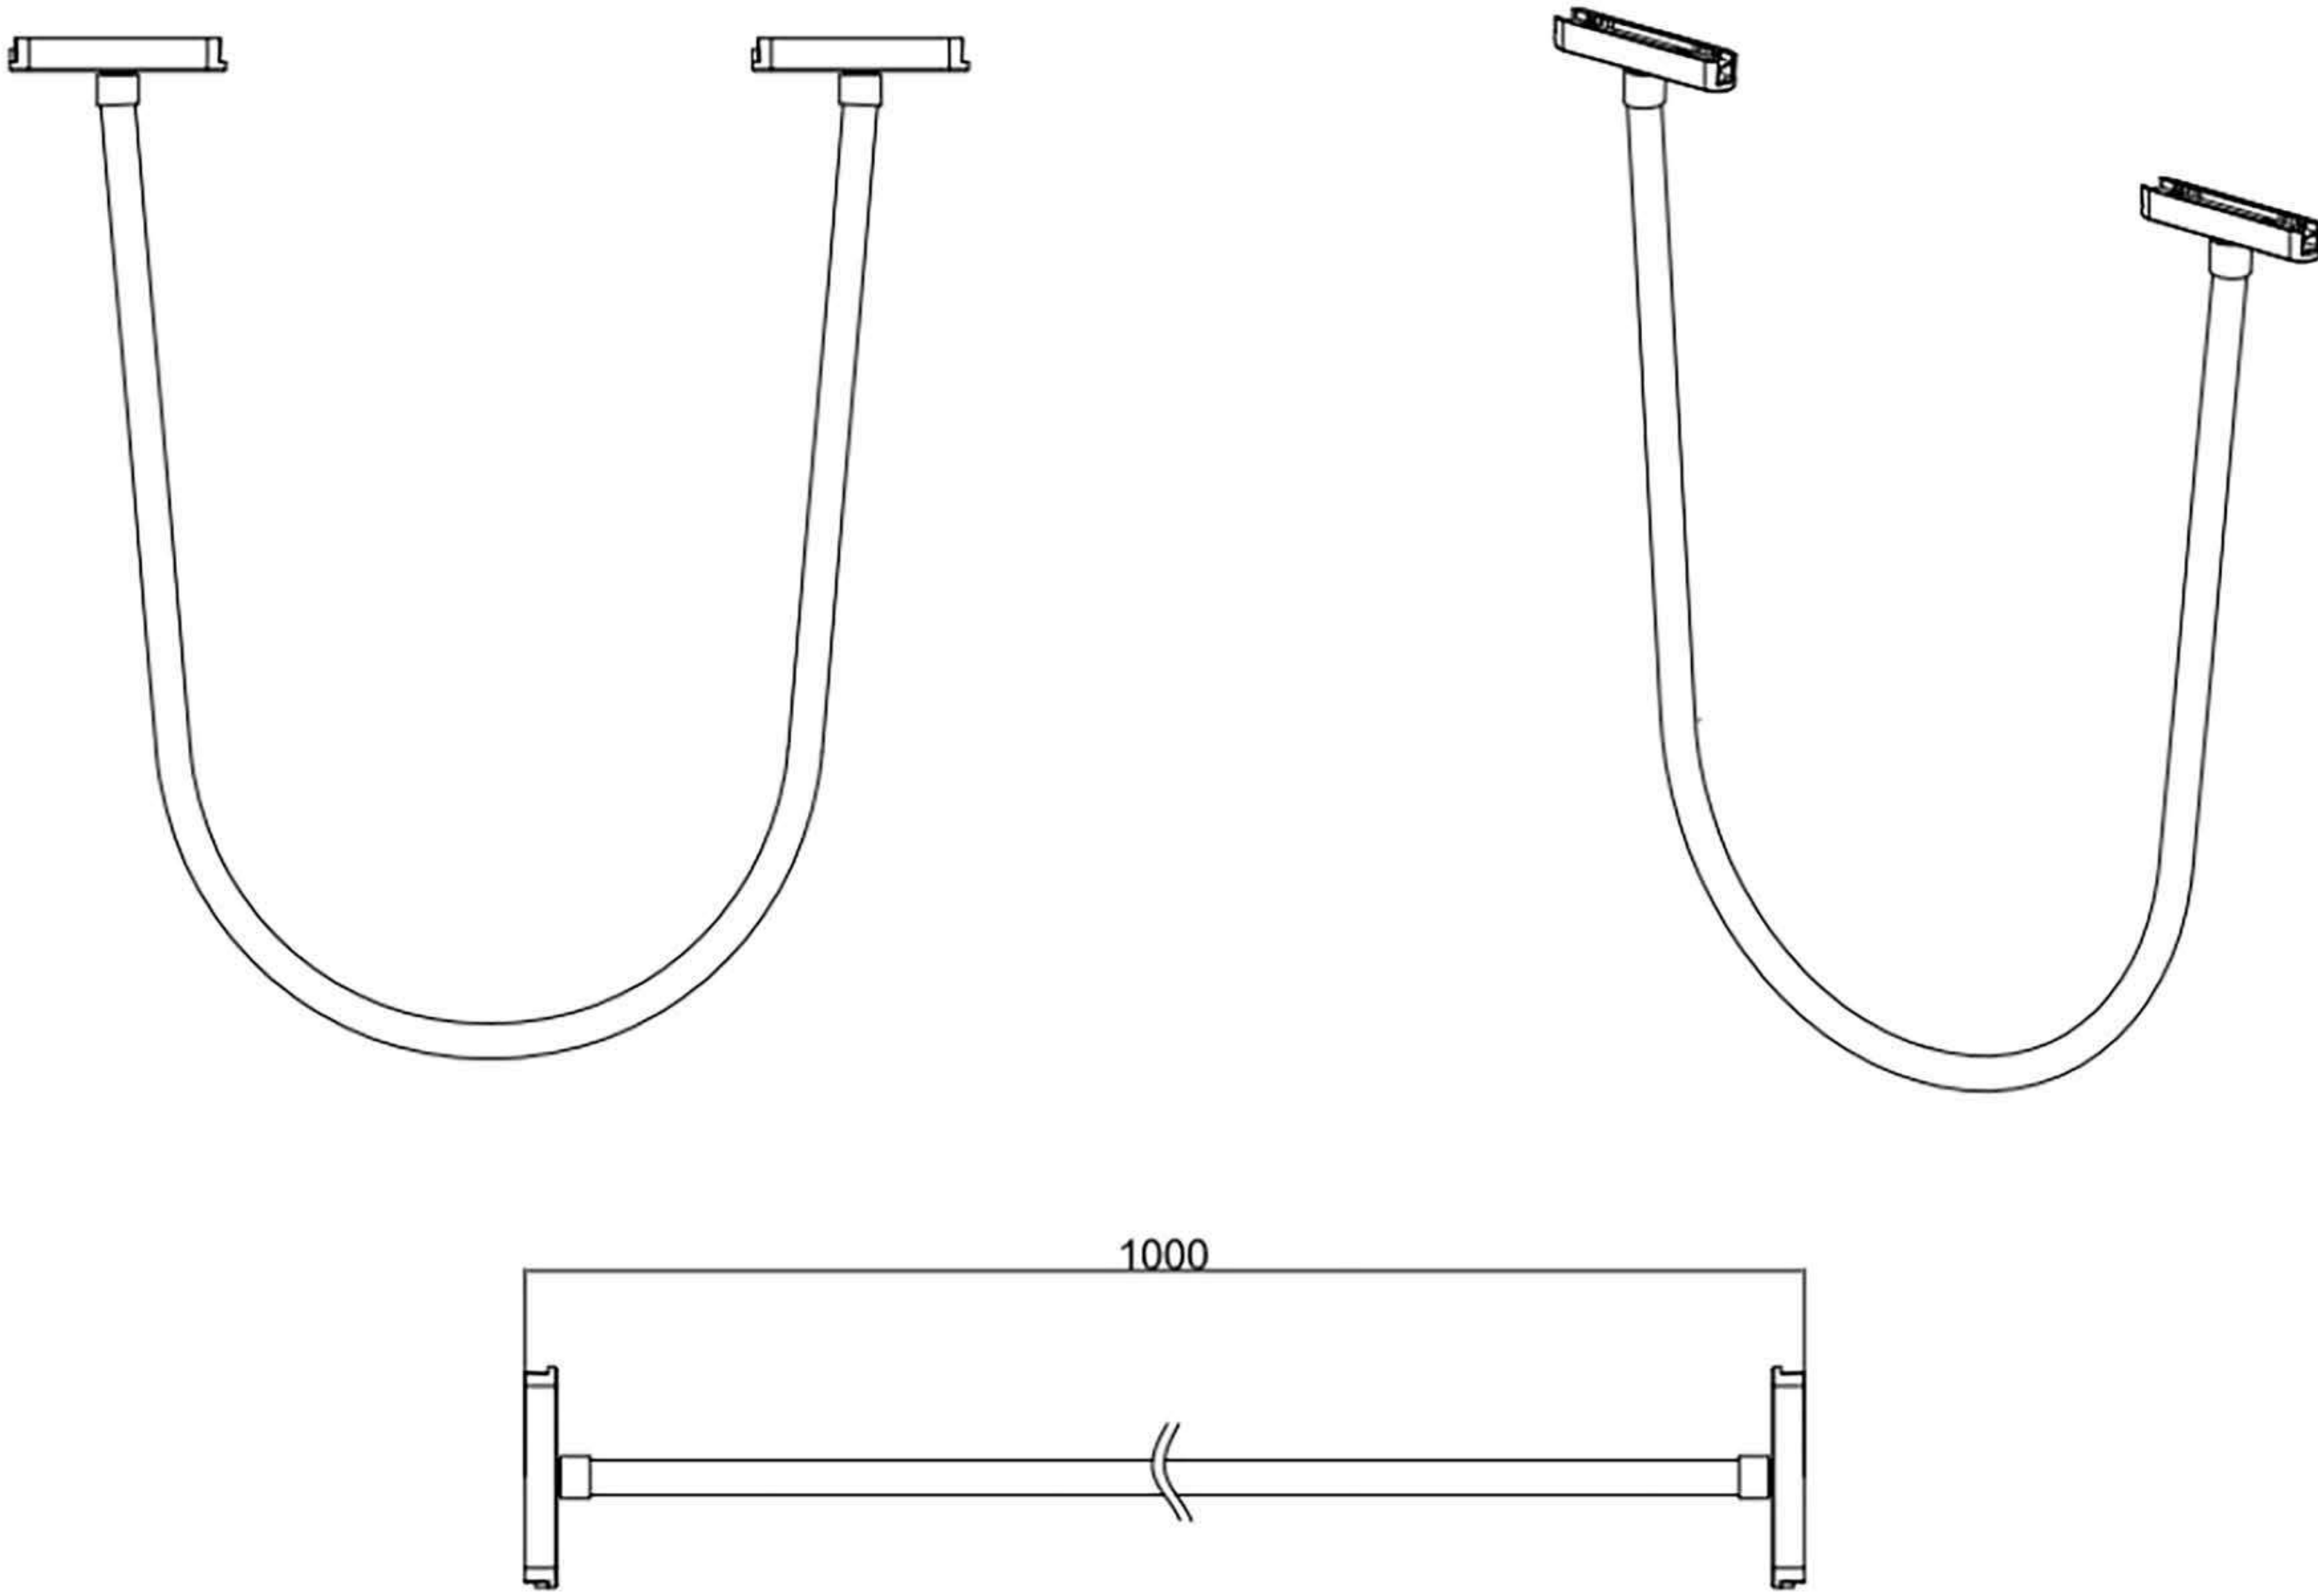

Code No	Color	Watt(W)	CCT	Luminous Flux	Beam Angle	Dimension
DS-EH-GJ-1000	black	12W	3000K-5000K / RGB	/	360°	Ø22xL1000mm
DS-EH-GJ-2000	black	20W	3000K-5000K / RGB	/	360°	Ø22xL2000mm

MINI TRACKS MAGNETIC




- ▶ BODY: ALUMINUM
- ▶ COLOURS: BLACK / WHITE

Code No	Color	Dimension(mm)
DS-EH-1000	Multiple	L1000xW18xH6.7mm
DS-EH-2000	Multiple	L2000xW18xH6.7mm


ACCESSORIES FOR MAGNETIC MINI RAILS



MINI MAGNETIC RAIL CONNECTOR		
Code No	Color	Dimension(mm)
DS-EH I connector	Black	L28.6xW19xH6.7 mm

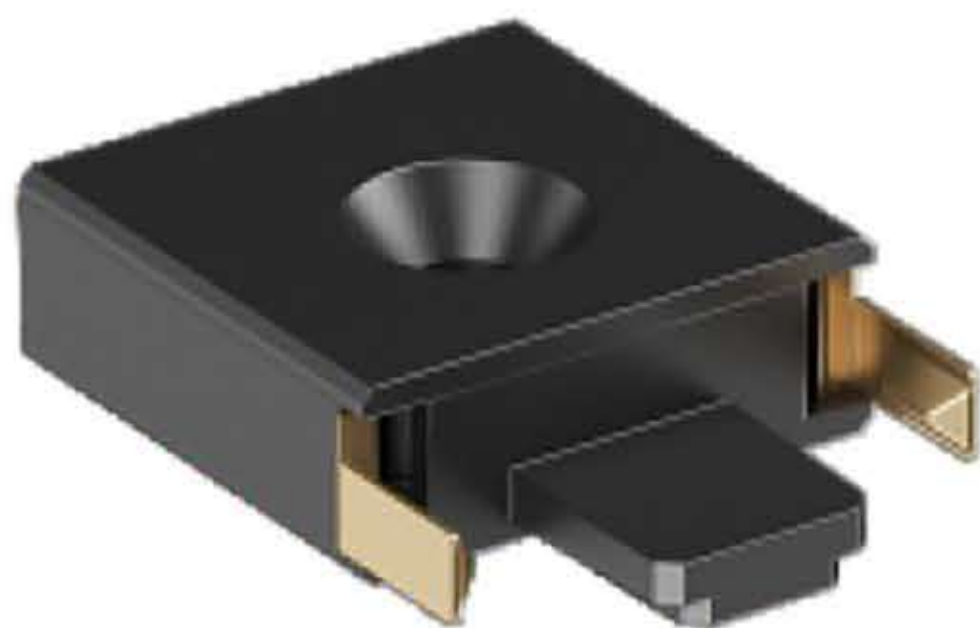

MINI MAGNETIC RAIL CONNECTOR		
Code No	Color	Dimension(mm)
DS-EH End cap	Black	L26xW19xH6.7 mm

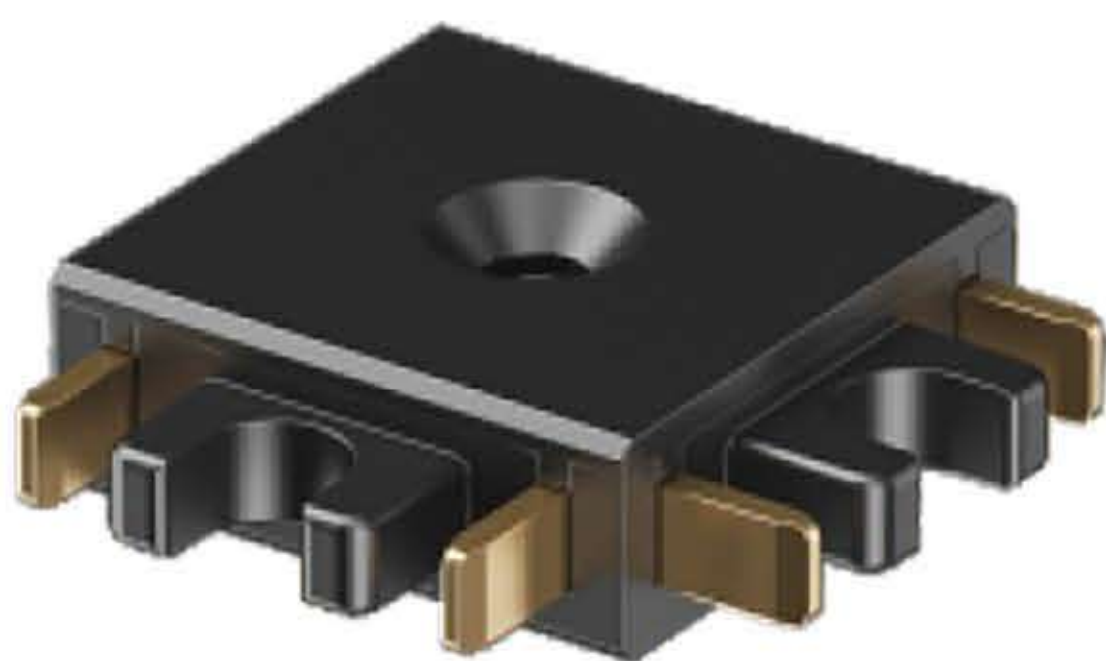


MINI MAGNETIC RAIL CONNECTOR		
Code No	Color	Dimension(mm)
DS-EH Corner connector	Black	L24xW24xH6.7 mm



MINI MAGNETIC RAIL CONNECTOR		
Code No	Color	Dimension(mm)
DS-EH L Connector	Black	L24xW19xH24 mm



MINI MAGNETIC RAIL CONNECTOR		
Code No	Color	Dimension(mm)
DS-EH Wall-mounted Swing Head	Black	L100xW44xH55 mm

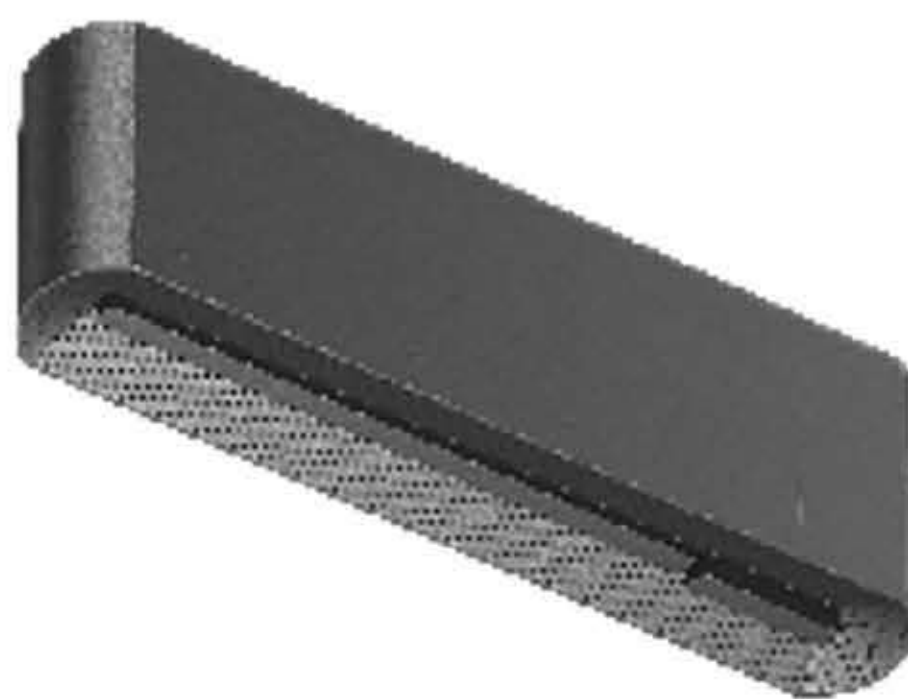

MINI MAGNETIC RAIL CONNECTOR		
Code No	Watt(w)	Dimension(mm)
DS-EH Adapter	120W / 150W	L294xW28xH60 mm

DARK SPACE

Renaissance International Solutions

Display Center:
B 50/1 Site-4 Industrial Area,
Sahibabad Ghaziabad, U.P. India 201010

Registered Office:
CP-528, Transport Nagar Lucknow, U.P. India 226012

www.DarkSpace.in