

NILFISK

Pressure-Pro®

Hot & cold water pressure washers,
direct drive, gear drive, belt
drive, electric, gas &
diesel powered

Equipment Catalog



Pressure-Pro, Inc.
7300 Commercial Circle
Fort Pierce, FL 34951
(772) 461-4486
www.Pressure-Pro.com

Hydro Tek
2353 Almond Avenue
Redlands, CA 92373
(909) 799-9222
www.HydroTek.us



Proudly designed
and assembled
in the USA

Effective January

2023

PRESSURE WASHERS TABLE OF CONTENTS

DIRT LASER SERIES

GAS DIRECT DRIVE 2

DIRT LASER HOT

4 WHEEL GAS DIRECT DRIVE 3

SKID 12V GAS 4

DIRT LASER TRAILERS & TANK SKIDS

TRAILERS & WATER TANK PACKAGES 5

COLD WATER MACHINES

PRO POWER SERIES

GAS DIRECT DRIVE 6

EAGLE II SERIES

GAS DIRECT DRIVE 7-10

EAGLE SERIES

GAS V-BELT DRIVE..... 10-13

DIESEL DIRECT DRIVE..... 16

GAS GEAR DRIVE..... 17

PRO SERIES

GAS V-BELT DRIVE 18-19

PRO-MAX SERIES/PRO-MAX HP SERIES

GAS POLYCHAIN BELT DRIVE..... 20-21

EAGLE ELECTRIC SERIES

ELECTRIC HAND CARRY DIRECT DRIVE 22

ELECTRIC WALL MOUNT DIRECT DRIVE..... 23

ELECTRIC DIRECT DRIVE CART 24-25

ELECTRIC V-BELT DRIVE CART 26

PRO-MAX SERIES

ELECTRIC POLYCHAIN BELT DRIVE..... 27

PRO-MAX HP SERIES

ELECTRIC POLYCHAIN BELT DRIVE HP 28

HDC GAS SERIES

HEAVY-DUTY GAS V-BELT DRIVE 29

PRO-SKID SERIES

MODULAR TANK FEED..... 30-31

PRO-ATV SERIES

MODULAR TANK FEED..... 32-33

HD COMMERCIAL TOW-PRO TRAILERS

GAS V-BELT DRIVE 34-35

PRO-CHEM SERIES

SOFT WASH SPRAY SYSTEMS 37

HOT WATER MACHINES

HOT SHOT SERIES

4 WHEEL ELECTRIC DIRECT DRIVE 38

4 WHEEL ELECTRIC V-BELT DRIVE 39

HOT SHOT SERIES

4 WHEEL GAS DIRECT & V-BELT DRIVE 40

4 WHEEL DIESEL DIRECT & V-BELT DRIVE 41

SKID SERIES

PRO-SUPER SKID 12V GAS V-BELT DRIVE 42

PRO-SUPER SKID W/ 115V GENERATOR 43

SKID SERIES

PRO-SUPER SKID DIESEL V-BELT DRIVE 44

HN SERIES

STATIONARY LP/NG GAS FIRED V-BELT
DRIVE ELECTRIC 45

TRAILERS/TANK SKIDS

PRO-SUPER SKID TOW-PRO TRAILERS

GAS 12V V-BELT DRIVE 46

SPECIALTY ITEMS

HOT WATER GENERATORS

HOT LINK HOT WATER GENERATOR..... 47

HOT BOX VERTICAL STATIONARY..... 48

HYDRO VACUUMS

WASTEWATER & FLOOD RECOVERY..... 49

LIMITED WARRANTY 50


POLICIES 51

DIRT LASER COLD WATER SERIES



PERFORMANCE WITHOUT LIMITS...

Whether you're working on a home improvement project, an outdoor surface with stubborn grime, or a semi-professional industrial job, we've got the equipment you need for projects big and small. Choose from one of five top of the line machines to help you tackle the most rigorous of cleaning jobs to bring back the shine.

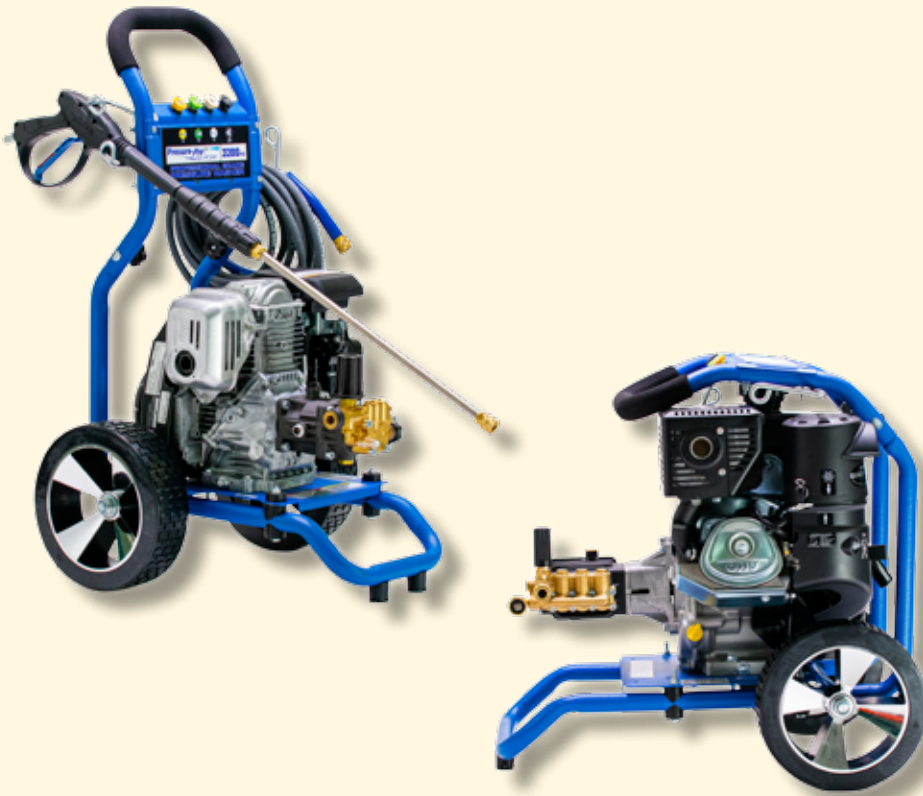

FEATURES & BENEFITS

- Ergonomic Design - Promotes operator comfort & safety; detachable, soft grip handle; reduces strain on the back
- Accessibility - All components reachable for maintenance; easy connect & disconnect hose
- Industrial Gray Hose - Easy roll up with no black marks
- Honda and Kohler Engines - Easy startup with reliability
- Flat-Free Airless Tires - Never goes flat; vibration isolator technology; non-marking
- Compact Design - Industry-leading design requires minimal space for storage & transportation
- Commercial duty 2 piece gun/wand
- Gun/Wand/Hose holders for convenient storage
- Complete quick connect nozzle set includes 15,25,40 degree + soap with easy dash panel storage
- Downstream soap injection

Exclusive Pressure-Pro Pump

- All brass pump head for extra long life
- Built in pressure relief (EZ Start) relieves pump pressure dramatically reducing the effort it takes to start the engine

DIRT LASER MODELS

Part#	GPM	PSI	Model/Brand	Pump
PP3225K	2.5	3200	Kohler SH265	Pressure-Pro
PP3225H*	2.5	3200	Honda GC190	Pressure-Pro
PP3425H	2.5	3400	Honda GX200	Pressure-Pro
PP4240H*	4.0	4200	Honda GX390	Pressure-Pro
PP4440K	4.0	4400	Kohler CH440	Pressure-Pro

*GC190 and GX390 models not available for sale into CA

DIRT LASER HOT

GAS POWERED, DIESEL HEATED

The SH Series is a portable high power washer with a compact design, ideal for use where electric power is not available. Commercial duty engines provide power to the triplex, ceramic plunger, direct-drive pumps to give you the right cleaning power where you need it.

Requires Group 24 550CCA battery, not included.



SH40004HH



SH40004KH

**Large 8 gallon
diesel tank to
supply diesel
burner.**

STANDARD FEATURES

- Rugged Powder Coated Steel frame with balanced lifting point
- Integrated handles and 4 large tires for easy portability
- Stainless Steel insulated coil enclosure
- Integrated gun/ wand holder and hose storage hooks
- Pressure relief valve, Safety bust disk included for operator safety
- Dimensions: 44"L x 28"W x 45"H

STANDARD ACCESSORIES

- 50' high pressure hose
- Gun and wand assembly
- QC spray nozzles

OPTIONAL ACCESSORIES

- Downstream soap injection with QC soap nozzle (AC340)
- Hour meter (AM512)

PORTABLE DIRECT DRIVE MODELS


Part#	GPM	PSI	CC	Engine	Pump
SH27003VH	2.5	2700	205	Vanguard E/S	AR
SH40004HH*	3.5	4000	389	GX390 Honda E/S	AR
SH40004KH	3.5	4000	429	CH440 Kohler E/S	AR

*GX390 models not available for sale into CA

DIRT LASER HOT SKID

The SK Series is a truly versatile machine. It can be trailer or truck mounted to work for you, right where you need it.

Requires Group 24 550 CCA battery, not included.

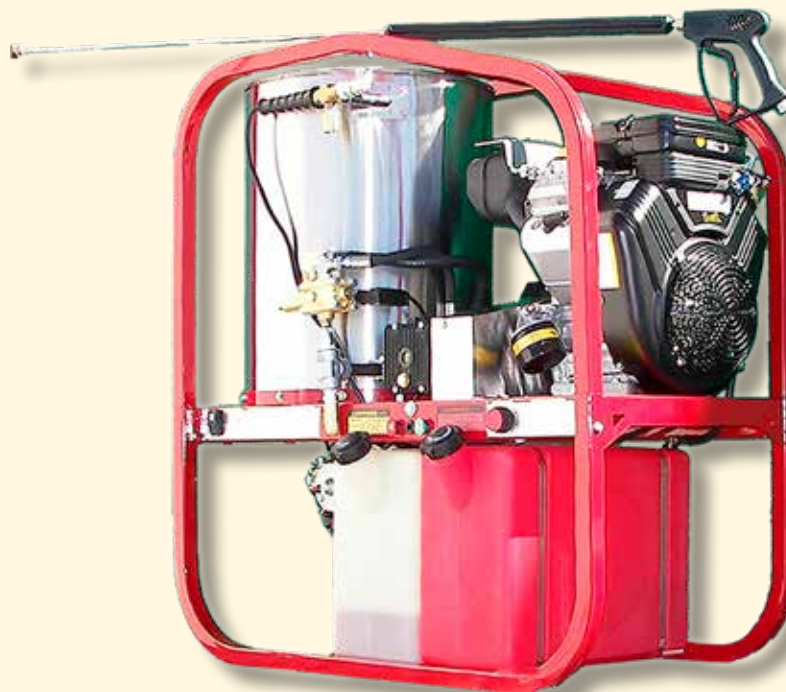

SK30005VH

STANDARD FEATURES

- Commercial/ Industrial, electric start gasoline engines
- Rugged powder coated steel frame with balanced lifting point
- Triplex, ceramic plunger direct or belt drive pumps
- Adjustable thermostat up to 250°F
- High capacity ½" SCH 80 steel coil
- Stainless Steel insulated coil wrap
- 2 Large 8 gallon gas and diesel tanks (on belt drive models) for long run times without refueling
- Remote mounted unloader for easy maintenance
- External bypass loop keeps pump running cool
- Pressure relief valve, Safety bust disk included for operator safety
- Dimensions: 43"L x 27"W x 45"H

STANDARD ACCESORIES

- 50' high pressure hose
- Gun and wand assembly
- QC spray nozzles

OPTIONAL ACCESORIES

- Downstream soap injection with QC soap nozzle (AC340)
- Hour meter (AM512)
- 200 gallon Transport trailer with reels, 200 gallon tank skid with reels, Tow & Stow™ tank skid transporter (See page 5 for additional details)

GAS POWERED DIRECT DRIVE 12V SKID MODEL

Part#	GPM	PSI	CC	Engine	Pump
SK40004HH*	3.5	4000	389	GX390 Honda	AR

*SK40004HH has a 1.6 gallon gasoline tank mounted on the engine and dual 8 gallon diesel fuel tanks.

GAS POWERED BELT DRIVE 12V SKID MODELS

Part#	GPM	PSI	CC	Engine	Pump
SK30005VH	5.0	3000	479	Vanguard	AR
SK40005VH	4.8	4000	570	Vanguard	AR

**GX390 models not available for sale into CA*

DIRT LASER TRAILER AND TANK PACKAGES

Choose the tank configuration that best suits your needs.

All systems include the following features:

- Hot/Cold/Steam power washer with all features of SK Series washers
 - 200 gallon capacity tank with inlet water filter strainer to protect pump from debris
 - Stainless steel inlet & high pressure hose reels, includes 50' high pressure & 100' inlet hose
- NOTE: For detailed machine specs and features refer to page 38 for SK Series additional info.

Single axle trailer:

- 3700 # rated torsion axles for smooth ride
- Flip up locking wheeled jack
- Heavy duty steel fenders and recessed lights

SINGLE AXLE TRAILER MODELS

Part#	GPM	PSI	CC	Engine
T185SKH/SK40004HH*	3.5	4000	389	GX390 Honda
T185SKH/SK30005VH	5.0	3000	479	Vanguard
T185SKH/SK40005VH	4.8	4000	570	Vanguard



**T185SKH
SK30005VH**

Machine shown with optional black frame.



**T185TWH
SK30005VH**

Easily mounts into your truck or existing flatbed trailer with 4 bolts.

TANK SKID MODELS

Part#	GPM	PSI	CC	Engine
T185TWH/SK40004HH*	3.5	4000	389	GX390 Honda
T185TWH/SK30005VH	5.0	3000	479	Vanguard
T185TWH/SK40005VH	4.8	4000	570	Vanguard

Ideal for schools, malls, shopping centers, hospitals and other large facilities.

- Flip up handle automatically locks the wheels for safe and compact storage
- Pivoting front axle allows for easy maneuverability
- No weight on the tongue allows it to be pulled with a Utility Vehicle
- Transporter is intended to be used and stored on site, not for public roads.

TOW & STOW™ WASH CART MODELS

Part#	GPM	PSI	CC	Engine
TSKDT/T185TWH/SK40004HH*	3.5	4000	389	GX390 Honda
TSKDT/T185TWH/SK30005VH	5.0	3000	479	Vanguard
TSKDT/T185TWH/SK40005VH	4.8	4000	570	Vanguard



**TSKDT
T185TWH
SK40005VH**

*GX390 models not available for sale into CA

PRO POWER SERIES

PPS2527KAI



PPS2533HCI

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- 50 mesh inlet filter
- Adjustable pressure unloader
- Low oil shutdown on all models except Honda GC
- Pneumatic tires
- Dual padded shock absorbing feet
- 3/4" cold-rolled steel axle
- Honda GX200 & Kohler SH Series engines are 50 state approved
- Thermo-sensor (prevents overheating in bypass mode)

STANDARD ACCESSORIES

- Gun/wand assembly
- 25' hose w/ couplers*
- Chemical injector
- 3 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

***NOTE:** 2700-3300 PSI models include 22mm twist coupler socket hose ends; 4200 PSI models include 22mm twist socket x 3/8" QC plug hose ends.

NOTE: All SH265, GC190 & GX200 ship UPS with contractor grade two piece gun/wand assembly. Minor assembly required.

PRO POWER MODELS

Part#	GPM	PSI	Model/Brand	Pump
PPS2527HAI*	2.5	2700	GC190 Honda	AR RMV-A/Int UL
PPS2527KAI	2.5	2700	SH265 Kohler	AR RMV-A/Int UL
PPS2530HAI*	2.5	3000	GC190 Honda	AR RMV-B/Int UL
PPS2533HAI	2.5	3300	GX200 Honda	AR RMV-B/Int UL
PPS2533KAI	2.5	3300	SH265 Kohler	AR RMV-B/Int UL
PPS2533HCI	2.5	3300	GX200 Honda	CAT 4PPX/Int UL

*GC190 models not available for sale into CA

EAGLE II SERIES



E3030HCI

EAGLE SERIES - DIRECT DRIVE MODELS

	Carts: Skids*:	E3027HC -	E3027HG S/E3027HG	E3027HV S/E3027HV	E3027KV -	E3030HCI -	E3032HG** -
Engine		Honda GX200	Honda GX200	Honda GX200	Kohler SH265	Honda GX200	Honda GX270
Pump		Cat/Int UL	GP	Viper	Viper	Cat/Int UL	GP
Electric start		-	-	-	-	-	-
Drive system		Direct	Direct	Direct	Direct	Direct	Direct
Pressure	PSI	2700	2700	2700	2700	3000	3200
Flow	GPM	3	3	3	3	3	3
Dimensions (inches LxWxH)	Cart	37 x 21.5 x 24	37 x 21.5 x 24	37 x 21.5 x 24	37 x 21.5 x 24	37 x 21.5 x 24	41 x 22 x 25
	Skid	-	23 x 17.5 x 17	23 x 17.5 x 17	-	-	-
Weight (lbs)	Cart	79	83	83	82	79	117
	Skid	-	71	71	-	-	-
Fuel type (Power source)		Gasoline	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel tank size	L / quarts	3.1/3.27	3.1/3.27	3.1/3.27	3.21/3.4	3.1/3.27	5.3/5.6
Accessories:							
Downstream chemical injection w/ QC		Standard	Standard	Standard	Standard	Standard	Standard
Gun-Lance holder*		Standard	Standard	Standard	Standard	Standard	Standard
Wheels		Small Flat Free	Small Flat Free	Small Flat Free	Small Flat Free	Small Flat Free	Large Flat Free
Grey non-marking Hose with QC		Yes	Yes	Yes	Yes	Yes	Yes
Nozzles		0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap

*Skid versions have no gun-lance holder or wheels

**GX270 models not available for sale into CA.

NOTE: Ships with 2 piece wand, minor assembly required.

EAGLE II SERIES



S/E4040HG

EAGLE SERIES - DIRECT DRIVE MODELS

Carts: Skids*:		E4040HA** S/E4040HA**	E4042HC** -	E4042HG** -	E4040HG** S/E4040HG**	E4042HV** S/E4042HV**
Engine		Honda GX390	Honda GX390	Honda GX390	Honda GX390	Honda GX390
Pump		AR	CAT	GP - PEP	GP - EZ	Viper
Electric start		-	-	-	-	-
Drive system		Direct	Direct	Direct	Direct	Direct
Pressure	PSI	4000	4200	4200	4000	4200
Flow	GPM	4	4	4	4	4
Dimensions (inches LxWxH)	Cart	41 x 22 x 25	41 x 22 x 25	41 x 22 x 25	41 x 24 x 25	41 x 22 x 25
	Skid	27.5 x 19 x 20	-	-	27.5 x 19 x 20	27 x 19 x 20
Weight (lbs)	Cart	126	133	128	130	128
	Skid	123	-	-	127	125
Fuel type (Power source)		Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel tank size	L / quarts	6.1/6.44	6.1/6.44	6.1/6.44	6.1/6.44	6.1/6.44
Accessories:						
Downstream chemical injection w/ QC		Standard	Standard	Standard	Standard	Standard
Gun-Lance holder*		Standard	Standard	Standard	Standard	Standard
Wheels		Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free
Hose (Grey non-marking with QC)		Yes	Yes	Yes	Yes	Yes
Nozzles		0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap

*Skid versions are on a Powder coated steel base and have no gun-lance holder or wheels

** GX390 models not available for sale into CA.

NOTE: Ships with 2 piece wand, minor assembly required.

EAGLE II SERIES



E4042HV

EAGLE SERIES - DIRECT DRIVE MODELS

Carts: Skids*:		E4042HV** S/E4042HV**	E4040HAE** S/E4040HAE**	E4040HCE** -	E4040HGE** S/E4040HGE**	E4042HVE** -
Engine		Honda GX390	Honda GX390	Honda GX390	Honda GX390	Honda GX390
Pump		Viper	AR	CAT	GP	Viper
Electric start		-	Standard	Standard	Standard	Standard
Drive system		Direct	Direct	Direct	Direct	Direct
Pressure	PSI	4200	4000	4000	4000	4200
Flow	GPM	4	4	4	4	4
Dimensions (inches LxWxH)	Cart	41 x 22 x 25	41 x 24 x 25	41 x 24 x 25	41 x 22 x 25	41 x 22 x 25
	Skid	27 x 19 x 20	27 x 25.5 x 20	-	-	-
Weight (lbs)	Cart	128	155	162	159	157
	Skid	125	151	-	155	-
Fuel type (Power source)		Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel tank size	L / quarts	6.1/6.44	6.1/6.44	6.1/6.44	6.1/6.44	6.1/6.44
Accessories:						
Downstream chemical injection w/ QC		Standard	Standard	Standard	Standard	Standard
Gun-Lance holder*		Standard	Standard	Standard	Standard	Standard
Wheels		Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free
Hose (Grey non-marking with QC)		Yes	Yes	Yes	Yes	Yes
Nozzles		0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap

*Skid versions are on a Powder coated steel base and have no gun-lance holder or wheels

**GX390 models not available for sale into CA

NOTE: Ships with 2 piece wand, minor assembly required.

EAGLE II SERIES

E4040KG



EB4040KG



EB4040KGE

EAGLE SERIES - KOHLER DIRECT & BELT DRIVE MODELS


Carts: Skids*:		E4040KG	E4042KV S/E4042KV	EB4040KG	EB4042KV	EB4040KGE
Engine		Kohler CH440	Kohler CH440	Kohler CH440	Kohler CH440	Kohler CH440
Pump		GP-EZ	Viper	GP-EZ	Viper	GP
Electric start		-	-	-	-	Standard**
Drive system		Direct	Direct	Belt	Belt	Belt
Pressure	PSI	4000	4200	4000	4200	4000
Flow	GPM	4	4	4	4	4
Dimensions (inches LxWxH)	Cart	41 x 22 x 25	41 x 22 x 25	41 x 26 x 25	41 x 26 x 25	46 x 26 x 26
Skid		-	-	-	-	-
Weight (lbs) Cart		139	137	167	158	207
Skid		-	-	-	-	-
Fuel type (Power source)		Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel tank size	L / quarts	7.0/7.39	7.0/7.39	7.0/7.39	7.0/7.39	7.0/7.39
Accessories:						
Downstream chemical injection w/ QC		Standard	Standard	Standard	Standard	Standard
Gun-Lance holder*		Standard	Standard	Standard	Standard	Standard
Wheels		Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free
Hose (Grey non-marking with QC)		Yes	Yes	Yes	Yes	Yes
Nozzles		0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap	0, 15, 25, 40, Soap

*Skid versions are on a Powder coated steel base and have no gun-lance holder or wheels

**18 amp charging system works for running a hot box

NOTE: Ships with 2 piece wand, minor assembly required.

EAGLE II SERIES

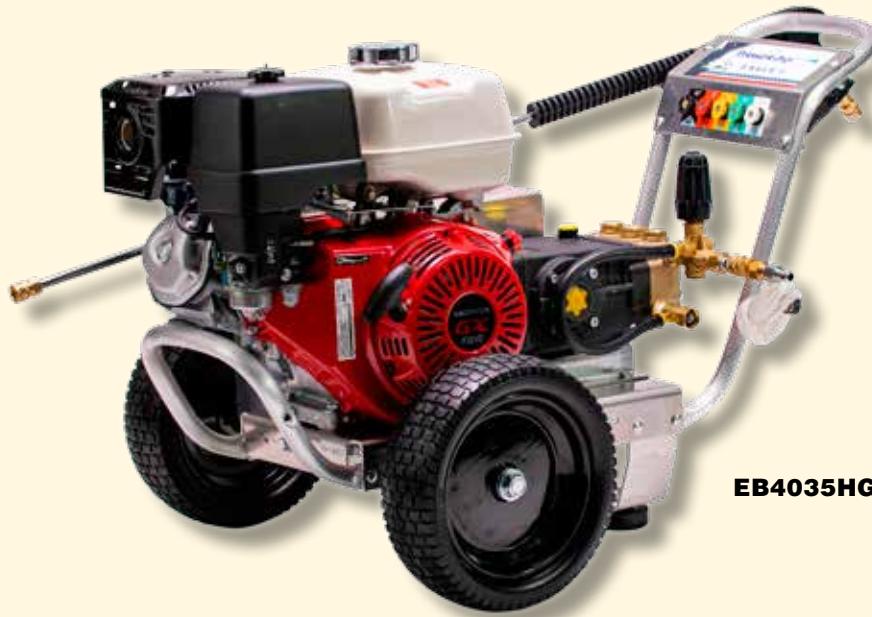

EB4035HG

EAGLE SERIES - BELT DRIVE MODELS

	Carts: Skids*:	EB3025HG -	EB4035HG** S/EB4035HG**	EB4040HA** S/EB4040HA**	EB4040HC** S/EB4040HC**	EB4040HG** S/EB4040HG**
Engine		Honda GX200	Honda GX390	Honda GX390	Honda GX390	Honda GX390
Pump		GP	GP	AR	CAT	GP
Electric start		-	-	-	-	-
Drive system		Belt	Belt	Belt	Belt	Belt
Pressure	PSI	2500	3500	4000	4000	4000
Flow	GPM	3	4	4	4	4
Dimensions (inches LxWxH)	Cart	41 x 23 x 25	41 x 26 x 25	41 x 26 x 25	41 x 26 x 25	41 x 26 x 25
	Skid	-	30 x 17 x 20	29 x 17 x 20	29 x 17 x 20	29 x 17 x 20
Weight (lbs)	Cart	110	159	157	151	158
	Skid	-	150	148	142	149
Fuel type (Power source)		Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel tank size	L / quarts	3.1/3.27	6.1/6.44	6.1/6.44	6.1/6.44	6.1-6.44
Accessories:						
Downstream chemical injection w/ QC		Standard	Standard	Standard	Standard	Standard
Gun-Lance holder*		Standard	Standard	Standard	Standard	Standard
Wheels		Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free
Hose (Grey non-marking with QC)		Yes	Yes	Yes	Yes	Yes
Nozzles		0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap

*Skid versions are on a Powder coated steel base and have no gun-lance holder or wheels

**GX390 models not available for sale into CA

NOTE: Ships with 2 piece wand, minor assembly required.

EAGLE II SERIES



EB4042HV

EAGLE SERIES - BELT DRIVE MODELS

	Carts: Skids*	EB4042HV** S/EB4042HV**	EB5030HG** S/EB5030HG**	EB5525HG** S/EB5525HG**	EB4035HGE** S/EB4035HGE**	EB4040HAE** S/EB4040HAE**
Engine		Honda GX390	Honda GX390	Honda GX390	Honda GX390	Honda GX390
Pump		Viper	GP	GP	GP	AR
Electric start		-	-	-	Standard	Standard
Drive system		Belt	Belt	Belt	Belt	Belt
Pressure	PSI	4200	3000	2500	3500	4000
Flow	GPM	4	5	5.5	4	4
Dimensions (inches LxWxH)	Cart	41 x 26 x 25	41 x 26 x 25	41 x 26 x 25	46 x 26 x 26	46 x 26 x 26
	Skid	29 x 17 x 20	29 x 17 x 20	29 x 17 x 20	34.5 x 22 x 20	34.5 x 22 x 20
Weight (lbs)	Cart	149	158	158	199	197
	Skid	140	149	149	166	164
Fuel type (Power source)		Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel tank size	L / quarts	6.1/6.44	6.1/6.44	6.1/6.44	6.1-6.44	6.1-6.44
Accessories:						
Downstream chemical injection w/ QC Standard		Standard	Standard	Standard	Standard	Standard
Gun-Lance holder*		Standard	Standard	Standard	Standard	Standard
Wheels		Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free
Hose (Grey non-marking with QC)		Yes	Yes	Yes	Yes	Yes
Nozzles		0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap

*Skid versions are on a Powder coated steel base and have no gun-lance holder or wheels

**GX390 models not available for sale into CA

NOTE: Ships with 2 piece wand, minor assembly required.

EAGLE II SERIES



EB4040HGE

EAGLE SERIES - BELT DRIVE MODELS

	Carts: Skids*:	EB4040HCE** S/EB4040HCE**	EB4040HGE** S/EB4040HGE**	EB4042HVE** S/EB4042HVE**	EB5030HGE** -	EB5525HGE** S/EB5525HGE**
Engine		Honda GX390	Honda GX390	Honda GX390	Honda GX390	Honda GX390
Pump		CAT	GP	Viper	GP	GP
Electric start		Standard	Standard	Standard	Standard	Standard
Drive system		Belt	Belt	Belt	Belt	Belt
Pressure	PSI	4000	4000	4200	3000	2500
Flow	GPM	4	4	4	5	5.5
Dimensions (inches LxWxH)	Cart	46 x 26 x 26	46 x 26 x 26	46 x 26 x 26	46 x 26 x 26	46 x 26 x 26
	Skid	34.5 x 22 x 20	34.5 x 22 x 20	34.5 x 22 x 20	34.5 x 22 x 20	34.5 x 22 x 20
Weight (lbs)	Cart	191	198	189	198	198
	Skid	158	165	156	-	165
Fuel type (Power source)		Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel tank size	L / quarts	6.1/6.44	6.1/6.44	6.1/6.44	6.1-6.44	6.1-6.44
Accessories:						
Downstream chemical injection w/ QC Standard		Standard	Standard	Standard	Standard	Standard
Gun-Lance holder*		Standard	Standard	Standard	Standard	Standard
Wheels		Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free	Large Flat Free
Hose (Grey non-marking with QC)		Yes	Yes	Yes	Yes	Yes
Nozzles		0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap	0,15,25,40,Soap

*Skid versions are on a Powder coated steel base and have no gun-lance holder or wheels

**GX390 models not available for sale into CA

NOTE: Ships with 2 piece wand, minor assembly required.

EAGLE II SERIES-DIRECT DRIVE

High-grade aircraft aluminum frame is more durable, and will last a lot longer in corrosive cleaning environments giving you peace of mind knowing you will not have to replace the frame

Weld-free frame system means there are no welds to break which allows for a **Lifetime Warranty on the Frame**.

Ergonomic handle height with ideal balance point is easy to maneuver and doesn't hurt your back or catch your heels when pulling around the jobsite

Large, wide flat-free tires mean no filling required before cleaning and travel easily over a variety of terrain. Since the engine and pump are within footprint of the tires; they are also protected during transport

Hardened steel axle is extra strong to protect your machine if dropped during loading or unloading. **Unique capture system** on axles allows for single nut removal for wheel replacement and eliminates the frustration of rusted-on axle collars

Eagle II machines do not walk because they incorporate industry leading technology and a variety of vibration reduction systems matched to the requirements of each specific machine. These include **dual-padded, shock-absorbing feet, handle isolators, and a unique engine mount system** which means that your equipment will not only last longer, but will also remain in place for safer work environment for the operator and those in the surrounding area

Easy access to inlet/outlet fittings for less time and hassle spent during setup and cleanup on the jobsite

Honda/Kohler Engines & Industrial duty, triplex, plunger pumps (AR, Cat, GP, Viper) are well-known and trusted for reliability gives you peace of mind from knowing that the machine will withstand the demands of heavy-duty use

External unloaders with a bypass loop protect the pump from overheating, and extend the amount of time the pump may be left in bypass mode. This prolongs the pump life and saves money on costly repairs



EAGLE II SERIES-BELT DRIVE



Thermal sensor protects pump from overheating saving money in repairs

Low-pressure soap injection allows soap to be applied after the pump and is more easily applied with the pressure-washer wand. The right accessories improve flexibility and promote faster cleaning



Grey hose does not leave black marks on clean concrete which saves time that would be spent rinsing off clean concrete

Industrial quick connects quickly and easily connect the hose to the machine or add/remove additional lengths of hose or accessories. Less time spent on setup and teardown means a faster finish



Gun/wand holder for convenient storage and allows faster access to accessories

5 quick connect nozzles are conveniently stored on the dash panel providing easy access and allows the operator to match the machine to various applications

Additional Belt Drive Features:



Interlocking belt guard with 1-bolt design allows for easy removal of belt guard for service and maintenance. Also delivers quieter operation since the belt guard does not rattle



Tri-belt design for maximum performance. 3 belts = more horsepower transferred, less belt slippage for greater power and performance; more cost-efficient cleaning



Pull Straight belt-tensioning system is a single-bolt belt tensioning system makes it easy to adjust belt tension. Simple maintenance feature that makes it easier to keep machine running at optimal levels

EAGLE DIESEL SERIES



E4032KLDGE

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- Easy access single bolt interlocking belt cover - belt drives models only
- Single bolt engine adjustable belt tension - belt drives models only
- 50 mesh inlet filter
- Adjustable pressure unloader
- Low oil shutdown
- Pneumatic tires
- Dual padded shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- Commercial/Industrial grade engines
- Thermo-sensor (prevents overheating in bypass mode)

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

DIESEL ENGINE DIRECT DRIVE MODELS

Part#	GPM	PSI	Model/Brand	Pump
E4032KLDGE	4.0	3200	KD440ES Kohler	GP

EAGLE GEAR SERIES



EG4035HCP

GAS ENGINE GEAR DRIVE MODELS

Part#	GPM	PSI	Model/Brand	Pump
EG4035HCP*	4.0	3500	GX390 Honda	CAT

**GX390 models not available for sale into CA*

PRO SERIES



S/VB8035HGEA406



VB8035HGEA406

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- Easy access single bolt interlocking belt cover
- Single bolt engine adjustable belt tension
- 50 mesh inlet filter – *excludes 8 GPM units
- EZ-Start
- Adjustable pressure unloader
- Low oil shutdown except GX690 & Vanguard models
- Engine and pump oil drains offer easy maintenance
- Oversize pneumatic tires
- Dual padded shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- 3VX belt system offers balanced power transfer
- Commercial/Industrial grade engines
- Low speed pump and thermo-sensor (prevents overheating in bypass mode)
- All units feature electric start and marine battery box

NOTE: *8 GPM units set up for tank feed. All units are completely factory assembled, tested in the USA, and delivered ready to operate. Requires battery prior to operating.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Maxi-Flo 20% chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

NOTE: Chemical injector & nozzle are not included on 5000, and 6000 PSI models. (See Available Options)

AVAILABLE OPTIONS:

Powder Coated Steel Skid Mount on select models-consult factory
ACI5000 5000 PSI Chemical Injector Assembly.
ACI6000 6000 PSI Chemical Injector Assembly.

NOTE: All Pro Series models are not for sale to CA.

GAS ENGINE V-BELT DRIVE MODELS

Part#	GPM	PSI	Model/Brand	Pump
VB5535VGEA411	5.5	3500	18 HP Vanguard	HP
VB5535HGEA411	5.5	3500	GX630 Honda	HP
VB8035HGEA406*	8.0	3500	GX690 Honda	GP
VB5040HAEA411	5.0	4000	GX630 Honda	AR
VB5550HGEA510	5.5	5000	GX690 Honda	GP
VB4560HGEA600	4.5	6000	GX690 Honda	GP

PRO SERIES



S/VB1030HGE105/VHRM6



Also available with standard
Pressure-Pro muffler.
Order item #S/VB1030HGE105

STANDARD FEATURES

- Powered Coated Steel Skid
- Genuine Honda Muffler
- 3VX banded system offers balanced power transfer
- Engine and pump oil drains offer easy maintenance
- Adjustable pressure YU21405S Green Spring Unloader
- Set up for tank feed (inlet nipple and bypass hose)
- Commercial / Industrial grade engines
- Electronic Fuel Injection provides higher output and performance
- Lower vibration and quieter operation

NOTE: Electric start is standard and includes marine battery box. No battery or fuel tank is included. 10 GPM units set up for tank feed. All units are completely factory assembled, tested in the USA, and delivered ready to operate.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' 1/2" high pressure hose w/ quick connects
- 4 color-coded QC spray nozzles

NOTE: All Pro Series models are not for sale to CA.

PRO SERIES

Part#	GPM	PSI	Model/Brand	Pump
S/VB1030HGE105/VHLM6	10	3000	iGX800 Honda	GP

PRO-MAX SERIES

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- Easy access tip holder/gun holder/hose hanger on handle
- Epoxy powder coated finish
- 10,000 hour rated Gates polychain cogg belt (2 year warranty)
- 50 mesh inlet water filter –
*excludes 8 thru 15 GPM units
- EZ-Start
- Adjustable pressure unloader
- Low oil shutdown except GX690 models
- Engine oil drain offers easy maintenance
- Oversize pneumatic tires
- Dual spring cushioned shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- Commercial/Industrial grade engines
- Low speed pump and thermo-sensor (prevents overheating in bypass mode)

NOTE: Electric start is standard on V-Twin engine models and include marine battery box, and remote 6 gallon poly fuel tank. *8+ GPM units set up for tank feed. All units are completely factory assembled, tested in the USA, and delivered ready to operate. Requires battery prior to operating.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Maxi-Flo 20% chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

AVAILABLE OPTIONS

Consult Factory

NOTE: All Pro-Max Series models are not for sale to CA.



B5535HGEA403



POLYCHAIN DRIVE
No belt changes required,
10,000 hour rated.

GAS ENGINE POLYCHAIN BELT DRIVE MODELS

Part#	GPM	PSI	Model/Brand	Pump
B5535HGEA403	5.5	3500	GX630 Honda*	HP
B8035HGEA406	8.0	3500	GX690 Honda*	GP

PRO-MAX HP SERIES

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- Easy access tip holder/gun holder/hose hanger on handle
- Epoxy powder coated finish
- 10,000 hour rated Gates polychain cogged belt (2 year warranty)
- 50 mesh inlet water filter
- EZ-Start
- Adjustable pressure unloader
- Low oil shutdown except GX690 models
- Engine oil drain offers easy maintenance
- Oversize pneumatic tires
- Dual spring cushioned shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- Commercial/Industrial grade engines
- Low speed pump and thermo-sensor (prevents overheating in bypass mode)
- All units feature electric start and include marine battery box

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate. Requires battery prior to operating.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- 4 QC spray nozzles

NOTE: Chemical injector is not included on 5000, 6000 & 7000 PSI units (See Available Options).

AVAILABLE OPTIONS

Consult Factory

ACI5000 5000 PSI Chemical Injector Assembly.

ACI6000 6000 PSI Chemical Injector Assembly.

NOTE: All Pro-Max Series models are not for sale to CA.




B4070HGEA700

GAS ENGINE POLYCHAIN BELT DRIVE HP MODELS

Part#	GPM	PSI	Model/Brand	Pump
B5550HGEA511	5.5	5000	GX690 Honda	GP
B4560HGEA600	4.5	6000	GX690 Honda	GP
B4070HGEA700	4.0	7000	GX690 Honda	GP
B4070HAEA700	4.0	7000	GX690 Honda	AR

HAND CARRY SERIES

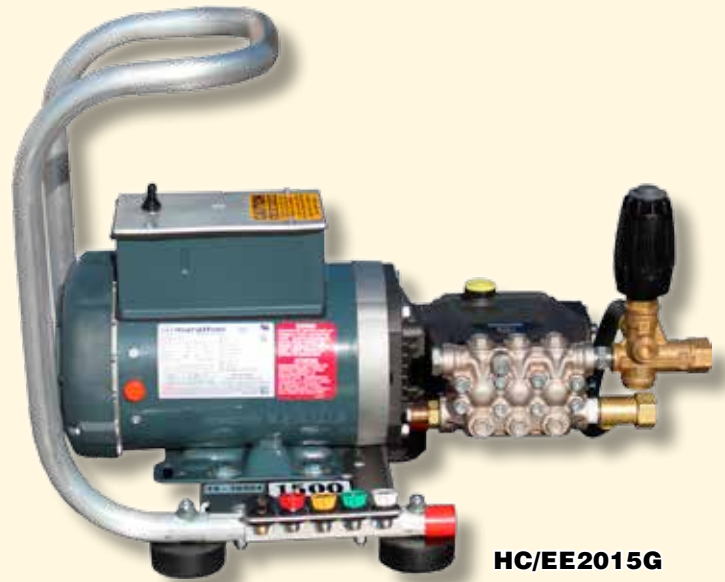

HC/EE2015G



HC/EE2015V

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with lifetime warranty
- 50 mesh inlet filter
- Adjustable pressure unloader
- Thermo-sensor (prevents overheating in bypass mode)
- Commercial/Industrial grade motors
- Includes GFCI w/35' cord w/plug

NOTE: Units are completely factory assembled, tested in the USA, and delivered ready to operate. All units are single phase electric power.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

ELECTRIC HAND CARRY DIRECT DRIVE MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
HC/EE3010G	3.0	1000	2.0	115V/1PH/18A	GP
HC/EE2012G	2.0	1200	1.5	115V/1PH/13A	GP
HC/EE2015G	2.0	1500	2.0	115V/1PH/18A	GP
HC/EE2015V	2.0	1500	2.0	115V/1PH/18A	Viper

WALL MOUNT SERIES



WM/EE4020G
w/ Auto Start/Stop Option



WM/EE2015G

AVAILABLE OPTIONS: SELECT MODELS

*Auto Start/Stop (115V)
consult factory

*Auto Start/Stop (230V)
consult factory

Minor assembly required.

ELECTRIC WALL MOUNT DIRECT DRIVE MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
WM/EE3010G	3.0	1000	2.0	115V/1PH/18A	GP
WM/EE2015G	2.0	1500	2.0	115V/1PH/18A	GP
WM/EE3015G	3.0	1500	3.0	230V/1PH/12A	GP
WM/EE4020A	4.0	2000	6.0	230V/1PH/26A	AR
WM/EE4020G	4.0	2000	6.0	230V/1PH/26A	GP

EAGLE ELECTRIC SERIES



EE2015V



EE2015G

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- 50 mesh inlet filter
- Adjustable pressure unloader
- Pneumatic tires
- Dual padded shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- Thermo-sensor (prevents overheating in bypass mode)
- Commercial/Industrial grade motors
- Includes GFCI w/35' cord w/plug

NOTE: Units are completely factory assembled, tested in the USA, and delivered ready to operate. All units are single phase electric power.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

ELECTRIC DIRECT DRIVE MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
EE3010G	3.0	1000	2.0	115V/1PH/18A	GP
EE2012G	2.0	1200	1.5	115V/1PH/13A	GP
EE2015A	2.0	1500	2.0	115V/1PH/18A	AR
EE2015G	2.0	1500	2.0	115V/1PH/18A	GP
EE2015V	2.0	1500	2.0	115V/1PH/18A	Viper
EE3015G	3.0	1500	3.0	230V/1PH/12A	GP

EAGLE ELECTRIC SERIES



EE3030A

AVAILABLE OPTIONS: SOME MODELS

NOTE: 5HP & Larger Units Come with Power Coated Steel Skid.

*Auto Start/Stop (115V)
consult factory

*Auto Start/Stop (230V)
consult factory

ELECTRIC DIRECT DRIVE MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
EE3030A	3.0	3000	6.0	230V/1PH/26A	AR
EE3530G	3.5	3000	7.5	230V/1PH/35A	GP
EE4030A	4.0	3000	7.5	230V/1PH/35A	AR
EE4035A	4.0	3500	10.0	230V/1PH/44A	AR
EE3540A	3.5	4000	10.0	230V/1PH/44A	AR

EAGLE SERIES



EB4030E1G402

AVAILABLE OPTIONS: SOME MODELS

Consult Factory

*Auto Start/Stop (230V).
consult factory

*Auto Start/Stop w/time
delay-consult factory

*460V – consult factory

***NOTE:** Review specs for models
with Auto Start/Stop options as
these units are custom made and
**NONCANCELABLE
& NONRETURNABLE**

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- Choice of reliable AR, Cat and General pumps
- 3VX belt system offers balanced power transfer
- 50 mesh inlet water filter
- Adjustable pressure unloader
- Pneumatic tires
- Dual padded shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- Low speed pump and thermo-sensor (prevents overheating in bypass mode)
- TEFC Commercial/Industrial motors
- Heavy duty motor controls in NEMA enclosure w/35' GFCI cord and plug

NOTE: All units are completely
factory assembled, tested in the USA,
and delivered ready to operate.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

ELECTRIC V-BELT DRIVE MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
EB4030E1G402	4.0	3000	7.5	230V/1PH/33A	GP
EB4030E3A402	4.0	3000	7.5	230V/3PH/17A	AR
EB4030E3CP402	4.0	3000	7.5	230V/3PH/17A	CAT
EB4030E3G402	4.0	3000	7.5	230V/3PH/17A	GP

PRO-MAX ELECTRIC SERIES



with Auto Start/Stop Option

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- Easy access tip holder/gun holder/hose hanger on handle
- Epoxy powder coated finish
- 10,000 hour rated Gates polychain cogged belt (two year warranty)
- 50 mesh inlet water filter
- Adjustable pressure unloader
- Oversize pneumatic tires
- Dual spring cushioned shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- Low speed pump and thermo-sensor (prevents overheating in bypass mode)
- TEFC Commercial/Industrial motors
- Mag Starter assembly, w/thermal overload, and start-stop buttons in NEMA enclosure w/35' GFCI cord and plug included on 1 phase units

NOTE: 8 GPM units set up for tank feed. All units are completely factory assembled, tested in the USA, and delivered ready to operate.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Maxi-Flo 20% chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

AVAILABLE OPTIONS: SOME MODELS

Skid Mount - Consult Factory

*Auto Start/Stop (230V). consult factory

*460V – consult factory

***NOTE:** Review specs for models with Auto Start/Stop options as these units are custom made and **NONCANCELABLE & NONRETURNABLE**

ELECTRIC POLYCHAIN BELT DRIVE MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
B4030E1G403	4.0	3000	7.5	230V/1PH/33A	GP
B4040E3G403	4.0	4000	15.0	230V/3PH/34A	HP

PRO-MAX HP SERIES

STANDARD FEATURES

- Revolutionary aircraft grade aluminum frame with dual handles (no welds to fail)
- Lifetime frame warranty
- Easy access tip holder/gun holder/hose hanger on handle
- Epoxy powder coated finish
- 10,000 hour rated Gates polychain cogged belt (two year warranty)
- 50 mesh inlet water filter
- Adjustable pressure unloader
- Oversize pneumatic tires
- Dual spring cushioned shock absorbing feet
- 3/4" cold-rolled steel threaded axle
- Low speed pump and thermo-sensor (prevents overheating in bypass mode)
- TEFC Commercial/Industrial motors
- Mag Starter assembly, w/thermal overload, and start-stop buttons in NEMA enclosure w/35' GFCI cord and plug)

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- 4 QC spray nozzles

NOTE: Chemical injector is not included on 5000, 6000 & 7000 PSI units (See Available Options).

AVAILABLE OPTIONS

ACI5000 5000 PSI Chemical Injector Assembly.

ACI6000 6000 PSI Chemical Injector Assembly.

*460V – consult factory

***NOTE: NONCANCELABLE & NONRETURNABLE.**



Models with Auto Start/Stop option no longer available



POLYCHAIN DRIVE
No belt changes required,
10,000 hour rated.

ELECTRIC POLYCHAIN BELT DRIVE MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
B4070E3G700	4.0	7000	20.0	230V/3PH/46A	GP

HDC GAS SERIES

SHOWN WITH
OPTIONAL
WHEEL KIT



**HDCV5550HG
PKW005**

STANDARD FEATURES

- Rugged powder coated steel frame
- Removable roll cage w/ hose reel platform. Dimensions: 43"L x 21"W x 36"H
- On board 12 gallon poly fuel tank
- Marine battery box
- Skid mount or portable
- Commercial/Industrial gasoline engines
- Engine and pump oil drains offer easy maintenance
- Polychain or V-belt drive
- Adjustable pressure unloader
- Many flow rates and pressures available

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate. Requires battery prior to operating.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- Tank feed plumbing
- 50' high pressure hose w/quick connects
- Maxi-Flo 20% chemical injector assembly w/ quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

NOTE: Chemical injector & nozzle are not included on 5000, 6000 & 7000 PSI units (See Available Options). Portable units come with bypass plumbing.

AVAILABLE OPTIONS

BRK200-C Brake Kit.

PKW005 Wheel Kit w/ Handle Assembly.

ACI5000 5000 PSI Chemical Injector Assembly.

ACI6000 6000 PSI Chemical Injector Assembly.

NOTE: All HDC Gas Series models are not for sale to CA.

HEAVY-DUTY V-BELT DRIVE GAS ENGINE MODELS

Part#	GPM	PSI	Model/Brand	Pump
HDCV8035HG	8.0	3500	GX690 Honda	GP
HDCV5550HG	5.5	5000	GX690 Honda	GP

PRO-SKID SERIES



**AST200
ASR100
KBP100
AHR250-1
TS/D4040HG431**

TANK, ALUMINUM SKID & INLET PLUMBING KITS

Part#	Description
AST050	50 Gallon Tank, Bands, Aluminum Skid, and Inlet Plumbing
AST100	100 Gallon Tank, Bands, Aluminum Skid, and Inlet Plumbing
AST200	200 Gallon Tank, Bands, Aluminum Skid, and Inlet Plumbing

PRESSURE WASHER POWER UNITS

Part#	GPM	PSI	Model/Brand	Pump
TS/D3024HG432	3.0	2400	GX200 Honda	GP Direct Drive
TS/D3027HG432	3.0	2700	GX200 Honda	GP Direct Drive
TS/D4040HA431*	4.0	4000	GX390 Honda	AR Direct Drive
TS/D4040HG431*	4.0	4000	GX390 Honda	GP Direct Drive
TS/VB4040HG431*	4.0	4000	GX390 Honda	HP V-Belt Drive

PRO-SKID SERIES

Pro-Skid units can be combined with various cold water pump/engine units to achieve a "Totally Self Contained" 100 or 200 gallon tank feed system. Available pressures of 2400 PSI to 4000 PSI and flow rates up to 5.5 GPM in belt, gear, and direct drive configurations. Add the tank/skid model with desired equipment options listed to design a custom Honda powered unit built to your specifications. All skids are constructed of aircraft grade aluminum which is chemical resistant and rustproof. All units feature adjustable pressure unloader valve. These skid units mount quickly and securely into truck beds, trailers or other vehicles.

STANDARD ACCESSORIES

- Gun/wand assembly w/quick connects
- 50' high pressure hose w/quick connects
- Chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

NOTE: All 100 gallon units are factory assembled (200 gallon units require minor assembly), tested in the USA, and delivered ready to operate.

*GX270 and GX390 models not available for sale into CA

PRO-SKID SERIES



**AST200
TS/VB4040HGE431**

DIMENSIONS:

AST-100 with AHR250
39" W x 62" L x 44" H
39" W x 62" L x 31" H (w/o hose reel)

AST-200 with AHR250
49" W x 62" L x 53" H
49" W x 62" L x 40" H (w/o hose reel)

**Call factory for more
configurations.**

OPTIONS

Part#	Description
ASR100	Aluminum Hose Reel Support Assembly with Mounting Hardware
KBP100	Tank Feed Unloader Bypass Return and Hose Assembly
KTF100	Float Valve Assembly – (shuts water off when tank is full)
KTD075	Tank Drain, 3/4"
LWS100	Low Water Shutdown – (shuts engine off when water level is low)

OPTIONAL HOSE REELS

Part#	Description
AHR100-1	GP Hose Reel with Hardware, 100' x 3/8" maximum
AHR200-1	GP Hose Reel with Hardware, 200' x 3/8" maximum
AHR250-1	Hosetract Heavy Duty Hose Reel with Hardware, 250' x 3/8" maximum

PRO-ATV SERIES

**CST050-GATOR
AHR250-G
RCS/G1050HH
266693
4465-1702 200'**



TANK, ALUMINUM SKID & INLET PLUMBING KITS

Part#	Description
AST050-GATOR	Assembly Skid/Tank, 50 Gallon, Inlet Plumbing

ROLL CAGE SKID POWER UNITS

Part#	GPM	PSI	Model/Brand	Pump
RCS/E3027HA-TF*	3.0	2700	GX200 Honda	Viper Direct Drive
RCS/G1050HH	10	500	GX200 Honda	Hypro Gear Drive

PRO-ATV SERIES

Pro-ATV Skid units can be combined with various cold water pump/engine units to achieve a “Totally Self Contained” 50 gallon tank feed system. Available pressures from 500 PSI to 4000 PSI and flow rates up to 10 GPM in gear, and direct drive configurations. Add the tank/skid model with desired equipment and options listed to design a custom Honda powered unit built to your specifications. All skids are constructed of aircraft grade aluminum which is chemical resistant and rustproof. These units mount quickly and securely into Gator, Rhino, Mule or other ATV vehicles.

PRO-ATV SERIES



**AST050-GATOR
AHR100-1
RCS/E3027HG-TF*
KBP100**

Gator ATV NOT INCLUDED

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate.

***RCS/E3027H** models come with STANDARD ACCESSORIES noted on page 30

AST050-GATOR

Dimensions: (with AHR100-1)
38"W x 48"L x 44"H

CST050-GATOR

Dimensions: (with AHR250-G)
38"W x 48"L x 49"H

Call factory for more configurations.

OPTIONS

Part#	Description
KBP100	Tank Feed Unloader Bypass Return & Hose Assy. (CST050-GATOR already has Bypass)
266693	Ag. Spray Gun, compare to JD9
4465-1702	Ag. Hose, 3/8", Yellow, Select 200' or 400' (Price is per foot)
KTF100	Float Valve Assembly – (shuts water off when tank is full)
KTD075	Tank Drain, 3/4"
LWS100	Low Water Shutdown – (shuts engine off when water level is low)

OPTIONAL HOSE REELS

Part#	Description
AHR100-1	GP Hose Reel with Hardware, 100' x 3/8" maximum
AHR200-1	GP Hose Reel with Hardware, 200' x 3/8" maximum
AHR250-1	Hosetract Hose Reel w/ Hardware, 250' x 3/8" max. (High Pressure Jumper Hose)



**TRHDCV5535HG
AHS290
988VR-100**

TRAILER FEATURES

- 2- 250' high pressure hose reels
- Chemical resistant coating
- 200 gallon water tank & Poly tool box
- Lights, jack w/ wheel, & safety chains
- Fully tested and assembled in the USA
- HD trailer (forkliftable) 3500# capacity axle, 135"L x 82"W x 60"H
- Aluminum fenders, 15" wheels/tires, external grease fittings.

HD COMMERCIAL SKID FEATURES

- Rugged powder coated steel frame
- On board 12 gallon poly fuel tank
- Full sized battery w/ marine battery box
- Commercial/Industrial gasoline engines
- Engine and pump oil drains offer easy maintenance
- V-belt drive
- Adjustable pressure unloader

NOTE: All HDC Gas Series models are not for sale to CA.

GAS ENGINE V-BELT DRIVE TRAILER MODELS (Without Hose)

Part#	GPM	PSI	Model/Brand	Pump
TRHDCV5535HG	5.5	3500	GX630 Honda	HP
TRHDCV8035HG	8.0	3500	GX690 Honda	GP

HD COMMERCIAL TOW-PRO TRAILERS



TRHDCV5535HG

SELF-CONTAINED, NO OUTSIDE POWER SOURCE NEEDED

HOSE OPTIONS

Part#	PSI	Diameter/Length	Color
AHS235	4000	3/8" X 100'	Black W/Qc's
AHS240	4000	3/8" X 150'	Black W/Qc's
AHS245	4000	3/8" X 200'	Black W/Qc's
AHS285	4000	3/8" X 100'	Gray W/Qc's
AHS290	4000	3/8" X 150'	Gray W/Qc's
AHS295	4000	3/8" X 200'	Gray W/Qc's
*AHS335	6000	3/8" X 100'	Black W/Qc's
*AHS335-6K	6000	3/8" X 100'	Black W/10K Qc's
*AHS835	7200	3/8" X 100'	Black W/10K Qc's
988VR-100	400	3/4" X 100'	Black HD Garden Hose

* For 5000 , 6000 PSI, and 7000 PSI models only

Add Trailer Model and Options to Calculate Complete Trailer Cost

AVAILABLE OPTIONS

KCT025 25 gallon Chemical Tank.

KTF200 Float valve kit.

LWS100 Low water shut-down.

ACI5000 5000 PSI Chemical Injector Assembly.

ACI6000 6000 PSI Chemical Injector Assembly.

PRO-CHEM SERIES

PRO-CHEM SOFT WASH SPRAY SYSTEMS

Pro-Chem Soft Wash Spray Systems are low pressure chemical applicators designed for cleaning roofs, building exteriors, driveways, screen enclosures, wood decks, fences, vinyl siding or any softer surfaces to remove bacteria, molds, mildews, moss, fungus and algae when pressure washing is not feasible. "Totally Self Contained" 100 gallon tank feed systems with 300 PSI and flow rates of 6 or 10 GPM featuring Honda gasoline engines and gear reduced AR diaphragm pumps. All skid frames are constructed of aircraft grade aluminum which is chemical resistant and rustproof.

STANDARD FEATURES

- 100 gallon poly tank/skid self-contained system
- Lightweight, rustproof modular aluminum skid w/ lifetime warranty
- Durable corrosion resistant aluminum and stainless steel hose reel
- Exclusive Tank-less Clean-N-Flush Valve
- Gear Drive AR Diaphragm pumps
- Rugged GX200 Honda Commercial Engines

STANDARD ACCESSORIES

- 300' x 3/8" chemical application hose
- Adjustable Spray Gun: Up to 30' Spray distance

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate. UNITS MUST BE FLUSHED IMMEDIATELY AFTER EACH USE.

DIMENSIONS:

100 Gallon Models: 39" W x 65" L x 51" H



PRO-CHEM SOFT WASH SPRAY SYSTEMS

Part#	Tank Size	GPM	PSI	Model/Brand	Pump
SW100-G1003HA	100*	10.0	300	GX200 Honda	AR

*Gallon

NOTE: Purchase bare model without tank or any accessories S/G1003HA/BARE

Build Your Own Soft-Wash System



System # 1

12 V
ALUMINIUM
SKID SETUP

PICK A TANK AND/OR SKID

TNK050	Polypropylene Tank - 50 gallons
TNK100	Polypropylene Tank - 100 gallons

CST050-GATOR	Assy, Chemical Skid/Tank, 50 GL (Gator, Rhino, Mule, Etc.)
CST100-GATOR/1	Assy, Chemical Skid/Tank, 100 GL (Gator, Rhino, Mule, Etc.) 3/4 Inlet 1/2 Bypass

PICK A PUMP

2088-343-135	Pump, Shurflo, Auto Demand, 12V, 3.0, GPM @ 45 PSI
2088-713-534	Shurflo, 12V, 3.6GPM@45 PSI, ShurCoated
KCA076-RC (Optional)	Direct/Gear Drive Roll Cage Skid, Aluminum w/ 5 Tip Holes & Hose Reel Plate

REQUIRES A BATTERY, BATTERY BOX, HOSE REEL, HOSE & GUN*

SU1RMF	Battery, Lawn & Garden
9082-1	Box, Battery (Small Tractor Batt) BX 12
SM12-AL/SS	Aluminum Hose Reel (Capacity 250) w/SS, Manifold & Swivel
P600-12	Hose, PVC Spray, 1/2" Orange 600 PSI
266693	Gun, Trigger Heavy Duty, JD9-C 800 PSI

System # 2

GAS-POWERED
DIAPHRAGM PUMP
SETUP

PICK A TANK AND/OR SKID

TNK050	Polypropylene Tank - 50 gallons
TNK100	Polypropylene Tank - 100 gallons

CST050-GATOR	Assy, Chemical Skid/Tank, 50 GL (Gator, Rhino, Mule, Etc.)
CST100-GATOR/1	Assy, Chemical Skid/Tank, 100 GL (Gator, Rhino, Mule, Etc.) 3/4 Inlet 1/2 Bypass

REQUIRES A PRO-CHEM SPRAYER, HOSE REEL, HOSE & GUN**

S/G1003HA/BARE	Pro-Chem Sprayer, 300 psi, 6.5Hon/AR/Skid/Bare
SM12-AL/SS	Aluminum Hose Reel (Capacity 250) w/SS, Manifold & Swivel
P600-12	PVC Spray, 1/2" Orange 600 PSI
266693	Gun, Trigger Heavy Duty, JD9-C 800 PSI

**These are the basic components for building your own system; other accessories through your local Sales rep or Dealer.

HOT SHOT SERIES



4 WHEEL PORTABLE DIRECT DRIVE ELECTRIC MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
3230-30A1	3.0	3000	6.0	230V/1PH/26A	AR

AVAILABLE OPTIONS: ALL MODELS

ATK010 Inline Adjustable Thermostat.

AVAILABLE OPTIONS: 4 WHEEL MODELS ONLY

BRK100 Brake Kit.

HRK415 Hose Reel Kit, 150' x 3/8" max.
w/ no add'l hose.

**GP, CAT pumps available –
consult factory**

HOT SHOT SERIES

AVAILABLE OPTIONS: ALL MODELS

ATK010 Inline Adjustable Thermostat.

BRK100 Brake Kit.

HRK415 Hose Reel Kit, 150' x 3/8"
max.w/ no add'l hose.

**AR, CAT and Viper pumps
available – consult factory**

STANDARD FEATURES

- Rugged powder coated steel roll cage frame w/ lifting hook & 13" flat free tires & threaded axles
- 4-wheel dimensions: 39"L x 31"W x 49"H
- Super efficient schedule 80 coil w/ one-piece molded insulation combustion chamber
- Stainless steel coil wrap
- 8 gallon poly diesel fuel tank w/ fuel filter
- Commercial/Industrial grade motors
- Reliable Beckett burners
- High limit over temp protection
- Safety pressure relief valve
- Low speed pump w/ thermo-sensor (prevents over heating in bypass mode)
- Includes GFCI with 35' cord and plug

NOTE: All units are completely factory assembled, tested in the USA, and delivered ready to operate.

STANDARD ACCESSORIES

- Gun/wand assembly with insulated grip and quick connects
- 50' high pressure hose w/quick connects
- Adjustable high pressure chemical metering system
- 4 color-coded QC spray nozzles



4230VB-30G1

4 WHEEL PORTABLE V-BELT DRIVE ELECTRIC MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
4230VB-20G1	4.0	2000	5.0	230V/1PH/25A	GP
4230VB-30G1	4.0	3000	7.5	230V/1PH/33A	GP

HOT SHOT GAS SERIES

GAS ENGINE DIRECT DRIVE

4012-10C



4012-17G

GAS ENGINE V-BELT DRIVE

STANDARD FEATURES

- Rugged powder coated steel roll cage frame w/ lifting hook & 13" flat free tires & threaded axles
- 4-wheel dimensions: 39"L x 31"W x 49"H
- Super efficient schedule 80 coil w/ one-piece molded insulation combustion chamber
- Stainless steel coil wrap
- 8 gallon poly diesel fuel tank w/ fuel filter
- Commercial/Industrial grade engines
- Reliable Beckett burners
- High limit over temp protection
- Safety pressure relief valve
- Thermo-sensor (prevents over heating in bypass mode)

NOTE: Gasoline Honda, Kohler and Diesel powered models include electric start, and battery w/ marine battery box. All units are completely factory assembled, tested in the USA, and delivered ready to operate.

STANDARD ACCESSORIES

- Gun/wand assembly with insulated grip and quick connects
- 50' high pressure hose w/quick connects
- Maxi-Flo 20% chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

4 WHEEL PORTABLE DIRECT DRIVE GAS ENGINE 12V MODELS

Part#	GPM	PSI	Model/Brand	Pump
4012-10A*	4.0	4000	GX390 Honda	AR
4012-10C*	4.0	4000	GX390 Honda	CAT
4012-10G*	4.0	4000	GX390 Honda	GP
4012-42HV*	4.0	4200	GX390 Honda	Viper
4012-42KV	4.0	4200	CH440 Kohler	Viper

4 WHEEL PORTABLE V-BELT DRIVE GAS ENGINE 12V MODELS

Part#	GPM	PSI	Model/Brand	Pump
4012-17G*	4.0	4000	GX390 Honda	HP

*GX390 models not available for sale into CA

HOT SHOT DIESEL SERIES



4012-15G

DIESEL ENGINE DIRECT DRIVE

AVAILABLE OPTIONS

ATK005 Adjustable Thermostat

BRK100 Brake Kit.

HRK415 Hose Reel Kit, 150' x 3/8" max.
w/no add'l hose.

**AR, CAT, GP and Viper gear
drive pumps available -
consult factory.**

4 WHEEL PORTABLE DIRECT DRIVE DIESEL ENGINE 12V MODELS

Part#	GPM	PSI	Model/Brand	Pump
4012-15G	4.0	3200	KD440ES Kohler	GP

PRO-SUPER SKID SERIES



8012PRO-35HG

STANDARD FEATURES

- Rugged powder coated steel, low-profile frame w/ fork lift channels
- 48"L x 43"W x 48"H frame dimensions offer versatile installation
- Super efficient schedule 80 coil
- Stainless steel coil wrap, burner hood, and control panel
- On board 12 gallon poly diesel & gas (excludes GX390 models) fuel tanks w/ fuel filters
- Reliable Honda & Vanguard gasoline Commercial/Industrial electric start engines
- Marine battery box
- Fully self-contained, no external power required
- Choice of reliable AR, CAT and General pumps
- Reliable Beckett burners
- Adjustable thermostat
- 3VX belt system offers balanced power transfer
- Engine and pump oil drains offer easy maintenance
- Safety pressure relief valve

NOTE: 12V units include 20 amp charging system. 115V units include 2900 watt generator. All units are completely factory assembled, tested in the USA, and delivered ready to operate. Requires battery prior to operating.

All Pro-Super Skid Gas Series models are not for sale to CA.

PRO-SUPER SKID GAS ENGINE V-BELT DRIVE 12 VOLT MODELS

Part#	GPM	PSI	Model/Brand	Pump
4012PRO-10G	4.0	3500	GX390 Honda	HP
6012PRO-20G	5.5	3500	GX630 Honda	HP
6012PRO-20G-V	5.5	3500	18 HP Vanguard	HP
6012PRO-10G	5.5	4000	GX630 Honda	GP
7012PRO-40HA	7.0	4000	GX690 Honda	AR
8012PRO-35HG	8.0	3500	GX690 Honda	GP

PRO-SUPER SKID SERIES



6115PRO-10G

STANDARD ACCESSORIES

- Gun/wand assembly with insulated grip and quick connects
- 50' high pressure hose w/quick connects
- Maxi-Flo 20% chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

AVAILABLE OPTIONS

ESK016 Exhaust Stack Kit,
Fits 16" Coil.


**All Pro-Super Skid Gas
Series models are not
for sale to CA.**

PRO-SUPER SKID W/ 115 VOLT, 2900 WATT, 20 AMP GENERATOR

Part#	GPM	PSI	Model/Brand	Pump
6115PRO-20G	5.5	3500	GX630 Honda	HP
6115PRO-10G	5.5	4000	GX690 Honda	GP
8115PRO-30HG	8.0	3000	GX690 Honda	GP

PRO-SUPER SKID SERIES

DIESEL ENGINE / DIESEL BURNER

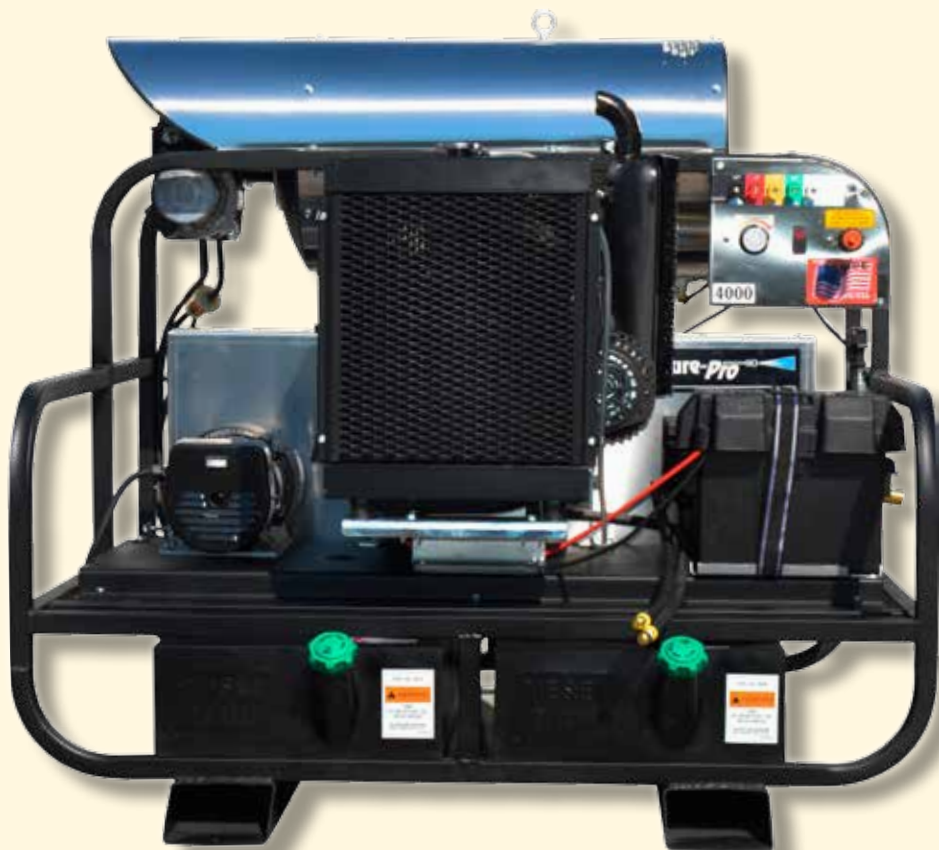

6115PRO-40KLDG

STANDARD FEATURES

- Rugged powder coated steel, low-profile frame w/ fork lift channels
- Frame Dimensions: 53"L x 51"W x 52"H All models except 4012PRO-32KLDG / 48" L x 43" W x 48" H Model 4012PRO-32KLDG Only
- Super efficient schedule 80 coil
- Stainless steel coil wrap, burner hood, and control panel
- Dual 12 gallon poly diesel fuel tanks with fuel filters
- Reliable Kohler & Kubota Diesel Commercial/Industrial electric start engines
- Marine battery box
- Fully self-contained, no external power required
- Choice of reliable AR, CAT and General pumps
- Reliable Beckett burners
- Adjustable thermostat
- 3VX belt system offers balanced power transfer
- Engine and pump oil drains offer easy maintenance
- Safety pressure relief valve

NOTE: 12V units include 45 amp charging system (except 4012PRO-32KLDG which includes 20 amp charging system). 115V units include 2900 watt generator. All units are completely factory assembled, tested in the USA, and delivered ready to operate. Requires battery prior to operating.

PRO-SUPER SKID DIESEL ENGINE V-BELT DRIVE 12 VOLT MODELS

Part#	GPM	PSI	Model/Brand	Pump
6012PRO-40KLDG	5.5	4000	KDW1003 Kohler	GP
8012PRO-35KLDG	8.0	3500	KDW1003 Kohler	GP
8012PRO-40KLDG	8.0	4000	KDW1003 Kohler	HP

STANDARD ACCESSORIES

- Gun/wand assembly with insulated grip and quick connects
- 50' high pressure hose w/quick connects
- Maxi-Flo 20% chemical injector assembly w/quick connects
- 4 color-coded QC spray nozzles
- 1 color-coded QC chemical nozzle

AVAILABLE OPTIONS

PKW003-C Wheel Kit.
ESK016 Exhaust Stack Kit,
Fits 16" Coil.

HN SERIES



HN20004E2G-PP

STANDARD FEATURES

- Clean and efficient heating system
- NEMA4 water tight electrical box
- By-Pass-Cool system protects pump from overheating if left on after use
- 24 volt automatic ignition system on low emission natural gas burner
- Durable frame construction
- Best in class accessibility
- Dual rated for 208v or 230v - 1ph, 20 amp
- V-Belt drive with EZ align pump rail
- General Pump
- Heavy duty industrial motor with standard thermal overload protection
- Adjustable temperature up to 250°F
- Burst disc technology for operator safety
- Rustproof float tank to regulate incoming water ensuring consistent system performance
- Remote ready: Choose an on/off timer remote option or a full function remote option for complete control from the wash – Add R on part number, consult factory Example: HN20004E2G-PPR
- Diesel fired and LP models available, consult factory

STANDARD ACCESSORIES:

- Gun/wand assembly
- 50' high pressure hose
- Full pressure chemical injection, precision stainless steel metering valve
- 3 color-coded QC spray nozzles (15", 25", 40")

STATIONARY LP/NG GAS FIRED V-BELT DRIVE ELECTRIC MODELS

Part#	GPM	PSI	HP	Volts/Phase/Amps	Pump
HN20004E2G-PP	4.0	2000	5.0	230V/1PH/20A	GP
HN30004E2G-PP	4.0	3000	8.0	230V/1PH/37A	GP
HN35005E3G-PP	4.3	3500	10	208-230v/3PH/29A	GP
HN35005E4G-PP	4.3	3500	10	460/3PH/13A	GP

DIESEL, LP AND REMOTE OPTIONS

PART# DESCRIPTION

-LP	Liquid propane conversion, installed
-D	Diesel fired conversion & 18gal fuel tank, installed (note: this option obstructs forklift access)
-R	Remote option wall mt., full function with 100' wire, incl. hour meter
BGD10	Draft diverter 10"
AEN80	Timer kit, wind-up remote 30 min. shutoff (not installed)
AM603	Hour meter option, panel mounted
AC340	Downstream soap injection kit, 3-5gpm
HS219	Stainless back panel option, installed, for HN models
AR425	5000 psi rated, 360° Pivoting hose reel, mounts on tube frame, 150' capacity, stainless (requires jumper hose)
AR151	5000 psi rated, Hose reel, 250' capacity, stainless (requires jumper hose) additional reels available

PRO-SUPER SKID TOW-PRO TRAILERS



TR6012PRO-35HG

**SELF-CONTAINED, NO OUTSIDE
POWER SOURCE NEEDED**

GAS ENGINE 12V V-BELT DRIVE TRAILER MODELS (Without Hose)

Part#	GPM	PSI	Model/Brand	Pump
TR6012PRO-35HG	5.5	3500	GX630 Honda	HP
TR8012PRO-35HG	8.0	3500	GX690 Honda	GP

TRAILER FEATURES

- 2- 250' high pressure hose reels
- Chemical resistant coating
- 200 gallon water tank & Poly tool box
- Lights, jack, w/ wheel & safety chains
- Fully tested and assembled in the USA
- HD trailer (forkliftable) 3500# capacity axle, 135"L x 82"W x 63"H
- Aluminum fenders, 15" wheels/tires, external grease fittings.

PRO-SUPER SKID FEATURES

- Rugged powder coated steel, low-profile frame w/ fork lift channels
- Super efficient schedule 80 coil
- Stainless steel coil wrap, burner hood, and control panel
- On board 12 gallon poly diesel & gas (excludes GX390 models) fuel tanks w/ fuel filters - Non-Carb Evaporative Compliant - Not for sale to California.
- Reliable Honda & Vanguard gasoline Commercial/Industrial electric start engines
- Marine battery box
- Fully self-contained, no external power required
- Choice of reliable AR, Cat and General pumps
- Reliable Beckett burners
- Adjustable thermostat
- 3VX belt system offers balanced power transfer
- Engine and pump oil drains offer easy maintenance
- Safety pressure relief valve

NOTE: 12V units include 20 amp charging system. 115V units include 2900 watt generator. Requires battery prior to operating.

All Pro-Super Skid Gas Series models are not for sale to CA.

HOT LINK HOT WATER GENERATOR



CPHL5DC

STANDARD FEATURES

- Use with your cold water pressure washer
- 100 – 4350 psi
- 1-5 gpm
- Includes 48" jumper hose
- 3 gallon diesel fuel tank
- Adjustable temp up to 200°F
- Stainless steel insulated coil enclosure
- Redundant safety features include flow switch, pressure relief valve, and burst disc
- Compact Dimensions:
29"L x 22"W x 22"H

2 MODELS AVAILABLE

- 12v DC for remote use, hook to the battery on your pressure washer (requires 14 amp charging system)
- 115v includes 35' GFCI cord with plug. Plugs into any standard 15 amp outlet or 2000 watt generator

OPTIONAL ACCESSORIES

- Hot water rated, high pressure hose
- AHC25 4 wheel kit with handle for easy portability

Convert your existing cold water pressure washer into a hot water pressure washer. Do you already own a cold water pressure washer but wish it had hot water? Attach a Hot Link to your existing cold water pressure washer and you have the power of hot water to quickly melt away grease and grime. The Hot Link System allows you the flexibility of using hot water on those stubborn jobs such as grease, gum, or graffiti that require the impact of hot water to get the job done right. It will save you money by getting the job done faster, and you do not have to buy a new pressure washer if you already have a cold water system. Its compact size allows for easy storage when not in use and takes up little room on your truck or trailer. You can choose from two diesel heated models.

HOT LINK HOT WATER GENERATOR

Part#	Voltage/Fuel	GPM	PSI
CPHL5DC	12 VDC Diesel	3.5	4350
CPHL5E1	115 VAC Diesel	5.0	4350

HOT BOX SERIES



HBS12V40



HBS12V60



HBS115-80

HOT BOX MODELS

Part#	Voltage/Fuel	GPM	PSI	Dimensions
HBS12V40	12 VDC Diesel	4.0	4000	28"L x 18"W x 41"H
HBS12V60	12 VDC Diesel	6.0	4000	28"L x 18"W x 46"H
HBS12V80	12 VDC Diesel	8.0	4000	32"L x 21"W x 49"H
HBS115-40	115 VAC Diesel	4.0	4000	28"L x 18"W x 41"H
HBS115-60	115 VAC Diesel	6.0	4000	28"L x 18"W x 46"H
HBS115-80	115 VAC Diesel	8.0	4000	32"L x 21"W x 49"H

STANDARD FEATURES

- Rugged powder coated steel frame
- Super efficient schedule 80 coil
- Stainless steel coil wrap
- Vertical diesel models include 8 gallon poly diesel fuel tank with fuel filter; horizontal models include 12 gallon poly diesel fuel tank with fuel filter
- Reliable Beckett burners
- Adjustable thermostat temperature control
- Safety pressure relief valve
- 35' cord with GFCI on 115 & 120 volt models

HYDRO VACUUM® WASTEWATER & FLOOD RECOVERY VACUUMS

The RGV Gas Vac is an engine powered, water recovery system with pump out. It can be used with either one or two separate pickup devices and is ideal for facilities maintenance contractors who need to collect wash water or for restoration contractors who need to pick up water after a fire or flood.

The unique polyethylene separation tanks are non-corrosive, weigh significantly less than 50 gallon steel drums, and have access to the inside for periodic cleaning & maintenance with a quick lift-off lid. Open the large 1½" valve to purge sludge/solids that settle at the bottom. Each separation tank has an automatic transfer system which pumps the water out to your bulk tank, landscape, or sanitary sewer where permitted, no heavy tipping to dump your tanks.
(For use with cold water or hot water up to 200°F)



Transfer pump plug



Air throttle valve

RGV40: GAS ENGINE DRIVE VACUUM RECOVERY SYSTEM

PART#	DESCRIPTION	WT
RGV40V12*	25 gpm,425 CFM, 14"Hg, 190" Lift, 627cc Vanguard Elec. Start	535
RGV40H12*	25 gpm,425 CFM, 14"Hg, 190" Lift, GX630 Honda Elec. Start	535

Features

- Vacuum and pump out simultaneously and automatically, no loss of suction or lost time dumping tanks
 - 12v Transfer pumps require no outside power, completely self contained
 - Recovers up to 25gpm, use up to 350' total hose length – Use with one or two pickup devices
 - Air throttling system allows you to independently control the suction for precise control over pickup devices when using varying lengths of hose
 - 2 qty. 26 gallon lightweight non-corrosive polyethylene hexagonal separation tanks w/ 1.5" sludge/solids drain & removable Stainless Steel lids
 - Easy 1 plug connection for transfer pump power and high water level shutdown
 - Debris filters protect pumps and blower motor
 - Large 8 gallon fuel tank integrated into frame base while keeping a small footprint
 - Requires 2" diameter vacuum hose (350' max.) and 2" diameter discharge hose (100' max.)
 - Optional: your choice of vacuum berms, recovery surface cleaners, vacuum accessories, see pages 70, 74 & 75
 - Main Unit Dimensions & Weight: 44"L x 26" W x 34" H, 425 lbs., Vacuum Tanks: 25"L x 20" W x 36"H, 54 lbs. each
- *NOTE:** Max hose length 350', vacuum & discharge hose not included, see Vacuum Options & Accessories Pages 74 & 75, 650cca 24 Group Battery required (not included).



Using vacuum tools such as a vacuum arch ATP40 or a Twister Vacuum ANTV5 will increase your efficiency



RGV GAS ENGINE VACUUM RECOVERY OPTION

PART#	DESCRIPTION	WT
ATP36	Solids/Sand Separation Tank	62

ATP36



For additional vacuum accessories, see page 74 in the Parts & Accessories catalog.

LIMITED WARRANTY

MANUFACTURER'S WARRANTY

All machines are warranted by the manufacturer to be free of defects in materials and workmanship under normal use. The manufacturer's obligation under this warranty shall be limited to the repair of or exchange of any parts that may prove defective subject to normal use. **Repairs must be pre-authorized.** In no event shall the manufacturer be liable for incidental nor consequential damages, freight damages, transportation costs, nor labor charges, which result from any defect in the product or breach of this warranty.

This warranty shall not apply to any part or parts, which have been subjected to accident, negligence, alteration, abuse or misuse. If any defect appears, immediately contact the dealer from which it was purchased. **Returned units or parts must be shipped to the manufacturer prepaid only. A dated sales receipt with the serial number is required for all warranty claims.**

Returned Goods: Goods being returned for credit must be pre-approved with a **Returned Material Authorization number (RMA)** by Pressure Pro and shipped prepaid. All items returned are subject to a minimum restock fee of 15% and a maximum of 35% for special order items.

Heating Coils have a 5 year limited warranty against defect in material and workmanship. 1 year replacement, and 4 additional years prorated. Warranty excludes damage due to freezing, chemical deterioration, scale build up, rust, corrosion, or thermal expansion. Labor and freight excluded.

Aluminum cold water frames have a limited **LIFETIME** warranty against defect in material or workmanship, excluding labor and freight.

PUMP WARRANTY – AR, CAT, GENERAL, UDOR & VIPER PUMPS

Pumps are warranted to the original purchaser for a period specified by manufacturer from the date of purchase.

Warranty covers manufacturing defects or workmanship that may develop under normal use in a manner up to the directions and usage recommended by the manufacturer.

Warranty does not apply to misuse or when pump or accessory is altered or used in excess of recommended speeds, pressures, temperatures or handling fluids not suitable for pump or accessory material construction. Warranty does not apply to normal wear, freight damage, freezing damage or damage caused by parts or accessories not supplied by the manufacturer.

Liability of manufacturer for warranty is limited to repair or replacement at the option of the manufacturer when such products are found to be of original defect or workmanship at the time it was shipped by the factory.

ENGINE WARRANTY

Honda GX – 3 year limited warranty against defects in material and workmanship under normal use. Refer to Honda Owner's Manual or contact your nearest authorized Honda service dealer.

Honda GC – 2 year consumer or 90 day commercial use limited warranty against defects in material or workmanship. Refer to Honda Owner's Manual or contact your nearest authorized Honda service dealer.

Kohler – 3 year limited warranty. Refer to Owner's Manual or contact your nearest authorized Kohler service dealer.

Kohler Diesel – 1 year limited warranty on all components, and 2 years for major components. Refer to Owner's Manual or contact your nearest authorized service dealer.

NOTE: Due to revised (SAE) J1349 net horsepower rating standards on all gasoline powered engines, horsepowers noted in our literature may be subject to modification as determined by engine manufacturer.

ACCESSORIES WARRANTY

Guns, hoses, tips, valves, etc. have a warranty of 90 days. This warranty does not apply to malfunctions caused by fault or negligence or improper use. Labor and freight excluded.

FREIGHT

FOB Ft. Pierce, Florida (UPS, common carrier).

TERMS

Net – 30 (on approved credit).

NOTE: Prices, specifications and models are subject to change without notice. All unit specifications are based on industry standards of plus or minus 10%.

POLICIES

SALES POLICY: Pressure-Pro®, Inc. sells to qualified dealers/distributors who are in the business of reselling pressure washing equipment and providing repair, service, and support.

ORDERS: Unless otherwise specified all parcel orders are shipped via preferred carrier. Next Day, 2nd Day and 3rd day shipments require a 1:00 PM EST deadline. *Additional Shipping Fees Will Apply.* All LTL (Less Than Truckload) shipments will ship at the carrier's standard service level unless expedited service is requested.

PRICING: Our pricing is subject to change without notice. We will make every possible attempt to inform our customers of any price changes at the time that the order is placed.

PAYMENT: We accept company checks, wire transfer, and credit cards (Visa, Master Card, American Express, or Discover). Credit card payment option is only available if paid prior to order shipment date. Cannot be combined with credit terms. 30 day terms are available upon credit approval. There will be a \$35.00 return check fee for insufficient funds. Invoices are considered past due after invoice date term and will incur monthly interest charges until paid. Please call for more information and a credit application. Orders on credit terms will not be considered for allocation or production scheduling until the credit department releases them.

SALES TAX: Each dealer / distributor is required to provide an up-to-date Reseller's Certificate under the state tax laws that they distribute to. In the event that a current Reseller's Certificate is not provided, we will be required to include state sales tax on the invoice.

SHIPPING POLICY:

- FedEx is our preferred carrier for small parcel shipping (small parts or parcel machines under 150 lbs). UPS shipping and handling charges are prepaid and added to customer's invoice. Oversized items will incur additional handling charges.
- Less Than Truckload (LTL) shipments are sent F.O.B. factory freight prepaid and add. This gives our customers access to our extremely competitive negotiated freight rates. Residential deliveries and signature required will incur additional charges.
- All orders will be treated independently for shipping. We will attempt to consolidate orders into a single shipment but if items must ship together they must be on the same purchase order.

SHORTAGES AND BACKORDERS: Count the pieces received against the driver's delivery receipt. Note any discrepancies in writing on the delivery receipt. *Be Specific:* Identify or describe the missing item. Call your customer service representative immediately with any discrepancies.

FREIGHT DAMAGE CLAIMS: All freight delivered must be inspected for damage and noted on freight bill prior to signing!! If damage is suspected but not seen, request exemption number from carrier. Failure to do so will result in your company being liable for the damaged merchandise. Notify the carrier immediately upon delivery of any noticeable damage. We cannot assist you in working out a settlement with the carrier unless they are immediately notified of the damage. If you suspect internal damage **OPEN IMMEDIATELY!** Even if no damaged goods are suspected, open the carton within 24 hours and make a thorough inspection of the products. Hold all damaged goods and their packaging materials for inspection by the carrier.

All Pressure-Pro® freight shipments are packaged and secured to the pallets with straps and/or shrink wrap. If shipment is missing strap and/or shrink wrap, request carrier provide an exception number before signing for delivery.

PLEASE INSTRUCT YOUR CUSTOMERS OF THIS POLICY AS WELL.

DEFECTIVE MERCHANDISE AND WARRANTIES: The liability of Pressure-Pro®, Inc. is limited to the cost of the defective item. All products carry the manufacturer's warranty. The customer will be responsible for labor, and any other expenses connected with warranty repair or replacement. Freight charges are not covered under the warranty policy.

SPECIFICATIONS: Specifications are subject to change without notice. All models and parts meet or exceed PWMA (Pressure Washer Manufacturers Association) standards of +/- 10% variation.

NILFISK

Pressure-Pro® 

Equipment Catalog

2023



Proudly designed
and assembled
in the USA

Pressure-Pro, Inc.
7300 Commercial Circle
Fort Pierce, FL 34951
(772) 461-4486
www.Pressure-Pro.com

Hydro Tek
2353 Almond Avenue
Redlands, CA 92373
(909) 799-9222
www.HydroTek.us