



VALUE ADDED ICONS

Throughout the following pages, look for these icons displayed with each Kärcher machine. Find out what makes our professional cleaning equipment some of the most innovative and sought after equipment in the industry.



Tested by a Nationally Recognized Testing Laboratory (NRTL) and meets safety standards.



Leadership in Energy and Environmental Design and is widely used green building rating system.



Most Kärcher pumps come with a 7-year warranty, wear parts excluded.



Puncture proof, flat free tires.



International (Canadian Standards Association) tests and certifies electrical, ecolefficiency reducing energy consumption mechanical, plumbing and gas of products.



Economical and environmental mode for while still offering optimal cleaning performance.



National Association of Trailer Manufacturers that provides applicable Federal Motor Vehicle Safety Standards for members.



Two-way dosing valve for switching between different detergents and for precise and variable cleaning agent dosing.



Trigger gun uses the recoil force of the high-pressure spray to reduce the hold force of the trigger to zero.



Ouick lock screw connection for pressure washers and accessories.



Pressure and water flow regulation directly at the gun.



Electric start of motor for convenience of easier and faster start-up.



Easy Operation dial provides self-explanatory symbols to identify cleaning modes.



Automatically shuts down the motor and pump when the trigger gun is released.



Lithium Ion battery offering a longer life than other batteries, consistent voltage, and energy charging savings.



Battery-powered industrial pressure washer system.



Many Kärcher German machines can be operated using environmentally friendly biodiesel.



FACT - Flexible Application Control Technology allows adjustment of brush speed for different applications.



THE 8 GREATS For soap recommendations, start with these eight highly rated category leaders.

TABLE OF CONTENTS

HOT WATER PRESSURE WASHERS		KM 75/40 W BP	50
ELECTRIC POWERED > DIESEL HEATED		KM 85/50 R BP	51
HDS UPRIGHT CLASS	5	KM 90/60 R BP ADV	52
HDS COMPACT CLASS	6	EXTRACTORS	
MOJAVE SERIES	7	PUZZI™ 8/1 C	54
ELECTRIC POWERED > ELECTRIC HEATED	•	BRC 30/15 C	55
HDS SPECIAL CLASS	8	VACUUMS	
HDS CABINET	9	RANGER	56
	9	CVS 65/1 BP	57 57
ELECTRIC POWERED > NG/LP HEATED	10	NT 48/1	58
SECHURA SERIES SECHURA - NG	10	NT 68/1	59
SECHURA - I.P	11 12	BV/VAC PAC™ HEPA SERIES	60
HDS VHP	13	SCRUBBERS	
	13	BR 35/12 C BP	61
GAS POWERED > DIESEL HEATED	1.4	BD 38/12 C BP	62
HDS P / PE CAGE	14	BD 50/50 C BP CLASSIC	63
JALAPAO SERIES	15	BD 50/55 W BP CLASSIC	64
TRAILERS		BD 70/75 W BP CLASSIC	65
TULE SERIES HDS 3.5/40 GE MT	16	BR 75/75 W BP CLASSIC	66
TRK-3500	17	BD 80/100 W BP CLASSIC	67
TRK-6000	18	BR 85/100 W BP CLASSIC	68
COLD WATER PRESSURE WASHERS		B 80 W BP	69
		B 150 R BP	72
BATTERY POWERED		B 150 R BP ACCESSORIES	73
CLEANWAVE	20	CLEANING HEADS & BRUSHES	74 - 76
ELECTRIC POWERED		SPECIALTY	
PRO HD 400 ED	21	SG 4/4	77
HD COMPACT CLASS	22	SGV 6/5	78
HD MID CLASS CAGE	23	SG BP GUM REMOVER	79
HD MID CLASS	24	AIR BLOWERS	
HD SUPER CLASS	25	AB 84 CUL	80
HD SPECIAL CLASS	26	FLOOR MACHINES	
HD WALL MOUNTED	27	BDS 51/175 C	81
HD SERIES ELECTRIC	28	DD3 31/173 C	01
HD ROLL CAGE	29	DETERGENTS	
HD CABINET - BELT DRIVE	30		
GAS POWERED		KÄRCHER DETERGENTS KÄRCHER DETERGENTS	82
JARVIS SERIES	31	KARCHER DETERGENTS	02
TETON SERIES	32	PARTS & ACCESSORIES	
HD SERIES GAS	33	BRANDED PARTS	82
HD SERIES GAS SKID	34		
HD CART	35	UNBRANDED PARTS PRESSURE WASHER ACCESSORIES	138
HD PB CART	36	PRIVATE LABEL PARTS	156
HD PB / PEB / D CAGE HD GAS MINI SKIDS	37 38	GUNS & LANCES	155
	38	HOSES	165
HIGH PRESSURE		COUPLERS, FITTINGS & FILTERS	175
HD 7.9/72-4 CAGE EC	39	NOZZLES	193
HOT WATER GENERATORS		PUMPS	211
MOBILE HOT WATER GENERATOR	40	UNLOADERS, INJECTORS, VALVES & GAUGES	243
STATIONARY HOT WATER GENERATOR SERIES	41	ENGINES, MOTORS & PULLEYS	268
WATER RECOVERY / FILTRATION		BURNERS	276
MISSISSIPPI RECOVERY	42	ELECTRICAL COMPONENTS	292
SPECIALS		CHASSIS COMPONENTS	306
KÄRCHER SPECIALS	43	CAR WASH BAY ACCESSORIES	309
TO METER OF LEWIED	+5	AG SPRAY ACCESSORIES	316
FLOOR CARE		SOFT WASH	323
SWEEPERS			
EB 30/1	47		
KM 70/20 C	47		
KM 70/30 C BP ADV	49		
·, · · · · ·			

HOW TO IDENTIFY KÄRCHER EQUIPMENT BY NAME

It's easier than you think.

Machine

contained

All Kärcher branded machines are named systematically so that every machine name explains what the product is. For example the name of a backpack vacuum would start with "BV". Not all names translate as directly, for example all sweeper's names start with "KM". The numbers in the name refer to the width of the cleaning path, machine's holding capacity and/or motor speed. Any additional information following the numbers explains some of the additional benefits of the machine, for example "Bp" means battery powered. Use the tables below to help you identify the details of your Kärcher machine.

Cleaning path/

width/

15 liter tank

capacity

BRC 30/15 C

Options/

compact

CV 60/1 RS BP

60 = cleaning path in cm 1 = number of motors RS = stand-on Bp = battery powered



KM 100/120 R BP

KM = sweeper 100 = sweeping path in cm 120 = combined hopper size in liters Bp = battery powered





BR = scrubber with cylindrical brushes

75 = cleaning path in cm

75 = tank volume in liters

W = walk-behind model with traction drive

Bp = battery-powered



MACH	INE TYPE
Code	Features or attributes
AB	Air blower
AP	All purpose multi-surface cleaner
В	Scrubber
BD	Scrubber with disc brushes
BDP	Burnisher
BDS	Floor machine
➤ BR	Scrubber with cylindrical brushes
BRC	Self contained extractor
BV	Backpack vacuum
cv	Vacuum
cvs	Vacuum Sweeper
EB	Compact sweeper
HD	Cold water pressure washer
HDS	Hot water pressure washer
КМ	Sweeper
NT	Wet/dry vacuum
PS	Portable sprayer
Puzzi™	Spotter or box & wand extractor
SG	Gum remover
SGV	Steamer
Т	Canister vacuum

CLEAN	ING PA	/гн	CAPA	CITY
СМ	Inches		Liters	Gallon
30	12		4	1
35/36	14		10	2.64
38	15		12	3.17
40	16	\ \	25	6.6
43	17	4	40	10.6
45	18		50	13.21
51	20		60	15.85
55	22		70	18.49
60	24		75	19.81
65	26		80	21.13
71	28		90	23.78
> 75	30		120	31.7
90	36		150	39.63
100	40		250	66.04
120	47			

FLOOP	R CARE OPTIONS/FEATURES
Code	Options
AP	Semi-automatic filter cleaning system
Вр	Battery powered
С	Compact, pad assist
D	Disc brush
HEPA	HEPA level air filtration
LPG	Liquid propane gas
R	Cylindrical brush
S	Orbital brush
R	Ride-on machine
RS	Stand-on machine
TACT	Triggered Airdraft Cleaning Technology
Te	Automatic Power Outlet
→ w	Walk-behind, traction drive

PRESS	PRESSURE WASHER OPTIONS/FEATURES										
Code	Options										
+	Remote On-Off with Time Delay										
Ea	230V / 1 phase										
Eb	230V / 3 phase										
Ec	460V / 3 phase										
Ed	120V / 1 phase										
G	Gas powered										
Gb	Gas powered, belt driven										
GeB	Gas powered, electric start, belt driven										
Mt	Mini trailer										
Р	Petrol powered										
Pe	Petrol powered, electric start										

HDS UPRIGHT CLASS



Mobility at its finest.

This high-performance, robust upright machine offers outstanding maneuverability, easy transport and intuitive operation. Ideal for tradesmen, commercial use and contract cleaners.

















Features

- Effortless transport over landings or stairs and space saving storage
- Large, flat-free tires for unpaved surfaces
- Large fine mesh filter reliably protects against dirt particle damage
- Easy!Force gun with cruise control like technology uses its own recoil force to hold the trigger down - so no more sore hands after hours of use

TECHNICAL DATA

Model	Part No.	GРM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HDS 1.7/12 U Ed	1.064-907.0	1.7	1200	Direct	2.3	110-120V / 1ph	12.5	Kärcher Axial	178	28 x 28 x 46	

ACCESSORIES

	Order No.	Description
•	4.118-005.0	EASY!Force trigger gun (German model) - zero force required.
•	4.112-006.0	33" spray lance
	6.110-034.0	33' high-pressure hose
•	4.117-027.0 ■	Triple jet nozzle, 032
	2.112-015.0	Gutter cleaning lance
	4.112-032.0 ■	Underbody lance
	6.110-051.0	High-pressure hose, 33', 10m DN8, suitable for food industry, extension piece
	6.110-049.0	Pipe cleaning hose
	2.111-013.0	FR 30 ME surface cleaner
	2.111-011.0	Surface cleaner FR 30
	4.115-000.0	Wet blasting attachment
	4.113-003.0	Rotating washing brush natural fiber bristles
	4.113-004.0	Rotating washing brush nylon bristles
	2.113-000.0	Power nozzle 25° spray angle
	4.114-019.0	Dirtblaster Nozzle 035
	4.637-033.0 ■	Detergent injector for high pressure
	2.115-000.0	Quick coupling
	2.115-001.0	Plug nipple
	4.112-000.0	41" Spray lance

HDS COMPACT CLASS



It's all in the detail.

Kärcher's German-built electric hot water machines are the most advanced on the market, featuring Kärcher's patented axial pump integrated with a 2-pole motor for optimum efficiency. Kärcher's efficient and compact downdraft-fired burner uses far less fuel than standard heat exchangers. Units come standard with low-fuel shut-off, low-water protection, high-temperature shut-off, thermal overload protection, EASY!Force gun, and 50' hose. All units are certified ETL safety standards.





















Features

- ecolefficiency mode economical and environmentally friendly, even during longer periods of use, and this mode reduces fuel consumption and CO2 emissions by 20%
- Robust wheels and steering mechanism for maneuverability
- Large integrated handles in the chassis
- Integrated tilting aid for effortlessly negotiating obstacles such as steps and curves

TECHNICAL DATA

Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HDS 2.3/12 C Ed	1.272-901.0	2.3	1100	Direct	2.8	110-120V / 1ph	18.5	Kärcher Axial	270	40 x 28 x 41	

ACCESSORIES

	Order No.	Description
-	4.118-005.0	EASY!Force trigger gun (German model) - zero force required.
	4.112-000.0 ■	41" spray lance
•	6.110-030.0	High pressure hose, 50', both sides Easy!Lock, ID 8
	4.117-037.0 ■	Triple jet nozzle, 050 (for machine 1.272-901.0)
	4.111-041.0	Adapter for Easy!Force trigger gun connection to 3/8" hose

MOJAVE SERIES









Robust and innovative.

The Kärcher Mojave series is the perfect all-around machine for a variety of applications and target groups, including agriculture, automotive and transportation industries. The machines deliver the highest performance for best cleaning results - all combined in a robust package. The components include unique features in the market and combine it with high quality components engineered for a high product lifetime.

















New, innovative, features and upgrades

- Standard auto start/stop
- Equipped with EASY!Force accessories, hour meter, status LED, crane hook, and other upgraded features
- Steam stage, Servo Control, and stainless steel side panels included on Premium units

TECHNICAL DATA

Model	Part No.	GPM	PSI	Motor	Electrical	Amps		Pressure Adjustment	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HDS 2.2/12 Ed Standard	1.109-151.0	2.2	1200	2-pole	120V / 1ph	20	No	- /	397	50 x 40 x 50
HDS 3.0/20-4 Ea/Eg Standard	1.109-153.0	3.0	2000	4-pole	208-230V / 1ph	26	No	At unloader	507	50 x 40 x 50
HDS 3.5/30 Eg Standard NEW	1.109-154.0	3.5	3000	4-pole	208V / 1ph	35	No	At unloader	550	50 x 40 x 50
HDS 3.5/30-4 Ea Standard NEW	1.109-155.0	3.5	3000	4-pole	230V / 1ph	35	No	At unloader	507	50 x 40 x 50
HDS 4.0/20 Eg Premium NEW	1.109-156.0	4.0	2000	4-pole	208V / 1ph	30	Yes	Servo Control	550	50 x 40 x 50
HDS 4.0/20-4 Ea Premium	1.109-157.0	4.0	2000	4-pole	230V / 1ph	30	Yes	Servo Control	550	50 x 40 x 50
HDS 4.0/20-4 Eh/Eb Premium	1.109-158.0	4.0	2000	4-pole	208-230V / 3ph	24	Yes	Servo Control	550	50 x 40 x 50
HDS 4.0/20-4 Ec Premium	1.109-159.0	4.0	2000	4-pole	460V / 3ph	12	Yes	Servo Control	550	50 x 40 x 50
HDS 4.0/30-4 Eh/Eb Premium	1.109-163.0	4.0	3000	4-pole	208-230V / 3ph	30	Yes	Servo Control	550	50 x 40 x 50
HDS 4.0/30-4 Ec Premium	1.109-164.0	4.0	3000	4-pole	460V / 3ph	14	Yes	Servo Control	550	50 x 40 x 50
HDS 4.0/30-4 Ef Premium	1.109-165.0	4.0	3000	4-pole	575V / 3ph	12	Yes	Servo Control	550	50 x 40 x 50
HDS 5.0/30-4 Eh/Eb Premium	1.109-166.0	5.0	3000	4-pole	208-230V / 3ph	34	Yes	Servo Control	550	50 x 40 x 50
HDS 5.0/30-4 Ec Premium	1.109-167.0	5.0	3000	4-pole	460V / 3ph	16	Yes	Servo Control	550	50 x 40 x 50
HDS 5.0/30-4 Ef Premium	1.109-168.0	5.0	3000	4-pole	575V / 3ph	13	Yes	Servo Control	550	50 x 40 x 50

ACCESSORIES

Order	No.	Description
■ 4.118-	-005.0	EASY!Force trigger gun (German model) - zero force required
■ 4.112-	-000.0	41" spray lance
■ 6.110-	-029.0	50' EASY!Lock Longlife hose with ANT!!Twist connection (included on premium units)
■ 6.110-	-030.0	50' EASY!Lock hose with ANTI!Twist connection (included on standard units)
■ 2.113-	-007.0 ■	Power nozzle 25042 for HDS 3.0/20-4 Ea/Eg
■ 2.113-	-021.0 ■	Power nozzle 25040 for HDS 3.5/30-4 Ea
■ 4.115-	-020.0 ■	Power nozzle 25058 for HDS 4.0/20-4 Ea Premium
■ 2.114-	-008.0 ■	Steam nozzle (included on HDS 4.0/20-4 Ea)
■ 4.118-	-008.0 ■	Servo Control dial (included on HDS 4.0/20-4 Ea)
□ 8.750-	-685.0	100' pivot reel
□ 9.808-	-276.0	Hose reel bracket kit (hose reel not included)

lacktriangle Included \Box Optional lacktriangle Compatible with EASY!Lock

HDS SPECIAL CLASS



The zero emission specialist.

The emission-free HDS-E 3.3/25-4M Ec with electric heater is ideal where exhaust gases are undesirable or prohibited. Thanks to the unique type of heater insulation and Karcher ecolefficiency mode, the HDS-E 3.3/25-4M Ec is efficient and eco-friendly. Models are certified to ETL safety standards.




















Features

- eco!efficiency mode economical and environmentally friendly, even during longer periods of use
- Intuitive operation with large single-button selector dial

TECHNICAL DATA

Model	Part No.	GРM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HDS-E 3.3/25-4M I	c 1.030-902.0	1.6-3.3	465-2520	Direct	7.5	460V / 3ph	35	Kärcher Axial	290	50 x 32 x 45	
HDS-E 3.3/25-4M I	f 1.030-903.0	1.6-3.3	465-2520	Direct	7.5	575V / 3ph	28	Kärcher Axial	352	50 x 32 x 45	

ACCESSORIES

	Order No.	Description
•	4.118-005.0	EASY!Force trigger gun (German model) - zero force required.
•	4.112-000.0 ■	41" spray lance
•	6.110-030.0 ■	50' EASY!Lock Longlife hose with ANTI!Twist connection
	2.113-009.0	Power nozzle, TR 25047
	2.111-013.0	Surface cleaner, FR 30 ME
	4.111-037.0	Coupler
	4.118-007.0	Servo Control
	4.111-036.0	Adapter for EASY!Lock lance connecting to M18 Dirtblaster nozzle
	4.111-041.0	Adapter for EASY!Lock gun connecting to 3/8" hose
	8.750-685.0	100' pivot reel
	8.921-775.0	Hose reel bracket (complete with Easy!Lock adapter, street elbow and 6' jumper hose)

HDS CABINET



Cleaning technology for indoors.

This Kärcher all-electric hot water pressure washer introduces hot-water tank technology to deliver hot water on demand ideal for indoor cleaning. Water is heated by flowing through a coil inside an 80-gallon water tank. Heating elements generate 138,000 BTU to produce hot water of up to 180°F. All models are certified to ETL safety standards.











Features

- Heavy-duty, steel cabinets are protected by an epoxy powder coat finish; upper cabinet ventilated for cool operation
- Thermal pump saver valve prevents damage by venting recirculated water
- Low-water flow switch prevents damage to heating elements due to lack of water
- Easy-to-attach detergent injector and three quick couplers nozzles
- Auto start function allows unit to be turned on with pull of the trigger
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down so, no more sore hands after hours of use

TECHNICAL DATA

Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HDS 4.0/20 E Ec	1.109-075.0	4.2	2000	Belt	6.2	460V / 3ph	55	Kärcher KM	640	32 x 24 x 52
HDS 4.0/30 E Ec	1.109-076.0	3.5	3000	Belt	7.5	460V / 3ph	59	Kärcher KM	640	32 x 24 x 52
HDS 4.0/20 E Ef	1.109-956.0	3.5	2000	Belt	5	575V / 3ph	46	Kärcher KM	620	34 x 25 x 52
HDS 4.0/30 E Ef	1.109-957.0	3.5	3000	Belt	7.5	575V / 3ph	49	Kärcher KM	640	34 x 25 x 52

ACCESSORIES

Order No.	Description	
8.756-481.0	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.	

OPTIONS (FACTORY INSTALLED)

Order No.	Description
8.925-520.0	Time delay shutdown (replaces auto start-stop) (only for 460V units)
9.801-002.0	Pressure washer stainless steel cabinet (only for 460V units)

■ Included □ Optional ■ Please Note: NOT compatible with EASY!Lock

SECHURA SERIES



High cleaning performance.

The North American Kärcher HDS natural gas and LP-heated cabinet pressure washer delivers up to 9.5 gpm at 3000 psi of industrial power. Built in the U.S.A., each model is constructed with anodized structural rivets, industrial motors and Kärcher pumps that are backed by a 7-year warranty.











Features

- All-access cabinet design with six lift out panels and easy lock fasteners provides easy access to components for maintenance in tight situations
- Swing-out cast iron burner ring with separate "stay-in-place" ignition pilot light allows easy access and removal of the burner ring
- Improved "Stay-Tite" belt tensioning system maintains belt tension on the pump with a torsion bar for precise tension adjustment
- The heating coil is made of leak-free, cold rolled, schedule 80 steel pipe and is wrapped with a thick foil blanket insulation that keeps cabinet walls cool to the touch
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down so, no more sore hands after hours of use

ACC	ESSORIES	
	Order No.	Description
	4.118-005.0	EASY!Force trigger gun (German model) - zero force required.
	8.917-509.0	Kit, wireless remote pump/burner/detergent
	8.921-832.0	Wireless hand-held transmitter
	8.917-817.0	Kit, wall bracket wireless transmitter
	8.921-774.0	NG kit, wired remote station - pump and burner (note: cord length is 20 ft)
	8.921-773.0	NG kit, wired remote detergent
	8.922-157.0	Remote control box (wired) (Pump / burner switch Included, add 8.921-773.0 for detergent switch). For additional remote only.
	8.917-507.0	Snap-N-Go Auto Start/Stop Kit w/ Lock Out (no remote, or wireless remote)
	9.807-646.0	Snap-N-Go Auto Start/Stop Kit w/o Lock Out (wired remote, requires 8.921-774.0)
	8.917-508.0	Snap-N-Go Time Delay Kit
	8.921-776.0	Kit, steam combo
	9.801-040.0	Draft diverter, 10", up to 5 gpm
	8.717-730.0	Draft diverter, 12", over 5 gpm
	8.753-474.0	Draft damper, 10"
	8.753-478.0	Draft damper, 12"
	8.753-706.0	Reducer, stack 12" to 10"
	8.753-707.0	Reducer, stack 10" to 8"
	8.923-213.0	Outlet relocator

SECHURA - NG

ECHNICAL DATA											
Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	вти	Ship Dimensions (L x W x H) Inches
Natural Gas-Heated	3.5-5.0 GPM M	ledium (Cabinet C	Design							
HDS 3.5/20 Ea ST NG	1.109-715.0	3.5	2000	Belt	5	230V / 1ph	25	KD4020R / 1350	815	320000	49 x 24 x 48
HDS 4.0/22 Ea ST NG	1.109-716.0	4	2200	Belt	6.2	230V / 1ph	29	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Eb ST NG	1.109-717.0	4	2200	Belt	6.2	230V / 3ph	16	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Ec ST NG	1.109-718.0	4	2200	Belt	6.2	460V / 3ph	7	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Ef ST NG	1.109-719.0	4	2200	Belt	6.2	575V / 3ph	6.5	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Eg ST NG	1.109-720.0	4	2200	Belt	6.2	208V / 1ph	30	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Eh ST NG	1.109-721.0	4	2200	Belt	6.2	208V / 3ph	18	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 3.9/30 Ea ST NG	1.109-723.0	3.9	3000	Belt	8.2	230V / 1ph	36	KM4035R / 1225	856	354000	49 x 24 x 48
IDS 3.9/30 Eb ST NG	1.109-724.0	3.9	3000	Belt	8.2	230V / 3ph	25	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Ec ST NG	1.109-725.0	3.9	3000	Belt	8.2	460V / 3ph	11	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Ef ST NG	1.109-726.0	3.9	3000	Belt	8.2	575V / 3ph	14	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Eg ST NG	1.109-727.0	3.9	3000	Belt	8.2	208V / 1ph	38	KM4035R / 1225	856	354000	49 x 24 x 48
IDS 3.9/30 Eh ST NG	1.109-728.0	3.9	3000	Belt	8.2	208V / 3ph	27	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 5.0/23 Ea ST NG	1.109-730.0	5.0	2300	Belt	8.2	230V / 1ph	36	KT6035R / 1225	856	439000	49 x 24 x 48
IDS 5.0/23 Eb ST NG	1.109-731.0	5.0	2300	Belt	8.2	230V / 3ph	25	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Ec ST NG	1.109-732.0	5.0	2300	Belt	8.2	460V / 3ph	11	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Ef ST NG	1.109-733.0	5.0	2300	Belt	8.2	575V / 3ph	14	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Eg ST NG	1.109-734.0	5.0	2300	Belt	8.2	208V / 1ph	38	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Eh ST NG	1.109-735.0	5.0	2300	Belt	8.2	208V / 3ph	27	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 4.8/30 Ea ST NG	1.109-736.0	4.8	3000	Belt	10	230V / 1ph	42	KT6035R / 1225	885	415000	49 x 24 x 48
IDS 4.8/30 Eb ST NG	1.109-737.0	4.8	3000	Belt	10	230V / 3ph	26	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Ec ST NG	1.109-738.0	4.8	3000	Belt	10	460V / 3ph	15	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Ef ST NG	1.109-739.0	4.8	3000	Belt	10	575V / 3ph	14	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Eg ST NG	1.109-740.0	4.8	3000	Belt	10	208V / 1ph	49	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Eh ST NG	1.109-741.0	4.8	3000	Belt	10	208V / 3ph	32	KT6035R / 1225	885	415000	49 x 24 x 48

TECHNICAL DATA											
Model	Part No.	GРM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	вти	Ship Dimensions (L x W x H) Inches
Natural Gas-Heated	6.3+ GPM Larg	e Cabin	et Design	1 /							
HDS 6.3/32 Eb ST NG	1.109-744.0	6.3	3200	Belt	15	230V / 3ph	39	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 6.3/32 Ec ST NG	1.109-745.0	6.3	3200	Belt	15	460V / 3ph	19	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 6.3/32 Ef ST NG	1.109-746.0	6.3	3200	Belt	15	575V / 3ph	18	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 6.3/32 Eh ST NG	1.109-747.0	6.3	3200	Belt	15	208V / 3ph	39	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 8.0/32 Eb ST NG	1.109-748.0	8.0	3200	Belt	20	230V / 3ph	46	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 8.0/32 Ec ST NG	1.109-749.0	8.0	3200	Belt	20	460V / 3ph	26	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 8.0/32 Ef ST NG	1.109-750.0	8.0	3200	Belt	20	575V / 3ph	21	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 8.0/32 Eh ST NG	1.109-751.0	8.0	3200	Belt	20	208V / 3ph	60	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 9.5/30 Eb ST NG	1.109-752.0	9.5	3000	Belt	20	230V / 3ph	52	KX1036R / 1650	1910	816000	64 x 35 x 61
HDS 9.5/30 Ec ST NG	1.109-753.0	9.5	3000	Belt	20	460V / 3ph	26	KX1036R / 1650	1910	816000	64 x 35 x 61
HDS 9.5/30 Ef ST NG	1.109-754.0	9.5	3000	Belt	20	575V / 3ph	21	KX1036R / 1650	1910	816000	64 x 35 x 61
HDS 9.5/30 Eh ST NG	1.109-755.0	9.5	3000	Belt	20	208V / 3ph	60	KX1036R / 1650	1910	816000	64 x 35 x 61

SECHURA - LP

TECHNICAL DATA											
Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	вти	Ship Dimensions (L x W x H) Inches
LP Gas-Heated 3.5-5	5.0 GPM Mediu	m Cabin	et Desig	n							
HDS 3.5/20 Ea ST LP	1.109-756.0	3.5	2000	Belt	5	230V / 1ph	25	KD4020R / 1350h	815	320000	49 x 24 x 48
HDS 4.0/22 Ea ST LP	1.109-757.0	4	2200	Belt	6.2	230V / 1ph	29	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Eb ST LP	1.109-758.0	4	2200	Belt	6.2	230V / 3ph	16	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Ec ST LP	1.109-759.0	4	2200	Belt	6.2	460V / 3ph	7	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Ef ST LP	1.109-760.0	4	2200	Belt	6.2	575V / 3ph	6.5	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Eg ST LP	1.109-761.0	4	2200	Belt	6.2	208V / 1ph	30	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 4.0/22 Eh ST LP	1.109-762.0	4	2200	Belt	6.2	208V / 3ph	18	KM4035R / 1250	843	364000	49 x 24 x 48
HDS 3.9/30 Ea ST LP	1.109-764.0	3.9	3000	Belt	8.2	230V / 1ph	36	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Eb ST LP	1.109-765.0	3.9	3000	Belt	8.2	230V / 3ph	25	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Ec ST LP	1.109-766.0	3.9	3000	Belt	8.2	460V / 3ph	11	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Ef ST LP	1.109-767.0	3.9	3000	Belt	8.2	575V / 3ph	14	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Eg ST LP	1.109-768.0	3.9	3000	Belt	8.2	208V / 1ph	38	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 3.9/30 Eh ST LP	1.109-769.0	3.9	3000	Belt	8.2	208V / 3ph	27	KM4035R / 1225	856	354000	49 x 24 x 48
HDS 5.0/23 Ea ST LP	1.109-771.0	5.0	2300	Belt	8.2	230V / 1ph	36	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Eb ST LP	1.109-772.0	5.0	2300	Belt	8.2	230V / 3ph	25	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Ec ST LP	1.109-773.0	5.0	2300	Belt	8.2	460V / 3ph	11	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Ef ST LP	1.109-774.0	5.0	2300	Belt	8.2	575V / 3ph	14	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Eg ST LP	1.109-775.0	5.0	2300	Belt	8.2	208V / 1ph	38	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 5.0/23 Eh ST LP	1.109-776.0	5.0	2300	Belt	8.2	208V / 3ph	27	KT6035R / 1225	856	439000	49 x 24 x 48
HDS 4.8/30 Ea ST LP	1.109-777.0	4.8	3000	Belt	10	230V / 1ph	42	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Eb ST LP	1.109-778.0	4.8	3000	Belt	10	230V / 3ph	26	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Ec ST LP	1.109-779.0	4.8	3000	Belt	10	460V / 3ph	15	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Ef ST LP	1.109-780.0	4.8	3000	Belt	10	575V / 3ph	14	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Eg ST LP	1.109-781.0	4.8	3000	Belt	10	208V / 1ph	49	KT6035R / 1225	885	415000	49 x 24 x 48
HDS 4.8/30 Eh ST LP	1.109-782.0	4.8	3000	Belt	10	208V / 3ph	32	KT6035R / 1225	885	415000	49 x 24 x 48

TECHNICAL DATA											
Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	вти	Ship Dimensions (L x W x H) Inches
Natural Gas-Heated	6.3+ GPM Larg	e Cabin	et Design	1							
HDS 6.3/32 Eb ST LP	1.109-785.0	6.3	3200	Belt	15	230V / 3ph	39	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 6.3/32 Ec ST LP	1.109-786.0	6.3	3200	Belt	15	460V / 3ph	19	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 6.3/32 Ef ST LP	1.109-787.0	6.3	3200	Belt	15	575V / 3ph	18	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 6.3/32 Eh ST LP	1.109-788.0	6.3	3200	Belt	15	208V / 3ph	39	KT6035R / 1625	1825	507000	64 x 35 x 61
HDS 8.0/32 Eb ST LP	1.109-789.0	8.0	3200	Belt	20	230V / 3ph	46	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 8.0/32 Ec ST LP	1.109-790.0	8.0	3200	Belt	20	460V / 3ph	26	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 8.0/32 Ef ST LP	1.109-791.0	8.0	3200	Belt	20	575V / 3ph	21	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 8.0/32 Eh ST LP	1.109-792.0	8.0	3200	Belt	20	208V / 3ph	60	KX9536R / 1458	1840	658000	64 x 35 x 61
HDS 9.5/30 Eb ST LP	1.109-793.0	9.5	3000	Belt	20	230V / 3ph	52	KX1036R / 1650	1910	775000	64 x 35 x 61
HDS 9.5/30 Ec ST LP	1.109-794.0	9.5	3000	Belt	20	460V / 3ph	26	KX1036R / 1650	1910	775000	64 x 35 x 61
HDS 9.5/30 Ef ST LP	1.109-795.0	9.5	3000	Belt	20	575V / 3ph	21	KX1036R / 1650	1910	775000	64 x 35 x 61
HDS 9.5/30 Eh ST LP	1.109-796.0	9.5	3000	Belt	20	208V / 3ph	60	KX1036R / 1650	1910	775000	64 x 35 x 61

HDS VHP



For dirt and grime indoors and out.

Looking for a heavy-duty pressure washer that can handle the dirt and grime indoors and out? Then the versatile HDS VHP is the right machine for the task. Available in both 120V and 230V configurations, this hot water pressure washer features cleaning power up to 2.5 GPM and 2000 PSI. And, since the HDS VHP is built with tubed pneumatic tires, this heavy-duty series delivers power wherever the job takes you. It is designed for vapor type propane only.











Features

- Belt-driven Kärcher pump with a 7-year warranty
- Four tubed pneumatic tires provide excellent maneuverability
- Extra-durable heating coil is made of leak-free, cold-rolled steel pipe and features a 5-year warranty
- Features a rugged 10 gauge steel chassis with polyester powder coat finish
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use

TECHNICAL DA	ГЛ

Model	Part No.	GРM	PSI	НР	Electrical	Amps	Pump RPM	Pump	вти	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HDS VHP2-15024D	1.109-556.0	1.8	1500	2	120V / 1ph	17	1100	KP3030R	140,000	470	50" x 26" x 41"
HDS VHP3-20024A	1.109-557.0	2.5	2000	5	230V / 1ph	20	1375	KP3030R	245,000	500	50" x 26" x 41"

ACCESSORIES

	Order No.	Description	
•	8.756-481.0 ■	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.	

OPTIONS (FACTORY INSTALLED)

Order No.	Description
8.903-538.0	Stainless-steel motor cover
8.903-501.0	Electronic ignition (convenience in lighting pilot) for 120V machine
8.925-856.0	Electronic ignition (convenience in lighting pilot) for 230V machine

■ Included □ Optional ■ Please Note: NOT compatible with EASY!Lock

HDS P / PE CAGE





Outstanding on all terrains.

Built on a rugged 1-1/4" powder coated steel frame, these compact gas roll cage models are designed for construction sites, farms and factories. The different models deliver hot water cleaning of up to 3500 PSI. Each features a Kärcher pump with limited 7-year warranty, industrial-grade motor and flat-free tires.



















Features

- Flat-free tires
- 7-year pump warranty
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use

TECHNICAL DATA												
Model	Part No.	GPM	PSI	Drive	сс	Engine	Start	Pump	Burner	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HDS 2.8/25 P Cage	1.575-555.0	2.7	2400	Direct	196	Honda GX200	Recoil	Kärcher KG	12V DC	406	50 x 40 x 50	
HDS 3.5/35 Pe Cage	1.575-553.0	3.5	3500	Direct	389	Honda GX390	Electric	Kärcher KS	12V DC	595	50 x 40 x 58	
HDS 3.5/35 Pe Cage	1.110-085.0	3.5	3500	Direct	389	Vanguard 400	Electric	Kärcher KS	12V DC	595	50 x 40 x 58	

ACCESSORIES

	Order No.	Description	
-	8.756-481.0 ■	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.	

■ Included □ Optional ■ Please Note: NOT compatible with EASY!Lock

JALAPAO SERIES







The industrial workhorse.

Kärcher Jalapao series oil-fired skids are the workhorses of the pressure washer industry. Delivering up to 8.0 GPM of hot water and up to 3500 PSI, these rugged gas and diesel-powered machines are built on an open frame using heavy-gauge 1-1/4" powder coated steel and are ideal for mounting in a truck or on a trailer. The electric-start engine and powerful belt-drive Kärcher KT and KX pumps are isolated from the rest of the machine on a shock-mounted sub-frame to reduce vibration. Steam combination comes standard with all models.









Features

- Honda, Vanguard and Kubota engines with electric start
- Kärcher belt-drive tri-plunger pumps with 7-year warranty
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down so, no more sore hands after hours of use

FECHNICAL DATA												
Model	Part No.	GPM	PSI	Drive	сс	Engine	Fuel	Pump	Burner	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HDS 3.9/30 Pe Cage	1.575-600.0	3.9	3000	Belt	389	Honda GX390	Gas	Kärcher KT	12V DC	790	54 x 56 x 55	
HDS 4.8/30 Pe Cage	1.575-601.0	4.8	3000	Belt	570	Vanguard 18	Gas	Kärcher KT	12V DC	800	54 x 56 x 55	
HDS 4.8/30 Pe Cage	1.575-602.0	4.8	3000	Belt	570	Vanguard 18	Gas	Kärcher KT	120V AC	945	54 x 56 x 55	
HDS 4.7/35 Pe Cage	1.575-603.0	4.7	3500	Belt	688	Honda GX630	Gas	Kärcher KT	12V DC	855	54 x 56 x 55	
HDS 4.7/35 Pe Cage	1.575-604.0	4.7	3500	Belt	688	Honda GX630	Gas	Kärcher KT	120V AC	890	54 x 56 x 55	
HDS 5.6/35 De Cage	1.110-622.0	5.4	3500	Belt	1123	Kubota D1105-E3B	Diesel	Kärcher KT	12V DC	1214	54 x 56 x 55	
HDS 5.6/35 De Cage	1.110-623.0	5.4	3500	Belt	1123	Kubota D1105-E3B	Diesel	Kärcher KT	120V AC	1300	54 x 56 x 55	
HDS 8.0/30 Ge Cage	1.575-611.0	8.0	3000	Belt	688	Honda GX690	Gas	Kärcher KX	12V DC	805	54 x 56 x 55	
HDS 8.0/30 Ge Cage	1.575-612.0	8.0	3000	Belt	688	Honda GX690	Gas	Kärcher KX	120V AC	865	54 x 56 x 55	

ACCESSORIES

Order No.	Description	
8.756-481.0 ■	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.	

OPTIONS

Order No.	Description
8.904-051.0	Battery (NOT for use with GX390 models or Kubota, field installed)
8.903-430.0	Stackless flue adapter (field installed)
Included Optiona	al ■ Please Note: NOT compatible with EASY!Lock

TULE SERIES HDS 3.5/40 GE MT



Shown with optional hose reel

Towable and maneuverable hot water pressure washer.

Ready to pick up and go at a moments notice, Kärcher's Tule Series HDS 3.5/40 Ge MT hot water pressure washer trailer provides the necessary cleaning power on virtually any job site which has a water source. Simply unhitch the Tule Series HDS 3.5/40 Ge MT and take the cleaning power where you need it most. The Tule Series trailer features a reliable Honda engine, 8 gallon diesel fuel tank, electric start with manual start backup and much more.

U.S. Design Patent No. 9,724,734 B2

















Features

- Honda GX 390 engine and electric start with manual start backup
- Adjustable thermostat for water temperature regulation
- 8 gallon diesel fuel tank
- Lift handle and swing away tongue for easier hook up of the trailer and storage

TECHNICAL DATA	TECHNICAL DATA										
Model	Part No.	GРM	PSI	Drive	Engine	Start	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches		
HDS 3.5/40 Ge MT	1.103-844.0	3.5	4000	Direct	Honda GX390	Electric	Kärcher KS	750	100 x 45 x 75		
HDS 3.5/40 Ge MT	1.110-118.0	3.5	4000	Direct	Vanguard 400	Electric	Kärcher KS	750	100 x 45 x 75		

ACCESSORIES

Order No.	Description	
■ 8.756-481.0 ■	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.	
8.756-797.0	3-5 GPM Chemical Injector Kit	
8.754-990.0	12V Battery (required for hot water operation)	
8.711-293.0	Zinc plated variable pressure lance	
■ 8.925-182.0	50', 3/8" hose, double-wire at 6000 PSI	

OPTIONS (FACTORY INSTALLED)

Order No.	Description
8.924-367.0	2-5/16" Ball Coupler
8.924-667.0	Lifting Kit
8.924-370.0	LED Lights
8.924-700.0	2-inch Collar Lock Coupler
8.924-368.0	3" Lunette coupler

OPTIONS (FIELD INSTALLED)

Order No.	Description
8.750-682.0	Hose Reel Fixed 100', 5000 PSI, 325° F, equipped for 3/8" hose
8.925-255.0	Hose Reel Bracket (Mount Kit)

■ Included □ Optional ■ Please Note: NOT compatible with EASY!Lock

TRK-3500



Shown with optional hot water pressure washer skid, rock guard, and hose reel.

High cleaning performance.

Adaptable and designed to accommodate a variety of pressure washer skids, the Kärcher TRK-3500 pressure washer trailer is affordable, versatile, and easy to ship and store. Made of rugged 14-gauge steel, the trailer's wheel and axle assembly feature a leaf-spring suspension of up to 3,500 lbs. Get cleaning by simply picking a compatible pressure washer and adding must-have options and accessories.







Features

- High-density, polyethylene 200-gallon water tank with a 12-inch access port, 3/4-inch float valve and a 50-mesh inlet filter; and two 5/16-inch chains for additional safety
- Electric brakes and break away kit
- Electrical wiring recessed within the heavy-duty frame
- Saddle boxes, lighted license plate holder and recessed tail lights
- 1,000 lb. swivel jack with a 2-inch ball coupler for quick and easy hook up of the trailer
- Optional hose reels hold up to 100 ft. of high-pressure hose and quick connects to chassis

TECHNICAL DATA

Model	Part No.	Axle	(GVWR) lbs.	Water Tank (Gallons)	Ship Weight (lbs)*	(L x W x H) Inches
TRK-3500	1.103-849.0	Single	3500	200	1072	138 x 66 x 52

^{*}Trailer and water tank only

PRECONFIGURED TRAILERS

Order No.	Part No.
1.103-850.0	Trailer Kärcher 3500E HDS 4.7/35 (electric brakes)
1.103-851.0	Trailer Kärcher 3500H HDS 4.7/35 (hydraulic brakes)

Preconfigured trailer packages include the TRK-3500 trailer, HDS 4.7/35 Pe Cage pressure washer, mounting kit, battery and high and low-pressure hose reels.

OPTIONS (FACTORY INSTALLED)

Order No.	Description
8.917-294.0	North American engineered series skid mounting kit (required for mounting pressure washer to trailer)
8.931-496.0	Hydraulic brakes
8.917-554.0	High pressure hose reel kit (100' capacity) ◆
8.917-555.0	Low pressure hose reel kit (100' capacity) ◆
8.924-493.0	2-5/16" Ball hitch coupler
8.924-368.0	3" Lunette eye coupler
8.931-506.0	Rock guard with wand holder
8.904-051.0	Battery installed on pressure washer

■ Included □ Optional ◆ IHIose not included

TRK-6000



TRK-6000 - shown with options and gas-powered hot water pressure washer; accommodates both gas and diesel-powered pressure washers. Tool box shown is no longer available on this unit.





Customizable mobile solution.

Kärcher has made customizing a mobile wash system for on-site cleaning easy.

- Choose a compatible skid-mounted hot water pressure washer for the dual-axle TRK-6000 trailer. The trailer comes with a 330-gallon water tank
- **2.** Customize your trailer with a broad selection of options and accessories, such as hose reels, chrome coverings, etc.



Features

- Electrical wiring recessed within tubular frame
- Lighted license plate holder and recessed tail lights
- 1,000 lb. swivel jack with a 2-5/16 inch ball coupler for quick and easy hook up of the trailer
- Two 3-way ball valve for easy switching of the water flow from the holding tank to a faucet
- High-density, polyethylene 200-330 gallon water tank with a 12-inch access port, 1 1/2-inch drain valve, 3/4-inch float valve and a 50-mesh inlet filter; and two 5/16-inch chains for added safety
- Electric brakes and break away kit
- Rugged steel cage for security while transporting

TECHNICAL DAT	Ά						
Model	Part No.	Axle	(GVWR) lbs.	Water Tank (Gallons)	Ship Weight (lbs)*	Ship Dimensions (L x W x H) Inches	
TRK-6000	1.103-807.0	Tandem	6000	330	1080	185 x 82 x 65	
*Trailer and wate	er tank only						

OPTIONS (FACTORY INSTALLED)

Order No.	Description
8.904-051.0	Battery installed on pressure washer
8.902-438.0	Hydraulic brakes, two axles, 2-5/16" ball coupler
8.902-452.0	Hydraulic brakes, two axles, 3" Lunette eye coupler
8.902-471.0	3" Lunette eye hitch coupler
8.912-409.0	2-5 gallon bucket chemical rack (factory installed only)
8.902-447.0	Hose reel kit for 100 ft. Of 3/8-inch high-pressure hose (no hose included)
8.902-448.0	Hose reel kit for 200 ft. Of 3/8-inch high-pressure hose (no hose included)
8.902-449.0	Hose reel kit for 75 ft. Of 3/4-inch industrial garden hose (no hose included)
8.902-455.0	Skid mounting & plumbing kit (required for mounting pressure washer to trailer)
8.902-469.0	Sign plate
8.902-466.0	Chrome wheels, pair, (2 pair required)
8.902-468.0	Chrome fenders, pair
8.924-475.0	2" ball coupler

■ Included □ Optional ■ Please Note: NOT compatible with EASY!Lock



WELCOME TO THE CLEANING REVOLUTION.

Clean without limits. Go cordless with the new Kärcher CleanWave battery-powered pressure washer.

CleanWave

NEW INNOVATION FOR PRESSURE WASHERS



Unleash the power, without the cord.

CleanWave rides the wave of innovation to propel us towards a cleaner, greener future with zero emissions. Kärcher, the global leader in cleaning equipment, introduces a battery-powered professional cold water pressure washer to usher in a new era of efficiency and flexibility. The innovative CleanWave provides a cordless solution to tackle heavy-duty cleaning with an unrivaled runtime of up to 4 hours.

The Deluxe model features auto start/stop, pump protection and ECO mode operation. CleanWave delivers robust cleaning performance without compromise.













Features

- ECO mode extends battery life up to 240 minutes
- Steel lifting bars and forklift compatable frame
- Charge time from flat to full in 8 hours
- Direct drive triplex crankshaft pump
- CleanWave Deluxe's lithium battery requires zero maintenance, providing 3,000 charge cycles. CleanWave Classic's AGM battery is non-gassing, non-spillable, and maintenance-free.
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use

TECHNICAL DATA												
Model	Part No.	GРM	PSI	Battery	Volts	Max Runtime (mins)	Full Charge Cycle (hrs)	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches		
HD 3.5/40 Bp CleanWave Deluxe	1.106-612.0	3.5	4000	Lithium	72	90	10	Direct	770	58 x 40 x 38		
in ECO mode		2.0	2000			240						
HD 2.0/20 Bp CleanWave Classic	1.106-613.0	2.0	2000	AGM	36	90	8	Direct	917	58 x 40 x 38		

REPLACEMENT PARTS

Order No.	Description	
4.118-005.0 ■	EASY!Force trigger gun (German model) - zero force required.	
4.112-006.0 ■	33" spray lance	
6.110-034.0	33' high-pressure hose	
8.933-337.0	Clear Wave Hose Reel	

■ Included □ Optional ■ Compatible with EASY!Lock *Contact factory for final price

PRO HD 400 ED



Practical anywhere.

The PRO HD 400 ED is a light weight, durable and compact cold water pressure washer that offers ultimate mobility for on-site applications and is designed to be stored, transported and operated in the vertical and horizontal position. It's features include a reliable 3-piston axial-pump with a brass cylinder head, an automatic pressure relief system for protecting the pump and storage options for accessories.















Features

- Vertical and horizontal operation for maximum flexibility and stability
- Rubber strap for secure storage of high-pressure hose
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use





TECHNICAL DA	IA									
Model	Part No.	GPM	PSI	Drive	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
Pro HD 400 ED	1.520-990.0	1.7	1300	Direct	120V / 1ph ~ / 60 Hz	14	Kärcher Axial	45	36 x 14 x 13	

ACCESSORIES

	Order No.	Description
•	4.118-005.0	EASY!Force trigger gun
	4.112-006.0 ■	33" Spray lance
1	6.110-034.0	33' EASY!Lock hose
-	2.113-062.0	Power nozzle, 030
	4.113-003.0	Rotating washing brush natural fiber bristles
	4.111-022.0 ■	Nozzle connector
	4.111-037.0 ■	Coupling
	2.115-000.0	Quick-release coupling
	2.115-001.0	Nipple
	4.114-018.0 ■	Performance Dirtblaster
	4.112-000.0	41" Spray lance
	2.111-016.0	Surface cleaner FR TR Classic
	2.111-017.0	Surface cleaner FR Classic DIY
	4.111-032.0 ■	Adapter M 22 Swivel
	4.112-011.0	Screw connector part
	6.110-034.0	Extension hose 33'

HD COMPACT CLASS







Designed to move.

The HD 1.8/13 C compact cold water pressure washer offers maximum portability, maneuverability and smart features. It can be stored, transported and operated in the vertical and horizontal position, and at 55.6 lbs, this professionally built unit can easily be moved by one person in and out of vehicles and around a cleaning site. It also includes storage options for accessories.















Features

- Vertical and horizontal operation for maximum flexibility and stability
- Additional carrying handle for easy loading, unloading and moving
- Removable and easy to clean water inlet filter that protects the pump from debris
- Rubber strap for secure storage of high-pressure hose.
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use

TECHNICAL DA	ATA								
Model	Part No.	GPM	PSI	Drive	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 1.8/13 C	1.520-916.0	1.8	1300	Direct	120V / 1ph ~ / 60 Hz	14	Kärcher Axial	55.6	37 x 15 x 14

CCESSORIES	
Order No.	Description
4.118-005.0 ■	EASY!Force trigger gun
4.112-006.0 ■	33" Spray lance
6.110-034.0	33' EASY!Lock hose
4.117-027.0 ■	Triple jet nozzle, 032
2.112-000.0	Inno Foam kit
2.112-010.0	Easy Foam set
4.112-035.0	Flexible spray lance
6.110-049.0	Pipe cleaning hose 65', 1740 psi
6.110-050.0	Pipe cleaning hose 98', 1740 psi
6.110-008.0	Pipe cleaning hose 65', 3625 psi
4.113.004.0	Rotating washing brush nylon bristles
4.113-003.0 ■	Rotating washing brush natural fiber bristles
2.111-011.0	Surface cleaner FR 30
2.111-016.0	Surface cleaner FR TR Classic
2.111-010.0 ■	Surface cleaner FRV TR 30
4.115-006.0 ■	Wet blasting attachment
4.111-022.0 ■	Nozzle connector
4.111-037.0	Coupling
2.115-000.0	Quick-release coupling
2.115-001.0 ■	Nipple

HD MID CLASS CAGE



For commercial use under tough conditions.

Whether in vertical or horizontal use: the unheated Cage mid class can cope with any situation in tough, daily commercial use. These mobile, very robust machines are equipped with a 3-piston axial pump with brass cylinder head, which makes possible an improvement of up to 15 percent in cleaning performance and energy efficiency.











18 X 16 X 39



HD 3.0/20 M Cage Ea

1.150-939.0



2000

Direct

Features

- Automatic pressure relief for protecting the components to extend their life
- Easy-to-access pump and electric box

Kärcher Axial

Sturdy, tubular steel frame protects all components and can be used to fasten the machine to a service vehicle

TECHNICAL DATA													
Model	Part No.	GPM	PSI	Drive	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches				
HD 2.3/15 M Cage Ed	1.150-936.0	2.3	1500	Direct	110V / 1ph	19	Kärcher Axial	86	18 X 16 X 39				

230V / 1ph 18

ACCESSORIES

	Order No.	Description
•	4.118-005.0	EASY!Force trigger gun
-	4.112-006.0	Jet pipe TR 33"
	2.113-043.0	Power nozzle TR 25036 (standard on 1.150-936.0)
•	2.113-007.0	Power nozzle TR 25042 (standard on 1.150-939.0)
-	6.110-034.0	High-pressure hose, 2 x EASY!Lock, DN 6, 3600 PSI, 33'
	6.110-035.0	High-pressure hose 2 x EASY!Lock DN 6, ANTI!Twist, 3600 PSI, 33'
	6.110-014.0	High-pressure hose, 2 x EASY!Lock, DN 8, ANTI!Twist, 4500 PSI, 100'
	6.110-030.0	High-pressure hose 2 x EASY!Lock DN 8, ANTI!Twist, 4500 PSI, 50'
	6.110-027.0	Longlife 400 high-pressure hose, 2 x EASY!Lock, DN 8, ANTI!Twist, 5800 PSI, 66'
	6.110-023.0	Longlife 400 high-pressure hose, 2 x EASY!Lock, DN 8, ANTI!Twist, 5800 PSI, 100'
	6.110-029.0	Longlife 400 high-pressure hose, 2 x EASY!Lock, DN 8, ANTI!Twist, 5800 PSI, 50'
	2.115-001.0	Male coupling
	2.115-000.0	Quick coupling
	4.114-041.0	Dirt blaster, large, size: 040
	2.111-013.0	Hard Surface Cleaner FR 30 Me
	2.111-010.0	FRV 30 Surface Cleaner
	2.640-401.0	Nozzle kit for FR 30 Me
	2.642-431.0	Nozzle kit for FRV 30
■ Ir	ncluded 🗆 Optional	■ Compatible with EASY!Lock

HD MID CLASS



Loaded with features.

This medium class machine is extremely mobile and user-friendly with low-speed four-pole single phase motor for continuous use.

























Features

- Unique CHEM switch system allows operator to switch between two on-board detergent tanks without interruption; includes precise two-way metering valve to accurately vary detergent volume
- Robust, three-piston axial pump feature detergent-resistant brass cylinder head and stainless valves; pump is protected by pressure switch and overflow valve
- Features ground-fault circuit interrupter (GFCI) for operator safety

TECHNICAL DATA

Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HD 3.0/20-4M Ea	1.524-905.0	1.3-3.0	435-2000	Direct	4.7	220-240V / 1ph	20	Kärcher Axial	105	44 x 18 x 20	

ACCESSORIES

	Order No.	Description
•	4.118-005.0	EASY!Force trigger gun
•	4.112-000.0 ■	33" spray lance
•	6.110-035.0	33' EASY!Lock hose
•	2.113-009.0	Power nozzle TR 25047
•	4.118-007.0	Rotary controller
	2.112-000.0	Inno Foam kit
	2.112-010.0	Easy foam set
	2.111-013.0	FR 30 ME surface cleaner
	2.111-023.0	FR TR 50 ME hard surface cleaner
	2.111-011.0	Surface cleaner FR 30
	2.111-010.0	FRV TR 30 hard surface cleaner
	4.115-000.0	Wet blasting attachment
	4.115-006.0	Wet blasting attachment
	2.111-009.0	Nozzle kit
	2.113-003.0	Power nozzle 40° spray angle

HD SUPER CLASS







For tough jobs in non-stop use.

Where vast amounts of dirt accumulate every day, reliable Kärcher super class models provide indispensable services. Ideal for use in the construction, agricultural and forestry sectors as well as industrial and municipal facilities.



















Features

- Robust, three-piston axial pumps features detergent-resistant brass cylinder head and stainless valves; pumps is protected by pressure switch and over flow valve
- Low-speed, 4-pole, air-cooled motor runs quieter and cooler than conventional motors thus prolonging its service life
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down so, no more sore hands after hours of use

TECHNICAL	DATA
IECHNICAL	DAIA

Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 3.5/30-4S Ea	1.286-908.0	1.8-3.5	435-3000	Direct	9	220/240V / 1ph	28	Kärcher Axial	178	47 x 21 x 23
HD 4.5/32-4S Eb	1.286-909.0	2.2-4.5	435-3200	Direct	10	230V / 3ph	25	Kärcher Axial	178	47 x 21 x 23
HD 4.5/32-4S Ec	1.286-910.0	2.2-4.5	435-3200	Direct	10	440V / 3ph	14	Kärcher Axial	160	47 x 21 x 23

ACCESSORIES

	Order No.	Description
•	4.118-005.0 ■	EASY!Force trigger gun
•	4.112-000.0 ■	41" spray lance
	6.110-030.0	50' EASY!Lock hose with ANTI!Twist connection
•	2.113-022.0 ■	Power nozzle, 045 (for machine 1.286-908.0)
-	2.113-025.0	Power nozzle, 055 (for machine 1.286-909.0)
	4.118-008.0 ■	Servo control
	2.112-000.0	Inno Foam kit
	2.112-015.0	Gutter cleaning lance
	4.112-035.0	Flexible spray lance
	6.110-049.0 ■	Pipe cleaning hose 65', 1740 psi
	6.110-050.0 ■	Pipe cleaning hose 98', 1740 psi
	6.110-008.0 ■	Pipe cleaning hose 65', 3625 psi
	2.111-023.0	FR TR 50 ME hard surface cleaner
	2.111-012.0	FRV TR 30 ME
	2.111-011.0	Surface cleaner FR 30
	2.111-010.0	FRV TR 30 hard surface cleaner
	4.115-000.0 ■	Wet blasting attachment
	2.113-020.0	25° power nozzle for applying cleaning agent
	4.114-019.0 ■	Dirtblaster Nozzle 035
	4.637-033.0 ■	Detergent injector for high pressure
	4.111-037.0 ■	Coupling

lacktriangled Included \Box Optional lacktriangled Compatible with EASY!Lock

HD SPECIAL CLASS



For strict hygiene requirements.

Cold water high-pressure cleaner was designed specifically for all-purpose industrial use in the sanitary/food industry. This top-of-the-range machine from the compact class allows you to regulate pressure and water flow seamlessly.



















Features

- Food-safe, non-marking high-pressure hose.
- Wear-resistant and non-marking gray wheels
- Accepts inlet water at temperatures up to 180° F
- Easy access to the variable pressure and water flow regulation and the "Inno Foam Set" high-pressure foam system can be used.
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use

TECHNICAL DATA

Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 2.3/14 C Ed Food	1.150-912.0	2.3	1400	Direct	3.2	120V / 1ph	20	Kärcher Axial	78	39 x 15 x 28

ACCESSORIES

	Order No.	Description
-	4.118-015.0 ■	EASY!Force trigger gun for food applications
•	4.112-006.0 ■	33" spray lance
	6.110-063.0 ■	50' EASY!Lock food grade hose with AVS hose reel connection
-	4.117-033.0 ■	Triple jet nozzle, 040
	2.112-009.0	Inno Foam (food grade - including nozzle inserts)

HD WALL MOUNTED



Convenient and quiet.

Kärcher's wall-mount unit has a durable steel frame, uses a quiet 1725 RPM motor, and is perfect for in-shop uses. A remote on/off switch with a 10' electrical cord allows the machine to be mounted high on a wall away from backspray.







Shown with optional wall mount bracket part no. 8.920-952.0

Features

- Accepts hot water up to 180 degrees
- Remote on/off switch
- Kärcher Triplex crankcase pump

TECHNICAL DATA

Model	Part No.	GРM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HD 2.0/14 Ed +	1.107-088.0	1.8	1400	Direct	2	120V / 1ph	20	Kärcher KE	123	20 x 19 x 17	

ACCESSORIES

Order No.	Description	
8.920-952.0	Wall mount bracket	

HD SERIES ELECTRIC



Designed for versatility.

Kärcher's cold water carts are corrosion-resistant aluminum pressure washers that easily convert from a cart to a skid for maximum cleaning versatility and durability. These reliable electric powered pressure washers have a low profile handle and compact footprint, making them easy to maneuver, and they offer a bypass loop for additional pump protection. 7-year pump warranty and flat-free tires.













Features

- Durable, corrosion resistant aluminum frame
- Modular design weld free frame easily converts from cart to skid
- Flat free tires
- VRT3 Unloader with bypass loop pump protection
- Commercial-duty Leuco crankcase pump

TECHNICAL DATA	A											
Model	Part No.	GРM	PSI	Drive	НР	Electrical	Amps	Pump	Pump RPM	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HD 2.0/1000 Ed	9.801-814.0	2.0	1000	Direct	1.5	120V / 1ph	15	Kärcher KF	1725	161	41 x 22 x 25	
HD 1.9/1300 Ed	9.801-794.0	1.9	1300	Direct	2	120V / 1ph	20	Kärcher KF	1725	175	41 x 22 x 25	
HD 3.0/1000 Ed	9.801-795.0	3.0	1000	Direct	2	120V / 1ph	20	Kärcher KF	1725	180	41 x 22 x 25	
HD 3.5/2000 Ea	9.801-796.0	3.5	2000	Direct	5	230V / 1ph	22	Kärcher KF	3450	181	41 x 22 x 25	

AC	CESSORIES	
	Order No.	Description
	8.750-247.0	Trigger Gun, model M407
	8.925-129.0	Hose, 50' x 3/8", 1w, 4,000 PSI SWXSO
	8.783-040.0	Lance 44" Zinc plated, handle & coupler (for HD 4.0/40 G Classic and HD 4.0/40 Ge Classic)
•	9.802-216.0	Chemical injector
	8.712-398.0	Nozzle, QCEM-6540 Brass (Chem)
-	8.712-337.0	Nozzle, red, 035
	8.712-338.0	Nozzle, yellow, 035
	8.712-339.0	Nozzle, green, 035
-	8.712-340.0	Nozzle, white, 035
	8.712-429.0	Rotary nozzle
	8.925-229.0	Legacy, 100' x 3/8" ID, 4500 PSI, 2-wire, smooth cover, black high pressure hose
	8.753-572.0	A+ Surface Cleaner SC21
	8.753-573.0	A+ Surface Cleaner SC24
	9.302-243.0	Legacy Turbo Nozzle, 4.0, 4350 PSI
	8.710-620.0	Legacy Superlite stainless steel, 72" - 56.0 oz
	9.807-754.0	Skid mount feet
	9.807-750.0	37.5" long handle
	9.807-753.0	Lance holder
	9.807-752.0	Hose storage hook
	9.807-751.0	Handle with hose reel

HD ROLL CAGE



Specialty applications.

These belt-drive, electric roll cage models feature cleaning power of 5000 PSI and are available with either 230/3 phase or 460/3 phase motors. These units are specialty machines perfect for use in the marine market cleaning the bottom of boats or in the concrete industry, mixers, forms and handling equipment. Both models are ETL safety certified.













Features

- Rugged steel chassis & roll cage
- Kärcher Belt-drive crankcase pump
- Cleaning power of 5000 PSI
- Flat-free tires
- 20 HP motor
- 50' high-pressure hose

TECHNICAL DATA

Model	Part No.	GРM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HD 5.0/50 Eb Cage	1.107-084.0	5.0	5000	Belt	20	230V / 3ph	48	Kärcher KX	524	42 x 26 x 30	
HD 5.0/50 Ec Cage	1.107-087.0	5.0	5000	Belt	20	460V / 3ph	26	Kärcher KX	524	42 x 26 x 30	

ACCESSORIES

Order No.	Description	
9.801-029.0	100' hose reel kit, 5000 PSI (hose not Included)	

HD CABINET - BELT DRIVE







3000

2500

Belt

7.5

Industrial throughout.

Our cold-water cabinet units really take the heat, accepting pre-heated water up to 145°F. Protected in durable stainless steel cabinets, they demonstrate industrial strength throughout, including belt-drive Kärcher crankcase pumps, industrial motors, and magnetic starters for operator safety.









31 x 21 x 16

31 x 21 x 16

Features

- Hour Meter is standard on all models
- A thermal pump protector to prevent the buildup of excessive pressures or heat
- High-Pressure Pump (with 7-year warranty) by dual, V-cogged belts.

Kärcher KM 270

Kärcher KX

■ EASY!Force gun with cruise control like technology - uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use

TECHNICAL DATA										
Model	Part No.	GPM	PSI	Drive	НР	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 2.8/10 ST Ed B	1.106-603.0	2.8	1000	Belt	2	120V / 1ph	20	Kärcher KM	210	31 x 21 x 16
HD 3.9/20 ST Ea B	1.106-604.0	3.9	2000	Belt	6	230V / 1ph	29	Kärcher KM	285	31 x 21 x 16
HD 3.9/20 ST Ec B	1.106-605.0	3.9	2000	Belt	6	460V / 3ph	11	Kärcher KM	260	31 x 21 x 16
HD 3.9/20 ST Eh B	1.106-606.0	3.9	2000	Belt	6	208V / 3ph	16	Kärcher KM	265	31 x 21 x 16
HD 3.5/30 ST Ea B	1.106-607.0	3.5	3000	Belt	7.5	230V / 1ph	36	Kärcher KM	330	31 x 21 x 16

460V / 3ph

460V / 3ph

11

13.5

ACCESSORIES

HD 3.5/30 ST Ec B

Order No.	Description	
8.756-481.0 ■	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.	
9.801-013.0	Hour Meter (factory included)	

OPTIONS (FACTORY INSTALLED)

HD 5.6/25 ST Ec B 1.106-609.0

1.106-608.0

Order No.	Description
8.903-045.0	Kit Time Delay Shutdown (for HD 2.8/10 ST Ed B model)
8.929-374.0	Kit Time Delay Shutdown (for HD 4.2/20 ST Ea B model)
8.903-041.0	Kit Time Delay Shutdown (for HD 3.5/30 and HD 4.2/20 models, excluding HD 4.2/20 ST Ea B)
8.929-376.0	Kit Auto Start/Stop (for HD 2.8/10 ST Ed B model)
8.929-377.0	Kit Auto Start/Stop (for HD 4.2/20 ST Ea B model)
8.903-047.0	Kit Auto Start/Stop (for HD 3.5/30 and HD 4.2/20 models, excluding HD 4.2/20 ST Ea B)

OPTIONS (FIELD INSTALLED)

Order No.	Description	
9.801-033.0	Wall Mount Kit	
8.903-043.0	Stainless Steel Wall Mount Kit	
8.903-040.0	Floor Stand, 24" short	
9.801-034.0	Floor Stand, 36" Tall	
8.903-617.0	Stainless Steel Floor Stand, 36" Tall	
8.941-546.0	Stainless Steel Floor Stand, without Hose Hanger	
9.801-035.0	Wheel Kit for Floor Stands (4 casters)	

■ Included □ Optional ■ Please Note: NOT compatible with EASY!Lock

OPTIONS (FIELD INSTALLED)

	Order No.	Description
	9.801-031.0	Wheel Kit with Detergent Rack
	8.904-527.0	Wheel Kit with Detergent Rack (stainless steel)
	9.801-036.0	Hose Reel Kit, Floor Stand Only, 100 ft, No Hose
	8.750-682.0	100' x 3/8" fixed base hose reel
	8.919-437.0	Wall Mount
	8.903-039.0	Kit, Hose Reel w/Bracket for Stand, Wall Mount Kits

JARVIS SERIES



Jarvis 28" SCW 4.0/40 G (L) with Jarvis 21" SCW 2.4/25 G (Center) and SCW 2.4/25 CL (R)





Quick and easy outdoor cleaning solution.

The Jarvis series is a complete solution for quick, streak-free cleaning of businesses' entrances, parking lots, tennis courts, pool decks and sidewalks. This easy to use cold water surface cleaner pressure washer is an all-in-one unit with the pump and engine attached to the surface cleaner.

Designed to attack the superficial dirt sweeping alone does not get. The Jarvis surface cleaner pressure washer is perfect for all operators - simple on / off operation and flat free tires. Choose between the Jarvis with a folding handle for easy transport and storage or a conveniently mounted hose reel with 50' of nonmarking hose to have a more flexible and wider cleaning radius. Either way productivity is in your corner.











HONDA

Features

- 21" or 28" corrosion-resistant stainless steel surface cleaner housing and a professional grade swivel design
- Solid, powerful engines on each model with the Kärcher engine's 4-year warranty or the Honda GX engine's 3-year warranty
- Flat free tires
- Simple on / off operation
- EASY!Force gun with cruise control like technology uses its own recoil force to hold the trigger down so, no more sore hands after hours of use

TECHNICAL DATA						, (
Model	Part No.	Cleaning Width (Inches)	GPM	PSI	Drive	СС	Engine	Hose (Feet)	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
SCW 2.4/25 G - 21"	1.107-380.0	21	2.4	2500	Direct	200	Honda GX 200	10	KP3035G	159	44.0 x 27.6 x 34.2
SCW 4 0/40 G - 28"	1 107-437 0	28	4.0	4000	Direct	408	Kärcher	50	KZNUNUC 3	212	525 v 3/15 v 35 1

ACCESSORIES	
Order No.	Description
■ 8.756-481.0 ■	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.
8.711-370.0	Nozzle used on wand
8.707-537.0	Nozzle used on spray arm of surface cleaner (2 needed)
8.925-467.0	Hose, 1/4" x 10' R1
■ 8.708-582.0 ■	Nozzle used on wand
■ 8.711-465.0 ■	Nozzle used on spray arm of 28" Surface cleaner (2 needed)
■ 8.921-618.0 ■	Hose, 3/8" x 50', S0 x SW
□ 9.802-170.0 ■	QC coupler for Gun
□ 8.929-857.0 ■	Wand, 44"
□ 8.759-671.0	28" Deck for SC28
□ 8.759-672.0 ■	Swivel Assembly SC28
□ 8.759-673.0 ■	Kit Spray Arm SC28
□ 8.759-674.0 ■	Kit 28" Brush Assembly SC28
Included □ Option	al ■ Please Note: NOT compatible with EASY!Lock ■ Compatible with SCW 2.4/25 G & SCW 2.4/25 CL Only ■ Compatible with SCW 4.0/40 G Only

TETON SERIES



Cleaning versatility and durability.

Corrosion-resistant and light-weight, Kärcher's direct or belt drive, Teton Series aluminum pressure washers can be utilized as a cart or a skid for maximum cleaning versatility and durability. These reliable Kärcher powered pressure washers offer a 4-year engine warranty, bypass loop for additional pump protection, 7-year pump warranty and flat-free tires.

















Features

- Reliable Kärcher engine with an extended 4-year warranty
- Direct and belt drive models
- Durable VRT3 unloader with bypass loop diverts water flow when trigger gun is not activated
- Aluminum frame modular design converts easily from cart to skid

TECHNICAL DATA									
Model	Part No.	GPM	PSI	Drive	cc	Engine	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 3.0/27 G Teton	1.107-398.0	3.0	2700	Direct	212	Kärcher	Crankcase	112	45 x 28 x 29
HD 4.0/40 G Teton	1.107-399.0	4.0	4000	Direct	420	Kärcher	Crankcase	130	45 x 28 x 29
HD 4.0/40 Ge Teton†	1.107-400.0	4.0	4000	Direct	420	Kärcher	Crankcase	158	45 x 28 x 29
HD 3.5/35 G Teton	1.107-440.0	3.5	3500	Direct	302	Kärcher	Crankcase	132	45 x 28 x 29
HD 3.0/27 GB Teton	1.107-441.0	3.0	2700	Belt	212	Kärcher	Crankcase	123	45 x 28 x 29
HD 3.5/35 GB Teton	1.107-442.0	3.5	3500	Belt	302	Kärcher	Crankcase	158	45 x 28 x 29
HD 4.0/40 GB Teton	1.107-443.0	4.0	4000	Belt	420	Kärcher	Crankcase	169	45 x 28 x 29
HD 4.0/40 GeB Teton	1.107-444.0	4.0	4000	Belt	420	Kärcher	Crankcase	205	45 x 28 x 29
HD 5.0/30 GB Teton	1.107-445.0	5.0	3000	Belt	420	Kärcher	Crankcase	169	45 x 28 x 29
HD 5.0/30 GeB Teton	1.107-472.0	5.0	3000	Belt	420	Kärcher	Crankcase	205	45 x 28 x 29

ACCESSORIES

Order No.	Description
8.750-247.0	Trigger Gun, model M407
8.925-129.0	Hose, 50' x 3/8", 1w, 4,000 PSI SWXSO
8.783-039.0	Lance 30" Zinc plated, handle & coupler (for HD 3.0/27 G Classic)
8.783-040.0	Lance 44" Zinc plated, handle & coupler (for HD 4.0/40 G Classic and HD 4.0/40 Ge Classic)
9.802-216.0	Injector, Chem, NON ADJ, 0.083
8.712-429.0	Nozzle
8.925-229.0	Legacy, 100' x 3/8" ID, 6000 PSI, 2-wire, smooth cover, black high pressure hose
8.929-509.0	Direct Drive Hose Reel Bracket Kit
8.929-511.0	Belt Drive Hose Reel Bracket Kit
8.753-572.0	A+ Surface Cleaner SC21
8.753-573.0	A+ Surface Cleaner SC24
9.302-243.0	Legacy Turbo Nozzle, 4.0, 4350 PSI
8.710-620.0	Legacy Superlite stainless steel wand, 72" - 56.0 oz
9.807-754.0	Skid mount feet
9.807-750.0	37.5" long handle
9.807-753.0	Lance holder
9.807-752.0	Hose storage hook
9.807-751.0	Handle with hose reel (mild steel anthracite handle)

lacktriangle Included \Box Optional \dagger Electric start available on select models.

HD SERIES GAS





TECHNICAL DATA



Easily converts from cart to skid.

Corrosion-resistant and light-weight, Kärcher's HD Series Gas aluminum pressure washers have a durable weldless, modular frame that can be utilized as a cart or converted to a skid (optional - sold seperately) for maximum cleaning versatility and durability. Easy to maneuver with puncture proof, flat free tires. These reliable Honda or Vanguard powered pressure washers offer a bypass loop for additional pump protection, 7-year pump warranty on the oil end of the pump. The simple design of the HD Gas helps get the job done quickly and without hassle.











تواطينا فأقالت بداه

HONDA

Features

- Up to 5.0 GPM, 4000 PSI
- Belt or direct drive models with a reliable Honda or Vanguard engine
- Durable VRT3 unloader with bypass loop diverts water flow when trigger gun is not activated
- Compact footprint with aluminum frame modular design converts easily from cart to skid

Model	Part No.	GРM	PSI	Drive	Start	Pump	сс	Engine	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
HD 3.0/27 G	9.807-719.0	3.0	2700	Direct	Recoil	Crankcase	196	Honda GX200	112	45 x 28 x 29	
HD 3.5/35 G	9.807-720.0	3.5	3500	Direct	Recoil	Crankcase	270	Honda GX270	130	45 x 28 x 29	
HD 3.5/35 G	1.107-421.0	3.5	3500	Direct	Recoil	Crankcase	270	Vanguard 300	130	45 x 28 x 29	
HD 4.0/40 G	9.807-721.0	4.0	4000	Direct	Recoil	Crankcase	389	Honda GX390	149	45 x 28 x 29	
HD 4.0/40 G	1.107-429.0	4.0	4000	Direct	Recoil	Crankcase	389	Vanguard 400	149	45 x 28 x 29	
HD 4.0/40 Ge	9.807-722.0	4.0	4000	Direct	Electric	Crankcase	389	Honda GX390	158	45 x 28 x 29	

HD 3.5/35 G	9.807-720.0	3.5	3500	Direct	Recoil	Crankcase	270	Honda GX270	130	45 x 28 x 29
HD 3.5/35 G	1.107-421.0	3.5	3500	Direct	Recoil	Crankcase	270	Vanguard 300	130	45 x 28 x 29
HD 4.0/40 G	9.807-721.0	4.0	4000	Direct	Recoil	Crankcase	389	Honda GX390	149	45 x 28 x 29
HD 4.0/40 G	1.107-429.0	4.0	4000	Direct	Recoil	Crankcase	389	Vanguard 400	149	45 x 28 x 29
HD 4.0/40 Ge	9.807-722.0	4.0	4000	Direct	Electric	Crankcase	389	Honda GX390	158	45 x 28 x 29
HD 4.0/40 Ge	1.107-435.0	4.0	4000	Direct	Electric	Crankcase	389	Vanguard 400	158	45 x 28 x 29
HD 3.0/27 GB	9.807-723.0	3.0	2700	Belt	Recoil	Crankcase	196	Honda GX200	123	45 x 28 x 29
HD 3.5/35 GB	9.807-724.0	3.5	3500	Belt	Recoil	Crankcase	270	Honda GX270	156	45 x 28 x 29
HD 3.5/35 GB	1.107-422.0	3.5	3500	Belt	Recoil	Crankcase	270	Vanguard 300	156	45 x 28 x 29
HD 4.0/40 GB	9.807-725.0	4.0	4000	Belt	Recoil	Crankcase	389	Honda GX390	160	45 x 28 x 29
HD 4.0/40 GB	1.107-430.0	4.0	4000	Belt	Recoil	Crankcase	389	Vanguard 400	160	45 x 28 x 29
HD 4.0/40 GeB	9.807-726.0	4.0	4000	Belt	Electric	Crankcase	389	Honda GX390	196	45 x 28 x 29
HD 4.0/40 GeB	1.107-434.0	4.0	4000	Belt	Electric	Crankcase	389	Vanguard 400	196	45 x 28 x 29
HD 5.0/30 GB	9.808-252.0	5.0	3000	Belt	Recoil	Crankcase	389	Honda GX390	160	45 x 28 x 29
HD 5.0/30 GB	1.107-446.0	5.0	3000	Belt	Recoil	Crankcase	389	Vanguard 400	160	45 x 28 x 29
HD 5.0/30 GeB	9.808-386.0	5.0	3000	Belt	Electric	Crankcase	389	Honda GX390	160	45 x 28 x 29
HD 5.0/30 GeB	9.808-389.0	5.0	3000	Belt	Electric	Crankcase	408	Vanguard 400	160	45 x 28 x 29

ACCESSORIES	

	Order No.	Description
	8.750-247.0	Trigger Gun, model M407
	8.925-129.0	Hose, 50' x 3/8", 1w, TS, SOXSW
-	8.783-039.0	Lance 30" Zinc plated, handle & coupler (for HD 3.0/27 AG, HD 3.0/27 AGB)
•	8.783-040.0	Lance 44" Zinc plated, handle & coupler (for HD 3.4/35 G, HD 4.0/41 G, HD 4.0/41 Ge, HD 3.3/35 GB, HD 4.0/40 GB, HD 4.0/40 GeB)
	9.802-216.0	Injector, Chem, NON ADJ, 0.083
	8.712-429.0	Nozzle
	8.925-229.0	Legacy, 100' x 3/8" ID, 6000 PSI, 2-wire,

□ 8.753-572.0 A+ Surface Cleaner SC21

	Order No.	Description
	8.753-573.0	A+ Surface Cleaner SC24
	9.302-243.0	Legacy Turbo Nozzle, 4.0, 4350 PSI
	8.710-620.0	Legacy Superlite stainless steel, 72" - 56.0 oz
	9.807-754.0	Skid mount feet
	9.807-750.0	37.5" long handle
	9.807-753.0	Lance holder
	9.807-752.0	Hose storage hook
	9.807-751.0	Handle with hose reel
	8.929-509.0	Hose reel kit for direct driven machines
	8.929-511.0	Hose reel kit for belt driven machines

■ Included □ Optional

ACCESSORIES

HD SERIES GAS SKID



Cleaning on the go.

The perfect accompaniment to Kärcher's HD Series Gas and Teton Series direct drive pressure washers – these mild steel skids offer two configurations:

- 1. Skid with a 50 gallon water tank and one 100' hose reel or
- 2. Skid with two 100' hose reels.

The HD Series Gas skids fit within a standard UTV / ATV bed and work with three different direct drive aluminum pressure washers to offer ultimate portability and usability for various applications.





Features

- 50 gallon water tank (HD Pallet Skid with Tank only)
- Forklift holes
- Includes skid feet
- 1 to 2, 100' hose reels
- Fits within standard UTV/ATV bed
- Assembly required

TECHNICAL DATA								
Model	Part No.	Frame Material	Description	Compatible Pressure Washer (sold separately)	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches		
HD Pallet Skid with Tank	9.807-833.0	Mild Steel	50 gal water tank and 1 hose reel	HD Series Gas direct drive HD 3.0/27 G (9.807-719.0)	185	40 x 48 x 35		
HD Pallet Skid with 2 Hose Reels	9.807-838.0	Mild Steel	2 hose reels	HD 3.5/35 G (9.807-720.0) HD 3.5/35 G (1.107-421.0) HD 4.0/40 G (9.807-721.0) HD 4.0/40 G (1.107-429.0) HD 4.0/40 Ge (9.807-722.0) HD 4.0/40 Ge (1.107-435.0)	172	40 x 48 x 35		
				Teton Series direct drive HD 3.0/27 G Teton (1.107-398.0) HD 4.0/40 G Teton (1.107-399.0) HD 4.0/40 Ge Teton (1.107-400.0) HD 3.5/35 G Teton (1.107-440.0)				

OPTIONS (FACTORY INSTALLED)

Order No.	Description
8.923-105.0	Rubber feet kit
8.923-107.0	Inlet filter kit
8.923-106.0	Lifting eye bolts kit
8 923-108 0	Three-way valve kit

HD CART



Compact and dependable.

The HD Carts are tough gasoline-powered direct-drive cold water machines that deliver cleaning power of up to 4000 PSI. Built on compact sturdy steel frames, each unit features a dependable industrial-grade Honda engine, Kärcher crankcase pump, hose/gun rack, detergent injection, and tubed pneumatic tires.













Features

- Steel frame with powder coat finish
- Commercial grade Honda GX engine
- Cleaning power up to 4000 PSI
- Industrial direct-drive Kärcher crankcase pump

TECHNICAL DA	TA								
Model	Part No.	GPM	PSI	Drive	СС	Engine	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 2.5/27 P	1.575-101.0	2.5	2700	Direct	196	Honda GX200	Kärcher KP	135	35 x 21 x 24
HD 3.0/30 P	1.575-102.0	3.0	3000	Direct	270	Honda GX270	Kärcher KP	175	35 x 21 x 24
HD 3.8/35 P	1.575-104.0	3.8	3500	Direct	389	Honda GX390	Kärcher KS	185	35 x 21 x 24
HD 3.5/40 P	1.107-223.0	3.5	4000	Direct	389	Honda GX390	Kärcher KS	188	35 x 21 x 24

OPTIONS (FIELD INSTALLED)

Order No.	Description
9.801-026.0	100' EZEE Hose Reel kit (hose not Included)

HD PB CART



Reliable and professional.

Our cold-water series provides a broad selection of rugged belt-drive units, all with reliable Honda GX engines, which deliver cleaning volume of up to 3.7 GPM. Each model is certified to ETL safety standards and comes with a rugged steel chassis, cast iron belt pulley system, flat-free tires, and industrial-grade Kärcher crankcase pump.















Features

- Powder coated steel chassis
- Reliable Honda GX engine
- Onboard hose and lance storage
- Water volume up to 3.7 GPM
- Industrial belt-drive Kärcher pump
- Flat-free tires
- Quick connect nozzles

TECHNICAL DA	ATA									
Model	Part No.	GPM	PSI	Drive	сс	Engine	Fuel	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 3.0/30 PB	1.575-152.0	3.0	3000	Belt	270	Honda GX270	Gas	Kärcher KB	225	45 x 26 x 24
HD 3.7/35 PB	1.575-154.0	3.7	3500	Belt	389	Honda GX390	Gas	Kärcher KM	250	45 x 26 x 24
HD 3.0/40 PB	1.575-155.0	3.0	4000	Belt	389	Honda GX390	Gas	Kärcher KM	250	45 x 26 x 24

HD PB / PEB / D CAGE



Extra rugged and powerful.

Our roll cage models are the most powerful units in our cold water line, with cleaning power of up to 5000 PSI. Protected by either a rugged powder coated roll cage built of 1-1/4" steel or a corrosion-resistant stainless steel cage, these units feature powerful Vanguard, Honda or Kohler engines, tri-plunger oil bath Kärcher pumps, flat-free tires, and an extra rugged belt-drive assembly with notched V belts and cast iron pulleys.



















Features

- Belt-drive
- Rugged steel chassis & roll cage for PB and PEB models. Corrosionresistant stainless steel frame for D Cage model only
- Honda, Vanguard or new Kohler engine model HD 3.4/30 D Cage (Shown to the left)
- Electric start on dual-axle models
- Industrial belt-drive Kärcher pump with 7-year warranty
- Flat-free tires on all models

TECHNICAL DATA										
Model	Part No.	GРM	PSI	Drive	сс	Engine	Fuel	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 3.7/35 PB Cage	1.575-205.0	3.7	3500	Belt	389	Honda GX390	Gas	Kärcher KM	350	42 x 26 x 30
HD 4.0/40 PB Cage	1.575-207.0	4.0	4000	Belt	479	Vanguard 16	Gas	Kärcher KT	470	42 x 26 x 30
HD 4.0/50 PeB Cage	1.575-200.0	4.0	5000	Belt	688	Honda GX630	Gas	Kärcher KX	495	42 x 26 x 30
HD 4.5/50 PeB Cage	1.575-201.0	4.5	5000	Belt	688	Honda GX690	Gas	Kärcher KX	500	42 x 26 x 30
HD 3.4/30 D Cage	1.107-373.0	3.4	3000	Belt	442	Kohler KD440	Diesel	LM3540R.3	195	50 x 40 x 50

OPTIONS (FIELD INSTALLED)

Order No.	Description
9.801-028.0	100' EZEE Hose Reel kit, single axle (hose not Included)
9.801-029.0	100' Hose Reel kit, 5000 psi, double axle (hose not Included)
8.750-682.0	100' capacity Hose Reel fixed base (for HD 3.4/30 D Cage model only)
8.929-070.0	Skid feet (for HD 3.4/30 D Cage model only)

HD GAS MINI SKIDS



Trailer mount for cleaning-on-the-go.

These skid mount pressure washers include a high pressure pump with unloader and gas engine mounted on stainless steel base. 12-volt battery and fuel tank included as noted below. Pressure ranges to accommodate high-volume needs.

Note: Trigger gun, wand and hose not included.













Features

- Up to 10 GPM / Up to 4,000 PSI
- Belt-drive or direct-drive pump
- 4-year warranty on engine

TECHNICAL DATA	4									
Model	Part No.	GPM	PSI	Drive	НР	сс	Start	Engine	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 3.5/30 G◆	9.808-396.0	3.5	3000	Direct	9	270	Recoil	Honda GX270	120	
HD 4.0/40 G◆	1.107-475.0	4.0	4000	Direct	14	400	Recoil	Vanguard	140	
HD 5.0/30 G◆	1.107-476.0	5.0	3000	Direct	14	400	Recoil	Vanguard	140	
HD 4.0/40 GB◆	1.107-477.0	4.0	4000	Belt	14	400	Recoil	Vanguard	160	
HD 5.0/30 GB◆	1.107-478.0	5.0	3000	Belt	14	400	Recoil	Vanguard	160	
HD 8.0/35 GeB❖	1.107-413.0	8.0	3500	Belt	22	688	Electric	Honda GX690	335	
HD 8.0/35 GeB❖	1.107-460.0	8.0	3500	Belt	25	764	Electric	Kärcher	345	
HD 10/30 GeB❖	1.107-449.0	10.0	3000	Belt	25	764	Electric	Kärcher	345	

[◆]Battery not included ◆Fuel tank not included

HD 7.9/72-4 CAGE EC



Maximum power in a compact package.

The HD 7.9/72-4 Cage Ec high pressure cleaner features one-button operation and an automatic pressure relief valve, making it easy to use, while delivering the most powerful cleaning performance in its class for a variety of applications.





Features

- Built-in pressure relief valve reduces pressure in the hose, remaining flexible when the trigger gun is closed
- Pressure increases gradually when activating the trigger gun prevents sudden jolts
- Large wheels, crane hook and an optimal center of gravity ensure easy transportation, even over rough terrain

Ship Weight

Ship Dimensions

Model No.	Part No.	GPM	PSI	Temp	Pump	Drive	Motor Rating	(lbs)	(L x W x H) Inches
HD 7.9/72-4 Cage Ec	1.367-163.0	7.9	7200	140° F	Crankshaft	E-Motor 460 V / 60 Hz	30 kW / 41 HP	699	51.9 x 29.4 x 43
ACCESSORIES									
ACCESSORIES									
Order No.	Item Descripti	ion							
■ 4.760-679.0	28" spray land	e (up to	0 9,280	PSI)					
■ 6.391-847.0	66' pressure h	ose (up	to 8,9	90 PSI)					
5.765-263.0	Flat jet nozzle	, 060							
□ 2.637-017.0	Add-on kit pre	pressi	ure pun	qr					
□ 2.639-251.0	Shoulder supp	ort							
□ 4.760-653.0	41" spray lanc	e (up to	9,280	PSI)					
□ 4.760-677.0	81" spray lanc	e (up to	9,280	PSI)					
□ 4.403-004.0	Hose coupling								
□ 6.391-846.0	33' pressure h	ose (up	to 8,9	90 PSI)					
□ 6.391-019.0	100' pressure	hose (u	up to 8,	990 PSI)					
□ 2.113-073.0	Flat jet nozzle	, 075 (5	5,075 P	SI)					
□ 2.113-075.0	Flat jet nozzle	, 095 (3	3,625 P	SI)					
□ 2.113-077.0	Flat jet nozzle	, 120 (2	2,175 P	SI)					
□ 5.765-264.0	Point jet nozzl	le, 060							
□ 2.113-074.0	Point jet nozzl	le, 075	(5,075	PSI)					
□ 2.113-076.0	Point jet nozzl	le, 095	(3,625	PSI)					
□ 2.113-078.0	Point jet nozzl	le, 120	(2,175	PSI)					
□ 6.415-060.0	F9 power rota	ry jet (7,200 F	PSI)					
□ 6.025-526.0	F9 power rota	ry jet r	epair k	it					
□ 6.392-401.0	33' pipe cleani	ing hos	е						
□ 6.392-402.0	66' pipe cleani	ing hos	е						
□ 6.392-403.0	100' pipe clea	ning ho	se						
□ 6.470-223.0	Foot valve								
□ 6.025-527.0	Pipe cleaning	nozzle,	Standa	rd 060					
□ 6.025-528.0	Pipe cleaning	nozzle,	Quattr	060					
□ 6.025-529.0	Pipe cleaning	nozzle,	Rotary	060					
□ 2.643-577.0	FRI 50 Me ind	ustrial	surface	cleaner, 20)"				
□ 6.415-059.0	Nozzle kit for	FRI 50	Me						

■ Included □ Optional

TECHNICAL DATA

Max. Inlet

MOBILE HOT WATER GENERATOR



Hot water heater.

For attaching to a cold water pressure washer.

Our Kärcher Series water heater provides supplemental heat to cold water machines, giving users the benefits of hot water cleaning when it's needed. An electric-powered, diesel heated unit, the Heater 5.0/30 Ed effectively heats water at a rate of up to 5 gallons per minute.







Features

- Effective heating of up to 5 GPM
- Heavy-duty, steel cabinet protected by an epoxy powder coat finish
- Portable

TECHNICAL DATA	1								
Model	Part No.	GPM	PSI	Electrical	Amps	Heated By	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches	
Heater 5.0/30 Ed	1.575-650.0	to 5	up to 3000	120V / 1ph	5	Diesel	330	35 x 47 x 50	

STATIONARY HOT WATER GENERATOR SERIES





Model 9452

Heating modules.

The 9400 Series heating modules give customers the flexibility to "convert" a cold water pressure washer into a hot water unit. By attaching the heating module to a cold water pressure washer the pressurized water is now heated to produce all the benefits of hot water cleaning. The four models use fuel oil, diesel or natural gas to heat the water using Kärcher's high-efficiency, vertical heating coil.





Model 9462





Features

- Fuel burner types available: diesel, kerosene, home heating oil, natural gas, LP gas (optional)
- All models are equipped with a flow switch to control the burner
- Heavy-duty, steel cabinet

TECHNICAL D	ATA
-------------	-----

Model	Part No.	GPM	PSI	Volt / PH	сс	BTU / Hour	АМР	Fuel	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
9450	1.103-905.0	10	3200	115/1	389	700,000	8	Oil-Fired	525	32.5 x 25 x 50.5
9452	1.103-906.0	10	3200	115/1	479	540,000	1	Natural - Gas- Fired	500	32.5 x 25 x 50.5
9460	1.103-907.0	10	3200	115/1	688	920,000	8	Oil-Fired	920	40.5 x 32 x 65
9462	1.103-908.0	10	3200	115/1	688	920.000	1	Natural - Gas- Fired	935	40.5 x 32 x 65

OPTIONS (FIELD INSTALLED)

8.903-076.0	Natural-Gas to LP Conversion for Model 9452 (Factory Installed)
8.903-075.0	Natural-Gas to LP Conversion for Model 9462 (Factory Installed)
9.801-040.0	10" Natural Gas-Fired Draft Diverter for Model 9452
8.717-730.0	12" Natural Gas-Fired Draft Diverter for Model 9462
8.749-806.0	10" Power Dampener
8.753-171.0	12" Power Dampener
8.749-807.0	Power Dampener Wiring Harness

MISSISSIPPI RECOVERY



Siphon muddy waters away.

Stop wash water from flowing down a drain or away from your area by collecting the wastewater from pressure washing. As EPA laws become more prevalent and strive to conserve water quality, contract cleaners and construction sites will need to recover their wash water and runoff. Eliminate the problem with the Mississippi Recovery series that is capable of recovering and transferring up to 30 GPM of water and transferring to a holding tank. Its small footprint allows the Mississippi to be mounted on a trailer. Be fully in control of water flow with the optional water dikes and drain covers to stop water from flowing down a drain or away from your site. Comes standard with 50' feet of vacuum hose and a scupper head.









Features

- 3 stage vacuum motor delivers 100 CFM 100" sealed lift vacuum
- Simple curbside controls for easy use
- Rated for water up to 120°F
- Compatible with hot water machines and surface cleaners
- Bolt-on mounting system configured on the base to mount to a trailer for portability from site to site or optional caster wheel kit
- Drain port and filter basket together to keep sludge from clogging

TECHNICAL DATA											
Model	Part No.	Electri- cal	Tank	Vac Motor	АМР	Recovery	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches			
Mississippi Recovery	1.103-516.0	120V	27 Gallon	3 Stage 100 CFM 100" sealed lift	15	30 GPM	127	24 x 27 x 59			

ACCESSORIES

Order No.	Description
8.618-451.0	50' of High Temp 2" Vacuum Hose
8.928-850.0	Scupper Head

OPTIONS (FIELD INSTALLED)

Order No.	Description
9.113-972.0	21" Vac Recovery Surface Cleaner
8.928-887.0	Caster Wheel Kit
8.925-858.0	Vacuum Discharge Hose Kit

DRAIN COVERS AND WATER DIKES

Order No.	Description	
8.751-135.0	Drain Cover, 36" x 36", 30oz PVC	
8.751-136.0	Drain Cover, 48" x 48", 30oz PVC	
8.751-137.0	Drain Cover, 48" x 48", Urethane	
8.751-138.0	Water Dike, 10', 22oz PVC	
8.751-139.0	Water Dike, 10', 40oz Urethane	
8.751-140.0	Water Dike, 20', 22oz PVC	
8.751-141.0	Water Dike, 20', 40oz Urethane	



EB 30/1



The quick clean-up tool.

This ultra-quiet and compact sweeper is perfect for quick clean-ups in busy and crowded areas. The rechargeable battery pack ensures safety by eliminating trip hazards. The EB 30/1 is built to handle small cleaning jobs in professional working environments.

Designed for high-traffic environments

- Cordless electric sweeper designed for commercial applications.
- Flexible and professional interim clean-up
- Powerful, rechargeable battery provides for up to 45 minutes of operation on hard surface, and up to 30 minutes on carpet.
- Extremely quiet operation allows for cleaning even during business hours, making it ideal for use in noise sensitive areas
- Optional high-speed battery charger available for complete charging in 50 minutes



EB 30/1

TECHNICAL SPECIFICATIONS		
Cleaning path	in	12
Container capacity	in³	67
Operating noise level	dBA	56
Battery runtime	min	30 - 45
Standard battery charge time	hr	1
Weight	lbs	6
Dimensions (L x W x H)	in	10 x 12 x 43

EQUIPMENT	
Order No.	Description
1.545-121.0	EB 30/1, lithium-ion battery-operated sweeper

ACCESSORIES

Order No.	Description	
6.654-328.0	Lithium-ion battery	\$
6.654-197.0	Quick battery charger for EB 30/1	\$
4.762-400.0	Cylindrical brush	\$
4.762-401.0	Cylindrical stiff red brush, for hard-wearing surfaces	\$

KM 70/20 C





Superior performance with manual power.

Speedy sweeping and painless maintenance rolled into one convenient package. This sweeper provides superior sweeping performance in a compact manual push sweeper. It is built to be rugged and durable for long life.

Fast and efficient

- Push sweepers are the easy way to clean paths, halls, sidewalks and warehouses quickly and conveniently
- Main cylindrical brush is driven by both wheels so that it sweeps equally well in either right or left turns

Built to last

- Rugged metal pinion drive for long life
- Durable design

Easy to use

Height of cylindrical brush can be easily adjusted in five positions by a knob on the handle

KM 70/20 C

TECHNICAL SPECIFICATIONS	
Cleaning path/width- main broom	n 19
Cleaning path/width with 1 sb i	n 28
Cleaning path/width with 2 sb i	n 36
Side broom diameter i	n 13
Debris container capacity ga	I 11
Practical productivity sq. ft/h	r 30,000
Weight	s 50.7
Dimensions (L x W x H)	n 51.2 x 30.14 x 40.7

EQUIPMENT

Order No.	Description	
1.517-106.0	KM 70/20 C, twenty eight inch walk-behind sweeper	\$
1.517-107.0	KM 70/20 C 2SB, thirty six inch walk-behind sweeper, dual brushes	\$

ACCESSORIES

	Order No.	Description	
•	6.966-005.0	Side broom, water-resistant bristles, extremely durable, suitable for all types of surfaces	\$
	6.906-041.0	Main broom, water-resistant bristles, extremely durable, suitable for all types of surfaces	\$
	4.040-772.0	Dust Filter	\$
	2.640-908.0	Litter picker-for picking up waste	\$

KM 70/30 C BP ADV







Efficient sweeping on hard or soft floors.

Fast and efficient for sweeping indoors or outdoors-on hard floor or carpet for those that need to get the job done right the first time. Rely on this sweeper to make quick work of any sweeping needs with its highly productive electronic driven broom. It also features active dust control for optimum air quality. User-friendly features such as an easy adjust broom height and an adjustable handle height make this a popular machine with those who use it.

Productive sweeping

- Delivers fast, efficient sweeping for hard and soft floor surfaces
- 28 inch cleaning path

We thought of you

- For a wide range of applications indoors and outdoors, with a particularly quiet battery drive system at 69 dBA
- Features Active Dust Control with a separate fan and flat pleated filter for dustless sweeping indoors
- Simple adjustment of the main cylindrical broom and side broom

KM 70/30 C BP ADV

TECHNICAL SPECIFICATIONS		
Cleaning path/width- main broom	in	19
Cleaning path/width with 1 sb	in	28
Side broom diameter	in	13
Debris container capacity	gal	11
Practical productivity	sq. ft/hr	30,800
Operating noise level	dBA	59
Sweeping method	direct/overthrow	direct
Weight	lbs	105.8
Dimensions (L x W x H)	in	48.8 x 28 x 45.2

EQUIPMENT

EQUIPMENT		
Order No.	Description	
1.517-218.0	KM 70/30 C Bp Adv, twenty eight inch walk-behind sweeper	\$

ACCESSORIES

	Order No.	Description	
•	6.966-005.0	Side broom, water-resistant bristles, extremely durable, suitable for all types of surfaces	\$
	6.906-041.0	Main broom, water-resistant bristles, extremely durable, suitable for all types of surfaces	\$
	6.904-367.0	Flat dust filter	\$
	2.640-908.0	Litter picker–for picking up waste	\$
	5.731-625.0	Filter element - plastic filter, water resistant, washable, saves maintenance costs	\$
	6.907-041.0	Standard cylindrical broom - water-resistant universal bristles, extremely durable, suitable for all types of surfaces.	\$

KM 75/40 W BP





Big enough to get the job done, but maneuverable to clean congested areas, count on the KM 75/40 W Bp for your sweeping needs. This machine provides the versatility to clean anywhere—carpet or hard floors, indoors or out. We built it to perform day in and day out in the toughest commercial applications.

Highly productive

- Cleans effectively indoors and out for increased versatility
- Self-propelled, 30 inch cleaning path for increased productivity
- Easy to understand controls increase operator effectiveness
- Over throw sweeping system with an easily removed hopper make emptying quick and efficient

Improved air quality

- Active dust control system provides better air quality
- Air is vacuumed through a high-efficiency automotive style filter
- Manual filter shaker for easy cleaning and consistent results
- Wet-sweep bypass for cleaning wet surfaces





KM 75/40 W BP

TECHNICAL SPECIFICATIONS		
Cleaning path/width- main broom	in	22
Cleaning path/width with 1 sb	in	30
Side broom diameter	in	16.5
Debris container capacity	gal	10.5
Practical productivity	sq. ft/hr	36,328
Operating noise level	dBA	64
Sweeping method	direct/overthrow	overthrow
Weight	lbs	172
Dimensions (L x W x H)	in	56 x 30 x 46.5

FOUIPMENT

LQUIPINILIAI		
Order No.	Description	
9.840-739.0	KM 75/40 W Bp, thirty inch walk-behind sweeper	

ACCESSORIES

	Order No.	Description	
.	8.631-173.0	Battery, 12V AGM 70 Ah	\$
	8.629-377.0	Automatic shelf charger, 24V, 24A, 115V, standard on AGM models	\$
•	6.905-626.0	Side Broom, Soft Bristle	\$
	6.906-884.0	Main Broom	\$
•	5.731-635.0	Flat pleated filter–plastic filter, water resistant, washable, reduces maintenance costs	\$
	6.634-201.0	Red key	\$
	6.905-625.0	Side broom, hard for heavy-duty cleaning	\$
	6.906-885.0	Main Broom, Hard Bristle	\$
	6.906-950.0	Anti-Static Rolling Brush	\$
	2.641-571.0	Carpet Sweeping Kit (includes fluff filter, anti-static cylindrical brush and triple caster)	\$
	6.906-886.0	Main cylindrical broom, soft/natural - specifically designed with natural bristles for sweeping fine dust on smooth indoor floors.	\$

KM 85/50 R BP



Compact, agile and intuitive.

The KM 85/50 R Bp is a battery-powered ride-on sweeper perfect for confined and congested areas. Its compact design and high maneuverability make cleaning faster than ever in narrow corridors and around sharp corners. It is extremely easy to operate and maintain, and boasts impressive area performance outdoors.

Efficient filter system

- Polyester flat pleated filter
- Effective cleaning with dual scraper

Ergonomic design for enhanced performance and comfort

- Clear and simple operation for all components
- Easy, tool-free seat adjustment for operator comfort
- Adjustable rotation speed depending on type of dirt
- Drives through door openings as narrow as 36"



KM 85/50 R BP

TECHNICAL SPECIFICATIONS		
Cleaning path/width- main broom	in	24.2
Cleaning path/width with 1 sb	in	33.5
Cleaning path/width with 2 sb	in	41.3
Side broom diameter	in	16.5
Debris container capacity	gal	13.2
Practical productivity - 1 / 2 sb	sq. ft/hr	32,940 / 40,685
Operating noise level	dBA	69
Sweeping method	direct/overthrow	direct
Weight	lbs	555
Dimensions (L x W x H)	in	50 x 35 x 46

EQUIPMENT

EQUIF MENT		
Order No.	Item Description	
9.841-453.0	KM 85/50 R Bp Wet, 1 side broom, shelf charger	\$
9.841-454.0	KM 85/50 R Bp AGM, 1 side broom, shelf charger	\$

ACCESSORIES

ACCESSO	ALLS		
Order I	lo. Item Description		
■ 4.762-4	30.0 Main brush, standard	\$	
■ 6.906-1	32.0 1-side brush, standard	\$	
■ 6.435-7	73.0 Pneumatic tire (1 each)	\$	
5.731-5	85.0 Flat Filter complete	\$	
4.037-1	42.0 Key complete key switch	\$	
□ 6.435-4	31.0 Solid rubber non-marking wheel	\$	
□ 4.762-4	42.0 Main brush, soft	\$	
□ 4.762-4	43.0 Main brush, hard	\$	
□ 4.762-4	41.0 Main brush, antistatic	\$	
□ 6.905-6	26.0 Side brush, soft	\$	
□ 6.905-6	25.0 Side brush, hard	\$	
□ 2.852-4	99.0 Carpet cleaning kit	\$	
□ 2.852-3	21.0 Additional left side brush kit	\$	
□ 2.852-5	00.0 Warning beacon	\$	
□ 5.035-4	88.0 Home Base kit (adapter and cable hook)	\$	
□ 6.980-0	77.0 Double Hook (requires 5.035-488.0)	\$	
 To all others. 	to distribute a contract		

KM 90/60 R BP ADV



Built for tough environments.

Sweep large areas quickly with this highly maneuverable, ride-on sweeper that increase productivity and safety. This machine cleans multiple surfaces, from tough industrial flooring to soft carpet. Its innovative Tact filter cleaning system extends the filter life, saving you money.

Highly productive sweeping

- Automatic, continuous sweeping
- Overthrow sweeping



KM 90/60 R BP ADV

TECHNICAL SPECIFICATIONS		
Cleaning path/width- main broom	in	24.2
Cleaning path/width with 1 sb	in	35.4
Cleaning path/width with 2 sb	in	45.3
Side broom diameter	in	16.5
Debris container capacity	gal	16
Practical productivity - 2 sb	sq. ft/hr	47,520
Operating noise level	dBA	69
Sweeping method	direct/overthrow	direct
Weight	lbs	782
Dimensions (L x W x H)	in	64 x 38.5 x 49.5

EQUIPMENT

Order No.	Description
9.841-246.0	KM 90/60 R Bp Adv, 1SB, 2 x 12V/225 Ah wet batteries, shelf charger
9.841-247.0	KM 90/60 R Bp Adv, 1SB, 2 x 12V/234 Ah AGM batteries, shelf charger
9.841-248.0	KM 90/60 R Bp Adv, 2SB, 2 x 12V/225 Ah wet batteries, shelf charger
9.841-249.0	KM 90/60 R Bp Adv, 2SB, 2 x 12V/234 Ah AGM batteries, shelf charger

ACCESSORIES

	CESSORIES	
	Order No.	Description
	4.762-430.0	Main broom
•	6.906-132.0	Side broom
•	6.907-519.0	TACT Filter (2 required)
	5.035-488.0	Home Base kit (adapter and cable hook)
	6.980-078.0	Mop clip (requires 5.035-488.0)
	6.980-080.0	Bottle Hook (requires 5.035-488.0)
	6.907-023.0	Anti-static rolling brush
	4.762-443.0	Main cylindrical brush, hard
	4.762-442.0	Main cylindrical brush, soft/natural
	6.905-625.0	Side broom, hard for heavy-duty cleaning
	2.642-693.0	Side brush kit, left
	2.851-334.0	Carpet sweeping kit (includes anti-static rolling brush)
	2.642-989.0	Warning beacon revolving signal light
	6.414-532.0	Round filter - plastic filter, water-resistant, washable, saves maintenance costs. (Fits previous KM 90/60 R Bp without Tact)
	4.762-442.0	Main cylindrical brush, soft/natural-with natural bristles, ideal for sweeping fine dust on smooth surfaces both indoors and outdoors
	8.628-341.0	12V/225 Ah wet batteries
	8.622-843.0	Battery pack 234 Ah AGM, 3 required

KM 100/120 R BP







Maximize productivity and clean any environment.

This configurable ride-on sweeper is designed to minimize your total cost of cleaning. It is perfect for larger cleaning tasks whether they are indoors or out.

Clean for long periods with easy debris disposal

- Debris container holds up to 31 gallons of dirt
- Easy waste disposal due to the hydraulic container emptying high dump (>4ft 11in)
- Up to 3.5 hours of run time with a fully charged battery

Easy operation, high productivity

- Operator functions are color coded yellow
- Working speed of 4.35 mph results in higher productivity
- Convenient operation with logically linked function

KM 100/120 R BP

TECHNICAL SPECIFICATIONS		
Cleaning path	in	28.7 - 50
Brush quantity	units	1 - 4
Brush diameter	in	5
Main broom speed	rpm	600
Debris bin capacity	gal	31.7
Debris bin emptying height	inch	60
Total machine battery voltage	V	24
Filter area	ft²	64.5
Productivity (practical/theoretical)	ft²/hr	75,577
Climbing ability	%	18
Weight with batteries	lbs	1,580
Dimensions (L x W x H)	in	67 x 47 x 54

EQUIPMENT	
Order No.	Description
9.899-870.0	KM 100/120 R BP, AGM batteries, shelf charger

ACCESSORIES

A	CESSORIES	
	Order No.	Description
	6.905-095.0	Main broom
•	6.905-986.0	Side broom
•	8.629-184.0	Battery pack 24V, 6v, AGM, 3 required
•	8.642-664.0	Battery charger, 24V, 50A
•	6.414-532.0	Round filter
٠	6.815-172.0	Key
	2.853.095.0	Deluxe seat add-on kit
	2.852-913.0	Left side broom add-on kit
	2.853-034.0	4 Side broom add-on kit
	2.852-491.0	Ram protection add-on kit
	2.853-030.0	Vacuum add-on kit
	2.853-048.0	Wheel set, non-chalking
	2.852-835.0	Water spray add-on kit
	2.852-828.0	Overhead guard
	2.853-092.0	Blue spotlight add-on kit
	2.853-042.0	Rear light add-on kit
	2.853-094.0	Work lighting add-on kit
	2.852-863.0	STVZO add-on kit
	2.852-911.0	Warning beacon revolving signal add-on kit
	6.905-190.0	Main broom, soft
	6.905-191.0	Main broom, hard
	6.906-133.0	Side broom, soft
П	6 906-065 0	Side broom, bard

PUZZI™ 8/1 C



Handy and compact for easy spot cleaning.

The handy, compact and powerful Puzzi™ 8/1 C spray extraction cleaner is ideal for small areas and interim cleaning with excellent cleaning results.

Easy to use

- Foot switch makes it easy to turn on and off no bending required.
- Transparent dome lid for easy-to verify operation.

Easy to transport

- Swivel casters for easy maneuvering.
- Lightweight at less than 19 lbs., it can be carried up and down stairs without strain.

Smart features

- 8' high-pressure solution and vacuum hose
- Removable dirty water tank.

PUZZI™ 8/1 C

TECHNICAL SPECIFICATIONS		
Solution/recovery capacity	gal	2.1 / 1.8
Operating noise level	dBA	71
Power cord length	ft	33
Vacuum	hp, stage	1.5 hp
Water lift	in	88
Pump pressure	psi	14.5 - 43.5
Flow rate	gpm	0.26
Weight	lbs	22
Dimensions (L x W x H)	in	22.5 x 13 x 17.3

EQUIPMENT

Order No.	Description
1.100-244.0	Puzzi™ 8/1 C, with 98-inch spray hose with integrated water feed and hand tool

ACCESSORIES

	Order No.	Description
4	6.394-826.0	8-foot hose complete with couplings
•	4.130-000.0	Handhold Complete
4	4.130-063.0	Upholstery Nozzle
	4.130-444.0	Stair cleaning tool, 9-inch
	6.391-411.0	13-foot high pressure solution & vacuum hose
	4.130-117.0	Stone & hard surface nozzle
	4.762-219.0	Hard surface adapter for standard hand tool
	4.130-010.0	Crevice nozzle
	4.130-007.0	Carpet Floor Wand Complete (240mm)
	4.762-014.0	Hard Surface Adapter for Floor Wand (240mm)

BRC 30/15 C









Compact, fast and simple extraction.

Get acquainted with the faster, simpler solution for small area extraction. The BRC 30/15 C is designed to productively clean carpet with less effort, resulting in time-saving productivity gains. In interest of simplicity this machine requires minimal service. It is lightweight and compact for ease of use and transportability.

Compact deep cleaning solution

■ High performance vacuum motor for faster drying time

Extraction is no sweat

- Quiet, lightweight, easy to use
- Designed for minimal service

Portable and mobile

- Large 10-inch non-marking wheels for easy transport and maneuverability
- Fold-down handle for easy transportation in any vehicle

BRC 30/15 C

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	10.5
Solution/recovery capacity	gal	4.5 / 4
Operating noise level	dBA	. 77
Power cord length	ft	25
Vacuum	hp, stage	1.5, 3
Water lift	in	120
Pump pressure	psi	26
Flow rate	gpm	0.38
Weight	lbs	79
Dimensions (L x W x H)	in	23 x 14 x 28

EQUIPMENT

Order No.	Description
1.008-058.0	BRC 30/15 C, 4 gallon carpet extractor

ACCESSORIES

	Order No.	Description
	8.621-604.0	Brush, chevron, 10-inch
•	8.629-552.0	Brush, extractor, natural bristles
	8.631-030.0	Assembly, adapter (1/8"m x 1/4" fpt nipple)
	8.629-036.0	Hose and hand tool kit, bag Included
	8.600-075.0	Adapter 1/8 to 1/4 quick-disconnect for accessory solution hose

RANGER



Workhorse durability and premium features at a competitive price.

Specifically designed for the budget hotel sector without sacrificing performance or reliability. This vacuum uses an energy efficient impeller style system that will make quick work of any cleaning job. Plus, the manual height adjustment means you can use it on different types of carpet, as well as hard floor surfaces with ease. For a professional vacuum that doesn't skimp on quality or features, choose the Ranger upright vacuum.

Productivity in mind

- Flat to floor feature allows the vacuum to easily clean under beds and furniture
- Manual height adjustment for different types of flooring
- Breath easier with the HEPA rated vacuum bag

Low total cost of ownership

- Long life belt backed by a two-year warranty
- Safety mechanism prevents damage to vac extending life of brush
- Break-away foot pedal designed to prevent damage

RANGER

TECHNICAL SPECIFICATIONS	
Cleaning Path in	12
Productivity (Practical) sq. ft/hr	2,510
Dust Bag qt	5.6
Power W	480
Power Cord ft	25
Noise Level dBA	78
Weight Ibs	13.4
Dimensions (L x W x H) in	15 x 13 x 46

EQUIPMENT

Order No.	Item Description
1.012-900.0	Ranger 12" upright vacuum

ACCESSORIES

	Order No.	Description	
•	8.600-495.0	Brush Roller 12 in	
П	8 645-209 0	HEPA Filter hags 10 nack	

CVS 65/1 BP



The carpet specialist for different carpet styles.

The CVS 65/1 BP Pack is an impressive battery-operated carpet sweeper that also works well on hard surfaces. The 36V lithiumion battery allows for up to 60 minutes of continuous operation, or 19,375 sq ft, on a single charge. The efficient, two-step filter system comprising of a pre-filter and a PTFE-coated flat pleated filter for dust classes L and M ensures dust-free working, while its low operating noise of just 56 dB(A) also allows for use in noise-sensitive areas.

Optimized sweeping

- High productivity
- Big carpet surfaces can be cleaned up efficiently in short time

36/75 Power+ Battery

- Easily note remaining battery capacity
- Productive and efficient use of the machine
- Possible to run several machines on the same battery platform





CVS 65/1 BP

TECHNICAL SPECIFICATIONS		
Cleaning path/width- main broom	in	18
Cleaning path/width with 1 sb	in	26
Side broom diameter	in	10
Debris container capacity	gal	5
Practical productivity	sq. ft/hr	19,375
Operating noise level	dBA	56
Sweeping method	direct/overthrow	direct
Weight	lbs	88
Dimensions (L x W x H)	in	30 x 26.5 x 21

EQUIPMENT

Order No.	Description
1.517-302.0	CVS 65/1 Bp

ACCESSORIES

A	CESSURIES	
	Order No.	Description
•	2.445-075.0	Battery Power+ 36V/75
•	2.445-053.0	Fast Charger Battery Power+ 36V
•	2.886-002.0	Main broom antistatic
•	2.884-355.0	Side brush standard
	6.907-449.0	Flat dust filter
	5.745-280.0	Pre-filter
	5.032-196.0	Homebase bag
	2.884-358.0	Set of 10 disposal bags

NT 48/1



A tough and versatile clean.

This machine is a tough and versatile wet/dry vacuum. Built to handle difficult wet or dry dirt, this vac is the machine that will stand up to tough everyday use. The optional front mounted squeegee provides even more productive water pickup. The large filter provides impressive suction power and long work intervals improving your productivity.

Portable

- Mobile, all-purpose wet/dry vacuum for small to medium jobs and multiple locations
- Integrated handle ensures easy and comfortable transport.

Real-world convenience

Optional front mounted squeegee for more productive pickup.

NT 48/1

		111 194 =
TECHNICAL SPECIFICATIONS		
Vacuum width, floor tool	in	12
Vacuum hose length	ft	8
Power cord length	ft	25
Waste container capacity	gal	12
Operating noise level	dBA	72
Air flow rate	cfm	142
Waterlift	in of water	80
Motor	watts	1,380
Weight	lbs	22
Dimensions (L x W x H)	in	19 x 15.3 x 30.3

EQUIPMENT

-40	
Order No.	Description
1.428-623.0	NT 48/1, 13-gallon wet/dry vacuum
9.840-844.0	NT 48/1, 13-gallon wet/dry vacuum with front mounted squeegee

ACCESSORIES

AC	CESSORIES	
	Order No.	Description
•	6.414-789.0	Cylindrical Dust Filter
•	6.904-285.0	Paper filter bag (5-pack, 1 bag Included with machine)
•	6.906-512.0	All-Purpose Nozzle
•	6.900-385.0	8.3-inch all purpose crevice nozzle
_	4.440-626.0	8 feet x 1.375 inch hose with comfortable hand grip
•	6.900-514.0	Metal suction tube, 1.4 inch X 1.6 feet
•	6.906-240.0	Crevice nozzle, 1.4-inch
	6.904-211.0	Wet Filter Bag
	6.906-384.0	14.6" Aluminum All-Purpose Nozzle with Height-Adjustable Cylindrical, Brush Strips and Oil Resistant Squeegees
	6.907-409.0	10.2-inch plastic all-purpose nozzle
	6.907-408.0	14.2-inch plastic all-purpose head with cylindrical, brush strips and standard squeegee
	6.906-383.0	17.7" Aluminum All-Purpose Head with Height-Adjustable cylindrical, Brush Stripes and oil-resistant Squeegees
	2.860-113.0	Upholstery hand tool
	2.860-114.0	10-inch turbo nozzle with reducer 35/32
	6.903-033.0	11.4" Crevice Tool
	6.905-988.0	4.7" Plastic Upholstery Nozzle, 35 mm ID
	6.903-034.0	Radiator Brush for use with 6.900-385.0
	6.903-035.0	Plastic, Pipe Diameter 3.9"
	6.903-862.0	Suction Brush, Natural Hair, Pivotable, 35 mm ID
	2.860-116.0	Nozzle Set, Crevice Tool, Upholstery Tool, Round Brush, 35 mm ID
	2.863-147.0	All-Purpose Brush, Soft Bristles 35 mm ID
	8.622-960.0	Replacement 15-inch squeegee blade

NT 68/1



Utility with ease.

Easily tackle medium to large jobs with this wet/dry vac. Designed with a robust 1.8 hp vac motor to handle any task you throw at it. If even more productivity is desired, the optional front mounted squeegee makes quick work of water recovery. Thoughtful features such as no-tipping dumping and on-board storage make this the operator's choice for wet/dry vacs.

Performance

- Optional front-mounted squeegee offers more productive water pick-up
- 18 gallon capacity offers easy mobility for medium to large jobs

Thoughtful design

- Complete with on-board tool storage compartment with safety sign storage bracket
- Self-adjusting squeegee assembly

NT 68/1

TECHNICAL SPECIFICATIONS		
Vacuum width, floor tool	in	24.5
Power cord length	ft	50
Waste container capacity	gal	18
Operating noise level	dBA	71
Air flow rate	cfm	142
Waterlift	in of water	80
Motor	watts	1,200
Weight	lbs	64
Dimensions (L x W x H)	in	35.5 x 24.5 x 37.5

EOUIPMENT

LQOII MLITI				
Order No.	Description			
1.103-494.0 NT 68/1, eighteen gallon wet/dry vacuum with 24" front squeegee, with tools				
1.103-495.0	NT 68/1, eighteen gallon wet/dry vacuum with 24" front squeegee			
1.013-021.0	NT 68/1 eighteen gallon wet/dry vacuum with hose and wand only			

ACCESSORIES

AC	CESSORIES	
	Order No.	Description
	5.731-595.0	Cartridge Filter (Wet)
	6.414-552.0	Cartridge Filter (Dry)
	6.900-385.0	8.3-inch all purpose crevice nozzle
	6.906-240.0	Crevice nozzle, 1.4-inch
	6.906-384.0	14.6" Aluminum All-Purpose Nozzle with Height-Adjustable Cylindrical, Brush Strips and Oil Resistant Squeegees
	6.907-409.0	Floor tool package:10.2-inch plastic all-purpose nozzle, basalt grey
	6.903-018.0	14.6" Aluminum All-Purpose Head with Height-Adjustable Cylindrical, Brush Stripes and squeegee blades
	6.907-408.0	Floor tool package: 14.2-inch plastic all-purpose head with cylindricals, brush strips and standard squeegee, basalt grey
	6.906-383.0	17.7" Aluminum all-purpose head with height-adjustable cylindrical, brush stripes and oil-resistant Squeegees
	2.860-113.0	Upholstery hand tool
	2.860-114.0	10-inch turbo nozzle with reducer 35/32
	6.903-033.0	11.4" Crevice Tool
	6.900-922.0	14.6" Crevice Nozzle, Metal
	6.902-154.0	Wand
	8.635-292.0	Front mount squeegee assembly
	6.906-512.0	Squeegee head
	8.634-534.0	Replacement squeegee blades (two required)

BV/VAC PAC™ HEPA SERIES



Breathe easy with HEPA filtration.

The BV/VAC PAC HEPA series are portable back mounted vacuums great for increasing productivity, efficiency, while saving you money. Breathe easier with HEPA-level filtration standard on these vacuums. They also have an ergonomic harness system, allowing the operator to move around quickly and easily for maximum productivity.

Meets your needs

- HEPA filtration is now standard, providing optimum air quality by filtering with 99.9% effectiveness to 0.3 microns
- Vacuum hose is a top-mounted swivel design for left-hand and right-hand operation





BV 7/1 VAC PAC 6 HEPA

BV 11/1 VAC PAC 10 HEPA

TECHNICAL SPECIFICATIONS			
Vacuum width, floor tool	in	13	13
Vacuum hose length	ft	60	60
Power cord length	ft	50	50
Waste container capacity	qt	6	10
Operating noise level	dBA	67	67
Air flow rate	cfm	112	112
Waterlift	in of water	104	104
Motor	watts	1,200	1,200
Weight	lbs	10	11
Dimensions (L x W x H)	in	8.5 x 8.8 x 19.8	8.5 x 8.8 x 23.7

EQUIPMENT

Order No.	Description
1.014-013.0	BV 7/1 VAC PAC 6 HEPA backpack vacuum, 6 qt. (includes hose and tool kit)
1.014-014.0	BV 11/1 VAC PAC 10 HEPA backpack vacuum, 10 qt. (includes hose and tool kit)

ACCESSORIES

	Order No.	Description
-	8.628-666.0	Wand, 2 PC Aluminum Double Curve
	8.619-894.0	Hose Assembly
	8.639-285.0	HEPA pleated filter
-	8.619-884.0	Cloth bag for VAC PACTM HEPA 10 / BV 11/1
	8.619-885.0	10-quart paper bags, 10-pack for BV 11/1
	8.619-891.0	Paper bags for VAC PACTM HEPA 6 / BV 7/1
	8.619-890.0	Cloth bags for VAC PACTM HEPA 6 / BV 7/1
	8.619-887.0	Filter Dome
•	8.604-141.0	VAC PACTM tool kit (#02293 crevice tool, #02083 dusting brush, #02084 upholstery tool, #02085 upholstery brush, #02086 extension tube)
	8.628-451.0	24-inch Anodized Aluminum Crevice Tool
	8.600-008.0	5-inch Upholstery Tool
	8.628-360.0	Upholstery Brush
	8.600-007.0	3-inch dusting tool with adapter
	8.628-445.0	Tool, Carpet
	8.628-444.0	Tool, bristle shod dry pick-up
	8.619-876.0	VAC PACTM Crevice Tool
	8.631-254.0	Harness assembly for VAC PACTM HEPA 6 & 10 and BV 11/1
	8.642-914.0	15" sidewinder carpet tool with 1.5" neck
	8.642-915.0	15" sidewinder hard floor brush with 1.5" neck
	8.642-916.0	18" sidewinder carpet tool with 1.5" neck
	8.642-917.0	18" sidewinder hard floor brush with 1.5" neck

 \blacksquare Included \square Optional

BR 35/12 C BP











The race is always won in the corners.

Thanks to our innovative steerable scrub deck, the BR 35/12 C Bp can clean up to the wall at a 90° angle. It can also clean in reverse, or in any direction. The height-adjustable, telescoping steering column allows optimal ergonomics for any operator. The folding steering column also makes it easy to secure for transport.

Steer your way to cleaner floors

- Our innovative steerable scrub deck allows for scrubbing in any direction, and provides perfect scrubbing right up to the edge.
- The telescoping handle adjusts to any operator's height
- Brush height is adjustable for multiple floor types
- Kärcher's unique ecolefficiency mode features increases operating time by 50%, and reduces noise by 40%.

BR 35/12 C BP

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	14
Brush type	clyindrical/disc/pad	cylindrical
Brush quantity	units	1
Brush diameter	in	3.8
Suction bar (squeegee) width	in	18
Drive	pad-assist/traction	brush-assist
Solution/recovery capacity	gal	3/3
Theoretical/practical productivity	sq. ft/hr	11,000 / 6,600
Operating noise level - std/Eco! mode	dBA	66 / 62
Battery charger	shelf/on-board	on-board
Battery runtime - std/Eco! mode	min	66 / 90
Battery charging time	hrs	1-3
Battery lifetime-est charging cycles	x thousands	3
Brush contact pressure	lbs	29
Brush speed	rpm	700 - 1,050
Vac motor rating	watts	280
Vac motor suction	cfm	42
Waterlift	in of water	32
Weight with batteries	lbs	77
Dimensions (L x W x H)	in	39 x 18 x 51

EQUIPMENT

Order No. Description

1.783-470.0 BR 35/12 C Bp, fourteen inch scrubber with cylindrical brushes

ACCESSORIES

	Order No.	Description
	4.037-031.0	Cylindrical Brush, red, medium
	4.037-036.0	Cylindrical Brush, white, soft
	4.037-037.0	Cylindrical Brush, orange, high/low
	4.037-038.0	Cylindrical Brush, green, hard
	4.037-039.0	Cylindrical Brush, black, very hard
	4.762-009.0	Cylindrical Pad cylindrical shaft
	6.369-053.0	Cylindrical Pads on sleeve, yellow, soft
	6.369-047.0	Cylindrical Pads on sleeve, red, medium
	6.369-052.0	Cylindrical Pads on sleeve, green, hard
	4.037-040.0	Cylindrical microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile
	4.037-127.0	Squeegee blade set, optional, Linatex
-	4.037-035.0	Squeegee blade set, standard, oil-resistant, polyurethane
	6.654-294.0	Lithium-ion battery, 21 Ah

 \blacksquare Included \square Optional

BD 38/12 C BP







Steer your way to cleaner floors.

Think of the BD 38/12 as a 15 inch disc version of the popular BR 35/12. The design allows for the easiest driving of a walk-behind disc scrubber on the market. The squeegee follows behind the disc to ensure 100% solution pickup even through the corners.

Steerable, innovative disc scrubber

- Extremely agile for efficient cleaning of small and very furnished areas.
- Easy to use-scrub right up to the wall

Real world practicality

- Quick charging lithium-ion battery has a longer lifetime than normal batteries.
- Very compact, light and easy to transport and roll over steps.
- Application also in noise sensitive areas possible due of significantly reduced noise level.

BD 38/12 C BP

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	15
Brush type	clyindrical/disc/pad	disc
Brush quantity	units	1
Brush diameter	in	15
Suction bar (squeegee) width	in	16
Drive	pad-assist/traction	brush-assist
Solution/recovery capacity	gal	3.2 / 3.2
Theoretical/practical productivity	sq. ft/hr	11,210 / 6,725
Operating noise level - std/Eco! mode	dBA	65 / 62
Battery charger	shelf/on-board	on-board
Battery runtime - std/Eco! mode	min	60 / 120
Battery charging time	hrs	2 - 3
Battery lifetime-est charging cycles	x thousands	3
Brush contact pressure	lbs	35 - 46
Brush speed	rpm	180 / 150
Vac motor rating	watts	280
Vac motor suction	cfm	42
Waterlift	in of water	32
Weight with batteries	lbs	79
Dimensions (L x W x H)	in	37 x 30 x 51

EOUIPMENT

Order No.	Item Description
1 783-431 0	BD 38/12 C compact scrubber with fifteen inch disc brush

ACCESSORIES	
Order No.	Item Description
■ 6.907-151.0	Disc brush, red
■ 6.654-294.0	Lithium-ion battery, 21 Ah
4 .037-059.0	Squeegee blades, made from transparent and oil-resistant polyurethane, includes front and rear blade
6.907-150.0	Pad driver plate
6.369-003.0	Red disc pads, set of 5
6.369-002.0	Green disc pads, medium soft, green, set of 5
□ 6.369-001.0	Black disc pads, hard, set of 5
6.905-060.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile, set of 5

BD 50/50 C BP CLASSIC



Professional cleaning, now made easier.

This economically-designed scrubber provides you all the cleaning power to take on large jobs—perfect for retail environments, schools and health care facilities.

Easy to use

- Three cleaning modes make it simple for any operator to get the job done right
- The slim design of the Kärcher BD 50/50 allows you to see in front of the scrubber easier
- Home Base kit allows for carrying of other essentials on the machines, for less visits to the supply closet.







BD 50/50

		,			
TECHNICAL SPECIFICATIONS					
Cleaning path/width	in	20	Battery charger	shelf/on board	shelf
Brush type	cylindrical/disc/pad	pad	Brush contact pressure	lbs	59 - 62
Brush quantity	units	1	Brush speed	rpm	180
Brush diameter	in	20	Vac motor rating	watts	500
Suction bar (squeegee) width	in	35	Vac motor suction	cfm	51
Drive	pad-assist/traction	pad-assist	Waterlift	in of water	48
Solution/recovery capacity	gal	13.2 / 13.2	Weight with batteries	lbs	306
Theoretical/practical productivity	sq. ft/hr	21,530 / 13,995	Dimensions (LxWxH)	in	47 x 21 x 39
Operating noise level	dRA	66			

EQUIPMENT

Order No.	Description
9.841-369.0	BD 50/50 C Bp Classic, pad driver, 24V/105 Ah wet batteries
9.841-370.0	BD 50/50 C Bp Classic, pad driver, 24V/100 Ah AGM batteries
ACCESSORIES	
Order No.	Description

A	CESSURIES	
	Order No.	Description
•	4.762-534.0	Pad driver, 20-inch, features a quick-change coupling and centerlock
•	4.777-179.0	V-Shaped squeegee, 35-inch, with caster, polyurethane
	4.905-027.0	Disc brush, soft, made of natural fibers, for cleaning and polishing
	4.905-029.0	Brush, hard black - For stubborn dirt and basic cleaning. For hard wearing surfaces.
	4.905-026.0	Disc brush, medium grit, red, for general cleaning (standard on brush machines)
	6.369-079.0	Red disc pad, 20-inch, medium soft red for cleaning all types of floors, 5-pack
	6.369-078.0	Green disc pad, 20-inch, aggressive for cleaning heavily soiled floors and for deep cleaning, 5-pack
	6.369-077.0	Black pad, 20-inch, hard, for cleaning heavily soiled floors and for deep cleaning, 5 pack
	6.369-468.0	Beige disc pad, 20-inch, light grit, for polishing and refreshing of hard and elastic smooth floor coverings, 5 pack
	6.273-023.0	Oil resistant, replacement squeegee blades
	6.371-146.0	Beige disc pad, 20-inch, soft, natural hair, for polishing
	4.777-401.0	Squeegee, 33.5-inch, straight, made of oil-resistant transparent polyurethane, for smooth floors
	5.035-488.0	Home Base kit (adapter and cable hook)
	6.980-077.0	Double Hook (requires 5.035-488.0)
	4.035-406.0	Home Base kit carrying case
	6.980-078.0	Mop clip (requires 5.035-488.0)
	6.980-080.0	Bottle Hook (requires 5.035-488.0)
	4.070-075.0	Universal hook
	8.641-483.0	Charger for wet batteries (included with 9.841-369.0)
	8.629-377.0	Charger for AGM batteries (included with 9.841-370.0)

BD 50/55 W BP CLASSIC



Outstanding price-performance ratio.

Robust, compact and user friendly, this traction drive walk behind scrubber has everything you need to get the job done. Quickly and efficiently clean a wide variety of settings, including healthcare, education and retail.

Exceptional Maneuverability

Compact design and traction control provides easy transportation and handling in any environment.

Built to last

Die Cast aluminum scrub deck and assembly provides maximum durability.







BD 50/55 W

TECHNICAL SPECIFICATIONS					
Cleaning path/width	in	20	Battery charger	shelf/on board	shelf
Brush type	disc/pad	pad	Brush contact pressure	lbs	59
Brush quantity	units	1	Brush speed	rpm	180
Brush diameter	in	20	Vac motor rating	watts	500
Suction bar (squeegee) width	in	33.5	Vac motor suction	cfm	51
Drive	pad-assist/traction	traction	Waterlift	in of water	48
Solution/recovery capacity	gal	14.5 / 14.5	Weight with batteries	lbs	379
Theoretical/practical productivity	sq. ft/hr	27,500 / 17,500	Dimensions (LxWxH)	in	52 x 22.5 x 42
Operating noise level	dBA	65			

EQUIPMENT

Order No.	Description	
9.998-002.0	BD 50/55 W Bp Classic,	24V/100Ah AGM batteries, shelf charger

ACCESSORIES

•	CCESSONIES		
4	Order No.	Description	
	4.778-008.0	Squeegee, 33.5-Inch, parabolic	
	4.400-011.0	Suction blades, 33-inch, red	
	4.400-005.0	Suction blades, 33-inch, transparent	
	2.644-228.0	Add-on kit deflector roll squeegee, stackable	
	4.905-026.0	Disc brush, medium	
□ 4.905-028.0 Disc brush, very soft □ 4.905-027.0 Disc brush, soft □ 4.905-029.0 Disc brush, hard		Disc brush, very soft	
		Disc brush, soft	
		Disc brush, hard	
	4.762-534.0	Pad driver	
	4.070-075.0	Universal hook kit	
	4.039-271.0	Mop holder	
	5.035-488.0	Home-base adapter	
	6.980-077.0	Double hook	
	6.980-078.0	Holder handhold grey	
	6.980-080.0	30.0 Holder bottle	

BD 70/75 W BP CLASSIC



Smaller, but still mighty.

This economically-designed scrubber provides you all the cleaning power to take on large jobs—perfect for retail environments, grocery stores, municipalities, and BSC's.

Easy to use

- Adaptable to specific floor type cleaning needs
- Large aluminum brush deck is tough and durable
- Wet, AGM and lithium battery options are available

BD 70/75 W BP CLASSIC

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	28
Brush type	clyindrical/disc/pad	pad
Brush quantity	units	2
Brush diameter	in	14
Suction bar (squeegee) width	in	41
Drive	pad-assist/traction	traction
Solution/recovery capacity	gal	19.8 / 19.8
Theoretical/practical productivity	sq. ft/hr	30,645 / 19,920
Operating noise level	dBA	63
Battery charger	shelf/on board	shelf
Brush contact pressure	lbs	66 - 150
Brush speed	rpm	180
Vac motor rating	watts	500
Vac motor suction	cfm	51
Waterlift	in of water	64
Weight with batteries	lbs	512 wet / 556 AGM
Dimensions (L x W x H)	in	57 x 30 x 42

EQUIPMENT

Order No.	Description
9.841-466.0	BD 70/75 W Bp Classic, 185 Ah wet batteries, shelf charger
9.841-467.0	BD 70/75 W Bp Classic, 190 Ah AGM batteries, shelf charger
9.841-240.0	BD 70/75 W Bp Classic, 24V Lithium, shelf charger

ACCESSORIES

	Order No.	Description	
	4.762-590.0	Pad drive board STRONG (standard)	
	6.369-003.0	Pad red, medium-soft (standard), set of 5	
	8.663-291.0	Battery 6V/190 Ah AGM (standard with 9.841-467.0) (4 REQUIRED)	
	8.622-835.0	Battery 6V/185 Ah wet (standard with 9.841-466.0) (4 REQUIRED)	
•	8.643-374.0	Shelf charger for 190Ah AGM batteries	
	8.644-222.0	Shelf charger for 185Ah Wet batteries	
•	4.777-108.0	Squeegee, 1030mm (standard w/suction blades)	
	4.037-144.0	Suction blades, 1030mm, blue (standard)	
	4.905-010.0	Disc brush, red, medium	
	4.905-013.0	Disc brush, black, hard	
	4.905-012.0	Disc brush, natural, soft	
	4.905-011.0	Disc brush, white, very soft	
	4.037-145.0	Suction blades, 1030 mm (polyurethane)	
	9.753-088.0	Squeegee transport plate	
	4.444-015.0	Suction Hose Accessory	
	2.644-140.0	Warning beacon add-on kit	

BR 75/75 W BP CLASSIC



Heavy-duty cleaning made simple.

Not only is this scrubber incredibly effective, it's also incredibly easy to use and maintain. Its durable frame and excellent sight lines makes it highly maneuverable, even able to turn in spaces as narrow as 5.1 feet in width. The die cast aluminum scrub decks and squeegee assemblies provide unbeatable durability and exceptional cleaning.

Easy to use

- Easy to operate with minimal training needed, the intuitive controls prevent operating errors.
- Adaptable to specific floor type cleaning needs
- Large aluminum brush deck is tough and durable
- Wet, AGM and Lithium battery options are available

BR 75/75 W BP CLASSIC

TECHNICAL SPECIFICATIONS					
Cleaning path/width	in	30	Battery charger	shelf/on board	shelf
Brush type	cylindrical/disc/pad	cylindrical	Brush contact pressure	lbs	66
Brush quantity	units	2	Brush speed	rpm	600
Brush diameter	in	4	Vac motor rating	watts	500
Suction bar (squeegee) width	in	40.5	Vac motor suction	cfm	51
Drive	pad-assist/traction	traction	Waterlift	in of water	64
Solution/recovery capacity	gal	19.8 / 19.8	Weight with batteries	lbs	556 AGM
Theoretical/practical productivity	sq. ft/hr	30,645 / 21,342	Dimensions (LxWxH)	in	57 x 30 x 42
Operating noise level	dBA	65			

EQUIPMENT

Order No.	Description	
9.848-458.0	BR 75/75 W Bp Classic, 185 Ah wet batteries, shelf charger	
9.848-459.0	BR 75/75 W Bp Classic, 195 Ah AGM batteries, shelf charger	
9.848-460.0	BR 75/75 W Bp Classic, 114 Ah Lithium battery, shelf charger	

ACCESSORIES

Order No.	Description
8.663-291.0	Battery 6V/190 Ah AGM (standard with 9.841-467.0) (4 REQUIRED)
■ 8.622-835.0 Battery 6V/185 Ah wet (standard with 9.841-466.0) (4 REQUIRED)	
8.643-374.0	Shelf charger for 190Ah AGM batteries
8.644-222.0	Shelf charger for 185Ah Wet batteries
4.777-108.0	Squeegee, 1030mm (standard w/suction blades)
4.037-144.0	Suction blades, 1030mm, blue (standard)
4.035-605.0	Cylindrical red brush, 30-inch
4.037-145.0	Suction blades, 1030 mm (polyurethane)
9.753-088.0	Squeegee transport plate
2.644-140.0	Warning beacon add-on kit
2.763-047.0	R 75 Aluminum brush head, cylindrical, 30-inch
6.907-729.0	Cylindrical white brush, soft, 30-inch
6.907-730.0	Cylindrical orange brush, high-low for grout, 30-inch
6.907-731.0	Cylindrical green brush, hard, 30-inch
6.907-732.0	Cylindrical black brush, very aggressive, 30-inch
5.035-488.0	Home Base kit (adapter and cable hook)
6.980-077.0	Double Hook (requires 5.035-488.0)
4.035-406.0	Home Base kit carrying case
6.980-078.0	Mop clip (requires 5.035-488.0)
6.980-080.0	Bottle Hook (requires 5.035-488.0)
4.070-075.0	Universal hook

 \blacksquare Included \square Optional

BD 80/100 W BP CLASSIC



Quality and durability in a cost effective package.

This economically-designed scrubber provides you all the cleaning power to take on large jobs—perfect for retail environments, grocery stores, and BSC's.

Easy to use

- Storage compartment in the back for shelf charger and other accessories.
- An automatic brake is integrated into the transaxle and a cost effective, large aluminum brush deck is included.



BD 80/100 W BP CLASSIC

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	32
Brush type	clyindrical/disc/pad	pad
Brush quantity		2
Brush diameter	in	16
Suction bar (squeegee) width		43
Drive	pad-assist/traction	traction
Solution/recovery capacity		26.4 / 26.4
Theoretical/practical productivity	sq. ft/hr	
Operating noise level	dBA	
Battery charger	shelf/on board	shelf
Brush contact pressure	lbs	88 - 200
Brush speed	rpm	180
Vac motor rating	watts	600
Vac motor suction	cfm	53
Waterlift	in of water	67
Weight with batteries	lbs	705
Dimensions (L x W x H)	in	59 x 33 x 42

EQUIPMENT

Order No.	Description
9.841-456.0	BD 80/100 W Bp Classic, 295 Ah wet batteries, shelf charger
9.841-457.0	BD 80/100 W Bp Classic, 285 Ah AGM batteries, shelf charger
9.808-180.0	BD 80/100W Bp Classic, 24V Lithium Battery, Shelf Charger

ACCESSORIES

~~	CLOSORILS	
	Order No.	Description
	4.762-591.0	Pad drive board (standard)
-4	6.371-332.0	Pad, red, medium-soft (standard)
	8.629-184.0	Battery, Discover 6V/285 Ah AGM (standard with 9.841-457.0)
•	8.644-818.0	Battery, Discover 24V Lithium Ion
	8.622-837.0	Battery, Trojan 6V/271 Ah wet (standard with 9.841-456.0)
	8.643-373.0	Shelf charger for wet batteries (standard wtih 9.841-456.0)
	8.643-374.0	Shelf charger for AGM batteries (standard with 9.841-457.0)
	4.777-102.0	Squeegee, 1100 mm (standard with suction blades)
	4.037-138.0	Suction blades, 1230 mm, blue (standard)
	4.905-000.0	Disc brush, red, medium
	4.905-032.0	Disc brush, black, hard
	4.905-031.0	Disc brush, natural, soft
	4.905-030.0	Disc brush, white, very soft
	4.037-140.0	Suction blades 1230 mm, transparent
	9.753-088.0	Squeegee transport plate
	2.644-140.0	Warning beacon add-on kit

 \blacksquare Included \square Optional

64

BR 85/100 W BP CLASSIC



Toughness meets ease of use.

This powerhouse is designed for simplicity, reliability, and ease of use, making it perfect for tackling challenging environments with exceptional cleaning ability and rugged construction. Its sturdy frame and excellent sight lines ensure maximum maneuverability, even in narrow spaces.

Sturdy scrub deck

Scrub deck and squeegee are made of durable aluminum which affords the user longer life in daily cleaning applications.

Exceptional contact pressure

 Significant contact pressure (88 lbs) of its cylindrical brushes ensures exceptional cleaning.on all types of floors.

BR 85/100 W BP CLASSIC

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	34
Brush type	cylindrical/disc/pad	cylindrical
Brush quantity	units	2
Brush diameter	in	4
Suction bar (squeegee) width	in	43
Drive	pad-assist/traction	traction
Solution/recovery capacity	gal	26.4 / 26.4
Theoretical/practical productivity	sq. ft/hr	35,025 / 24,192
Operating noise level	dBA	65
Battery charger	shelf/on board	shelf
Brush contact pressure	lbs	88
Brush speed	rpm	600
Vac motor rating	watts	500
Vac motor suction	cfm	51
Waterlift	in of water	64
Weight with batteries	lbs	705
Dimensions (LxWxH)	in	59 x 33 x 42

EQUIPMENT

Order No.	Description
9.848-455.0	BR 85/100 W Bp Classic, 185 Ah Wet batteries, shelf charger
9.848-456.0	BR 85/100 W Bp Classic, 195 Ah AGM batteries, shelf charger
9.848-457.0	BR 85/100 W Bp Classic, 114 Ah Lithium battery, shelf charger

ACCESSORIES

	Order No.	Description
	8.622-837.0	Battery, 6V/271 Ah wet (standard with 9.848-455.0)
	8.629-184.0	Battery, 6V/285 Ah AGM (standard with 9.848-456.0)
•	8.644-818.0	Battery, Discover 24V Lithium Ion (standard with 9.848-457.0)
	8.643-373.0	Shelf charger for wet batteries (standard with 9.848-455.0)
•	8.643-374.0	Shelf charger for AGM batteries (standard with 9.848-456.0)
•	4.777-102.0	Squeegee, 1100 mm (standard with suction blades)
	4.035-606.0	Red, 34" Cylindrical Brushes
	4.037-138.0	Suction blades, 1230 mm, blue (standard)
	4.037-140.0	Suction blades 1230 mm, transparent
	9.753-088.0	Squeegee transport plate
	2.644-140.0	Warning beacon add-on kit
	4.035-406.0	Home Base Kit
	6.907-772.0	White, Cylindrical Brush 34"
	6.907-734.0	Orange, Cylindrical Brush 34"
	6.907-735.0	Green, Cylindrical Brush 34"
	6.907-736.0	Black, Cylindrical Brush 34"

 \blacksquare Included \square Optional

B 80 W BP



This large scrubber easily goes anywhere.

The B 80 W BP scrubbers cover a lot of area quickly, but are still easily maneuverable. They feature a robust, interchangeable, maintenance-friendly scrub deck. Choose from cylindrical or disc in 26" widths.

Thoughtfully designed scrub decks

- Decks automatically raise and lower as necessary
- Interchangeable decks changed quickly and without tools.

Four color LCD screen

 Easily select your cleaning mode with the easy-to-read symbols on the large 4-color display

B 80 W BP + D 65







TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS			
Cleaning path/width	in	26	26
Brush type	cylindrical/disc/pad	Cylindrical	Disc
Brush quantity	units	2	2
Suction bar (squeegee) width	in	39	39
Drive	pad-assist/traction	Traction	Traction
Solution/recovery capacity	gal	21 / 21	21 / 21
Theoretical/practical productivity	sq. ft/hr	27,980 / 18,180	27,980 / 18,180
Operating noise level - std/Eco! mode	dBA	69 / 66	69 / 66
Battery charger	shelf/on-board	On-board	On-board
Brush contact pressure	lbs	213	117
Brush speed	rpm	400 - 1,550	180
Drive/vac motor rating	watts	350 / 580	350 / 580
Vac motor suction	cfm	53	53
Waterlift	in of water	67	67
Weight (excluding battery/ with battery)	lbs	282 / 617	289 / 617
Dimensions (L x W x H)	in	61 x 29 x 45	62 x 29 x 45

B 80 W BP + R 65

EQUIPMENT

EQUIT WILITI	
Order No.	Description
9.841-204.0	B 80 W Bp, D 65 disc scrub deck, 24V/260 Ah wet batteries, with curved squeegee
9.841-198.0	B 80 W Bp, R 65 cylindrical scrub deck, 24V/225 Ah wet batteries, on-board charger, with curved squeegee
9.841-200.0	B 80 W Bp, R 65 cylindrical scrub deck, 24V/255 Ah AGM batteries, on-board charger, with curved squeegee
9.841-201.0	B 80 W Bp, D 65 disc scrub deck, 24V/255 Ah AGM batteries, on-board charger, with curved squeegee
9.841-203.0	B 80 W Bp. R 65 cylindrical scrub deck. 24V/260 Ab wet batteries, on-board charger, with curved squeegee

ACCESSORIES

Order No.	Description
4.777-080.0	Squeegee assembly, 39-inch, V-shaped polyurethane oil-resistant blades, standard on machines with R 75 & D 75 scrub decks
5.035-488.0	Home Base kit (adapter and cable hook)
6.980-077.0	Double hook (requires 5.035-488.0)
8.600-251.0	Cable asm, bat. Jumper x 15" (required w/ no battery units)
4.035-345.0	Quick fill tank system (requires 9.083-003.0)
9.083-003.0	Hose coupling
6.273-205.0	Squeegee blade set, anti stripe oil resistant
6.273-291.0	Squeegee blade set, for textured floors
4.035-408.0	KIK Key

 \blacksquare Included \square Optional

See Cleaning Heads & Brushes section for available scrub decks.

B 75/110 R BP



Outstanding suction performance.

The brand-new B 75/110 R is perfect for all floors. The robust front bumper prevents damage to the machine and other objects, while speed dependent water supply saves on water and detergents. The newly designed squeegee picks up more water and requires less attention and the adjustable seat allows workers to feel more comfortable during long shifts.

Advanced updates for a top-of-the-line machine

- Front bumper and driving lights
- Side scrub deck for close to the edge cleaning
- Adjustable comfort seat
- Hill driving assistant and automatic electronic brake







B 75/110 R BP

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	30
Brush type	cylindrical/disc/pad	Cylindrical and disc
Brush quantity	units	2
Brush diameter	in	4" cylindrical, 15" disc
Suction bar (squeegee) width	in	37
Drive	pad-assist/traction	Traction
Solution/recovery capacity	gal	29 / 29
Theoretical/practical productivity - 30" deck	sq. ft/hr	48,440 / 31,485
Operating noise level	dBA	59 - 74
Battery charger	shelf/on board	Shelf
Brush contact pressure	lbs	165
Brush speed	rpm	180 / 1200
Drive /vac motor rating	watts	600
Vac motor suction	cfm	53
Waterlift	in of water	68
Weight with batteries	lbs	1190
Dimensions (L x W x H)	in	65 x 30 x 52
Minimum turning radius	ft	2.87
Climbing ability - maximum slope	% grade	10
Max. working speed	mph	3.8

EQUIPMENT

Order No.	Description
9.841-441.0	BD 75/110 R Bp Wet, 30" disc scrub deck
9.841-444.0	BD 75/110 R Bp AGM, 30" disc scrub deck
9.841-445.0	BR 75/110 R Bp Wet, 30" cylindrical scrub deck
9.841-449.0	BR 75/110 R Bp AGM, 30" cylindrical scrub deck

See Cleaning Heads & Brushes section for available scrub decks.

B 75/110 R BP ACCESSORIES

ACCESSORIES

A	CESSURIES	
	Order No.	Description
•	4.778-007.0	950 mm parabolic squeegee
•	2.763-005.0	D 75 scrub deck (depending on model selected)
	2.763-047.0	R 75 scrub deck (depending on model selected)
	4.039-366.0	Linatex squeegee blade set
	4.035-605.0	Red brush for R 75 scrub deck
	6.907-731.0	Green brush for R 75 scrub deck
	6.907-732.0	Black brush for R 75 scrub deck
	6.907-730.0	Orange brush for R 75 scrub deck
	6.907-729.0	White brush for R 75 scrub deck
	4.039-357.0	Polyurethane replacement squeegee blade
	8.644-917.0	Right side scrub deck (factory install only)
	4.039-350.0	Warning beacon kit
	4.039-327.0	Lid with tank rinsing
	2.644-245.0	Dose system
	4.035-406.0	Home base box
	4.039-349.0	Mop Home Base Attachment Kit
	8.622-835.0	Trojan T105 225 Ah battery
	8.632-254.0	Discover EVGT6A-A 255 Ah battery
	8.644-222.0	Shelf charger for wet batteries
	8.643-374.0	Shelf charger for AGM batteries

B 150 R BP



Race into efficiency with the B 150.

The B 150 R can cover up to 58,125 ft²/hr making this one impressively productive scrubber. Although it can cover large areas quickly, we made sure that it has great visibility for safety. Our KIK operating system and the color coded controls make operation simple and intuitive. KIK allows managers to control what functions and settings their employees can use and adjust.

Advanced model features all-wheel drive (special order)

- Clean ramps with grades up to 18%
- Features a unique all-wheel brake system for safety
- Utilize the large color LCD screen to adjust everything to your needs including contact pressure, water volume, brush speed, etc.

Let the machine do the work

Auto tank-rinsing and auto-fill come standard to allow the operator to do other tasks while rinse and fill are taking place





USGBC		B 150 R + R 75	B 150 R + D 75	B 150 R + R 85	B 150 R + D 90
TECHNICAL SPECIFICATIONS					
Cleaning path/width	in	30	30	34	36
Brush type	cylindrical/disc/pad	Cylindrical	Disc	Cylindrical	Disc
Brush quantity	units	2	2	2	2
Brush diameter	in	3.5	7.5	3.5	17.7
Suction bar (squeegee) width	in	37	37	47	47
Drive	pad-assist/traction	Traction	Traction	Traction	Traction
Solution/recovery capacity	gal	40 / 40	40 / 40	40 / 40	40 / 40
Theoretical/practical productivity	sq. ft/hr	48,438 / 34,445	48,438 / 34,445	54,895 / 38,630	58,125 / 40,903
Operating noise level - std/Eco! mode	dBA	67 / 64	67 / 64	67 / 64	67 / 64
Battery charger	shelf/on board	Shelf	Shelf	Shelf	Shelf
Brush contact pressure	lbs	245	224	275	238
Brush speed	rpm	1,200	140	1,200	140
Drive /vac motor rating	watts	600 / 750	600 / 750	600 / 750	600 / 750
Vac motor suction	cfm	55	55	55	55
Waterlift	in of water	72	72	72	72
Weight without batteries	lbs	959 - 1,146	959 - 1,146	959 - 1,146	959 - 1,146
Dimensions (L x W x H)	in	65 x 31 x 56			
Minimum turning radius	ft	2.9	2.9	2.9	2.9
Climbing ability - maximum slope	% grade	10	10	10	10
Max. working speed working	mph	3.7	3.7	3.7	3.7

EQUIPMENT

Order No.	Description	
9.841-286.0	B 150 R Bp, scrub deck, pad driver, and squeegees sold separately, 36V/360 Ah batteries	
9.841-287.0	B 150 R Bp 2SB, scrub deck, pad driver, and squeegees sold separately, 36V/360 Ah batteries, dual side brushes	
9.841-288.0	B 150 R Bp Advanced, scrub deck, pad driver, and squeegees sold separately, 36V/360 Ah batteries (special order)	
9.841-289.0	B 150 R Bp 2SB Advanced, scrub deck, pad driver, and squeegees sold separately, 36V/360 Ah batteries, dual side brushes (special order)	
9.841-290.0	B 150 R Bp, R 75 cylindrical scrub deck, 36V/360 Ah batteries	
9.841-291.0	B 150 R Bp, R 75 cylindrical scrub deck, 36V/312 Ah AGM batteries	
9.841-294.0	B 150 R Bp 2SB, R 75 cylindrical scrub deck, 36V/360 Ah batteries, dual side brushes.	
9.841-295.0	B 150 R Bp 2SB, R 75 cylindrical scrub deck, 36V/312 Ah AGM batteries, dual side brushes.	
9.841-292.0	B 150 R Bp, R 85 cylindrical scrub deck, 36V/360 Ah batteries.	
9.841-293.0	B 150 R Bp, R 85 cylindrical scrub deck, 36V/312 Ah AGM batteries.	
9.841-296.0	B 150 R Bp 2SB, R 85 cylindrical scrub deck, 36V/360 Ah batteries, dual side brushes.	
9.841-297.0	B 150 R Bp 2SB, R 85 cylindrical scrub deck, 36V/312 Ah AGM batteries, dual side brushes.	
9.841-367.0	B 150 R Bp, scrub deck sold separately, 36V/312 Ah AGM batteries	
9.841-368.0	B 150 R Bp 2SB, scrub deck sold separately, 36V/312 Ah AGM batteries, dual side brushes	
9.841-365.0	B 150 R Bp Advanced, scrub deck sold separately, 36V/312 Ah AGM batteries (special order)	
9.841-366.0	B 150 R Bp 2SB Advanced, scrub deck sold separately, 36V/312 Ah AGM batteries, dual side brushes (special order)	

Effective January 1, 2024. Prices, specifications and product descriptions subject to change without notice.

B 150 R BP ACCESSORIES

ACCESSORIES

AC	CESSURIES			
	Order No.	Description		
	5.035-344.0	Operator Key, Yellow		
	5.035-348.0	Foreman Key, Gray		
-	4.778-007.0	Squeegee assembly, 37-inch, parabolic assembly with linatex blades, standard on machines with R 75 & D 75 scrub decks		
	4.039-356.0	37" Linatex Squeegee Blades		
	4.039-357.0	37" Polyurethane Squeegee Blades		
	4.039-366.0	37" Mixed Blades (Front Poly/Rear Linatex)		
	4.778-009.0	Squeegee assembly, 47-inch, parabolic assembly with linatex blades, standard on machines with R 85 & D 90 scrub decks		
	4.039-362.0	47" Linatex Squeegee Blades		
	4.039-363.0	47" Polyurethane Squeegee Blades		
	8.622-842.0	6V/360 Ah wet batteries		
-	8.629-184.0	Battery, 6V/312 Ah AGM battery		
-	8.628-408.0	Battery charger, 36V, 36A, 115V. For use with 8.622-842.0		
-	8.600-015.0	AGM battery charger, 36V, 21A, 115V		
	2.642-058.0	Spray Suction Kit - for Cleaning Areas Not Easily Accessed by Machine (field installation required)		
	6.435-733.0	Non-marking rear wheel, for use on sensitive floors that mark easily (field installation required)		
	4.444-015.0	Suction hose accessories, for taking in water from corners (e.g. deep freezers)		
	4.035-516.0	360° Warning Beacon (field installation required)		
	2.641-811.0	Cleaning agent dosing system DS 3 - Can be directly connected to the main water supply; the fresh water tank is filled with the mixture of water and cleaning agent. Also in connection with the ABS filling system.		
	6.435-810.0	Front tires, traction – oil-proof, for drive motor 4.035-045.0		
	6.435-446.0	Front tires, traction – oil-resistant, for drive motor 4.035-569.0		
	6.951-073.0	Replacement side broom, for use with R-type scrub decks (1-pack)		
	2.644-089.0	Overhead guard		
	2.644-088.0	Add-on kit, side scrubbing deck		

■ Included □ Optional

See Cleaning Heads & Brushes section for available scrub decks.

CLEANING HEADS & BRUSHES







R-Series Cylindrical Heads



S-Series Vibration Heads

We offer three different scrub decks to suit your unique needs. The three types R (cylindrical), D (disc) or S (vibration) each have their specific advantages. Disc decks are ideal for everyday scrubbing. Cylindrical heads are ideal for stubborn dirt or uneven surfaces. The S heads are very efficient at stripping of floors. No matter your need, Kärcher has you covered.

D 43 | 17-INCH DISC SCRUB DECK

Order No.	Description	B 40	B 60	B 80	B 110 B 150
2.763-023.0	D 43 head, 17-inch scrub deck for all battery-powered B 40 units	-			
4.762-533.0	Pad driver				
6.905-526.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile				
4.905-023.0	Disc brush, natural fibers				
6.369-470.0	Disc pad, red (general purpose/standard)				
4.905-022.0	Red disc brush, 17-inch				
4.905-024.0	Disc brush, white 17-inch	•			
4.905-025.0	Disc brush, black 17-inch				
6.369-472.0	Disc pad green (aggressive)	•			
6.369-473.0	Disc pad black (very aggressive)	. .			
6.369-469.0	Disc pad white (soft)	•			
6.371-081.0	Disc pad beige (light aggregate)				
6.371-149.0	Disc pad, natural				
D 51 20-IN	NCH DISC SCRUB DECK				
2.763-026.0	D 51 head, 20" / 510mm Scrub Deck for all Battery-Powered B 40 units				
8.642-710.0	One Time Conversion Kit, D 51 Ortibal head (for serial # 10358 and higher)*				
8.638-801.0	Assembly, Deck, D 51 Orbital (replacement deck assembly)				
4.905-026.0	Disc brush, medium grit, red, for general cleaning (standard on brush machines)				
4.905-028.0	Disc brush, very soft, for cleaning sensitive floors and polishing, white				
4.905-029.0	Disc brush, hard, for stubborn dirt and deep cleaning. Only for hard-wearing surfaces, black				
4.905-027.0	Disc brush, soft, made of natural fibers, for cleaning and polishing				
4.762-534.0	Pad driver, 19 inch, features a quick-change coupling and centerlock (standard on pad driver machines)				
6.371-271.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile				
6.369-079.0	Red disc pad, 20-inch, medium soft red for cleaning all types of floors, 5-pack				
6.369-078.0	Green disc pad, 20-inch, aggressive for cleaning heavily soiled floors and for deep cleaning, 5-pack				

6.371-146.0 Beige disc pad, 20 inch, soft, natural hair, for polishing *For serial #10357 and lower, part number 6.613-512.3 must also be ordered

6.369-077.0 Black pad, 20-inch, hard, for cleaning heavily soiled floors and for deep cleaning, 5 pack

Beige disc pad, 20-inch, light grit, for polishing and refreshing of hard and elastic smooth floor coverings,

D 55 | 22-INCH DISC SCRUB DECK

6.369-468.0

2.763-001.0	D 55 brush head, disc head, 22-inch
4.905-015.0	Disc brush, white - soft
4.905-016.0	Disc brush, natural bristles
4.905-014.0	Disc brush, red, standard with D 55 head
4.905-017.0	Disc brush, black – very aggressive
4.762.445.0	Pad driver
6.371-153.0	Disc pad, red (soft)
6.371-154.0	Disc pad, green (medium)
6.371-155.0	Disc pad, black (hard)

D 65 | 26-INCH DISC SCRUB DECK

2.763-003.0	D 65 brush head, disc head, 26-inch	
4.905-011.0	Disc brush, white - soft	
4.905-012.0	Disc brush, natural bristles	
4.905-010.0	Disc brush, red, standard with D 65 head	
4.905-013.0	Disc brush, black - very aggressive	
4.762-446.0	Pad driver	
6.369-003.0	Red disc pads, set of 5	
6.369-002.0	Green disc pads, medium soft, green, set of 5	
6.369-001.0	Black disc pads, hard, set of 5	
6.369-959.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile	

Effective January 1, 2024. Prices, specifications and product descriptions subject to change without notice.

CLEANING HEADS & BRUSHES

D 75 | 30-INCH DISC SCRUB DECK

Order No.	Description	B 40 B 60 B 80 B 110 B 150
2.763-005.0	D 75 brush head, disc head, 30-inch	
4.905-019.0	Disc brush, white - soft	
4.905-020.0	Disc brush, natural bristles	
4.905-018.0	Disc brush, red, standard with D 75 head	
4.905-021.0	Disc brush, black - very aggressive	
4.762-447.0	Pad driver	
6.369-791.0	Disc pad, red (soft)	
6.369-790.0	Disc pad, green (medium)	
6.369-789.0	Disc pad, black (hard)	
6.371-078.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile	
D 90 36-II	ICH DISC SCRUB DECK	
2.763-008.0	D 90 brush head, disc, 36-inch	
4.905-003.0	Disc brush, red, standard with D 90 head	
4.905-004.0	Disc brush, natural bristles	•
4.905-005.0	Disc brush, white - soft	
4.905-006.0	Disc brush, black - very aggressive	
4.762-493.0	Pad driver	
6.369-022.0	Disc pad, black - hard	
6.369-023.0	Disc pad, green - medium	
6.369-024.0	Disc pad, red - soft	-
R 45 18-IN	ICH CYLINDRICAL SCRUB DECK	
2.763-020.0	R 45 head, 18-inch scrub deck for non-traction drive machines (for C Units)	
2.763-019.0	R 45 head, 18-inch scrub deck for traction drive machines (for W Units)	
4.762-392.0	Cylindrical red brush, medium stiff bristles for all-around cleaning on smooth and textured floors	. 21
4.762-405.0	Cylindrical white brush, soft bristles for gentle cleaning on all-surface floors	
4.762-406.0	Cylindrical orange brush, high-low bristles for cleaning all grouted surface floors	
4.762-407.0	Cylindrical green brush, stiff bristles for aggressive cleaning on irregular surface floors	
4.762-408.0	Cylindrical black brush, extremely stiff bristles for stubborn dirt on rugged floors	
4.762-413.0	Cylindrical pad shaft (required for all brushes below)	
4.114-009.0	Cylindrical microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile	
6.367-105.0	Cylindrical pad, yellow (soft)	
6.367-107.0	Cylindrical pads, red, general purpose	
6.367-108.0	Cylindrical pad, white, (very soft) for high-gloss floors	
6.367-106.0	Cylindrical pad, green (hard & aggressive)	
R 55 22-IN	ICH CYLINDRICAL SCRUB DECK	
2.763-013.0	R 55 head, 22-inch scrub deck for non-traction drive machines (for B 40 C units)	
2.763-011.0	R 55 head, 22-inch scrub deck for traction drive machines (for B 40 W)	
4.035-184.0	Cylindrical red brush, 22-inch, medium stiff bristles, all-around cleaning on smooth and textured floors	-
4.762-409.0	Cylindrical white brush, 22-inch, soft	
4.762-410.0	Cylindrical orange brush, 22-inch, high/low bristles for uneven floors	-
4.762-411.0	Cylindrical green brush, 22-inch, hard bristles	
4.762-412.0	Cylindrical brush black 22-inch	-
4.762-415.0	Cylindrical pad shaft, 22-inch, 2 required	
8.635-692.0	Cylindrical, stripping 22-inch	
4.114-010.0	Cylindrical microfiber pad, 22-inch, for daily cleaning of delicate surfaces including LVT and stone tile	
6.369-732.0	Yellow pad, 22-inch	
6.369-734.0	Red pad, 22-inch, medium grit for all-around cleaning on smooth and textured floors	
6.369-735.0	White pad, includes sleeve, 22-inch	
6.369-733.0	Green pad, 22-inch	
2.763-002.0	R 55 head, cylindrical, 22-inch	
6.906-977.0	Cylindrical brush, white, soft	
4.035-193.0	Cylindrical brush, red, standard with R 55 head	-
6.906-978.0	Cylindrical brush, orange, hi-lo grout brush	
6.906-979.0	Cylindrical brush, green, hard	-
6.906-980.0	Cylindrical brush, black, very aggressive	-
	Cylliurical, Stripping 22-liich	-
8.635-692.0	Cylindrical, stripping 22-inch Cylindrical brush, red (2 required)	
8.635-692.0 4.762-432.0	Cylindrical brush, red (2 required)	
8.635-692.0		

CLEANING HEADS & BRUSHES

R 65 | 26-INCH CYLINDRICAL SCRUB DECK

Order No.	Description	B 40 B 60 B 80 B 110 B 150
2.763-004.0	R 65 brush head, cylindrical, 26-inch	
6.906-981.0	Cylindrical white brush, soft	
4.035-187.0	Cylindrical red brush	
6.906-982.0	Cylindrical orange brush, high-low for grout	
6.906-983.0	Cylindrical green brush, hard	
6.906-984.0	Cylindrical black brush, very aggressive	
4.762-433.0	Cylindrical Pad Shaft	
6.369-389.0	White cylindrical pad, extra soft, set of 20	
6.369-454.0	Yellow cylindrical pad, soft, set of 20	
6.369-455.0	Green cylindrical pad, hard, set of 20	
6.369-456.0	Red cylindrical pad, medium, set of 20	
R 75 30-II	NCH CYLINDRICAL SCRUB DECK	
2.763-006.0	R 75 brush head, cylindrical, 30-inch	
6.906-985.0	Cylindrical brush, white, soft	
6.907-415.0	cylindrical brush, red, standard with R 75 head	
6.906-986.0	Cylindrical brush, orange, hi-lo grout brush	
6.906-987.0	Cylindrical brush, green, hard	
6.906-988.0	Cylindrical brush, black, very aggressive	
4.762-434.0	Cylindrical pad shaft	•
6.369-389.0	White cylindrical pad, extra soft, set of 20	
6.369-454.0	Yellow cylindrical pad, soft, set of 20	
6.369-455.0	Green cylindrical pad, hard, set of 20	
6.369-456.0	Red cylindrical pad, medium, set of 20	-
	NCH ALUMINUM CYLINDRICAL SCRUB DECK	
2.763-047.0	R 75 Aluminum brush head, cylindrical, 30-inch	
6.907-729.0	Cylindrical white brush, soft, 30-inch	
4.035-605.0	Cylindrical red brush, 30-inch	
6.907-730.0	Cylindrical orange brush, high-low for grout, 30-inch	
6.907-731.0	Cylindrical green brush, hard, 30-inch	
6.907-732.0	Cylindrical black brush, very aggressive, 30-inch	
R 85 34-II	NCH ALUMINUM CYLINDRICAL SCRUB DECK	
2.763-048.0	R 85 Aluminum brush head, cylindrical, 34-inch	•
6.907-772.0	Cylindrical white brush, soft, 34-inch	
4.035-606.0	Cylindrical red brush, 34-inch	
6.907-734.0	Cylindrical orange brush, high-low for grout, 34-inch	
6.907-735.0	Cylindrical green brush, hard, 34-inch	
6.907-736.0	Cylindrical black brush, very aggressive, 34-inch	
S 65 26-IN	NCH VIBRATION SCRUB DECK	
2.763-030.0	S 65 brush head, oscillating scrub deck, 26-inch	
4.036-063.0	S 65 orbital head connection kit, required for connecting S 65 orbital, B 60 and B 80 uni	ts (required)
8.635-789.0	Pad, S 65 surface prep, package of 5	
8.635-788.0	Pad, S 65, red, package of 5	
8.635-836.0	Pad, S 65, white, package of 5	

SG 4/4



Clean without chemicals.

Time is money-particularly in commercial cleaning. The SG 4/4 steamer has an ingenious two-tank filling system allowing for continuous use. Steam cleaning can impressively remove bacteria without chemical. It is also ideal for cleaning kitchens and grout.

Continuous use

- Our unique two-tank system allows for continuous use
- Very little time is needed to heat up the unit

Adjust to your needs

- Control the level of steam
- Switch to pressurized hot water to remove stubborn dirt

Designed for your health

■ Only water is used by the SG 4/4 to save you money and to improve the health of users and guests



TECHNICAL SPECIFICATIONS	
Voltage	V 110
Steam temp/pressure	°F/psi 248 / 58
Tank capacity	gal 1.06
Cable length	in 24.5
Weight without accessories	lbs 17.6
Dimensions (L x W x H)	in 19 x 12.6 x 10.8

COLLIDATION

EQUIFMENT	
Order No.	Description
1.092-805.0	SG 4/4, Commercial steam cleaner
9.841-414.0	SG 4/4 Commercial steam cleaner with transport cart

AC	CESSORIES			
	Order No.	Description		
	4.322-020.0	Steam Hose		
•	4.127-024.0	Extension Tube		
•	2.884-280.0	Hand Tool		
•	6.906-185.0	Floor Nozzle		
•	2.863-263.0	Power Nozzle Set		
	2.884-281.0	Point Jet Nozzle		
	4.013-030.0	Funnel		
	2.863-264.0	Round Brush Set		
	2.863-025.0	Window Nozzle		
	6.273-140.0	Wiper Blade (window)		
	2.863-062.0	Wallpaper Stripper		
	2.863-171.0	Steam+Clean Microfiber Cloth Set for Bathrooms (Includes 4 different cloths)		
	2.863-172.0	Steam+Clean Microfiber Cloth Set for Kitchens (Includes 4 different cloths)		
	2.863-173.0	Steam+Clean Microfiber Velour Floor Cloth Set (Includes 2 cloths)		
	2.863-174.0	Steam+Clean Microfiber Velour Cloth Covers for the Hand Tool (Includes 2 cloths)		
	6.962-097.0	Filling Funnel		
	2.885-465.0	Floor Tool Replacement		
	6.962-239.0	Two Wheel Transport Cart		
■ In				

■ Included □ Optional

SGV 6/5



Hygiene, non-stop.

The easy-to-use SGV 6/5 steam vacuum cleaner offers hygienic cleanliness. A single machine that is a steam cleaner and wet vacuum cleaner in one. With EASY Operation switch, secure accessory integration and hand tool for controlling the steam/vacuum function.

Straight forward operation

- One easy-to-use switch controls all operation
- Self-explanatory symbols means less training required

Continuous operation

Our unique design allows you to refill the water while in use

Change on the go

■ The Included hand tool features an adjustment knob that allows you to adjust the water/steam regulation and turn the vacuum on and off.



SGV 6/5

TECHNICAL SPECIFICATIONS		
Voltage	v	110 - 120
Steam temp/pressure	°F/psi	327 / 87
Tank capacity	gal	1.3
Cable length	ft	24.5
Weight without accessories	lbs	86
Dimensions (L x W x H)	in	25 x 19 x 38

EQUIPMENT

Order No.	Description
1.092-003.0	SGV 6/5, commercial steam cleaner and wet vacuum

ACCESSORIES

	Order No.	Description
	2.863-011.0	Round brush set, 3 Brushes
4	2.889-005.0	Floor Nozzle, 12 inches
•	2.889-006.0	Brush strips for floor nozzle 2.889-005.0
•	2.889-007.0	Rubber Strip, 12 inches for floor nozzle 2.889-005.0
•	2.889-008.0	Hand Nozzle
4	2.889-009.0	Brush Strip, 6 inches for hand nozzle 2.889-008.0
•	2.889-010.0	Rubber Strip, 6 inches for hand nozzle 2.889-008.0
	2.889-011.0	Adapter
	2.889-028.0	Crevice Nozzle
	2.889-052.0	Adapter for attaching round brushes
•	4.440-009.0	Steam suction hose
	2.889-058.0	Extension tube set (1 piece)
	2.889-004.0	Extension tube set (2 pieces)
	2.889-053.0	Triangular floor nozzle
	2.863-007.0	Round brush stainless steel (very hard bristles) set, 3 Nozzles
	2.863-008.0	Round Brass Brush (hard bristles) Set, 3 Nozzles
	2.863-009.0	Pekalon round brush (medium-hard bristles) set

 \blacksquare Included \square Optional

SG BP GUM REMOVER



SG1 C Bp, backpack gum remover

Turn up the heat on gum removal.

The Kärcher SG 1 C Bp is a portable gum remover. Powered by a single lithium ion battery, this gum remover is quiet and offers up to 4 hours of uninterrupted operation. Gum is removed in 4-6 seconds, and it is safe to use on stone, concrete and even carpet. Great for maintaining shopping malls, schools, train stations, airports, hotels, hospitals, restaurants and supermarkets.

Easy to Use

■ SG1 C Bp's low pressure fuel canisters are designed to ensure delivery of proper fuel volume and safe operation.

Ultimate portability

No cords ensures safety and convenience

Environmentally friendly

■ No harsh residue – safe on all surfaces



SG 1 C BP

TECHNICAL SPECIFICATIONS				
Run time	hrs 4			
Weight	lbs 11			
Dimensions (L x W x H)	in 4.5 x 13 x 20.5			

		11	
Dimensions (L x W x H)		in 4.5 x 13 x 20.5	
EQUIPMENT			
Order No.	Description		

ACCESSORIES

1.013-104.0

 10120011120		
Order No.	Description	
8.639-871.0	Service pack: 2 LPG cartridges, 4 bottles of solution and 2 black stainless steel brushes, 1 green brush. Expect 8-9 hours run time.	
8.642-880.0	Stainless steel brushes: 2 pack replacement stainless steel brushes (black)	
8.642-931.0	Polypropylene brushes: 2 pack polypropylene brushes (green), for carpet and material	
8.639-828.0	Charger	
8.638-521.0	Battery	
8.639-846.0	Lance & hose	

DETERGENTS

DL	DETERGENTS		
	Order No.	Description	
	8.638-579.0	12-Pack of gas bottles	
	8.638-580.0	24 liters of gum remover solution	

■ Included □ Optional

AB 84 CUL



Reduce carpet drying times by up to 50%.

Powerful enough for any job yet economical enough to not break the bank; rely on the AB 84 CUL as your air blower of choice. If you have wet floors or carpet, dry your facility up to 50 percent faster so you can resume to business-as-usual sooner. This economical unit features three speeds as well as three different vertical standing positions so you can direct air anywhere you need to. The powerful 3,000 cfm air movement promotes rapid drying in no time.

- Three speeds of air movement for every type of job
- Sturdy four point motor mount to withstand heavy use and rough handling
- Built-in carpet clip for flood restoration jobs
- Three different three standing positions to allow air to be directed in any angle
- Upright handle and transport wheels for added safety and convenience

AB 84 CUL

TECHNICAL SPECIFICATIONS		
Air flow rate - level 1, 2, 3	cfm	3000 / 2500 / 2000
Fan speed - level 1, 2, 3	rpm	1600 / 1350 / 1050
Power cord length	ft	25
Motor rating	HP	0.5
Voltage	V	115
Weight	lbs	39
Dimensions (L x W x H)	in	22.8 x 16 x 21.5

FOILIDMENT

EQUIPMENT	
Order No.	Description
04-039.0	AB 84 CUL, three - speed commercial air blower with upright handle

BDS 51/175 C



Strong, solid and robust operation.

The BDS 51/175 C floor machine is a high quality, durable unit that offer powers and versatility for scrubbing and stripping. It features an adjustable handle to accommodate various user heights and five inch non-marking wheels to allow easy transportation. This machine is available in single-speed or dual-speed.

Floor Machine Built for Durability and Reliability

- Robust motor for everyday reliability
- Separate start and run capacitors for durability
- Cord strain relief to keep cord from breaking or tearing
- Strong and solid handle housing for trouble free operation



BDS 51/175 C

TECHNICAL SPECIFICATIONS		
Pad size	in	20
Pad speed	rpm	175
Theoretical/practical productivity sq.	ft/hr	2,222
Operating noise level	dBA	63
Voltage	V	115
Motor	hp	1.5
Wheel diameter	in	5 x 1.25
Power cord length	ft	50
Weight	lbs	118
Dimensions (L x W x H)	in	24.5 x 21 x 47

EOUIPMENT

EQUIPMENT			
Order No.	Description		
1.009-103.0	BDS 51/175 C, twenty-inch		

ACCESSORIES

~	CLOSORILS	
	Order No.	Description
•	8.628-430.0	Pad driver, 20-inch with clutch plate (BDS 51/175)
	8.628-429.0	Pad driver, 20-inch for dual speed machine (BDS 51/175-300)
	8.645-238.0	Solution tank 4 gallon (Compatible with 1.009-102.0 & 1.009-103.0 models)
	8.600-507.0	Center lock
	8.628-369.0	20-inch aggressive grit brush with clutch plate
	8.628-378.0	20-inch mild grit brush with clutch plate
	8.628-379.0	20-inch nylon polish brush with clutch plate
	8.628-377.0	20-inch nylon scrub brush with clutch plate
	8.628-370.0	20-inch polypropylene brush with clutch plate
	8.625-259.0	20-inch sanding disc

■ Included □ Optional



Kärcher's detergents are highly concentrated and formulated for a broad range of uses on many surfaces. They are engineered specifically to be metered through hot- or cold-water pressure washers with a high dilution ratio, making the cost-in-use very economical.

Faster Results

Tested in the lab and in the field, to achieve results that are 3x faster than the original formula. With fast acting and efficient formulas, you'll use less product - saving you both time and money.

2 More Effective

Utilizing cutting-edge technology and enhanced raw materials, Kårcher detergents deliver superior cleaning results in even the toughest environments. Designed with a higher tolerance for hard water–less detergent is needed to break down the dissolved calcium and magnesium salts, leading to a marked reduction in insoluble mineral deposits commonly associated with hard water.

3 Environmentally Friendly

With an eye on preserving our natural resources, we are proud to offer a complete lineup of environmentally friendly detergents, many of which are phosphate-free. Rigorous testing has proven these new formulas to be effective while providing a sustainable solution for reducing the negative impacts often associated with runoff and providing you with peace of mind.



THE 8 GREATS

HEAVY DUTY DEGREASER

An industrial strength degreaser for cleaning heavy oils and greases, carbon, lubricants and hydraulic fluids found in industrial and manufacturing spaces. It is formulated to pass through a pressure washer without damaging the high-pressure pump or heating coil.



GENERAL PURPOSE CLEANER

A blend of ingredients formulated to provide a low-foaming detergent for safe removal of dirt and grime off a broad range of surfaces. It is formulated to pass through a pressure washer without damaging the high-pressure pump.

3

VEHICLE WASH AND WAX DETERGENT

Save time and money when you clean and protect in one step. Good for autos and trucks and safe on any finish. Superior performance in hard water leaving a shine with a spot free rinse.



FLEET WASH DETERGENT

A mild detergent designed for exterior cleaning of trucks, busses, equipment and implements. This special emulsifying formula contains high-powered cleaning agents that are effective on grease, road film and smoke trails.

5

SALT AND ICE MELT REMOVER

A combination detergent that removes heavy soil as well as damaging road salt residue. Its unique chelating action breaks down the crystalline structure of ice melt salt and prevents it from crystallizing back on the surface so it can be rinsed away with the dirt.



FLEET ALUMINUM BRIGHTENER

An extra-strength, acid-based, aluminum cleaner and brightener designed for non-polished aluminum tanks and trailers, aluminum wheels and for preparing aluminum for painting. This formula is non foaming.

7

HOOD AND DUCT DEGREASER

Specifically designed to remove the dangerous build-up of grease in exhaust hoods of food cooking establishments. Through a hot water pressure washer, fast effective removal restores hood and ducts to a clean, safe result. Even carbonized grease.



SHOP FLOOR CLEANER

A no-rinse formula designed for heavy-duty machine shop cleaning that will leave a streak-free finish. Lifts and removes petroleum-based grease and oily soils from finished and unfinished concrete, including painted and epoxy-coated floors.

		Order no.		Size	рH	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description
General Purpose (leane	rs: Formulated	for general p	ourpose	cleanii	ng. Designe	ed for daily	cleaning	of facility	/ surfaces, t	ools and floo	ors.	
General Purpose Cleaner	2	9.803-789.0		5 gal	10.2	purple	slight	1:128	low	5			General Purpose Cleaner is a blend of ingredients formulated to provide a low-foaming detergent for safe removal of dirt and grime off a broad range of surfaces. It is formulated to pass through a pressure washer without damaging the high-pressure pump. This formula is ideal for power washing around a home or shop, including exterior walls, decks, driveways, and roofs. It is also effective in cleaning machinery, equipment, cars, RVs, and trucks. It is safe for cleaning indoors or outdoors.
Building Interior/ Exterior Cleaner	3	8.698-135.0 8.698-136.0		5 gal	10.2	purple	slight	1:130	low	5	•		Building Interior/Exterior Cleaner is safe to use on aluminum, stainless steel, glass, plastic, paint, stone and masonry surfaces. Building Interior/Exterior Cleaner is ideal for power washing around a home or shop, including exterior walls, decks, driveways, and roof. This formula is phosphate-free and outperforms most competitive phosphate products.
Concrete Cleaner	6	9.803-744.0 9.803-784.0		5 gal	12.3	yellow	citrus	1:150	high	5			Concrete Cleaner is formulated to clean stone and concrete surfaces. It is effective in removing oil, grease, baked-on carbon, tar and asphalt from unfinished concrete floors, walls and grout. Concrete Cleaner is engineered to pass through a pressure washer without damaging the high-pressure pump. It is safe to use on aluminum, stainless steel, glass, plastic and painted surfaces. This formula is phosphate-free and outperforms most competitive phosphate products.
RM 99 Solar Cleaner	7	8.698-094.0		5 gal	8.8	none	none	1:800	low	4	•		RM 99 Solar Cleaner is specific for cleaning solar and photovoltaic systems, and it's perfectly adapted to their unique surfaces. Its highly efficient, gentle on materials, and removes even stubborn and greasy stains. It prevents limescale formation and maximizes the effectiveness of the system at minimum cost.
Transportation: P	roduct	ts designed spe	cifically for s	oil cond	itions	found on c	ars, vans a	nd specifi	cally veh	icles with fi	ne paint fini	shes. Effect	ive and safe, phosphate free.
Auto Wash	9	8.698-144.0 8.698-144.0		5 gal	10.2	purple	slight	1:128	low	5			Auto Wash is a blend of ingredients formulated to provide a low-foaming detergent for safe removal of dirt and grime found on most vehicles. It is formulated to reduce water spots caused by hard water leaving a higher shine than most products. Auto Wash can pass through a pressure washer without damaging the high-pressure pump and is safe to use on aluminum, stainless steel, glass, plastic, paint and fine automotive finishes.

		Order no.	Size	рН	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description
Vehicle Wash and Wax Detergent	10	9.803-726.0	5 gal	12.9	blue- green	floral	1:150	high	5	•	•	Vehicle Wash and Wax Detergent saves you time and money when you clean and protect in one
8	11	9.803-758.0	55 gal									step. Good for autos and trucks and safe on any finish. Superior performance in hard water leaving a shine with a spot free rinse.
Vehicle Wax	12	8.698-147.0	5 gal	5.3	straw	musk	1:2000	non- foaming	1			Vehicle Wax. Added at the final rinse, Vehicle Wax is a long-lasting liquid wax that creates a durable finish that improves a vehicle's appearance and helps keeps dirt from adhering to the surface. It gives added protection against salt, air pollution and acid rain and can be used safely on virtually every surface, including aluminum, stainless steel, glass, plastic, paint and fine automotive paint finishes.
Vehicle Pre-Soak	13	8.698-221.0 8.698-222.0	5 gal 55 gal	12.8	blue	citrus	1:60	high	4	•		Vehicle Pre-Soak is used to remove stubborn soils like bugs, tar, oil and grease deposits on vehicles. It's applied before washing in order to penetrate and breakup soils and washed away when the rest of the vehicle washing is done. The more time you allow to soak, the less scrubbing is required. Vehicle Pre-Soak is safe to use on fine auto finishes and strong enough to work on transportation fleet vehicles.
Vehicle Tire and Rim Cleaner	15	8.698-225.0	12 x 1 qt	12.9	clear	No added fragrance	RTU	high	3			Vehicle Tire and Rim Cleaner is a fast and easy way to deep clean the black rubber, road film and brake dust soils from your tires and rims. Simply spray, wait and rinse. This product should be used to clean tire and wheels before adding tire dressing. Make tire dressings look better and last longer. Safe to use on all tires. Safe for steel and aluminum wheels, including coated wheels.
Fleet Wash Detergent	16	9.803-724.0	5 gal	12.9	green	fresh	1:150	high	5	•	•	Fleet Wash Detergent is a mild detergent designed for exterior cleaning of trucks, busses,
8	17	9.803-754.0	55 gal									equipment and implements. This special emulsifying formula contains high-powered cleaning agents that are effective on grease, road film and smoke trails. It is excellent as a pre-spray for cleaning engines, whitewall tires and vinyl and metal tops. Fleet Wash Detergent is phosphate-free and outperforms most competitive phosphate products. It is safe to use through a pressure washer. Fleet Wash Detergent can be used on polished aluminum, stainless steel, glass, plastic, and painted surfaces.

									_	Hardness	Phosphate		
Salt and Ice	18	Order no. 8.698-141.0		Size 5 gal	pH 13.4	Color dark	Scent No added	Dilution 1:100	Foam high	1-5	Free	/ Certified	Description Salt and Ice Melt Remover is
Melt Remover	10	0.090-141.0		2 gai	13.4	red	fragrance	1.100	IIIgii		-	_	a combination detergent that
معليه	19	8.698-142.0		55 gal									removes heavy soil as well as all types of damaging road
													salt residue. Salt and Ice Melt Remover's unique chelating action
													breaks down the crystalline structure of ice melt salt and
													prevents it from crystallizing
													back on the surface so it can be easily rinsed away with the
													rest of the dirt. Effective on fine automotive finishes as well as
													construction equipment, trucks and fleet vehicles.
Quick Release Detergent	20	9.803-720.0		5 gal	12.8	none	No added fragrance	1:100	low	4		•	Quick Release Detergent is concentrated heavy duty vehicle
	21	9.803-750.0		55 gal						- 6			wash formulated to quickly and effectively remove dirt, grime,
		3.003 750.0		33 80.									grease and road film from vehicles. It is ideal for vehicle wash facilities
													where it can be used on tractor-
													trailers, heavy equipment, RVs, trucks, and autos. Quick Release
													Detergent is formulated to pass through a pressure washer without
													damaging the high-pressure pump and has an oil-water quick-release
													surfactant making it ideally suited for use with water treatment systems.
													ose with water treatment systems.
Degreasers: Degr	_		be used on			-						-	T
Heavy Duty Degreaser	22	8.698-154.0		5 gal	13.3	red / orange	No added fragrance	1:128	medium	5	•	•	Heavy Duty Degreaser is an industrial strength degreaser for
1.1.7	23	8.698-155.0		55 gal									cleaning heavy oils and greases, carbon, lubricants and hydraulic
													fluids found in industrial and manufacturing environments.
													Heavy Duty Degreaser is
				0,									formulated to pass through a pressure washer without damaging
							1						the high-pressure pump or heating coil. It is also safe to use on
													aluminum, stainless steel, glass, plastic and concrete. Heavy Duty
													Degrease is phosphate-free and outperforms competitive phosphate
						4							formula products.
Industrial	24	9.803-732.0		5 gal	13.7	blue	No added	1:100	high	5	•		Industrial Grease and Carbon
Grease and Carbon							fragrance						Remover is heavy-duty degreaser that quickly penetrates and cleans
Remover	25	9.803-772.0		55 gal									grime, spent oil and grease in a variety of applications, including
													vehicles, equipment, RVs, drilling rigs, trucks and other structures.
													This highly-concentrated blend
													is formulated to wet, penetrate and suspend soil, oils and grease
													and yet is safe to use indoors or outdoors on virtually every surface,
													including aluminum, stainless steel, glass, plastic, and painted surfaces.

		Order no.		Size	рH	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description
Industrial Oil and Grease Remover	27	8.698-157.0		5 gal	12.3	yellow	citrus	1:150	high	5			Industrial Oil and Grease remover is designed to work on petroleum based oils and greases typically found in factories like cutting oils, lubricants and metal coatings. This product is designed to quickly break up the oils and suspend them in order to rinse easy and prevent them from re-depositing. The result is an oil/grease free surface. Industrial Oil and Grease Remover is engineered to pass through a pressure washer without damaging the high-pressure pump. It is safe to use on aluminum, stainless steel, concrete, glass, plastic and painted surfaces.
Heavy Equipment Detergent	28	8.698-150.0		5 gal	12.9	green	fresh	1:150	high	5	•	•	Heavy Equipment Detergent is an effective, safe detergent that can be used on any surface. It
Detergent	29	8.698-151.0		55 gal									is excellent as a pre-spray for softening and breaking up dried on or baked on soils like mud, bugs, greasy film, diesel fuel, lubricants, Excellent foaming capability. It is safe to use through a pressure washer and can be used on polished aluminum, stainless steel, glass, plastic, paint. Heavy Equipment Detergent is phosphatefree and outperforms most competitive phosphate products.
Fleet Degreaser	30	9.803-734.0		5 gal	13.5	red / orange	No added fragrance	1:128	medium	5	•	•	Fleet Degreaser is a highly concentrated degreaser designed for petroleum based soils like
	31	9.803-739.0		55 gal									heavy deposits of oil, grease and dirt as well as axle or fifth-wheel grease, hydraulic oils and diesel smoke stains. Fleet Degreaser is formulated to pass through a pressure washer without damaging the high-pressure pump and is, therefore, safe to use through a pressure washer. It is also safe to use on aluminum, stainless steel, glass, plastic, painted surfaces. Fleet Degreaser is phosphate-free and outperforms competitive phosphate formula products.
Fleet Wash Solvent	32	9.803-740.0		5 gal	9.5	light yellow	citrus	1:50	medium	1		•	Fleet Wash Solvent Detergent adds the cleaning properties of solvents
Detergent	33	9.803-741.0	6	55 gal									to boost cleaning capability in order to remove heavy, petroleumbased soils. Citrus-based solvent helps break down these tough soils for fast, efficient removal, saving time and energy. It has the ability to penetrate and break down baked-on hydrocarbonbased soils, like exhaust trails and carbonized grease, yet is safe on most surfaces.
Degreasers - High	Alkali	nity / Caustic											
Heavy Duty Brown Degreaser	35	8.698-148.0 8.698-149.0		5 gal	13.3	dark brown	No added fragrance	1:50	high	5	•	•	Heavy Duty Brown Detergent is for cleaning machinery and equipment to remove heavy daily debris of oil, light grease, sand, mud and road film. This detergent is safe to use on most heavy equipment however, due to its strength to handle heavy soils, it should not be used on aluminum, magnesium or fine paint finishes.

		Order no.		Size	рН	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description
Fleet Machine and Heavy Equipment Degreaser	36 37	8.916-134.0 8.916-140.0		5 gal 55 gal	13.3	brown	No added fragrance	1:50	high	5		•	Fleet Machine and Heavy Equipment Degreaser is an extra-strong cleaner that is ideal for cleaning heavy equipment,
													road machinery. It is especially effective cleaning exhaust stains, road grime and heavy deposits of dirt and oil. Fleet Machine and Heavy Equipment Degreaser is phosphate-free and outperforms competitive phosphate products. This powerful formula is not recommended for use on fine auto finishes, aluminum, magnesium and galvanized metal.
Degreasers - High	a Alkali	nity / Caustic -	Food Process	ing and	Servi	ce					2 / N		
Hood and Duct Degreaser	38	8.698-199.0 8.698-200.0		5 gal 55 gal	13.7	straw	No added fragrance	1:30	medium	4	•	•	Hood and Duct cleaner is specifically designed to remove the dangerous build-up of grease in exhaust hoods of food cooking establishments. Through a hot
NSF Nenfood Compounds										•			water pressure washer, fast effective removal restores hood and ducts to a clean, safe result. Even carbonized grease. This cleaner can be used to pressure wash food service grills, fryers, broilers and ovens. Routine cleaning is required in most cities and states and by the insurance industry. NSF Approved, Nonfood Compounds A2
Chlorinated Degreaser	40	9.803-712.0		5 gal	12.3	none	slight chlorine	1:60	high	4	•	•	Chlorinated Degreaser removes fats, oils and greases typically found in food service and food
Nonfood Compounds A1	41	9.803-716.0		55 gal									processing establishments. It's chlorinated formula breaks down stubborn protein soils that contribute to bio-film formation. This formula is safe on stainless steel, aluminum and painted surfaces. NSF Approved, Nonfood Compounds A1
Fleet Interior Tank Cleaner	42	9.803-736.0		5 gal	13.7	straw	No added fragrance	1:30	medium	4	•	•	Fleet Interior Tank Cleaner is a highly concentrated and effective cleaner for the interior of tanks
NSF. Nenfood Compounds Ad	43	9.803-779.0		55 gal									and vessels. Interior tank cleaning may or may not be accessible for manual brushing/scraping. This powerful formula can cut through many layers of soil with high pressure washing and soaking, eliminating the need to enter the tank. It is extremely effective in removing the most difficult-to-clean oil, grease and hydrocarbon-based deposits. It cuts grease, grime, oil, burnt carbon. Do not use on aluminum, magnesium, galvanized metal or fine painted surfaces. It is safe to use through a pressure washer and does not damage the high-pressure pump. This formula is phosphate-free and outperforms most competitive phosphate products. NSF Approved, Nonfood Compounds A2

		Order no.		Size	рH	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description	
Acidic Cleaners									L	1				
Fleet Aluminum Brightener	44	9.803-746.0 9.803-747.0		5 gal 55 gal	<1	colorless to light straw	sharp	1:5 1:20	low	5	•		Fleet Aluminum Brightener is an extra-strength, acid-based, aluminum cleaner and brightener designed for non-polished aluminum tanks and trailers,	
Fleet Trailer Cleaner													aluminum tanks and trailers, aluminum wheels and for preparil aluminum for painting. Do NOT use on glass, polished aluminum or anodized aluminum. Fleet Aluminum Brightener is effective in removing grease, oils, baked-or carbon and diesel smoke. This formula is non foaming.	
	46	9.803-748.0		5 gal	1.1	straw	citrus	RTU	medium	4			Fleet Trailer Cleaner is a concentrated, non-etching, acid-based detergent formulated to	
	47	9.803-749.0		55 gal									quickly penetrate and remove grease, grime, dirt, road film and welding smut from polished aluminum and stainless steel surfaces. It shines aluminum and stainless by removing the oxidation that makes those surfaces dull looking.	
Concrete Remover	48	8.698-139.0		5 gal	2.2	yellow	sharp	1:1	low	4	•	X	Concrete Remover effectively removes concrete splatters and deposits form construction	
	49	8.698-140.0		55 gal							③		vehicles, equipment, tools and commercial surfaces. Not intended for use on fine automotive finishes. Always pre-test undiluted product in an inconspicuous area, to determine safety and suitability for the intended use.	
Metal Paint and Prep Phosphatizer	50	8.698-197.0		5 gal	3.1	none	No added fragrance	1:32	low	5		•	Metal Paint and Prep Phosphatizer is a complete and economical phosphatizing agent for the	
	51	8.698-198.0		55 gal						,			phosphatizing of iron and steel parts prior to painting. Effective in spray, dip and wipe-on applications. Metal Paint and Prep Phosphatizer works well in hard of soft water and rinses completely.	
Hard Floors: Form	nulated	for general pu	rpose and he	eavy-du	ty floo	r cleaning.	For use wit	h floor ca	are equip	ment (such	as scrubbers	s) only.		
Neutral Floor Cleaner	52	8.698-102.0		4 x 1 gal	7.9	light yellow	No added fragrance	1:128	low	4	•	•	Neutral Floor cleaner is formulated for everyday floor cleaning of resilient tile, hard finished floors,	
	53	8.698-103.0		5 gal									polished stone and polished concrete floors. A no-rinse formula designed to remove soil and leave	
	54	8.698-104.0		55 gal	C								a streak-free finish. Developed for scrubbers, this non-foaming formula, phosphate-free and contains ingredients that protect from scale and contaminants.	
Shop Floor Cleaner	55	8.698-105.0	6	5 gal	13.3	light red, clear	No added fragrance	1:128	low	5	•	•	Shop Floor Cleaner is formulated for heavy-duty cleaning of soils	
8	56	8.698-106.0		55 gal	-								typically found in machine shop environments. Lifts and removes petroleum-based grease and oily soils from all types of finished and unfinished concrete, including painted and epoxy-coated floors. No-rinse formula is designed to remove soil and leave a streak-free finish. Developed for scrubbers, this	

		Order no.	Size	рН	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description
Warehouse Floor Cleaner	57 58	8.698-107.0 8.698-108.0	5 gal 55 gal	12.9	blue	No added fragrance	1:128	medium	5		•	Warehouse Floor Cleaner is formulated for everyday warehouse concrete floor cleaning. Use on finished or unfinished
	59	8.698-109.0	275 gal									concrete. Safe for polished concrete floors. No-rinse formula is designed to remove dense concrete dust and leave a streak-free finish. Developed for scrubber machines, this formula is non-foaming, phosphate-free and contains ingredients that protect the machine from scale and contaminants.
Ice Breaker Freezer Cleaner	60	8.759-330.0	4 x 1 gal	11.9	clear blue	No added fragrance	Varies by temp	low	5	<u> </u>	•	A fast-acting, highly efficient cleaner / degreaser, specially formulated for cleaning frozen
	61	8.759-329.0	5 gal									food and cold storage areas where conventional products would freeze. Penetrates, dissolves and
	62	8.759-328.0	55 gal									suspends dirt, grime, fats and grease while freezer equipment is still operating. Safe on cleaning concrete, quarry tile, ceramic and metal surfaces.
Tire Mark Remover and Pre-Soak	63	8.759-327.0	1 x 1 qt	12.0- 12.8		citrus	RTU	low	5	100	•	Kärcher Tire Mark Remover eliminates stubborn rubber marks quickly and is a ready-to-
	64	8.759-326.0	4 x 1 gal									use, spray and wipe / pre-spray cleaner with synergistic solvent
	65	8.759-325.0	55 gal					۵	③			power. This cleaner has been specifically formulated to remove rubber tire marks on floors and other hard surfaces. Kārcher Tire Mark Remover also removes greasy soils and marks on most washable surfaces, including those listed below.
Soft Floor Cleane	rs: For	mulated for general	purpose and he	avy-dı	uty soft flo	or cleaning						
Red Carpet												
Red Carpet Extraction Cleaner	66	8.695-210.0	4 x 1 gal case	11.5	bright blue	citrus	1:128	low	5	•	•	Professional liquid extraction agent for residential and comercial carpet and upholstery cleaning. Encapsulates soils and flushes prespray clean.
Red Carpet	67	8.695-207.0	4 x	10.2	blue	citrus	1:16	medium	5		•	Professional pre-spray formulated
Super Pre-Spray			1 gal case		green							with a gentle but powerful blend of solvents, surfactants and other specialty materials. Designed to outperform all other fine fabric cleaning products.
Red Carpet Super Conditioning Rinse	68	8.695-209.0	4 x 1 gal case	2.2	green	citrus	1:128	low	5	•		Professional multi-purpose acidic extraction rinse. Removes soils and prespray residues that others leave behind, while safe organic acids neutralize alkalinity. Concentrated.
Red Carpet Wool & Natural Fiber Cleaner	69	8.695-211.0	4 x 1 gal case	8.0	slate blue	citrus	1:128	low	5			Professional strength Wool & Natural Fiber Cleaner has a neutral pH and and is built with gentle cleansers. Safe to use on cotton, wool and synthetic fibers. Concentrated.
Red Carpet Expert All-n-1 Carpet Cleaner	70	8.695-229.0 8.695-230.0	12 x 1 qt case 4 x 1 gal	8.8	blue	fresh	1:64	low	5		•	Provides everything you need in one convenient formula. Clean carpets, remove spots and deoderized all in one step. Concentrated.

		Order no.	Size	рH	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description
Red Carpet Liquid Defoamer	72	8.695-213.0	4 x 1 gal case	7.0	white	No added fragrance	1:128	n/a	1	Tite.	•	A unique blend of foam-reducing agents that instantly decreases foam levels in hoses and waste tanks.
Red Carpet Enzyme Deordorizer	73	8.695-218.0	4 x 1 gal case	8.5	amber	citrus	1:4	low	2			Professional level deoderizer that contains a premium blend of enzymes to break down odors and the source of odors associated with feces, urine, vomit, sweat, and pet odors.
Red Carpet Odor Neutralizer	74	8.695-219.0	4 x 1 gal case	7.6	clear	floral	1:128	medium	3			Professional grade mild acid formula for hard surface cleanining in commercial bathroom settings. Designed for use with Kärcher AP 100/50 M multi-purpose facility cleaning machine.
Red Carpet Pro Spotter	75	8.695-222.0	12 x 1 qt case	7.1	clear	No added fragrance	1:1	medium	5			Professional ready-to-use all- purpose water-based spotting agent. Can be used on almost all synthetic and natural fiber carpets, area rugs, upholstery, and fine fabrics.
iCapsol™ Encapsu	lating	Chemical										
iCapsol™ - Encapsulating Interim	76	8.695-226.0	4 x 1 gal case	7.2	amber	No added fragrance	1:16	medium	3	•		Low moisture carpet cleaner
Cleaning Chemical	77	8.695-469.0	12 x 1 pt case							(
iCapsol™ - Encapsulating Cleaning Chemical	78 79	8.695-227.0 8.695-643.0	4 x 1 gal case 5 gal	7.0	amber	No added fragrance	1:16	medium	3		•	Low moisture carpet cleaner with stain protection for easier next time cleaning.
with Carpet Protection	80	8.695-470.0	12 x 1 pt					3				
Disinfectants and	Caniti	70rc	case									
Vital Oxide (US Only)	81	8.639-560.0	6 x 1	8.0	clear	No added fragrance	RTU 1:5	medium	2	•	•	Vital Oxide is a hospital grade disinfectant sanitizer with 9 key
NSF	82	8.639-558.0	4 x 1 gal pack				1:9					attributes. Disinfection, Sanitizing, Odor Elimination, Carpet Sanitization, Allergen Removal, Kills Mold and Mildew, Parvo,
Nonfood Compounds A2	83	8.644-292.0	5 gal									Distemper, Tuberculous, SARS- CoV-2 (the cause of COVID-19). Sanitizer dilution is NSF
(36)	84	8.642-823.0	15 gal	8								approved as a no rinse sanitizer for non porous food contact surfaces. (US Only)
	85	8.698-112.0	55 gal									soaces. (es oy)
	86	8.759-565.0	12 x 3 oz case									
Vital Oxide,	87	8.644-439.0	Pack				RTU					
Secondary Label 3" x 3" (US Only)			of 25									
Vital Oxide, Secondary Label 3" x 3" (US Only)	88	8.642-868.0	Pack of 25				1:5					
Vital Oxide, Secondary Label 3" x 3" (US Only)	89	8.642-869.0	Pack of 25				1:9					

		Order no.		Size	рН	Color	Scent	Dilution	Foam	Hardness 1-5	Phosphate Free		Description
Hard Surface Clear	ners												
Professional Multi-Purpose & Daily Cleaner	90	8.759-332.0 8.759-331.0		12 x 1 qt 4 x 1 gal	10.8	none	No added fragrance	RTU	low	3			Kärcher Professional Multi-Purpose & Daily Cleaner quickly cuts through grease, grime and dirt. This highly versatile product can be used on a wide range of surface types including tile, plastics, laminate, and stainless steel. It is powerful yet gentle enough for use as a daily cleaner.
													Kärcher Professional Multi-Purpose Cleaner is also designed to be used to clean and prepare hard surfaces prior to a disinfection step. It is the first step of an EPA-recommended two-step process for complete cleaning and disinfecting.
Compass™ Clean	92	8.695-241.0		4 x 1 gal case	13.6	orange	No added fragrance	Varies by need	medium	3	•	•	Professional grade alkaline formula for hard surface cleaning. Designed for use with Kärcher AP 100/50 M multi-purpose facility cleaning machine.
Compass™ Shine	93	8.695-242.0	K	4 x 1 gal case	1.0	dark green	winter green	Varies by need	medium	5	No.		Professional grade mild acid formula for hard surface cleanining in commercial bathroom settings. Designed for use with Kärcher AP 100/50 M multi-purpose facility cleaning machine.
Compass™ Rinse	94	8.695-243.0		12 x 1 qt case	3.9	clear	No added fragrance	1:2560	low	5	•		Professional grade rinse-aid that ensures spot-free drying. Designed for use with Kärcher AP 100/50 M multi-purpose, facility cleaning machine.
Detergent for Pres	sure \	Washer Mainter	nance								,	,	
Coil Descaler	95	9.803-742.0		12 x 2 lb	1.0	white	No added fragrance	1:16	high	5	•	•	Coil descaler quickly and safely removes hard water scale build up that robs the performance of your pressure washer. Removing the build-up improves the water flow, heat transfer while reducing strain on the pump.
Pump and Coil Protectant	96	8.698-058.0 9.556-111.0		12 x 1 qt 4 x 1 gal	7.3	amber	No added fragrance	RTU	none	5	•		Pump and Coil Protectant is a multi-component product made from heat-resistant organic and inorganic salts. Its stabilizing action on the minerals which cause hardness in water, is based on
	98	9.556-011.0		5 gal									its ability to impede the growth of mineral deposits. This product
Pump and Coil Protectant Concentrate	99	9.556-010.0	0	5 gal	7.6	light brown	No added fragrance	5 gal makes 55 gals	none	5	•	•	is proprietary to machines that have a built in dispenser for this product. Keeps your machine running efficiently with optimum performance and reliability.

	_			
		Order no.	Size	Description
Gum Remover Supplies for So	G1	1		
Service Pack for SG1	100	8.639-871.0	1 pack	Contains 2 LPG, 4 Bottles of Solution, 2 Black SS Brushes, 1 Green Brush
			-	
Gas Bottles	101	8.638-579.0	12 pack	
Gum Remover	102	8.638-580.0	24 liters	
Solution				
Additional Accessories				
White 5 gallon pail with lid	103	9.846-058.0	5 gal	White 5 gallon pail and lid. UN rated
Blank Secondary Label	104	8.642-712.0	Individual	Secondary write in chemical / detergent label
Label Deel	105	0.750.064.0	50	LINIA 700 Companies Liquida Codium Undervida O II
Label Pack	105	8.759-964.0	50 pack	UN1760 Corrosive Liquids, Sodium Hydroxide,8,II
	106	8.759-965.0	50 pack	UN1760 Corrosive Liquids, Sodium Metasilicate,8,II
	100	0.733 303.0	30 pack	ONLY OU CONSTITUTE ENGINEERS. SOCIONI INCLUSINGUE, O, III
	107	8.759-966.0	50 pack	UN1719 Caustic Alkali Liquids, Sodium Hydroxide, Sodium Metasilicate,8,II
2-Gallon Pump	108	8.628-441.0	2 gal	Sprayer with wand
Sprayer with Wand				
Disposable Siphon Pail Pump	109	8.704-694-0	5 gal	Disposable Siphon Pail Pump (5 gallon)
Disposable Siphon Drum Pump	110	8.704-696.0	Individual	Disposable Siphon Drum Pump (15, 30, 55 gallon)
·				
Disposable Heavy Duty Siphon Drum Pump	111	8.704-698.0	Individual	Disposable Heavy Duty Siphon Drum Pump (15, 30, 55 gallon)
Drum / Tank Pump	112	8.704-700.0	Individual	Crank Type - Polypropylene (standard)
Dronny runk romp	112	0.704 700.0	marviadar	Crank Type Torypropyrene (standard)
	113	8.704-701.0	Individual	Crank Type - Ryton (deluxe)
Replacement Handle	114	8.700-526.0	Individual	Replacement Handle for Crank Type Drum / Tank Pump
Bung wrench and plug	115	8.712-534.0	Individual	Bung wrench 2" and 3/4" plug
Pail lid opener	116	8.704-689.0	5 gal	Pail lid opener for 5 gallon
Drum faucet	117	8.704-692.0	Individual	Drum faucet 3/4" bung size - natural
nII Tost Ctrins	110	0.752.577.0	100 past:	Contains 100 universal all test strips
pH Test Strips	118	8.753-577.0	100 pack	Contains 100 universal pH test strips

EASY!FORCE TRIGGER GUN – ZERO EFFORT REQUIRED!

Introducing the most effortless trigger gun on the market, the new Kärcher EASY!Force. The revolutionary EASY!Force trigger gun uses its own recoil force to hold the trigger down for you. This means no more sore hands after hours of use. Try our EASY!Force trigger gun — it is so much fun, you will not want to put it down!



Erogonomics. Our EASY!Force technology holds the trigger down once you start it, avoiding the strain on your hands associated with other trigger guns.

Faster set-up. The new EASY!Lock connection system allows set-ups that are five times faster than existing systems. A simple 360° turn provides a fully-threaded, secure connection.

Designed for long life. Our EASY!Force valve consists of a ceramic ball with ceramic sealing seat that is resistant to any particles liable to cause potential damage. This gives it a lifetime five times longer than trigger guns with conventional valve.













Two versions. Introducing the North American EASY!Force trigger gun with standard threads for our North American engineered pressure washers and accessories, and our EASY!Force trigger gun with EASY!Lock threading for our German engineered machines and EASY!Lock accessory system.

- EASY!Force North American Model. Standard 1/4" connection for wand and 3/8" connection for hose. (NOT for use with EASY!Lock accessories) P/N 8.756-481.0 (see page 112)
- EASY!Force German Model. The EASY!Lock Threading for EASY!Lock adapters and accessories. (Adapters not included) P/N 4.118-005.0

Built in safety. The trigger gun features a mechanical safety to prevent accidental starts for maximum safety without compromising its ease-of-use.

Perfect connections. The same quick locking, screw connection of EASY!Lock can be used on existing pressure washers and accessories. An easy system of adapters ensures compatibility is easy, and allows you to experience the power of the EASY!Force trigger gun. Contact your local dealer to find out more. Try our EASY!Force trigger gun – you won't want to put it down.

WHAT PERFECT CONNECTIONS **LOOK LIKE**

In order to cover the various interfaces, from the pressure washer to the nozzle, as well as ensuring compatibility is easy, a total of 10 different adapters are available. This ensures that all existing machines and accessories can continue to be used together with the new machines and accessories with EASY!Lock connections. Listed to the right are all adapters with their respective application.*

Our EASY!Lock system

The below illustration demonstrates the features of adapters 1-8. These adapters are for use with machines having metric connections. Adapters 9 and 10 are for use with 3/8" connections.

EMBOSSED NUMBER

Every adapter has its own number. Clear and unmistakable.





*For example, any pressure washer with M22 x 1.5 connection can quickly be converted to the new EASY!Lock system with adapter 2.

EASY!Lock connection

connection





EASY!Lock - M 22 X 1.5

Order no. 4.111-029.0

Adapter for connecting high-pressure hoses with EASY!Lock and high-pressure hoses with M 22×1.5 connection.





EASY!Lock - M 22 X 1.5

Order no. 4.111-030.0

Adapter for connecting high-pressure hoses with EASY!Lock and pressure washers / trigger guns with M 22 x 1.5 connection.





EASY!Lock - M 22 X 1.5

Order no. 4.111-031.0

Adapter for connecting spray lances or Servo Control regulators with EASY!Lock and trigger guns with M 22×1.5 .





EASY!Lock - AVS

Order no. 4.111-032.0

Adapter for connecting EASY!Force trigger gun and high-pressure hoses with AVS swivel connection.





EASY!Lock - M 22 X 1.5

Order no. 4.111-033.0

Adapter for connecting EASY!Force trigger gun and spray lances with M 22×1.5 connection.





EASY!Lock - M 22 X 1.5

Order no. 4.111-034.0

Adapter for connecting EASY!Force trigger gun / pressure washers with EASY!Lock and high-pressure hoses with M 22 x 1.5 connection.





EASY!Lock - M 18 X 1.5

Order no. 4.111-035.0

Adapter for connecting nozzles with EASY!Lock and spray lances with M 18×1.5 connection.





EASY!Lock - M 18 X 1.5

Order no. 4.111-036.0

Adapter for connecting spray lances with EASY!Lock and nozzles with M 18×1.5 connection.





EASY!Lock - STANDARD 3/8" HOSE

Order no. 4.111-041.0

Adapter for connecting EASY!Force trigger gun and standard 3/8" US-style hose connection.





EASY!Lock - STANDARD 3/8" MACHINE OUTLET

Order no. 4.111-042.0

Adapter for connecting high-pressure hoses with EASY!Lock and 3/8" US-style machine outlet.

ADDITIONAL EASY!LOCK ADAPTERS ON PAGE 101

EASY!FORCE TRIGGER GUN AND EASY!LOCK ACCESSORY SYSTEM























■ NOTE: Accessories only compatible with EASY!Force Trigger Gun for EASY!Lock Threading. (Part # 4.118-005.0, shown above in Box 1)

		Order no.	Description
EASY!Force Trigger Gun			
EASY!Force trigger gun for EASY!Lock threading	1	4.118-005.0 ■	Trigger gun uses the recoil force of the high-pressure spray to reduce the hold force of the trigger to zero.
EASY!Force trigger gun	2	4.427-014.0	EASY!Force trigger gun repair kit: manifold complete with full ceramic valve (for gun 4.118-005.0)
repair kit	3	2.885-483.0 ■	EASY!Force trigger gun repair kit: spare part lever kit (for guns 8.756-481.0 and 4.118-005.0)
Lance	4	4.112-000.0 ■	41" spray lance
Lance repair kit	5	2.880-001.0	EASY!Force lance repair kit: quad-ring sealing (3)
Side handle	6	4.321-380.0	Ergonomic handle that attaches to the spray lance and offers additional working positions.
Power nozzle Spray angle 25°	7	2.113-004.0	Patented Kärcher power nozzle technology offers 40% increase in cleaning performance over conventional nozzles. Engineered for EASY!Lock. Size: 035
	8	2.113-023.0 ■	Patented Kärcher power nozzle technology offers 40% increase in cleaning performance over conventional nozzles. Engineered for EASY!Lock. Size: 050
	9	2.113-014.0 ■	Patented Kärcher power nozzle technology offers 40% increase in cleaning performance over conventional nozzles. Engineered for EASY!Lock. Size: 075
	10	2.113-017.0	Patented Kärcher power nozzle technology offers 40% increase in cleaning performance over conventional nozzles. Engineered for EASY!Lock. Size: 100
Servo control	11	4.118-007.0	Pressure and water flow regulation directly at the EASY!Force trigger gun. For 0-3.3 GPM.
	12	4.118-008.0 ■	Pressure and water flow regulation directly at the EASY!Force trigger gun. For 3.3-4.9 GPM.
	13	4.118-009.0	Pressure and water flow regulation directly at the EASY!Force trigger gun. For 4.9 GPM.
Standard EASY!Lock Hose			
EASY!Lock hose	14	6.110-034.0	33' EASY!Lock hose, 3625 PSI
	15	6.110-031.0	33' EASY!Lock hose
	16	6.110-033.0	50' EASY!Lock hose
	17	6.110-030.0	50' EASY!Lock hose with ANTI!Twist connection
	18	6.110-014.0	100' EASY!Lock hose with ANTI!Twist connection
Longlife EASY!Lock Hose			
Longlife EASY!lock hose -	19	6.110-029.0	50' EASY!Lock Longlife hose with ANTI!Twist connection
designed with two steel layer instead of one, for no leaks!	20	6.110-023.0	100' EASY!Lock Longlife hose with ANTI!Twist connection
5800 PSI	21	6.110-028.0 ■	66' EASY!Lock Longlife hose with one side AVS hose reel connection
Food Grade EASY!Lock Hose			
Food grade EASY!Lock hose	22	6.110-051.0	33' EASY!Lock Food grade hose with ANTI!Twist connection
	23	6.110-052.0 ■	66' EASY!Lock Food grade hose with ANTI!Twist connection
	24	6.110-063.0	50' EASY!Lock Food grade hose with AVS hose reel connection

EASY!FORCE TRIGGER GUN AND EASY!LOCK ACCESSORY SYSTEM

































■ NOTE: Accessories only compatible with EASY!Force Trigger Gun for EASY!Lock Threading. (Part # 4.118-005.0, shown on previous page, in Box 1)

		Order no.	Description
Adapter for EASY!Lock	Svstem	Order 110.	Description
Adapter	1	4.111-029.0	EASY!Lock - M 22 $^{\times}$ 1.5. Adapter for connecting high-pressure hoses with EASY!Lock and high-pressure hoses with M 22 $^{\times}$ 1.5 connection.
	2	4.111-030.0 ■	EASY!Lock - M 22 \times 1.5. Adapter for connecting high-pressure hoses with EASY!Lock and pressure washers / trigger guns with M 22 \times 1.5 connection.
	3	4.111-031.0	EASY!Lock - M 22 × 1.5. Adapter for connecting spray lances or Servo Control regulators with EASY!Lock and trigger guns with M 22 x 1.5.
	4	4.111-032.0 ■	EASY!Lock - AVS. Adapter for connecting EASY!Force trigger gun and high-pressure hoses with AVS swivel connection.
	5	4.111-033.0 ■	EASY!Lock - M 22×1.5 . Adapter for connecting EASY!Force trigger gun and spray lances with M 22×1.5 connection.
	6	4.111-034.0	EASY!Lock - M 22 × 1.5. Adapter for connecting EASY!Force trigger gun / pressure washers with EASY!Lock and high-pressure hoses with M 22 x 1.5 connection.
	7	4.111-035.0 ■	EASY!Lock - M 18 \times 1.5. Adapter for connecting nozzles with EASY!Lock and spray lances with M 18 \times 1.5 connection.
	8	4.111-036.0	EASY!Lock - M 18 $^{\times}$ 1.5. Adapter for connecting spray lances with EASY!Lock and nozzles with M 18 $^{\times}$ 1.5 connection.
	9	4.111-037.0 ■	EASY!Lock - EASY!Lock to connect 2 EASY!Lock hoses
1	10	4.111-041.0	EASY!Lock - STANDARD 3/8" HOSE. Adapter for connecting EASY!Force trigger gun with standard 3/8" US-style hose connection.
	11	4.111-042.0	EASY!Lock - STANDARD 3/8" MACHINE OUTLET. Adapter for connecting high-pressure hoses with EASY!Lock and 3/8" US-style machine outlet.
O	12	4.111-055.0	Adapter complete TR22IG-3/8 NPT. Adapter to connect EASY!Force Trigger Gun to 3/8" FPT. This can be used to connect 3/8" FPT Inlet Injector.
	13	4.111-056.0	Adapter complete TR22AG-3/8 NPT. Adapter to connct EASY!Lock Hose to 3/8" MPT. This can be used to connect 3/8" MPT Injector.
	14	4.111-057.0	Adapter complete 17 TR20IG-1/4 NPT. Adapter to connect EASY!Force Lance to 1/4" FPT. This can be used to attached a standard Quick Coupler or Turbo Nozzle.
	15	4.111-058.0	Adapter complete 18 TR20AG-1/4 NPT. Adapter to connect standard North American Lance with 1/4" MPT to FRV 30.
	16	4.111-059.0	Adapter complete 19 TR22AG-1/4 NPT. Adapter to connect standard North American Trigger Gun with 1/4" FPT to EASY!Lock Pivoting Wand or EASY!Lock Inno Foam Lance.
	17	4.111-060.0	Adapter complete 20 TR22IG-1/4 NPT. Rotating Adapter to be able to connect EASY!Force Gun to standard 1/4" MPT thread lance. This can be used to connect a standard VP Wand.

ISOLAR 400/800 SOLAR PANEL CLEANER



No place is unreachable.

The iSolar accessories system is a complete modular solution that offers all the necessary products for your cleaning needs, from water connections to brushes. This system is also compatible with many Kärcher pressure washers, meaning, existing pressure washers can usually be used to operate iSolar. Because the system is modular, we can build a custom solution to fulfill any requirement.

The iSolar 400 and iSolar 800 offer superior and safe cleaning, thanks to brushes powered by a pressure washer's water jet. The mechanical action of the bristles, made of nylon for scratch-free surface cleaning, operate at low pressure, eliminating any danger of the panels being damaged. The rotating brushes are also fitted with robust ball bearings to guarantee exceptionally long service life.









1 iSolar 800

Counter-rotating disc brushes ensure:

- Excellent cleaning performance and area coverage
- Optimal handling with balancing of transverse forces
- Pre-rinsing of adjacent panels

2 Comfortable in every position

Stable articulated joint offers:

- Convenient and flexible working positions
- Robust brass design for maximum durability

3 iSolar 400

Entry-level model for smaller areas:

- Particularly suitable for elevated systems
- Pre-rinsing of adjacent panels

4 Safety first

For safe rooftop work:

- Safety harness with quick-release fasteners
- Guided fall arrestor with integrated shock absorber and lengthy guide rope

ISOLAR 400/800 SOLAR PANEL CLEANER

















		Order no.	Length	Flow rate	Max. feed temperature	Description
iSolar panel cleaner						
iSolar 400	1	6.368-093.0		4.4-5.7 GPM	104°F	The water-driven iSolar 400 disc brush features a working width of 400 mm and is especially suitable for cleaning small to medium-sized
		6.368-092.0		3.4-4 GPM		photo-voltaic systems. Thanks to the low weight and easy handling, even elevated systems can be conveniently cleaned.
iSolar 800	2	6.368-095.0		4.4-5.7 GPM	104°F	The water-driven iSolar 800 brush head with 800 mm working width works with two contra-rotating disc brushes and is used for cleaning
		6.368-094.0		3.4-4 GPM	104°F	photo-voltaic systems. The contra-rotating brushes balance out all transversal forces, guaranteeing optimal handling. The flexible angle joint on the brush head's connector also makes cleaning easier. It ensures that the bristles always lie flat, allowing uniform cleaning results. The brush head features especially high area performance ideal for cleaning large systems, for example on barn roofs.
Safety kit	3	6.988-152.0			0	Certified, standard-compliant safety system for safe working on roofs. The fall protection includes a traveling fall arrestor with shock absorber and 49.2 ft kernmantle rope, safety harness, an anchoring loop for fixing the safety machine, as well as a practical metal box for storage and transport.
iSolar TL 7 H (without hose, iSolar HP hose 7 required)	4	4.762-610.0	5-23 ft.		140°F	Telescopic wand made from carbon/fiberglass mixture for maximum rigidity with minimum weight. With a 23.6 ft maximum reach and practical quick-release couplings for easy extension and retraction.
iSolar TL 10 C (without hose, iSolar HP hose 10 required)	5	4.762-612.0	7-33 ft.		140°F	The telescopic wand is made from a carbon-fiberglass mixture (hybrid) and offers maximum rigidity with minimum weight. It has a reach of up to 32.8 ft and is fitted with practical quick-release couplings – for convenient extension and retraction. The speed is regulated via ball tap, guaranteeing easy handling. The carbon-fiberglass mixture is also on the lowest rod element and ensures electrical insulation and thus work safety.
iSolar TL 14 C (without hose, iSolar HP hose 14 required)	6	4.762-613.0	7-45 ft.		140°F	The telescopic wand is made from a carbon-fiberglass mixture (hybrid) and offers maximum rigidity with minimum weight. It has a reach of up to 45.9 ft and is fitted with practical quick-release couplings – for convenient extension and retraction. The speed is regulated via ball tap, guaranteeing easy handling. The carbon-fiberglass mixture is also on the lowest rod element and ensures electrical insulation and thus work safety.
iSolar HP hose 7	7	6.392-978.0	28 ft.		311°F	The high-quality and flexible high-pressure hose with rubber outer covering is suitable for use in combination with the iSolar TL 7. The outer skin of the hose features especially good sliding properties – ideal for extending and retracting the telescopic wand.
iSolar HP hose 10	8	6.392-977.0	38 ft.		311°F	The high-quality and flexible high-pressure hose with rubber outer covering is suitable for use in combination with the iSolar TL 10. The outer skin of the hose features especially good sliding properties – ideal for extending and retracting the telescopic wand.
iSolar HP hose 14	9	6.392-976.0	49 ft.		311°F	The high-quality and flexible high-pressure hose with rubber outer covering is suitable for use in combination with the iSolar TL 14. The outer skin of the hose features especially good sliding properties – ideal for extending and retracting the telescopic wand.
RM 99 solar cleaner	10	8.698-094.0				RM 99 Solar Cleaner is specific for cleaning solar and photovolta- ic systems, and it's perfectly adapted to their unique surfaces. Its highly efficient, gentle on materials, biodegradable and removes even stubborn and greasy stains. It prevents the formation of limescale and maximizes the effectiveness of the system at minimum cost.

HIGH-PRESSURE HOSES



Kärcher's original equipment hoses are the preferred choice of experienced pressure washer operators. Constructed of the highest-quality materials available, our anti-kink hoses deliver outstanding durability and improved operator convenience. Kärcher hoses are more flexible and easier to wind than competitors' hoses and are more convenient to use thanks to easy-grip hose-ends which can be tightened without tools.

			Max	Max working	Length	
		Order no.	Temp	pressure (PSI)	(ft.)	Description
Integral AVS connection - passive swivel						
High-pressure hose, 33', ID 6, AVS trigger gun connector	1	6.391-238.0	311°F	3625	33	With patented AVS trigger gun connector (rotatable) and coupling, M 22 x 1.5 with
High-pressure hose, 50', ID 6, AVS trigger gun connector	2	6.390-174.0	311°F	3625	50 (20 m)	anti-kink sleeve.
Integral AVS connection						
High-pressure hose, 33', ID 6	3	6.389-853.0	311°F	3625	33	Integral AVS connection
High-pressure hose, 33', ID 8	4	6.390-025.0	311°F	4565	33	
High-pressure hose, 50', ID 8	5	6.390-185.0	311°F	4565	50	
Female twist-type connection (22 mm)						
High-pressure hose, 33', ID 8, extension piece	6	6.391-342.0	311°F	4565	33	Female twist-type connection (22 mm)
High-pressure hose, 50', ID 8	7	6.390-010.0	311°F	4565	50	
High-pressure hose, 100', ID 8	8	6.390-293.0	311°F	4565	100	
High-pressure hose, 50', ID 10	9	6.390-023.0	311°F	3190	50	
Extension hose 2 x 22 mm (no swivel)					Y //	
High-pressure hose, 50', ID 8	10	9.162-323.0	185°F	4000	50	Extension hose 2 x 22 mm (no swivel)
(requires 4.403-002.0 brass extension coupling to connect to other hose)						
High-pressure hose, 100', ID 8	11	9.162-305.0	311°F	3600	100	
(requires 4.403-002.0 brass extension coupling to connect to other hose)						
Premium long-life 400 hose (Integral AVS connection)						
Integral AVS connection, 66', ID 8	12	6.390-208.0	311°F	5800	66	Kärcher's premium Long-life 400 hoses, identified with a yellow stripe, are the best of the best and are available to fit AVS or 22 mm twist-type connections. This hose has an integral pivot end to fit AVS trigger guns and a 22 mm female threaded end with anti-kink protection.
Premium long-life 400 hose (22 mm twist-type connection	n)					
22 mm twist-type connection, 33', ID 8	13	6.388-083.0	311°F	5800	33	The Long-life twist-type hose has two
22 mm twist-type connection, 50', ID 8	14	6.389-709.0	311°F	5800	50	22 mm female anti-kink threaded ends
22 mm twist-type connection, 66', ID 8	15	6.390-027.0	311 °F	5800	66	for non-AVS trigger guns. The yellow end indicates full 360° swivel capability at
22 mm twist-type connection, 100', ID 8	16	6.390-294.0	311°F	5800	100	that point–even under full pressure.
Food-grade hoses			·		1	
High-pressure hose, 50', ID 6, AVS trigger gun connector 11 mm, suitable for food industry, gray	17	6.391-654.0	311°F	3625	50	With patented AVS trigger gun connector (rotatable) and coupling, M 22 x 1.5 with
High-pressure hose, 50', ID 6, AVS gun connection, 15 mm, suitable for food	18	6.390-445.0	311°F	3625	50	anti-kink sleeve. With gray non-marking outer cover.

HIGH-PRESSURE HOSES

















	r					
		Order no.	Max Temp	Max working pressure (PSI)	Length (ft.)	Description
Food industry version with unions on both sides						
High-pressure hose, 33', ID 8, suitable for the food industry, extension piece	19	6.389-479.0	311°F	3625	33	Connectors at both ends, M 22 x 1.5, with kink protection.
High-pressure hose, 66', ID 8, suitable for food industry, extension piece	20	6.389-581.0	311°F	3625	66	With gray non-marking outer cover.
Special hose			7./	7		
High-pressure hose 66', ID 20, including connectors, outlet bend	21	6.391-886.0	311°F	5800	66	High pressure hose for connection to hose reel.
Standard EASY!Lock Hose						
EASY!Lock hose	22	6.110-034.0	311°F	3625	33	EASY!Lock hose
	23	6.110-031.0	311°F	4565	33	EASY!Lock hose
	24	6.110-033.0	311°F	4565	50	EASY!Lock hose
	25	6.110-030.0	311°F	4565	50	EASY!Lock hose with ANT!!Twist connection
	26	6.110-014.0	311°F	4565	100	EASY!Lock hose with ANTI!Twist connection
Longlife EASY!Lock Hose						
Longlife EASY!lock hose - designed with two steel layers instead of one, for no leaks!	27	6.110-029.0	311°F	5800	50	EASY!Lock Longlife hose with ANTI!Twist connection
	28	6.110-027.0	311°F	5800	66	EASY!Lock long life hose with ANTI!Twist connector
	29	6.110-023.0	311°F	5800	100	EASY!Lock Longlife hose with ANTI!Twist connection
	30	6.110-028.0	311°F	5800	66	EASY!Lock Longlife hose with one side AVS hose reel connection
Food Grade EASY!Lock Hose			·	1		
	31	6.110-063.0	311°F	3625	50	EASY!Lock Food grade hose with AVS hose reel connection
				1		I .

KÄRCHER R1 AND R2 HOSE

Introducing the new Kärcher R1 and R2 hose. The R1 and R2 hose is built to exceed the EN1829-2 Standard and will provide superior abrasion resistance that will increase the life of the hose. The R1 and R2 hose is rated up to 250°F and is available in 4000, 5000 and 6000 PSI.

Both single-and double-wire braid hoses come with durable bend restrictors on both ends, with a 24-inch bend restrictor on the gun end for added operator protection against high-pressure bursts.

The R1 and R2 hose has a "bite-the-wire" coupling that grips the hose better than any other design.



- Temperature Rating: R1 and R2 hose are rated for continuous temperatures up to 250°F.
- Certified Burst Protection: R1 and R2 hose meets the stringent UL-1776 safety standards with two hose guards-including a 24-inch sleeve on the gun end-for added operator protection against bursts.
- Easily Identified: Permanently embossed identification makes for easy tracing and owner protection.
- Unique Coupling: A "bite-the-wire" coupling actually reaches the wire braid for never-slip retention, far superior to the "compression" fittings used on conventional hoses.





		Order no.	Max Temp	Max working pressure (PSI)	Size	Length (ft.)	Description	
Kärcher R1, 1-wire								
3/8" MPT Swivel x 3/8" MPT Solid	1	8.925-148.0	250°F	4000	3/8"	25	Kärcher branded bend black restrictor	
	2	8.925-154.0	250°F	4000	3/8"	50	Wrapped impression, maximum	
	3	8.925-159.0	250°F	4000	3/8"	75	Oil resistant tube and cover with black hose guard, both ends. Rated to 250°F	
	4	8.925-163.0	250°F	4000	3/8"	100	guard, butil elius. Rateu tu 250 F	
	5	8.925-168.0	250°F	4000	3/8"	150		
	6	8.925-377.0	250°F	4000	3/8"	50	Case, Qty 75 (8.925-154.0), 3/8" 50' 1W	
	7	8.925-447.0	250°F	4000	3/8"	100	Case, Qty 40 (8.925-163.0), 3/8" 100' 1W	
ärcher R1, 1-wire						•		
3/8" MPT Swivel x 3/8" MPT Swivel	8	8.925-359.0	250°F	4000	3/8"	50	Kärcher branded bend black restrictor	
Värcher D2 2 wire	9	8.925-361.0	250°F	4000	3/8"	100	Wrapped impression, maximum Oil resistant tube and cover with black hose guard, both ends. Rated to 250°F	
(ärcher R2, 2-wire		7 25						
3/8" MPT Swivel x 3/8" MPT Solid	10	8.925-178.0	250°F	6000	3/8"	25	Kärcher branded bend red restrictor	
	11	8.925-182.0	250°F	6000	3/8"	50	Wrapped impression, maximum	
	12	8.925-186.0	250°F	6000	3/8"	75	Oil resistant tube and cover with yellow hose guard, both ends. Rated to 250°F	
	13	8.925-227.0	250°F	6000	3/8"	100	godi d, both chas. Nated to 250 i	
	14	8.925-381.0	250°F	6000	3/8"	50	Case, Qty 75 (8.925-182.0), 3/8" 50' 2W	
	15	8.925-448.0	250°F	6000	3/8"	100	Case, Qty 40 (8.925-227.0), 3/8" 100' 2W	
ärcher R2, 2-wire								
3/8" MPT Swivel x 3/8" MPT Solid	13	8.925-245.0	250°F	5000	1/2"	50	Kärcher branded bend red restrictor. Wrapped impression, maximum oil resistant tube and cover. 2-wire protection. Includes 1-3/8" FPT Coupler Socket.	
	14	8.925-246.0	250°F	5000	1/2"	50	Kärcher branded bend red restrictor. Wrapped impression, maximum oil resistant tube and cover. 2-wire protection. Includes 2-3/8" FPT twist set couplers.	
	15	8.925-251.0	250°F	5000	1/2"	100	Kärcher branded bend red restrictor. Wrapped impression, maximum oil resistant tube and cover. 2-wire protection. Configured 3/8" MPT SOX 3/8" MPTSW	

Prices, specifications and product descriptions subject to change without notice.

MISCELLANEOUS HOSES















		Order no.	Max Temp	Max working pressure (PSI)	Length (ft.)	Description
Water supply hose						
	1	4.440-207.0	86°F		25	ID 19 R1" / R 3/4", up to 85 °C, for suction with copper wire for grounding the unit.
Industrial garden hose						
/4" ID	2	8.711-797.0	212°F	200	25	Built to last, extra-large 3/4" ID Inlet water hose. EPDM cover and tube is perfect for water and provides ozone
	3	8.711-798.0	212°F	200	50	and heat protection.
	4	8.711-799.0	212°F	200	75	2-wire protection Seven times greater abrasion resistance
	5	8.711-800.0	212°F	200	100	Built to SAE 100R2AT OD dimensions 3/8" MPT Swivel x 3/8" MPT Solid
Sandblast hose						
3/4"	6	8.711-809.0	130°F		/ ft.	Sand, Spiralite /ft
3/4" x 25'	7	8.711-839.0	130°F		25	Assy, Sand, Spiralite
3/4" x 40'	8	8.711-840.0	130°F		40	Assy, Sand, Spiralite
1"	9	8.711-811.0	130°F		/ ft.	Sand, Spiralite /ft
Float tank inlet hose				////	/ (0	
8"	10	8.711-773.0	190°F	300		
11"	11	8.711-774.0	190°F	300		
13"	12	8.711-775.0	190°F	300		
30"	13	9.802-257.0	190°F	300		
45"	14	9.802-258.0	190°F	300		
Connector, Fluidmaster ball cock	15	8.707-316.0	190°F	300		
Push-on hose			A			
1/4" ID	16	9.802-254.0	190°F	300		Fabric braid hose with a Nitrile cover and tube. Easily pushes on to hose barb fitting and good up to 300 PSI.
1/2" ID	17	9.802-259.0	190°F	300		Fabric braid
3/4" ID	18	9.802-261.0	190°F	300		Nitrile cover -40°F to 212°F
Vinyl tubing	.9				•	
1/4" x 1/2"	19	9.802-251.0	50°F			Clear vinyl / ft available by the foot or in 100' rolls
1/4" x 1/2"	20	9.802-252.0	250°F			Braided vinyl / ft available by the foot or in 100' rolls



HOSE REELS AND BRACKETS





























		Order no.	1	ength (ft.)	Description
Ready-Stack hose reels		Order no.		engui (i)	Description
Ready-Stack hose reels	1	9.801-763.0	1	.00	Mild steel, 6000 PSI, 350°F
	2	9.801-764.0	2	200	Mild steel, 6000 PSI, 350°F
	3	9.801-765.0	1	.00	Stainless Steel, 6000 PSI, 350°F
	4	9.801-766.0	2	200	Stainless Steel, 6000 PSI, 350°F
	5	8.923-415.0	1	.00	Hose Guide for 100 Ft Reel
	6	8.923-427.0	2	200	Hose Guide for 200 Ft Reel
	7	8.923-416.0			Hose Reel Riser, feed hose over and around obstacles
	8	8.923-918.0			Reel Cart System, easily move multiple hoses and reels where needed.
Automatic, self-winding hose reels			60		
Self-winding hose reel	9	2.639-919.0	6	66	For wall mounting of high-pressure hose.
Swivel wall mount bracket	10	2.639-931.0			Hose and bracket (2.639-931.0) sold separately.
Manual hose reels					27
HD Classic hose reel	11	9.801-253.0			Non-pivoting with mounting kit for HD gas series. 4000 PSI, 225° F, connects to standard 22 mm high-pressure hose. Hose sold separately.
Jumper hose	12	9.162-154.0			
Fixed Based	13	8.750-682.0	1	.00	5000 PSI, 325° F, equipped for 3/8" hose. 2-year warranty.
Pivot Reel	14	8.750-685.0	1	.00	5000 PSI, 325° F, equipped for 3/8" hose. 2-year warranty.
Fixed Based	15	8.750-683.0	2	200	5000 PSI, 325° F, equipped for 3/8" hose. 2-year warranty.
Pivot Reel	16	8.750-684.0	1	.00	5000 PSI, 325° F, equipped for 3/8" hose. 2-year warranty.
Pivot Reel, Trailer Mount	17	8.920-146.0			
Pivot Reel, Trailer Mount	18	8.920-147.0			
Hose reel brackets					1
Mounting kit for HDS full size units	19	9.801-418.0			Hose sold separately.
Trailer Mount Support, Pivot Reels	20	8.920-127.0	3	33	
Universal Mount	21	8.919-430.0	5	50	
Skid Mount	22	8.919-794.0	1	.00	
Wall Mount	23	8.919-437.0	5	50	
Base Mount	24	8.919-434.0			
Bracket, Universal	25	8.919-072.0			
Bracket, 90°	26	8.919-445.0			
Bracket, 45°	27	8.919-441.0			
	28	8.919-448.0			

HOSE REEL SWIVELS





		Order no.	Description
Hose reel swivels			
1/2" M x 3/8" F	1	9.118-021.0	5000 PSI, stainless steel rotor, unique dual seal for extra long life. 2-year warranty.
1/2" F x 3/8" F	2	9.118-022.0	
3/8" M x 3/8" F	3	9.118-023.0	
3/8" F x 3/8" F	4	9.118-024.0	
1/2" M x 1/2" F	5	9.118-025.0	
/2" F x 1/2" F	6	9.118-026.0	
3/8" M x 1/2" F	7	9.118-027.0	
3/8" F x 1/2" F	8	9.118-028.0	
1/2" M x 3/8" F	9	9.118-020.0	Extended swivels - protects hose and limits bend and hose stress
/2" F x 3/8" F	10	9.118-029.0	
3/8" M x 3/8" F	11	9.118-030.0	
3/8" F x 3/8" F	12	9.118-031.0	
3/8" F x 1/2" F	13	9.118-032.0	
3/8" M x 1/2" F	14	9.118-033.0	
1/2" F x 1/2" F	15	9.118-034.0	
1/2" M x 1/2" F	16	9.118-035.0	

WASH BRUSHES













		Order no.	Flow rate	Description			
Push-on wash brush							
Push-on wash brush	1	4.762-016.0		For use with hot or cold water Classic machines. Clamps directly onto			
Push-on wash brush; EASY!Lock threading	2	4.113-001.0		18 mm spray lance.			
Push-on wash brush	3	4.762-444.0		For use with cold water Classic machines. Mounts onto double or triple nozzles.			
Rotating wash brush							
Rotating wash brush	4	4.762-559.0	> 4 GPM	Nylon bristles. Driven by water jet, gently removes fine dust and traffic			
Rotating wash brush	5	4.762-561.0	up to 4 GPM	film from all surfaces. For use with hot or cold water Classic machines. Clamps directly onto 18 mm spray lance.			
Rotating wash brush; EASY!Lock threading	6	4.113-004.0	up to 4 GPM	Clamps directly onto 16 min spray lance.			
Rotating wash brush; EASY!Lock threading	7	4.113-002.0	> 4 GPM				
Rotating wash brush	8	4.762-560.0	up to 4 GPM	Natural bristles. Driven by water jet, gently removes fine dust and traffic			
Rotating wash brush; EASY!Lock threading		4.113-003.0	up to 4 GPM	film from all surfaces. For use with hot or cold water Classic machines. Clamps directly onto 18 mm spray lance.			
Rotating wash brush; EASY!Lock threading	10	4.113-005.0	> 4 GPM	clamps directly onto 10 mm spray lattice.			

COUPLINGS AND ADAPTERS











		Order no.	Description				
Rotary coupling							
Rotary coupling	1	4.401-091.0	Prevents twisting of high-pressure hoses. Grip protection.				
Rotary coupling; EASY!Lock threading	2	4.111-021.0					
22 mm Rotary Hose Connector	3	4.401-076.0					
22 mm x 3/8 FPT	4	9.802-175.0					
Hose Coupling							
Combines two 22 mm HP Hoses	5	4.403-002.0 For connecting and extending two high-pressure hoses.					
Combines two 22 mm HP Hoses; EASY!Lock threading	6	4.111-037.0	Brass with rubber protector.				
Large Washer	7	6.362-124.0					
Small Washer	8	5.364-129.0					
Hose Coupling							
Nozzle screws / screw socket	9	4.402-022.0	(with apple appears) 1 v M 22 v 15 (1 v M 10 v 15				
Nozzle screws / screw scoket; EASY!Lock threading	10	4.111-022.0					

TRIGGER GUNS



The new Kärcher EASY!Force trigger gun is the most effortless gun, requiring zero effort. Its cruise control like technology uses its own recoil force to hold the trigger down for you, so no more sore hands after hours of use. This revolutionary gun is offered in two versions: the North American EASY!Force trigger gun with standard threads for our North American engineered pressure washers and accessories, and our EASY!Force trigger gun with EASY!Lock threading for our German engineered machines and EASY!Lock accessory system.

The new EASY!Lock connection system allows set-ups that are five times faster than existing systems. A simple 360° turn provides a fully-threaded, secure connection.

		Order no.	Flow rate	Description
EASY!Force trigger gun		Order 110.	riowrate	Description
EASY!Force trigger gun for EASY!Lock threading	1	4.118-005.0		EASY!Lock threading for EASY!Lock accessory system. EASY!Force trigger gun uses the recoil force of the high-pressure spray to reduce the hold force of the trigger to zero.
EASY!Force trigger gun North American Model	2	8.756-481.0 ■		Standard 1/4" connection for wand and 3/8" connection for hose. EASY!Force trigger gun uses the recoil force of the high-pressure spray to reduce the hold force of the trigger to zero.
Easy Press high-pressure gun with hold	ing power	reduction (Kärch	er patent)	
Easy press trigger gun with soft grip	3	4.775-466.0		Easy Press Trigger Gun, ID 8, 22 mm screw-type connection.
Easy press trigger gun with soft grip	4	4.775-463.0		ID 8, Integrated AVS Connection.
Servo Control				(8)
Servo control	5	4.775-526.0	Less than 3.3 GPM	Servo control for Easy Press trigger guns (4.775-466.0 or 4.775-463.0)
	6	4.118-007.0	Less than 3.3 GPM	Servo control; EASY!Lock threading
	7	4.775-470.0	3.3 to 4.9 GPM	Servo control for Easy Press trigger guns (4.775-466.0 or 4.775-463.0)
	8	4.118-008.0	3.3 to 4.9 GPM	Servo control; EASY!Lock threading
	9	4.775-471.0	Greater than 4.9 GPM	Servo control for Easy Press trigger guns (4.775-466.0 or 4.775-463.0)
	10	4.118-009.0	Greater than 4.9 GPM	Servo control; EASY!Lock threading
Trigger guns				
Trigger Gun	11	4.775-539.0		ID 8, 22 mm connection
Extended Trigger Gun	12	4.775-298.0		ID 6, Integrated AVS hose connection, without pressure gauge
Extended Softgrip Trigger Gun	13	4.775-529.0		Extended Soft-grip Trigger Gun, ID 6, Integrated AVS hose connection
Soft-grip Trigger Gun Replacement	14	4.775-080.0		Soft-grip Trigger Gun Replacement, ID 6, Integral AVS hose connection
Extended Trigger Gun	15	8.754-381.0		Extended Trigger Gun, 22 mm Male / Male Connectors (used on newer Classic HD direct drive units)

[■] Please note: NOT compatible with EASY!Lock.

























Ouick connect		Order no.	Flow rate	Description
Quick Disconnect	16	6.401-458.0		
Quick Disconnect; EASY!Lock threading	17	2.115-000.0		
22 mm x 1/4" quick coupler	18	9.154-045.0		
18 mm x 1/4" quick coupler	19	9.841-659.0		18MM x 1/4" QDC Coupler, 4000 PSI / 175
Hardened stainless steel nipple for coupler	20	6.401.459.0		
Trigger gun repair kits				
Trigger gun repair kit	21	2.880-369.0		for 4.775-041.0
	22	2.880-173.0	Y (0)	for 4.775-012.0; 4.775-010.0 /-015.0 / -017.0
	23	2.880-463.0		for 4.775-056.0
	24	2.883-191.0		for 4.775-079.0
	25	2.883-192.0		for 4.775-080.0
	26	2.883-888.0		For 4.775-254.0
	27	4.427-014.0		EASY!Force trigger gun repair kit: manifold complete with full ceramic valve (for gun 4.118-005.0)
	28	4.427-025.0		EASY!Force trigger gun repair kit: manifold complete with full ceramic valve (for gun 8.756-481.0)
	29	2.885-483.0		EASY!Force trigger gun repair kit: spare part lever kit (for guns 8.756-481.0 and 4.118-005.0)

SPRAY LANCES



Kärcher standard high-quality stainless steel spray lances, available in various lengths, can be rotated 360° while under pressure. They feature ergonomically shaped grips and large couplings for easy use and insulation. Special spray lances significantly extend the range of uses of high-pressure cleaners.

		Order no.	Max working pressure	Length	Description
Non-pivoting spray lance					
Non-pivoting spray lance	1	4.760-667.0		10" / 250 mm	Stainless steel with manual coupling. With
Non-pivoting spray wand, 10" / 250 mm; EASY!Lock threading	2	4.112-027.0			extended trigger gun.
Non-pivoting spray lance	3	4.760-665.0		21" / 550 mm	
Non-pivoting spray wand, 21" / 550 mm; EASY!Lock threading	4	4.112-024.0			
Spray lance	5	9.112-508.0		21" / 550 mm	with Quick Connect Female Threads
	6	9.802-220.0		21" / 550 mm	with Quick Connect Male Threads
Pivoting spray lance					
Pivoting spray lance	7	4.760-664.0	4350	24" / 600 mm	Spray pipes in different lengths, stainless steel
Pivoting spray wand; EASY!Lock threading	8	4.112-007.0	4350	24" / 600 mm	with large manual coupling. Ergonomic handles = ensure optimal handling and protection. Rotat-
Pivoting spray lance	9	4.760-663.0	4350	33.5" / 850 mm	able under pressure by 360°.
Pivoting spray wand; EASY!Lock threading	10	4.112-006.0	4350	33.5" / 850 mm	_
Pivoting spray lance	11	4.760-584.0	4350	41" / 1050 mm	_
Pivoting spray lance; EASY!Lock threading	12	4.112-000.0	4350	41" / 1050 mm	_
Pivoting spray lance	13	4.760-661.0	4350	61" / 1550 mm	_
Pivoting spray wand; EASY!Lock threading	14	4.112-018.0	4350	61" / 1550 mm	_
Pivoting spray lance	15	4.760-662.0	4350	81" / 2050 mm	_
Pivoting spray wand; EASY!Lock threading	16	4.112-021.0	4350	81" / 2050 mm	_
Pivoting spray lance	17	4.760-691.0	4350	24" / 600 mm	=
Pivoting spray lance	18	4.760-609.0	4350	81" / 2050 mm	_
Variable pressure spray lance	Ø.				
Variable pressure spray lance	19	4.760-362.0	4000	26" / 670 mm	With integral pressure gauge for infinitely variable pressure control on lance, nozzle connection 24 mm x 1.5, chemical feed in low-pressure mode.
Specialty lances					
Washroom and gutter lance	20	4.760-073.0	4000		With nozzle insert. Specially shaped for cleaning
Washroom and gutter wand; EASY!Lock threading	21	4.112-029.0	4000		gutters and hygienically cleaning wash rooms. — Stainless steel
Underbody spray lance	22	4.760.245.0	4000	27" / 700 mm	Mobile; for convenient and effective cleaning of vehicle underbodies and wheel arches. Stainless —
Underbody spray wand; EASY!Lock threading	23	4.112-032.0	4000	27" / 700 mm	steel. Nozzle sold separately.
Gutter cleaning wand; EASY!Lock threading	24	2.112-015.0	4000		


SPRAY LANCES




		Order no.	Description
O-ring kits			
For use on Kärcher guns, lances,	25	2.880-154.0	O-rings package of 3
nozzles and more.	26	2.880-296.0	O-rings package of 5
	27	2.880-208.0	O-rings package of 20
	28	2.880-168.0	O-rings package of 100
	29	2.880-292.0	O-rings for Swivel Connections, (5-pack: 2 swivel, 3 std)
Repair kits			
	30	2.880-001.0	EASY!Force lance repair kit: quad-ring sealing (3)

NOZZLES AND POWER NOZZLES

The Kärcher Power Nozzle, developed and patented by Kärcher, offers a performance that is distinctly better than that of conventional nozzles. The concentrated spray jet of large coherent droplets is sharp-contoured and increases impact pressure by up to 40%. This produces a considerable improvement in cleaning efficiency. Assuming the same degree of soiling, the Power Nozzle cleans at a much faster rate and, an environmentally friendly benefit, uses less water and cleaning agent. The Power Nozzle's spray jet cleans with the same high-impact pressure over its whole working width. This provides substantially more cleaning power for a given amount of energy.





Regular nozzle

Power nozzle

		Order no.	Nozzle size	Description
Nozzle adapter				
Nozzle adapter	1	9.315-002.0		18 mm x 1/4" female. For connecting Kärcher nozzles to non-Kärcher lances.
Nozzle spray angle 0°				
High-pressure nozzle spray angle 0°	2	2.884-533.0	040	Solid jet for removing extremely stubborn dirt.
	3	2.113-001.0	040	EASY!Lock threading. Solid jet for removing extremely stubborn dirt.
	4	2.113-033.0	045	EASY!Lock threading. Solid jet for removing extremely stubborn dirt.
	5	2.884-535.0	050	Solid jet for removing extremely stubborn dirt.
	6	2.113-034.0	050	EASY!Lock threading. Solid jet for removing extremely stubborn dirt.
	7	2.884-536.0	055	Solid jet for removing extremely stubborn dirt.
	8	2.113-035.0	055	EASY!Lock threading, Solid jet for removing extremely stubborn dirt.
	9	2.884-537.0	060	Solid jet for removing extremely stubborn dirt.
	10	2.113-036.0	060	EASY!Lock threading. Solid jet for removing extremely stubborn dirt.
	11	2.884-540.0	075	Solid jet for removing extremely stubborn dirt.
	12	2.884-544.0	110	Solid jet for removing extremely stubborn dirt.
Power nozzle spray angle 15°				
Power nozzle spray angle 15°	13	2.883-388.0	040	Flat stream for stubborn contaminations.
	14	2.113-045.0	040	EASY!Lock threading. Flat stream for stubborn contaminations.
_	15	2.883-389.0	045	Flat stream for stubborn contaminations.
	16	2.113-046.0	045	EASY!Lock threading. Flat stream for stubborn contaminations.
	17	2.883-390.0	055	Flat stream for stubborn contaminations.
	18	2.113-047.0	055	EASY!Lock threading. Flat stream for stubborn contaminations.
	19	2.883-391.0	060	Flat stream for stubborn contaminations.
	20	2.113-048.0	060	EASY!Lock threading. Flat stream for stubborn contaminations.
	21	2.883-392.0	070	Flat stream for stubborn contaminations.
	22	2.883-393.0	075	Flat stream for stubborn contaminations.
	23	2.883-394.0	080	Flat stream for stubborn contaminations.
	24	2.113-043.0	036	Power nozzle TR 15036
Power nozzle spray angle 25°		7 25		·
Power nozzle spray angle 25°	25	2.883-803.0	034	Fan jet nozzle for large area coverage and tackling dirt and stains.
	26	2.113-000.0	034	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
	27	2.883-821.0	036	Fan jet nozzle for large area coverage and stubborn dirt and contaminations.

KÄRCHER PARTS & ACCESSORIES

























Power nozzle spray angle 25°



	Order no.	Nozzle size	Description
28	2.113-005.0	036	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
29	2.883-805.0	038	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
30	2.113-006.0	038	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
31	2.883-397.0	040	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
32	2.113-021.0	040	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
33	2.883-829.0	043	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
34	2.113-008.0	043	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
35	2.883-398.0	045	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
36	2.113-022.0	045	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
37	2.883-399.0	050	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
38	2.113-023.0	050	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
39	2.883-400.0	052	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
40	2.113-024.0	052	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
41	2.883-403.0	065	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
42	2.113-061.0	065	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
43	2.885-133.0	068	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
44	2.113-027.0	068	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
45	2.883-404.0	070	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
46	2.113-028.0	070	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
47	2.883-926.0	072	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
48	2.113-014.0	075	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
49	2.883-785.0	110	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
50	2.113-018.0	110	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
51	2.885-157.0	155	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.
52	2.113-030.0	155	EASY!Lock threading. Fan jet nozzle for large area coverage and tackling dirt and stains.
53	2.113-061.0	065	Power nozzle TR 25065

Power nozzle spray angle 40°

Power nozzle spray angle 40°



	53	2.113-061.0	065	Power nozzle TR 25065
	54	2.884-522.0	040	Fan jet for high area performance - suitable for sensitive surfaces.
	55	2.113-003.0	040	EASY!Lock threading. Fan jet for high area performance - suitable for sensitive surfaces.
	56	2.884-523.0	045	Fan jet for high area performance - suitable for sensitive surfaces.
	57	2.113-053.0	045	EASY!Lock threading. Fan jet for high area performance - suitable for sensitive surfaces.
	58	2.884-524.0	050	Fan jet for high area performance - suitable for sensitive surfaces.
1	59	2.113-054.0	050	EASY!Lock threading. Fan jet for high area performance - suitable for sensitive surfaces.
	60	2.884-525.0	055	Fan jet for high area performance - suitable for sensitive surfaces.
	61	2.113-055.0	055	EASY!Lock threading. Fan jet for high area performance - suitable for sensitive surfaces.
4	62	2.884-526.0	075	Fan jet for high area performance - suitable for sensitive surfaces.
Ì	63	2.113-056.0	075	EASY!Lock threading. Fan jet for high area performance - suitable for sensitive surfaces.
	64	2.884-527.0	080	Fan jet for high area performance - suitable for sensitive surfaces.
	65	2.113-057.0	080	EASY!Lock threading. Fan jet for high area performance - suitable for sensitive surfaces.
	66	2.113-064.0	150	Power nozzle TR 40150

TRIPLE NOZZLES



Kärcher triple nozzles combine quality, flexibility and cleaning power. The robust and high-quality stainless steel nozzle guarantees a long service life. Choose one of three spray types: 0° high-pressure pencil jet, 25° high-pressure fan jet and 40° low-pressure jet (with cleaning agent suction). The integrated power nozzle contour in the 25° high-pressure fan jet guarantees maximum cleaning power. With the touchless triple nozzle, changeover between 0° pencil jet and 25° fan jet is especially convenient, by simply turning the spray lance.

		Order no.	Max working pressure	Nozzle size	Description
Triple nozzles					
Triple nozzle 028	1	4.767-144.0	4350 PSI	028	Manually selectable triple nozzle with stainless
Triple nozzle 031	2	4.767-145.0	4350 PSI	031	steel nozzle. Robust, durable and non-clogging. Convenient selection of high-pressure pencil
Triple nozzle 032	3	4.767-195.0	4350 PSI	032	jet (0°), high-pressure fan jet with power
Triple nozzle 032; EASY!Lock threading	4	4.117-027.0	4350 PSI	032	nozzle (25°) and low-pressure fan jet (40°). For high-pressure cleaners with hs; low-pres-
Triple nozzle 033	5	4.767-146.0	4350 PSI	033	sure fan jet for cleaning agent removal and
Triple nozzle 034	6	4.767-147.0	4350 PSI	034	application. M 18 x 1.5 connection.
Triple nozzle 034; EASY!Lock threading	7	4.117-029.0	4350 PSI	034	W 10 X 1.5 CONNECTION.
Triple nozzle 036	8	4.767-148.0	4350 PSI	036	
Triple nozzle 038	9	4.767-149.0	4350 PSI	038	
Triple nozzle 040	10	4.767-150.0	4350 PSI	040	
Triple nozzle 040; EASY!Lock threading	11	4.117-033.0	4350 PSI	040	3
Triple nozzle 042	12	4.767-151.0	4350 PSI	042	
Triple nozzle 043	13	4.767-152.0	4350 PSI	043	
Triple jet nozzle 045	14	4.767-153.0	4350 PSI	045	
Triple nozzle 045; EASY!Lock threading	15	4.117-036.0	4350 PSI	045	
Triple nozzle 050	16	4.767-154.0	4350 PSI	050	
Triple nozzle 050; EASY!Lock threading	17	4.117-037.0	4350 PSI	050	
Triple nozzle 055; EASY!Lock threading	18	4.117-039.0	4350 PSI	055	
Triple jet nozzle 060	19	4.767-157.0	4350 PSI	060	
Triple nozzle		/ A			
Triple nozzle	20	2.113-004.0		035	
	21	2.113-023.0		050	
	22	2.113-014.0		075	
	23	2.113-017.0		100	

TRIPLE NOZZLES













		Order no.	Max working pressure	Nozzle size	Description	
Triple nozzle, touchless changeover						
Triple nozzle, touchless changeover	24	4.767-001.0	4350 PSI	034	Fast and easy jet changeover by flicking the nozzle. Choice	
	25	4.767-065.0	4350 PSI	050	of high-pressure pencil jet or high-pressure fan jet (25°), with manual changeover to low-pressure fan jet (40°). For	
	26	4.767-066.0	4350 PSI	055	high-pressure cleaners with injectors; low-pressure fan	
	27	4.767-067.0	4350 PSI	060	jet for cleaning agent removal and application. M 18 x 1.5	
	28	4.767-068.0 4350 PSI 080 connection.		connection.		
	29	4.767-069.0	4350 PSI	120		
Angle vario nozzle 0º-90º						
Angle vario nozzle 0º-90º	30	4.763-039.0	4350 PSI	050	Allows variable adjustment of the high-pressure jet spray	
	31	4.763-058.0	4350 PSI	055	angle from 0–90°. This allows easy adaptation to all types of contaminations and surfaces.	
	32	4.763-036.0	4350 PSI	080	. or containing one and sorraces.	
	33	4.113-008.0	4350 PSI		EASY!Lock threading. Allows variable adjustment of the	
	34	4.113-006.0	4350 PSI		high-pressure jet spray angle from 0-90°. This allows easy adaptation to all types of contaminations and surfaces.	
Changeover nozzles						
Double changeover nozzles	35	4.764-177.0	4350 PSI	031, 0° and 25°		
	36	4.767-197.0	4350 PSI	034		
	37	4.767-198.0	4350 PSI	040		
	38	4.767-199.0	4350 PSI	045		
	39	4.767-201.0	4350 PSI	055		

ROTARY NOZZLES



The Kärcher dirt-blaster combines the advantages of pencil jets and fan jets. The nozzle spins at approximately 4,000 rpm to apply a powerful cleaning spray to a large area.







Rotating pencil jet

ing Pencil jet

Fan jet

		Order no.	Max working pressure	Nozzle size	Description
Dirt Blaster, small		•	•		
Dirt Blaster	1	4.767-229.0	2600 PSI	030	Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
	2	4.114-018.0	2600 PSI	030	EASY!Lock threading. Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
	3	4.767-230.0	2600 PSI	035	Dirt Blaster - rotating pencil jet - 10 times the cleaning power , Highest Stand Ceramic nozzle / nozzle and bearing ring , Max . 180 bar / 18 MPa , 60° C.
	4	4.114-019.0	2600 PSI	035	EASY!Lock threading. Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C
	5	4.767-231.0	2600 PSI	040	Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
	6	4.114-020.0	2600 PSI	040	EASY!Lock threading. Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
	7	4.767-232.0	2600 PSI	045	Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
	8	4.114-021.0	2600 PSI	045	EASY!Lock threading. Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
	9	4.767-233.0	2600 PSI	050	Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
	10	4.114-022.0	2600 PSI	050	EASY!Lock threading. Dirt Blaster - rotating pencil jet - 10 times the cleaning power . Highest Stand Ceramic nozzle / nozzle and bearing ring . Max . 180 bar / 18 MPa , 60° C.
Dirt Blaster, large	90	/ /			
Dirt Blaster	11	4.114-040.0	4350 PSI	035	Dirt blaster - rotating point jet - 10 times the cleaning performance.
	12	4.114-041.0	4350 PSI	040	Ceramic nozzle / bearing ring provides long service life. Max. 180 bar / 18 MPa, 60°C.
	13	4.114-042.0	4350 PSI	045	
	14	4.114-027.0	4350 PSI	050	<u></u>
	15	4.114-036.0	4350 PSI	055/060	<u></u>
	16	4.114-030.0	4350 PSI	070/080	<u></u>
Quick connect					·
Quick connect	17	9.154-023.0	2600 PSI		Convert from screw-connect to Quick Connect 18 mm
Dirt Blaster filter	10		1		1
Dirt Blaster filter	18	4.730-032.0	1		

ROTARY NOZZLES











		Order no.	Max working pressure	Nozzle size	Description
Dirt Blaster repair kits					
Dirt Blaster repair kits	19	2.883-473.0			055/060
	20	2.883-471.0			040
	21	2.883-472.0			050
	22	2.883-474.0			070/080
	23	9.302-231.0			045
	24	2.884-114.0			065
	25	2.884-051.0			100/120
	26	2.884-052.0			035
	27	2.883-810.0			4.763-949/-955
	28	2.883-811.0			4.763-950/-956
	29	2.883-813.0			4.763-952/-958
	30	2.884-113.0			4.763-988.0
	31	2.884-114.0			4.763-989.0

STEAM JET NOZZLES















		Order no.	Nozzle size	Description
Steam nozzle				
	1	4.766-024.0	055	50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	2	2.114-001.0	045	EASY!Lock threading. 50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	3	2.885-039.0	050	50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	4	2.885-119.0	055	50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	5	2.885-049.0	065	50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	6	2.114-005.0	065	EASY!Lock threading. 50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	7	2.885-041.0	070	50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	8	2.114-006.0	070	EASY!Lock threading. 50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
	9	2.114-010.0	090	EASY!Lock threading. 50° fan jet for cleaning and thawing in steam mode, e.g. thawing sand and gravel, de-icing form work, dewaxing vehicles.
Nozzle protector for steam nozzle				
Nozzle protector (rubber)	10	5.394-059.0		Nozzle protection for steam jet nozzles 4.766-023.0 and 4.766-024.0.
Dual nozzle holder				
Dual nozzle holder	11	4.764-012.0		Dual nozzle holder
Nozzle union				
Nozzle connector	12	5.401-210.0		With protector for high-pressure and power nozzles M 18 x 1.5.
Nozzle connector; EASY!Lock threading	13	4.112-011.0		1
Spacer (including nozzle union)				
Spacer (incl. nozzle union)	14	5.394-294.0		Spacer with nozzle connector - firs 18 mm lance connections
				·

PIPE CLEANING











		Order no.	Max working pressure	Nozzle size	Diameter	Description	
Pipe cleaning hose							
Pipe cleaning hose, ID 6, 30 m, 100 ft.	1	6.390-029.0	1740 PSI			Extremely flexible high-pressure hose	
Pipe cleaning hose, ID 6, 20 m, 66 ft.; EASY!Lock threading		6.110-008.0	2900 PSI			for cleaning inside pipes (threaded connection for R 1/8 nozzle).	
Pipe cleaning nozzles							
Pipe cleaning nozzle	3	5.763-015.0		055	16 mm	With R 1/8" fitting for attachment	
3 x 30° backwards	4	5.763-017.0		050	30 mm	to pipe cleaning hose.	
	5	5.763-021.0		070	30 mm		
Pipe cleaning nozzle 1 x forward, 3 x 30° backwards	6	5.763-016.0		060	16 mm	With R 1/8" fitting for attachment to pipe cleaning hose.	
1 x 10 mara, 5 x 50 backmaras	7	5.763-020.0		065	16 mm	to pipe cleaning nose.	
Rotating jets					A (C)		
4 rotating jets	8	6.415-428.0		050	16 mm	With R 1/8" fitting for attachment	
	9	6.415-440.0		065	16 mm	to pipe cleaning hose.	
Brass nozzles - direct connections to 22	mm hi	gh-pressure hose			7 /		
Brass nozzles - direct connections to 22 mm high-pressure hose	10	5.763-011.0				Brass nozzle, 830 PSI / 3.5 GPM - direct connects to 22 mm	
	11	5.763-013.0				Brass nozzle, 800 PSI / 5.3 GPM - direct connects to 22 mm	

SURFACE CLEANERS

Surface cleaners offer a massive area performance and clean without splashing. They come with a plastic and stainless steel hood for hot water cleaning applications.

Surface Cleaner FR Classic		Order no.	Flow rate	Diameter	Description
Surface Cleaner FR Classic; EASY!Lock threading - nozzles sold separately	1	2.111-016.0	2.6 GPM	12"	The entry-level model of Kärcher Hard surface cleaner for the splash-proof cleaning of surfaces in indoor and out-
Surface Cleaner FR Classic DIY - includes nozzle kit	2	2.111-017.0	2.6 GPM	12"	door applications. Nozzle kit has to be ordered separately. Max. 150 bar / 600 l / h / 40°C .
Hard surface cleaner FR TR 30 ME					
Hard surface cleaner FR TR 30 ME; EASY!Lock threading - nozzles sold separately	3	2.111-013.0		12"	The FR TR 30 ME hard surface cleaner is an indispensable accessory for efficient and economical professional cleaning – both indoor and outdoor. Rotating Power Nozzles, protected by a stainless steel housing, boost your cleaning coverage area by a factor of 10! With the FR TR 30 ME, you save time and achieve perfectly uniform results without splashing or getting wet. Equipped with an integrated vacuum connection, the FR TR 30 ME is ideal for cleaning indoor areas that would be impractical with other surface cleaners. Wall cleaning is just as convenient thanks to ergonomic handles and direct connection to a trigger gun. Use with both cold and hot water pressure washers. The versatility of the FR TR 30 ME is appreciated in workshops and industrial kitchens, as
					well as by contract cleaners and municipalities. Maximum pressure: 3625 PSI Max temperature: 175° F
Hard surface cleaner FR 50 ME					max temperature 175 T
Hard surface cleaner FR 50 ME; EASY!Lock threading	4	2.111-023.0		20"	With a 20" cleaning area, the FR 50 ME provides a greatly increased coverage area to make quick work of bigger cleaning jobs. The rotating nozzle beam has a swivel joint with ceramic bearings, and is built with a durable rust-free stainless steel housing that connects directly to standard Kärcher trigger guns. The unit's handle design and three non-marking casters ensure easy operation. Detergents can be added through a low pressure valve. Use with Kärcher Power Nozzles (sold separately) for the most thorough and uniform cleaning possible.
					Maximum pressure: 3625 PSI Max temperature: 175° F
Machine-specific nozzle kit for FR	5				
Nozzle packet for surface cleaners	5	2.640-482.0	1.9-2.1 GPM		Unit specific nozzle kit: Kärcher power nozzle for
nozzles sold separately	6	2.640-401.0	2.2-2.9 GPM		surface cleaners.
	7	2.639-187.0	2.9-4.0 GPM		_
	8	2.640-442.0	4.0-4.9 GPM		_
	9	2.639-188.0	4.8-5.7 GPM		_
	10	2.640-781.0	5.7-7.9 GPM		_
	11	2.640-282.0	8.0-9.7 GPM		_
	12	2.885-436.0			Nozzle packet for FR Classic, FR Classic DIY, Pro HD 400
	13	2.885-313.0			and 600 Nozzle packet for FR Classic, Pro HD 400
	14	2.885-312.0			Nozzle packet for FR Classic
Adapters					
Adaptor to connect gun directly to FR 30	15	4.402-022.0			
			1	1	

SURFACE CLEANERS WITH SUCTION



























		Order no.	Flow rate	Diameter	Description		
Hard surface cleaner FRV 30		order no.	Tiow rate	Diameter	Bestription		
Hard surface cleaner FRV 30; EASY!Lock threading - nozzles sold separately	17	2.111-010.0		12"	FRV 30 with integrated, automatic dirty water pickup makes cleaning even more efficient – suitable for indoor and outdoor use. Rinsing after cleaning is unnecessary as the dirty water can be conveniently removed with the supplied 5 m suction hose. Non-marking swivel castors and double ceramic bearings are further quality features. Order unit-specific nozzle kit separately.		
Extension hose	18	4.440-939.0			5 m, includes adapter		
Adapter	19	4.402-022.0			18 mm x 22 mm Adaptor to connect gun directly to FR30		
Adapter; EASY!Lock threading	20	4.111-022.0					
Dirt Trap	21	2.642-532.0			Galvanized steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.		
Suction cup kit for extension hose	22	2.642-528.0		1	Suction cup for fixing the suction hose to smooth surfaces.		
Extension hose	23	4.441-040.0			Extension suction hose, 16' with coupling (fits FRV 30 Me)		
Machine-specific nozzle kit for FRV							
Nozzle packet for surface cleaners nozzles sold separately	24	2.642-430.0	1.9-2.1 GPM		Unit specific nozzle kit: Kärcher power nozzles and venturi nozzle for FRV 30.		
Hozzies solu separatery	25 2.642-431.0	2.642-431.0	2.2-2.9 GPM		HIOZZIE IOI FRV 30.		
	26	2.642-432.0	2.9-4.0 GPM		_		
	27	2.642-433.0	4.0-4.9 GPM				
Hard surface cleaner FRV 50 ME							
Hard surface cleaner FRV 50 ME	28	2.643-598.0		4	Hard surface cleaner FRV 50 ME		
Hard surface cleaner FRV 50 ME; EASY!Lock threading	29	2.111-024.0			Hard surface cleaner FRV 50 ME; EASY!Lock threading		
FRV 50 Me suction hose	30	4.441-078.3					
FRV 50 Me extension hose	31	4.441-040.0					
FRV 50 Me attachment kit hose clamp	32	2.642-528.0					
FRV 50 Me kit mud	33	2.642-532.0					
Power Nozzle for Hard surface cleane	r FRV	50 ME					
Power nozzle	34	2.642-430.0			FRV 50 Me power nozzle 035		
	35	2.642-431.0			FRV 50 Me power nozzle 040		
	36	2.642-432.0			FRV 50 Me power nozzle 045		
	37	2.642-433.0			FRV 50 Me power nozzle 050		
	38	2.642-982.0			FRV 50 Me power nozzle 080		

WET BLASTING ATTACHMENTS



The wet blasting attachment fits easily on Kärcher high-pressure cleaner spray lances. The abrasive is sucked up into the water jet and applied with a powerful abrasive action. Ideal for removing rust, scale and paint from components as well as graffiti.







		Order no.	Nozzle size	Description	
Wet blasting attachment (without nozzle)					
Net blasting attachment with flow control		4.762-010.0		Adds abrasive to high-pressure jet. For removing paint,	
Wet blasting attachment with flow control; EASY!Lock	2	4.115-000.0		rust, scaling. Fits on spray lance in place of HP nozzle. With flow control. (Without nozzles)	
Wet blasting attachment without flow control	3	4.762-022.0		Adds abrasive to high-pressure jet. For removing paint, rust, scaling, Fits on spray lance in place of HP nozzle.	
Wet blasting attachment without flow control; EASY!Lock	4	4.115-006.0		Without flow control. (Nozzles not included)	
Nozzle pack for wet blasting attachment			1 4 4		
Nozzle kit for wet blasting attachment		2.638-526.0	035	Consisting of wet blasting nozzle and nozzle insert - use	
	6	2.637-900.0	040	in conjunction with wet blasting attachment (4.762-010.0 / -022.0)	
	7	2.637-901.0	045		
	8	2.637-902.0	050		
	9	2.637-903.0	055		
	10	2.637-904.0	060		
		2.112-021.0	0035		
	1	2.112-019.0	0040		
		2.112-022.0	0045		
		2.112-023.0	0050		
		2.112-024.0	0055		
		2.112-025.0	0060		
		2.112-026.0	0065		
Nozzle kit - sand nozzle only	12	5.769-011.0			
Boron carbide nozzle			1		
Boron carbide nozzle	13	6.415-084.0	6 mm	In addition to nozzle packs. Highly wear-resistant blasting	
	14	6.415-083.0	8 mm	nozzle with boron carbide lining for continuous use.	

FOAM SYSTEMS AND CLEANING AGENT INJECTORS

		Order no.	Flow rate	Description
Inno Foam kit				
Inno Foam System, for models that dispense detergent at low pressure. (Purchase nozzle insert separately) Inno Foam System, for models that dispense detergent at low pressure; EASY!Lock threading. (Purchase nozzle insert separately)		system is a twi injection system provides a mul applications. Apply a thick I then switch ea		Kärcher's complete, ready-to-use high pressure foaming system is a twin spray lance and precision chemical injustion system. The patent-pending dual spray lance provides a multitude of functions for many washing
Inno Foam System, for models that dispense detergent at high pressure. (Purchase nozzle insert separately)	3	2.640-692.0		pressure nozzles. The chemical injection system provides precise detergent metering (0-5% concentration), providing faster and more consistent results using the optimum amount of detergent.
Inno Foam System, for models that dispense detergent at high pressure; EASY!Lock threading. (Purchase nozzle insert separately)	4	2.112-008.0		Lance Length: 25.6" Maximum Pressure: 3700 PSI Maximum Flow Rate: 5.8 GPM Maximum Temperature: 176°F

Prices, specifications and product descriptions subject to change without notice.

FOAM SYSTEMS AND CLEANING AGENT INJECTORS (CONTINUED)



























	1	T		
		Order no.	Flow rate	Description
Easy Foam Set	1 -			
Easy Foam Set with RM injector	5	2.640-691.0		Easy Foam System, for models that dispense detergent at low pressure (purchase nozzle insert separately)
Easy Foam Set with RM injector; EASY!Lock threading	6	2.112-010.0		low pressure (porchase nozzie insert separatery)
Easy Foam Set	7	2.640-693.0		Easy Foam System, for models that dispense detergent at high pressure. (Purchase nozzle insert separately)
Easy Foam Bottle				
Easy Foam bottle for EASY!Lock threading	8	2.112-017.0		Nozzle size 025, for machines with Servo Control function
	9	2.112-018.0		Nozzle size 042, for machines without Servo Control function
Foam Nozzle Inserts for Inno / Easy Sets				
Foam nozzle inserts; EASY!Lock - nozzles sold separately	10	2.111-009.0	2.2-2.6 GPM	(
Foam nozzle inserts - nozzles sold separately	11	2.640-687.0	2.7-3.0 GPM	
Foam nozzle inserts; EASY!Lock - nozzles sold separately	12	2.111-018.0	2.7-3.0 GPM	
Foam nozzle inserts - nozzles sold separately	13	2.640-688.0	3.1-4.4 GPM	
Foam nozzle inserts; EASY!Lock - nozzles sold separately	14	2.111-019.0	3.1-4.4 GPM	
Foam nozzle inserts - nozzles sold separately	15	2.640-689.0	4.5-5.8 GPM	
Foam nozzle inserts; EASY!Lock - nozzles sold separately	16	2.111-020.0	4.5-5.8 GPM	
Foam nozzle mounting kit			63	
Foam nozzle attachment kit; EASY!Lock threading	17	2.112-013.0		For applying foam detergent in metered quantities in sanitary and food areas, or where long reaction time is needed. Fits all units and mounts to spray lance in place of HP nozzle.
High-pressure detergent injector				
High-Pressure Detergent Injector	18	3.637-170.0		Cleaning agent dosage at high-pressure 3-5%
High-Pressure Detergent Injector; EASY!Lock threading	19	4.637-033.0		
Cleaning agent injector for high and low pressure (without nozzles, downstream)	20	3.637-001.0		Dosage of detergents. Separately from the machine in low and high pressure. Dosage up to 15%.
Cleaning agent injector for high and low pressure; EASY!Lock threading (without nozzles, downstream)	21	4.637-032.0		
Machine-specific nozzle kits with order no. 3.637-170.0			•	
Nozzle Kit - HD units	22	4.769-045.0	2.2-3.0 GPM	
Nozzle Kit - HDS units	23	4.769-046.0	2.2-3.0 GPM	
Nozzle Kit - HD and HDS units	24	4.769-047.0	3.3-4.4 GPM	
Nozzle Kit - HD and HDS units	25	4.769-048.0	4.4-5.3 GPM	
Machine-specific nozzle kits with order no. 3.637-001.0		1		<u> </u>
High-pressure nozzle insert	26	4.769-003.0	up to 4.9 GPM	
High-pressure nozzle insert	27	4.769-002.0	4.9+ GPM	
Low-pressure nozzle insert	28	4.769-001.0	up to 4.9 GPM	
Low-pressure nozzle insert	29	4.769-006.0	4.9+ GPM	
			1	1

OTHER ACCESSORIES













		Order no.	Description
Fine-mesh water filter			
Fine-mesh water filter, 100 µm, R 3/4"	1	2.637-691.0	For connection to unit inlet, 100 µm.
Water fine filter, 90-120 µm, R 1"	2	2.638-255.0	Fits on unit, suitable for pressure and suction, 90-120 µm.
Fine-mesh water filter with adapter	3	4.730-102.0	Connects to unit, 125 µm, with R 3/4" / 1" adapter.
Fine-mesh water filter, 100 µm, R 1"	4	2.638-270.0	For connection to unit inlet, 100 µm.
Suction filter			
Suction filter with check valve	5	4.730-012.0	
HDS GHF x mm Screw Union	6	4.401-073.0	
HD GHF x mm Screw Union (plastic)	7	4.401-059.0	
18 mm (F) x 22 mm (M) Adapter; EASY!Lock threading	8	4.402-022.0	
22 mm x 3/8 QC	9	9.154-045.0	
Flue pipe			
4.75" (120 mm) outlet	10	4.656-149.0	HDS 1.7/12 U Ed; HDS Compact; HDS 1000 BE/DE; HDS Mid-Class (2005-2011)
6.25" (158 mm) outlet	11	4.656-079.0	HDS Full Size Units
7.9" (200 mm) outlet	12	4.656-080.0	HDS 1.7/12 U Ed; HDS
8", 12V DC, Barometric Dampener	13	8.717-764.0	
10", 12V DC, Power Dampener	14	8.749-806.0	
12", 12V DC, Power Dampener	15	8.753-171.0	
8", Round	16	8.717-728.0	
10", Round	17	9.801-040.0	
12", Round	18	8.717-730.0	7 .0
10", Exhaust Stack, Cap	19	8.717-731.0	
12", Exhaust Stack, Cap	20	8.717-732.0	
8" without Stack, new style kit	21	8.903-430.0	
Detergent injectors		7 , 2	
Injector, 1-2 GPM, 0.057	22	8.709-404.0	Brass Housing with Stainless Steel nipple
Injector, 2-3 GPM, 0.070	23	9.802-215.0	3500 or 5000 PSI Non-Adjustable Metering Viton Seals
Injector, 3-5 GPM, 0.083	24	9.802-216.0	Rated up to 190°F/ 88°C
Injector, 3-5 GPM, 0.083, 5,000 PSI	25	9.802-217.0	3/8" Q/C Inlet/Outlet
Injector Assembly, 1-2 GPM, 0.057	26	8.904-464.0	
Injector Assembly, 2-3 GPM, 0.070	27	8.929-062.0	
Injector Assembly, 3-5 GPM, 0.083	28	9.802-225.0	
Injector Assembly, 3-5 GPM, 5,000 PSI	29	9.802-226.0	-
Injector Repair Kit	30	8.704-199.0	

OTHER ACCESSORIES















		Order no.	Description
Voltage regulator			
25 Amp, 15 Volt	1	9.802-531.0	
Switches			
Reed switch - HDS Compact Range	2	2.883-477.0	HDS 1.7/12 U Ed; HDS 500 Ci; HDS 600 Ci; HDS 900 Ci
Reed switch - HDS Classic Full Size	3	2.880-000.0	(2005-2011)
Reed switch - HDS Classic Skids	4	2.880-194.0	HDS 1000 BE/DE; HDS 801 B; HDS 745; HDS 895; HDS 945; HDS 1000; HDS 1055; HDS 1195
Reed switch - HDS Classic Full Size	5	2.885-240.0	(2012 Forward)
On/off rotary switch, 115-230V	6	9.802-449.0	1PH 3-position
On/off rotary switch, 230/460V	7	8.716-027.0	3PH 3-position
On/off rotary switch, 120-600V	8	9.802-450.0	1-3PH 2-position
Adjustable thermostat switch/discharge	9	8.750-094.0	150°C/302°F, 2 meter capillary
Adjustable thermostat switch/discharge	10	8.750-095.0	120°C/240°F, 2 meter capillary
Adjustable thermostat switch, 300°	11	9.802-285.0	
Kärcher 500 flow switch			
Vertical mount only	13	8.712-244.0	Tough, impact-resistant, glass-reinforced, nylon housing. Tungsten contact reed switch.
Mount in any position (gray)	14	8.933-006.0	Heavy-duty machine brass internals. Viton seals. For solenoid control only.1-8 GPM. 4350 PSI.
Reed switch only (2-wire)	15	9.803-266.0	3/8" FPT Inlet / Outlet. 190°F. 1 Amp switch. 2 Wire Reed. 63" wire length.
Float tanks			
NG/LPG Float Tank, Universal Plastic Float Tank	16	9.802-084.0	3.5 gallon capacity. 22" x 13-1/2" x 5". Heavy 3/16" durable plastic. Convenient mounting tabs
Lid & Hinges for 9.802-084.0	17	8.912-233.0	77 . O Y
Fuel tanks		A	
Fuel Tank, 5 Gallon Black	18	9.802-079.0	Rugged fill neck cap with vent
Fuel Tank, 6 Gallon Black	19	9.802-081.0	
Fuel Tank, 8 Gallon Black	20	8.706-615.0	
Fuel Tank, 9 Gallon Black	21	9.802-089.0	
Fuel caps			
Cap, 14" with Fuel Gauge, Red	22	9.803-536.0	
Cap, 14" with Fuel Gauge, Black	23	9.803-535.0	
Plastic dip tube assembly			
Diptube, Plastic, 10" HDS Classic Skid	24	9.803-531.0	
Diptube, rubber bushing	25	9.802-053.0	
			I

AXIAL PUMPS, REPAIR KITS AND TOOLS



Kärcher's commercial-duty 3-piston axial pumps are simple, efficient, and very reliable and have fewer moving parts compared to crank-case and piston type pumps.

These proprietary pumps are engineered for long life with features like brass cylinder heads, ceramic pistons, and stainless steel valves. Kärcher's combined pump/motor units run cooler due to their unique water cooled design. And they use less power thanks to a unique drive center and wobble plate design.

Kärcher pumps feature a soft-dampening system to reduce pulsations in the high pressure system, increasing the service life of high pressure components.

	Order no.	Shaft	GPM	PSI	RPM
Kärcher axial pumps					
	9.120-021.0	3/4"	2.6	3000	3400
	9.120-020.0	5/8"	2.6	3000	3400
Geared reduction for Kärcher pumps					
	8.715-342.0		shaft, 24 mm o, 11-18 hp.	pump shaft, 13	39.3 oz., 2.176:1
Unloader valves					
	9.802-362.0	PA VBB v	vith switch (N/	C)	
	9.803-899.0	VBA35 fo	r Kärcher KG,	KD, and KE pur	mps
	8.715-508.0	VBXL 13	GPM @ 3000	PSI knob	
	8.753-028.0		Kärcher KD ar		
		KE pump			
	9.803-900.0	VBA35 fo	r Kärcher KM	and	
	8.753-011.0	VB56 for I	Kärcher KM and	LS pumps	
	8.753-010.0	VB56 with	1/8" Bore for E	Easy Start	
	8.715-502.0	HM DX U	nset (921462)	,	
Discharge manifold / rupture disk					
Coil Outlet Discharge Manifold	9.149-003.0		-		n of water in the
Rupture Disk, 8000 PSI, Red	8.725-944.0	coil and e	ensures operati	or safety.	
Rupture Disk, 5000 PSI, Blue	9.151-014.0				
Rupture Disk Spacer	9.184-030.0				
Safety system pistons					
Magnetic Pistons (HDS units to 2005)	4.553-022.0	Used for	low-water pro	tection.	
Brass Pistons (HDS 1000 BE/DE)	4.553-213.0				
Pump installation tools	1 2001 200 -	142			
To press in valve seat (5.581-143.0) on HDS 745, 945, 1000, 1055, 1195.	2.901-036.0	12 mm			
	2.901-033.0	18 mm	UDC 004E 0 1	- 1000	
(1)	2.901-015.0		HDS 801E, 94	5,1090	
Maria di Man	2.901-018.0	22 mm -	HDS 1195		
Valve seat installation tool HDS Classic Full Size - prior 2005; to press in valve seat	5.901-126.0	(5 591 1	13 O) on HDC 7	45, 945, 1000	1055 1195
TIDO Classic Full Size - pirtui 2000, to press III Valve seat	5.501-126.0	(5.561-14	+J.U) (UI (U.C.+	43, 343, 1000	, 1033, 1133
HDS Classic Full Size - 2005+; to press in valve seat	5.901-162.0	(5.581-14	43.0) on HDS 7	745, 945, 1000	, 1055, 1195
Valve seat removal tool					
	5.901-125.0	HDS Class	sic Full Size		
	5.901-161.0	HDS Class	sic - 2012		

AXIAL PUMPS, REPAIR KITS AND TOOLS (CONTINUED)

	Pump kit	Model part no.		Pump kit	Model part no.
HD electric models	1 1 2 1 4 1 1 1	,	HD gas models (continued)	1.5	
HD 1.8/13 C Ed	2.883-997.0	1.514-111.0	HD 3600 DH	2.884-217.0	1.180-934.0
HD 2.3/15 C Ed	2.883-997.0	1.150-611.0	HD 800 B	2.883-201.0	1.851-812.0
HD 3.0/20 C Ea	2.883-997.0	1.150-610.0	HD 830 B	2.884-214.0	1.187-103.0
HD 3.0/20-4M Ea	2.884-882.0	1.524-110.0	HD 830 B	2.884-214.0	1.187-108.0
HD 3.5/30-4S Ea	2.883-902.0	1.286-110.0	HD 1020 B	2.884-016.0	1.810-910.0
HD 3.7/22-4S Eg	2.883-902.0	1.286-115.0	HD 1020 B	2.884-016.0	1.810-920.0
HD 4.5/32-4S Eb	2.883-902.0	1.286-112.0	HD 1040 B	2.884-084.0	1.810-986.0
HD 4.5/32-4S Ec	2.883-902.0	1.286-113.0	HDS electric models		
HD 5/12 C	2.883-997.0	1.514-106.0	HDS 2.3/12 C Ed	2.883-891.0	1.170-606.0
HD 525 S	2.883-827.0	1.118-700.0	HDS 2.3/13 C Ed	2.883-891.0	1.170-605.0
HD 651	2.883-869.0	1.150-110.0	HDS 3.0/20 C Ea	2.883-891.0	1.170-612.0
HD 650	2.883-869.0	1.150-106.0	HDS 4.0/20-4M Ea	2.885-034.0	1.071-408.0
HD 655 S	2.883-286.0	1.902-405.0	HDS 4.5/22-4M Ea	2.885-034.0	1.071-409.0
HD 655 H	2.883-286.0	1.902-411.0	HDS 3.5/30-4M Ea	2.885-034.0	1.071-412.0
HD 655 H	2.883-286.0	1.902-412.0	HDS 3.5/23-4M Eg	2.885-034.0	1.071-426.0
HD 750	2.880-469.0	1.625-917.0	HDS 5.0/30-4S Eb	2.885-033.0	1.071-608.0
HD 760 WS	2.880-469.0	1.797-701.0	HDS 5.0/30-4S Ec	2.885-033.0	1.071-609.0
HD 850 S	2.880-469.0	1.877-681.0	HDS 801 E (460V)	2.883-446.0	1.030-681.0
HD 850 WS	2.880-469.0	1.754-701.0	HDS 801 E (575V)	2.883-446.0	1.030-701.0
HD 855 S	2.883-817.0	1.087-701.0	HDS 4.0/20-4M Ea	2.883-913.0	1.027-352.0
HD 1090	2.883-447.0	1.951-681.0	HDS 4.5/22-4M Ea	2.883-913.0	1.027-354.0
HD 10/25 S	2.883-902.0	1.286-105.0	HDS 4.5/19-4M Ea	2.883-913.0	1.027-357.0
HD gas models			HDS 3.5/30-4M Ea	2.883-913.0	1.027-350.0
HD 2.5/24 P (vers 1)	2.884-214.0	1.575-105.0	HDS 3.5/23-4M Eg	2.883-913.0	1.027-356.0
HD 2.6/26 P (vers 1)	2.884-214.0	1.575-106.0	HDS 5.0/30-4S Eb	2.883-914.0	1.028-341.0
HD 4.0/36 P (vers 1)	2.884-217.0	1.575-108.0	HDS 5.0/30-4S Ec	2.883-914.0	1.028-343.0
HD 2500 G	2.884-215.0	1.194-112.0	HDS NG/LP 4.5/22 Ea ST (vers 1)	2.883-322.0	1.575-715/716.0
HD 2500 MTD	2.884-215.0	1.194-114.0	HDS NG/LP 4.5/22 Ea ST (vers 2)	2.883-913.0	1.575-715/716.0
HD 2600 DK	2.884-215.0	1.194-122.0	HDS NG/LP 3.5/30 Ea ST (vers 1)	2.883-322.0	1.575-719/720.0
HD 2700 DB	2.884-215.0	1.194-116.0	HDS NG/LP 3.5/30 Ea ST (vers 2)	2.883-913.0	1.575-719/720.0
HD 2700 DH	2.884-215.0	1.194-117.0	HDS NG/LP 4.5/22 Ea ST (vers 1)	2.883-322.0	1.575-715/716.0
HD 2700 DH	2.884-215.0	1.194-123.0	HDS NG/LP 4.5/22 Ea ST (vers 2)	2.883-913.0	1.575-715/716.0
HD 2700 DH Q/C	2.884-215.0	1.194-118.0	HDS NG/LP 3.5/30 Ea ST (vers 1)	2.883-322.0	1.575-719/720.0
HD 2701 DR	2.884-215.0	1.194-200.0	HDS NG/LP 3.5/30 Ea ST (vers 2)	2.883-913.0	1.575-719/720.0
HD 3000 DH	2.884-216.0	1.187-116.0	HDS NG/LP 5.0/30 Eb ST (vers 1)	2.883-302.0	1.575-717/718.0
HD 3101 DR	2.884-216.0	1.187-117.0	HDS NG/LP 5.0/30 Eb ST (vers 2)	2.883-914.0	1.575-717/718.0
HD 3500 DB	2.884-217.0	1.810-998.0	HDS NG/LP 5.0/30 Ec ST (vers 1)	2.883-302.0	1.575-721/722.0
HD 3500 DH	2.884-217.0	1.810-997.0	HDS NG/LP 5.0/30 Ec ST (vers 2)	2.883-914.0	1.575-721/722.0
HD 3500 DH-Q/C	2.884-217.0	1.810-996.0	HDS 500 Ci	2.883-459.0	1.890-406.0
HD 3501	2.884-217.0	1.810-999.0	HDS 501 C (vers 1)	2.883-883.0	1.272-105.0

Prices, specifications and product descriptions subject to change without notice.

AXIAL PUMPS, REPAIR KITS AND TOOLS (CONTINUED)

	Pump kit	Model part no.
HDS electric models (continued)		
HDS 501 C (vers 2)	2.883-827.0	1.272-105.1
HDS 551 C	2.883-890.0	1.169-105.0
HDS 558 C	2.883-891.0	1.170-105.0
HDS 600 CI	2.883-922.0	1.852-407/408.0
HDS 900 Ci	2.883-855.0	1.873-408/409.0
HDS 745	2.883-322.0	1.026-911.0
HDS 745	2.883-913.0	1.026-344.0
HDS 895 M Eco	2.883-913.0	1.027-515.0
HDS 895 S VEX	2.883-913.0	1.027-304.0
HDS 945	2.883-913.0	1.027-335/336.0
HDS 945	2.883-322.0	1.027-871.0

		Pump kit	Model part no.
HDS electric models (continue	d)		
HDS 945		2.883-322.0	1.027-881.0
HDS 1000		2.883-913.0	1.027-337.0
HDS 1000		2.883-322.0	1.027-851.0
HDS 1000 A		2.880-283.0	1.718-931.0
HDS 1055		2.883-913.0	1.027-38.0/339.0
HDS 1055		2.883-322.0	1.027-81.0/691.0
HDS 1195		2.883-914.0	1.028-332.0
HDS 1195		2.883-302.0	1.028-681.0
HDS 2245 NG/LP		2.883-322.0	1.027-883/884.0
HDS 3005 NG/LP	16/2	2.883-302.0	1.028-883/884.0

AXIAL PUMPS REPAIR KITS

	Order No.	
cher axial pump repair k	tits	
	2.883-997.0	
	2.884-347.0	
	2.883-902.0	
	2.883-827.0	
	2.883-869.0	
	2.883-286.0	
	2.880-469.0	
	2.883-817.0	
	2.883-447.0	
	2.884-214.0	
	2.884-217.0	
	2.884-215.0	
	2.884-216.0	
	2.884-084.0	

		Order No.	
Kärcher axial pump repair kits (contin	ued)		
		2.883-891.0	
		2.885-034.0	
		2.885-033.0	
		2.883-446.0	
		2.883-913.0	
		2.883-914.0	
		2.883-322.0	
		2.883-302.0	
		2.883-827.0	
		2.883-890.0	
		2.883-922.0	
		2.883-855.0	
		2.880-283.0	

KÄRCHER TRIPLEX PUMPS



The U-Seals provide better run-dry protection, extend pump life, and allow for inlet water of up to 145°F. Kärcher K3 pumps provide a stronger crankcase with thicker mounting feet and extra-large European made tapered roller bearings for longer pump life. The crankcase is reinforced and comes with the new O-ring seal for leak-free operation. Specially die cast connecting rods provide for quieter operation and longer pump life.



		Order no.		GРM	PSI	НР	RPM	Shaft	Description
KX series					1		111 111		
KX9536R.2 - Right	1	8.920-593.0		9.5	3625	23.8	1740	25 mm	The KX series pump is the patriarch of the Kärcher crank-
KX9536L.2 - Left	2	8.920-594.0		9.5	3625	23.8	1740	25 mm	case pump line; delivering enough volume and pressure
KX1036R.2 - Right	3	8.920-595.0		10.4	3625	25.8	1740	25 mm	for the beefiest of pressure washers.
KX1036L.2 - Left	4	8.920-596.0		10.4	3625	25.8	1740	25 mm	Up to 10.4 GPM and 3625 PSI 40.6 oz oil crankcase capacity
									10% Lower RPM than comparable pumps Increased ceramic thickness
KX5450 series									
KX5450L - Left	5	8.921-658.0		5.4	5000	18.5	1740	24 mm	The KX5450 series of pumps provide performance up to
KX5450R - Right	6	8.921-657.0		5.4	5000	18.5	1740	24 mm	5.4 GPM and 5000 PSI.
		337.3				-5.5			40.6 oz oil crankcase capacity
									9' Water Vacuum Head
									Oversized connecting rods
KT series							747		. 0
KT4540L.2 - Left	7	8.921-715.0		4.5	4000	12.6	1360	25 mm	The KT series of pumps are super-duty pumps that
KT4540R.2 - Right	8	8.921-714.0		4.5	4000	12.6	1360	25 mm	provide the same performance as other pumps but at
KT6036L.2 - Left	9	8.921-717.0	S	6.0	3600	15.4	1450	25 mm	10% lower RPMs. –
KT6036R.2 - Right	10	8.921-716.0		6.0	3600	15.4	1450	25 mm	40.6 oz oil crankcase capacity Oversized connecting rods
KM series									
KM3540R.3 - Right	11	8.751-186.0	1	3.5	4000	9.7	1850	24 mm	The third generation of KM pumps are designed for a
KM4030L.3 - Right	12	8.751-186.0		4.0	3000	8.3	1000	24 mm	broad range of applications from 3.5 - 5.6 GPM and up
KM4030R.3 - Right	13	8.751-188.0	S	4.0	3000	8.3	1000	24 mm	to 4000 PSI. –
KM4035L.3 - Left	14	8.751-187.0	2	4.8	3500	11.6	1500	24 mm	23.6 oz oil crankcase capacity -
	15	8.751-190.0	e	4.8	3500	11.6	1500	24 IIIIII 24 mm	• 10% lower RPM than comparable pumps
KM4035R.3 - Right	-		S						Heavy-duty tapered roller bearings —
KM5030L.3 - Left	16	8.751-192.0		5.1	3000	10.6	1550	24 mm	-
KM5030R.3 - Right	17	8.751-191.0		5.1	3000	10.6	1550	24 mm	_
KM6035L.3 - Left	18	8.749-941.0		5.6	3500	13.5	1740	24 mm	-
KM6035R.3 - Right	19	8.749-940.0	_	5.6	3500	13.5	1740	24 mm	
KS series	1 1		. (///				ı	
KS3040G.3	20	8.751-193.0		3.0	4000	10.8	3400	1" hollow	The third generation of KS pumps are designed for a
KS3540G.3	21	8.751-194.0	5	3.5	4000	12.6	3400	1" hollow	broad range of applications from 3.0 - 5.0 GPM and up to 4000 PSI for direct drive gas/diesel engine applications.
KS4040G.3	22	8.751-195.0	S	4.0	4000	14.3	3400	1" hollow	
KS5030G.3	23	8.751-196.0		5.0	3400	13.4	3400	1" hollow	23.6 oz oil crankcase capacity Durable ceramic plunger with mirror finish
									Heavy-duty tapered roller bearings
KF & KFP series							•		
KF2030F	24	8.923-790.0		2.1	3000	3.0	3450	5/8" hollow	The KF series of pumps are hollow shaft pumps de-
	25	8.929-254.0	t	2.1	3000	3.0	1725	5/8" hollow	signed for direct drive electric units.
KFP2030S				2.8	3000	5.0	1725	5/8" hollow	- Up to 3.5 GPM and 2500 PSI
KFP2030S KF2830S	26	8.923-793.0	1	2.0					
	26 27	8.923-793.0 8.929-259.0		3.5	3000	6.0	3450	3/4" hollow	14 oz oil crankcase capacity Set-screw for motor shaft

KÄRCHER TRIPLEX PUMPS



















		Order no.	GPM	PSI	НР	RPM	Shaft	Description
KB series								
KBP3030R	29	8.929-255.0	3.0	3000	6.2	1650	24 mm	The Kärcher KD series of pumps are solid shaft pumps
KB3030L.1.1	30	8.923-782.0	3.0	3000	6.2	1650	24 mm	that provide superior performance when compared to
KB4025R.1	31	8.923-783.0	4.0	2500	6.8	1550	24 mm	similar size pumps.
KB4025L.1	32	8.923-784.0	4.0	2500	6.8	1550	24 mm	Up to 4.0 GPM and 3000 PSI 14 oz oil crankcase capacity Set-screw for motor shaft Durable ceramic pistons with mirror finished
KP Series					1			
KPP2525G	33	8.929-258.0	2.5	3500	-	3400	3/4"	The Kärcher KG series of pumps are hollow-shaft pumps
KPP3035G	34	8.929-256.0	3.0	3500	-	3400	3/4"	available in 3/4" and 1" shaft sizes for gas engines.
KPP3035G.1	35	8.929-257.0	3.0	3500	/-	3400	1"	
KP3535G.1	36	8.923-788.0	3.5	3500	/-	3400	1"	Up to 4.0 GPM and 3500 PSI 14 oz oil crankcase capacity
KP4035G.1	37	8.923-789.0	4.0	3500	-	3400	1"	Set-screw for motor shaft Durable ceramic pistons with mirror finished

QUICK CHANGE PUMPS



Quick change pump assemblies include a pump, unloader, thermal protector, by-pass loop hose, garden hose inlet with filter, and quick connect coupler. They are easy to install, less expensive than separate components and labor to assemble components, and eliminate the guesswork on selecting components to go with the pump.



*7-year pump warranty is for the pump only and does not include the accessories that come with the pump.

	Order no.	Туре	GPM	PSI	НР	RPM	Unloader	Shaft	Description
Quick Change Pumps									
Pump Assy, KP3035G	8.924-446.0	Direct	3.0	3500	7.2	3400	VRT3	3/4" Hollow	Pump assemblies that include
Pump Assy, KP3535G1	8.924-447.0	Direct	3.5	3500	8.4	3400	VRT3	1" Hollow	a pump, unloader, thermal ————— protector, connector hose and
Pump Assy, KS4040G.3	8.924-448.0	Direct	4.0	4000	11.0	3400	VRT3	1" Hollow	quick coupler.
Pump Assy, KB3030R	8.924-449.0	Belt	3.0	3000	6.2	1650	VRT3	24mm Solid	
Pump Assy, KM3540R.3	8.924-450.0	Belt	3.5	4000	9.6	1850	VRT3	24mm Solid	
Pump Assy, KM3840R.3	8.924-451.0	Belt	3.8	4000	10.4	1740	VRT3	24mm Solid	

Prices, specifications and product descriptions subject to change without notice.

TRIPLEX PUMP REPAIR KIT SELECTION CHART

Use the selection chart below to find the correct repair kits for the specific Kärcher pump model.

Pump model	Valves	Seal kits	Packing with brass	Plunger oil seals	Ceramic plunger kit
KX9636.2	8.753-349.0	8.752-844.0	8.757-937.0	9.802-606.0	8.752-839.0
(X1036.2	8.753-349.0	8.752-844.0	8.757-937.0	9.802-606.0	8.752-839.0
(X5450	8.753-515.0	8.753-512.0	8.757-937.0	9.802-606.0	8.753-514.0
KT4035.1	9.802-603.0	8.916-488.0	8.916-322.0	9.802-606.0	9.802-607.0
KT4040.1	9.802-603.0	8.916-488.0	8.916-322.0	9.802-606.0	9.802-607.0
KT5030.1	9.802-603.0	8.916-487.0	8.916-323.0	9.802-606.0	9.802-611.0
(T6035.1	9.802-603.0	8.916-488.0	8.916-322.0	9.802-606.0	9.802-607.0
<t4540.2< td=""><td>8.753-824.0</td><td>8.753-821.0</td><td>8.758-061.0</td><td>9.802-606.0</td><td>8.753-823.0</td></t4540.2<>	8.753-824.0	8.753-821.0	8.758-061.0	9.802-606.0	8.753-823.0
CT6036.2	8.753-824.0	8.753-821.0	8.758-061.0	9.802-606.0	8.752-823.0
(S3040.G.3	9.802-603.0	8.725-358.0	8.758-087.0	9.802-609.0	8.933-023.0
(S3540.G.3	9.802-603.0	8.725-358.0	8.758-087.0	9.802-609.0	8.933-023.0
(S4040.G.3	9.802-603.0	8.725-358.0	8.758-087.0	9.802-609.0	8.933-023.0
(S5030.G.3	9.802-603.0	8.725-358.0	8.758-087.0	9.802-609.0	8.933-023.0
(P2535G	8.754-859.0	8.754-860.0	8.758-083.0	9.803-937.0	8.754-862.0
(P3035G	8.754-859.0	8.754-860.0	8.758-083.0	9.803-937.0	8.754-862.0
(P3035G1	8.754-859.0	8.754-860.0	8.758-083.0	9.803-937.0	8.754-862.0
(P3535G1	8.754-859.0	8.754-860.0	8.758-083.0	9.803-937.0	8.754-862.0
(P4035G1	8.754-859.0	8.754-860.0	8.758-083.0	9.803-937.0	8.754-862.0
KM3540.2/.3	9.802-603.0	8.725-358.0	8.758-087.0	9.802-609.0	8.933-023.0
CM4030.2/.3	9.802-603.0	8.725-362.0	8.758-086.0	9.802-609.0	8.751-238.0
CM4035.2/.3	9.802-603.0	8.725-360.0	8.758-085.0	9.802-609.0	8.751-237.0
(M5030.2/.3	9.802-603.0	8.725-362.0	8.758-086.0	9.802-609.0	8.751-238.0
CM6035.2/3	9.802-603.0	8.725-360.0	8.758-085.0	9.802-609.0	8.751-237.0
KG2530.1	9.803-936.0	8.725-354.0	8.725-355.0	9.803-937.0	9.803-934.0
(G3030.1	9.803-936.0	8.725-354.0	8.725-355.0	9.803-937.0	9.803-934.0
(G3035.1	9.803-936.0	8.725-354.0	8.725-355.0	9.803-937.0	9.803-934.0
(G3535.1	9.803-936.0	8.725-354.0	8.725-355.0	9.803-937.0	9.803-934.0
(G4030.1	9.803-936.0	9.803-930.0	8.725-355.0	9.803-937.0	9.803-934.0
(F2030F	8.754-859.0	8.754-860.0	8.758-085.0	9.803-937.0	8.754-862.0
(F2030S	8.754-859.0	8.754-856.0	8.758-081.0	9.803-937.0	8.754-858.0
(F2830F	8.754-859.0	8.754-860.0	8.758-085.0	9.803-937.0	8.754-862.0
(F2830S	8.754-859.0	8.754-856.0	8.758-081.0	9.803-937.0	8.754-858.0
KF3530F	8.754-859.0	8.754-860.0	8.758-085.0	9.803-937.0	8.754-862.0
KE2020F.1	9.803-936.0	8.725-354.0	8.725-355.0	9.803-937.0	9.803-934.0
KE20201.1	9.803-936.0	8.725-354.0	8.725-357.0	9.803-937.0	9.803-935.0
		8.725-354.0			
KE2825F.1 KE2825S.1	9.803-936.0 9.803-936.0	8.725-354.0 8.725-356.0	8.725-355.0 8.725-357.0	9.803-937.0 9.803-937.0	9.803-934.0 9.803-935.0
KE3525F.1	9.803-936.0				9.803-934.0
		8.725-354.0	8.725-355.0	9.803-937.0	
(D3025.1	9.803-936.0	8.725-356.0	8.725-357.0	9.803-937.0	9.803-935.0
(D3030.1	9.803-936.0	8.725-354.0	8.725-355.0	9.803-937.0	9.803-934.0
(D4020.1	9.803-936.0	8.725-356.0	8.725-357.0	9.803-937.0	9.803-935.0
(B3030	8.754-859.0	8.754-856.0	8.758-081.0	9.803-937.0	8.754-858.0
(B4025	8.754-859.0	8.754-856.0	8.758-081.0	9.803-937.0	8.754-858.0
(BP3030R	8.754-859.0	8.759-015.0	8.929-348.0	9.803-937.0	8.754-858.0
KFP2030S	8.754-859.0	8.759-015.0	8.929-348.0	9.803-937.0	8.754-858.0
(FP3530F	8.754-859.0	8.759-031.0	8.758-218.0	9.803-937.0	8.754-862.0
(PP2535G	8.754-859.0	8.759-031.0	8.758-218.0	9.803-937.0	8.754-862.
(PP3035G	8.754-859.0	8.759-031.0	8.758-218.0	9.803-937.0	8.754-862.0
KPP3035G1	8.754-859.0	8.759-031.0	8.758-218.0	9.803-937.0	8.754-862.0

KÄRCHER TRIPLEX PUMP REPAIR KITS











Original Factory Direct Repair Kits.

		Order no.
Valve kits		Lawrence Company
Valve Kit, KM, KT, KS Series	1	9.802-603.0
Valve Kit, KX5450 Series	2	8.753-515.0
Valve Kit, KB, KP, KF Series	3	8.754-859.0
Valve Kit, KX9636, KX1036	4	8.753-349.0
Valve Kit, KE, KD, KG Series	5	9.803-936.0
Valve Kit, KBP, KFP, KPP Series	6	8.754-859.0
"U" seals		7 9/37
Plunger Seals, 15 mm, KS Series, KM3540.2/.3	7	8.725-358.0
Plunger Seals, 18 mm KM4035.2/.3	8	8.725-360.0
Plunger Seals, 20 mm, KM4030.2/.3, KM5030.2/.3, KM6035.2/.3	9	8.725-362.0
Plunger Seals, 20 mm, KT4035.1, KT4040.1, KT6035.1	10	8.916-488.0
Plunger Seals, KX5450	11	8.753-512.0
Plunger Seals, KX9626.2, KX1036.2	12	8.752-844.0
Plunger Seals, 15 mm, KE2020F.1, KD3030.1, KG.1 Series KE2825F.1, KE3525F.1	13	8.725-354.0
Plunger Seals, 18 mm, KE2020S.1, 025.1, KD4020.1	14	8.725-356.0
Plunger Seals, KBP3030R, KFP2030S Series	15	8.759-015.0
Plunger Seals, KFP3530F, KPP Series	16	8.759-031.0
Packings with brass (all packing kits with brass include U seals)		
Complete Seal Packing, 15 mm, KS Series, KM3540	17	8.758-087.0
Complete Seal Packing, 15 mm, KE2020F, KD3030, KG Series KE2825F, KE3525F	18	8.725-355.0
Complete Seal Packing, 18 mm, KE2020S, KE2825S, KD Series	19	8.725-357.0
Complete Seal Packing, 18 mm, KM4025	20	8.758-085.0
Complete Seal Packing, 20 mm, KM4030, KM5030	21	8.758-086.0
Complete Seal Packing, 20 mm, KT Series	22	8.916-322.0
Complete Seal Packing, KX5450	23	8.757-939.0
Complete Seal Packing, KX9636, KX1036	24	8.757-937.0
Complete Seal Packing, KBP3030R, KFP2030S Series	25	8.929-348.0
Complete Seal Packing, KFP3530F, KPP Series	26	8.758-218.0
Oil seals		
Plunger Oil Seals, KT Series	27	9.802-606.0
Plunger Oil Seals, KM, KS Series	28	9.802-609.0
Plunger Oil Seals, KE, KD, KG, KB, KP, KF Series	29	9.803-937.0
Plunger Oil Seals, 22 mm, KX9636.2, KX1036.2	30	9.802-606.0
Plunger Oil Seals, KBP, KFP, KPP Series	31	9.803-937.0
Ceramic plunger kit (includes bolt, washer, o-ring, teflon ring and ceramic plunger)		
Plunger, 18 mm, KM3540/.3, KS.3 Series	32	8.933-023.0
Plunger, 20 mm, KM4030.2/.3, KM5030.2/.3	33	8.751-238.0
Plunger, KM6035.2/.3	34	8.751-237.0
Plunger, 20 mm, KT Series	36	9.802-607.0
Plunger, 22 mm KT5030	37	9.802-611.0
Plunger, 15 mm KS.1 Series	38	8.933-023.0
Plunger, 15 mm, KE2020F, KD2825F, KE3525, KD3030, KG Series	39	9.803-934.0
Plunger, 18 mm, KE2020S, KE2825S, KD3025, KD4020	40	9.803-935.0
Plunger, 22 mm, KX9536.2, KX1036.2	41	8.752-839.0
Plunger, KBP3030R, KFP2030S Series	42	8.754-858.0
Plunger, KFP3530F, KPP Series	43	8.754-862.0
	1-3	1

Prices, specifications and product descriptions subject to change without notice.

KÄRCHER TOOLS



A must for every Service Department. Save time using the right tool for the job.

Kärcher pump tool kit (complete)	Order no.
Karcher pump tool kit (complete)	9.802-954.0
Pump repair tools	3,502,55 %
Oil Seal Bushing Inserter for KT Plunger Rod	9.802-572.0
Oil Seal Piston Inserter for KT Plunger Rod	9.802-578.0
Oil Seal Piston Inserter for KS and KS Plunger Rod	9.802-579.0
Oil Seal Bushing Inserter for KS and KS Plunger Rod	9.802-573.0
Allen Wrench, 8 mm for KT, KX, KH Manifold bolts	9.802-571.0
Allen Wrench, 6 mm for KM, KD, KG, KE, KS Manifold bolts	9.802-567.0
Allen Wrench, 5 mm for Crankcase cover bolts	9.802-570.0
Oil Seal Bushing Inserter for KT, KX, KH Crankshaft	9.802-565.0
Oil Seal Bushing Inserter for KM, KD, KG, KE, KS Crankshaft	9.802-566.0
Piston Seal Extractor	9.802-568.0
Oil Seal Inserter, Piston, KM, KD, KG, KE, KS Pumps	9.802-580.0
Oil Seal Inserter, Guide, KM, KD, KG, KE, KS Pumps	9.802-563.0
Oil Seal Inserter, Piston, KT, KX, KH Pumps	9.802-581.0
Guide, Oil Seal Inserter, KT, KX, KH Pumps	9.802-564.0
Guide, Seal Inserter, Manifold, KD, KE, KG Pumps	8.751-396.0
Guide, Seal Inserter, Manifold KX5050	8.751-404.0
Guide, Seal Inserter, Manifold, KD, KE, KG, KH, KX	8.751-397.0
Guide, Seal Inserter, Manifold, KH KX	8.751-405.0
Screwdriver, Flathead	8.751-403.0
Hammer, Plastic Head	9.802-569.0
Plastic Tool Box	9.802-574.0
Normal maintenance tool kit for KB, KP, KP1 and KF series	8.756-590.0
Oil seal maintenance tool kit for KB, KP, KP1 and KF series	8.756-717.0
Misc. tools	
Valve Seat Wrench	5.901-116.0
General Purpose Valve Pliers	4.901-062.0
Valve Seat Pullers - For use on deep valves	6.815-029.0
O-ring installation Tool for Classic, HD, HDS compact	5.901-090.0
O-ring Installation Tool	5.901-127.0

KÄRCHER TOOLS

	Order no.
Misc. tools (cont.)	
Fan Puller	6.815-019.0
Fan Installation Tool	5.901-138.0
Fan Puller - HDS Full-size and upright - 2012	6.816-069.0
Swash Plate Removal Tool	4.901-038.0
Splash Diffuser	4.901-077.0
Test gauges	
Fuel Pressure Gauge	4.901-060.0
Water Temperature Gauge	3.900-003.0
Water Pressure Test Gauge	4.742-025.0
Water Temperature and Volume Gauge	2.901-030.0
Pressure Shut-off Valve	4.580-034.0
Hour meter	
Hour Meter - 24V / 50 mm	6.681-035.0
Hour Meter - 24V / 22 mm	6.681-012.0
Kärcher pump oil	63
Single Phase - HD / HDS Classic 15W40	6.288-050.0
Three Phase - HD / HDS Classic 90wt	6.288-016.0
Kärcher low 40 Pump Oil	8.923-423.0
Assembly grease	
Silicone Grease - 5 grams	6.288-088.0
Silicone Grease - 100 grams	6.288-079.0
for Spare Parts / Pumping Kits - 5 grams	6.288-072.0
for Spare Parts / Pumping Kits - 100 grams	6.288-044.0

COILS



Kärcher's proprietary heating coil is unequaled in the industry for its high heating performance, compact design, and super-efficiency. Double-wall construction — with air passing between the two walls — provides insulation as well as oxygen for the combustion process.

The combustion chamber and heating coil provide even heat distribution with very little condensation or corrosion and 92% + fuel efficiency to conform to the strictest air quality standards.

Combined with other Kärcher advances, our heating coil helps make Kärcher the responsible choice with the lowest cost of operation in the industry.

	1	1	
		Order no.	Description
HDS coils		ı	
	1	4.680-080.0	HDS 1000 BE/DE
	2	4.680-081.0	HDS 4.0/30 Pe Cage; HDS 5.0/32 Pe Cage; HDS 5.5/35 Pe Cage
	3	4.680-129.0	Stainless Steel - HDS 500 Ci
	4	4.680-123.0	HDS 3.5/30-4M Ea; HDS 3.5/23-4M Eg; HDS 4.0/20-4M Ea; HDS 1055
	5	4.680-126.0	HDS 3.0/20 C Ea; HDS 501 C; HDS 551 C; HDS 558 C;
	6	4.680-126.0	HDS 2.3/12 C Ed
	7	4.680-127.0	Coil - HDS 801 B; HDS 600 Ci; HDS 900 Ci
	8	4.680-135.0	Coil - HDS 895 S (Tall)
	9	4.680-144.0	Coil - HDS Middle & Super Class (2012 Forward)
	10	4.680-147.0	Coil - HDS 1000
	11	4.680-154.0	Coil - HDS 1.7/12 U Ed
Stainless steel coils			
	12	4.680-113.0	HDS 4.5/19-4M Eg; HDS 1195
	13	4.680-114.0	Coil, Stainless Steel - HDS 2.3/13 C Ed; HDS 745; HDS 895 S (short); HDS 945
	14	4.680-129.0	Coil, Stainless Steel - HDS 801 B; HDS 600 Ci; HDS 900 Ci
	15	4.680-130.0	Coil, Stainless Steel - HDS 3.0/20 C Ea; HDS 501 C; HDS 551 C; HDS 558 C
	16	4.680-149.0	Coil, Stainless Steel - HDS Middle & Super Class (2012 Forward)
Liberty series coils			
	17	8.717-928.0	Coil - HDS Heater 5.0/30 Ed
	18	8.919-133.0	Coil - HDS Gas Engine Roll Cage (Subaru); HDS Electric Roll Cage; HDS Electric Hand Truck (small)
	19	9.802-995.0	Coil - HDS Electric Hand Truck (Large)
	20	8.919-136.0	Coil - HDS Gas Engine Roll Cage (Honda); HDS Electric Hand Truck (Medium)
	21	9.803-014.0	Coil - HDS Liberty Series Skids
	22	9.803-135.0	Coil - HDS NG/LPG Units
Cold rolled coils			
Cold-rolled pipe, no weak points	23	9.803-014.0	Skid Coil 20" Dia, Sch 80 with Aluminized Steel Wrap, Horizontal
from heating to make bends. Heavy-duty schedule 80 carbon steel	24	8.919-136.0	DuraCoil 14.5" Dia, Sch 80, HDS Cage, Roll Cage large
pipe. "Aluminized steel" wrapper.	25	8.919-133.0	DuraCoil 14.5" Dia, Sch 80, HDS Electric Roll Cage and Small Gas Cage
Best warranty in the industry	26	9.803-135.0	NG/LPG Coil, 18" Dia

COILS













		Order no.	Description
Top and bottom wraps			
	27	8.919-733.0	Coil Wrap, SS, HDS Elec Roll Cage, HDS Small Gas Roll Cage
	28	8.933-031.0	Coil Wrap, SS, HDS Electric Hand Truck, Belt Drive
	29	8.933-028.0	Coil Wrap, SS, Small HDS Electric Hand Truck
	30	8.915-908.0	Coil Wrap, SS, HDS Hand Truck, Direct Drive
	31	9.803-005.0	Top Wrap, SS, HDS Gas/Diesel Skids
	32	9.803-006.0	Bottom Wrap, SS, HDS Gas/Diesel Skids
	33	8.917-568.0	Coil Wrap, SS, NG/LPG Machines
Coil insulation			
Refractory grade ceramic.	34	9.802-883.0	Front Head, No Hole
Retains heat inside coil for better fuel efficiency and paint protection.	35	8.735-002.0	Front Head, No Hole, 16"
	36	9.802-894.0	Burner Head, with Hole
	37	8.731-284.0	Burner Head, with Hole, 16"
	38	8.933-009.0	Gasket, Burner Plate
	39	8.717-424.0	Gasket, Skid Stackless Top
	40	8.717-425.0	Gasket, Stackless Adapter
	41	9.802-900.0	Tank, 1" Blanket, Vertical Oil-Fired Coils
	42	9.802-901.0	Tank, 16" OD x 8" ID, Small Vertical Coils
	43	8.717-410.0	Blanket, with Foil sqft (10 sqft rqrd)
	44	9.802-896.0	Blanket-No Foil, 24" x 57", Horizontal
	45	9.802-902.0	Blanket-Die Cut, 28" x 24", Horizontal
	46	8.717-433.0	Blanket-Die Cut, 33" x 89" (NG/LPG)
	47	8.930-140.0	Insulation,Tank Head, 20", 10" Opening
	48	9.802-905.0	Insulation Blanket, HDS Hand Truck
	49	8.717-433.0	Insulation Disc, HDS Hand Truck

WAYNE BURNERS FOR KÄRCHER PRESSURE WASHERS





Kärcher's Hot Water Oil Fired Machines are now being built exclusively with Wayne Burners. Wayne Combustion has been building quality burners since 1928. They are known in the marketplace for superior reliability and ultra-high efficiency. The Wayne Burners have the following features:

- Lower Emissions
- Improved Efficiencies
- Positive flame retention
- Controlled Flame Pattern
- Low Nozzle Temperatures
- High static pressure overcomes adverse draft conditions for a better air/oil mixture.

	Order no.	Motor	Solenoid voltage	Air size	Firing rate Min (GPH)
Burners					
	8.756-181.0	Burner, MSR 3.75 120V 1T 120V S	120v	#6A	120v
	8.756-412.0	Burner, MSR 13.5VDC 2T 12VDC S	13.5vDC	#4A8	12vDC
	8.756-413.0	Burner, EHASR 120V 2T 120V S	120v	#4A	120v
	8.756-480.0	Burner, EHASR 12VDC DO 2T 12VDC S	12vDC	#4A	12vDC
	8.756-709.0	Burner, MSR, 230V 1T 230V S	230v	#6A	230v
	8.756-737.0	Burner EHASR 230V 1T 120V S	230v	#8A	120v
	8.756-738.0	Burner, EHASR 120VAC 1T 120V S	120v	#8A	120v
	8.756-756.0	Burner, EHASR 12VDCDO 1T 12VDC S	12vDC	#3A	12vDC
	8.756-890.0	Burner , EHASR 12VDC DO 2T 12V S	12vDC	#4A	12v

WAYNE BURNER REPLACEMENT PARTS & CROSS REFERENCE CHART



eplacemen	Order no.	Description
еріасепіен	8.700-822.0	FLEX COUPLING-F/307007 12V
	8.700-776.0	COUPLING 5/16 x 1/2 FS
	8.700-721.0	COUPLING FOR 079021X
	8.756-715.0	COUPLING, "E" DC
	8.756-438.0	FAN - 4.00"W X 6.25"D 1/2" BORE
	8.756-660.0	Fan, 2.44" X 4.53" X 5/16" BORE
	8.756-730.0	
		FAN, 3.44"W X 4.75"D 5/16" BORE
	8.756-726.0	FAN, 3.44"W X 5.25"D 5/16" BORE
	8.700-730.0	BLOWER WHEEL, 525' x 3-7/16(307000)
	8.700-728.0	BLOWERWHEEL EG1/MSR3.44x4.25STAR MET MTR
	8.700-760.0	FUEL PUMP, SUNTEC A2VA-3106 230V SOL
	8.756-290.0	FUEL PUMP, WCS - COMBO/W SOLENOID 120V
	8.756-437.0	PUMP - COMBO/W SOLENOID 12V/24V
	9.107-507.0	IGNITOR
	8.700-803.0	IGNITOR, 120V, BACK/M-MSR MOUNT
	8.700-802.0	IGNITOR, 120V, SIDE/EH-EHA MOUNT
	8.756-291.0	IGNITOR, BURNER, "E" 240 50-60
	8.756-324.0	IGNITOR, BURNER, "M" 240 50-60
	8.756-436.0	MOTOR, 1/4 120V 50-60HZ
	8.756-716.0	MOTOR, 1/4 13.5VDC AMETEK
	8.717-830.0	MOTOR, 1/8HP 1PH 230V 3450RPM
	8.756-293.0	MOTOR, BURNER, 1/5 120V 50-60HZ
	8.756-294.0	MOTOR, BURNER, 1/5 230V 50-60HZ
	8.756-292.0	MOTOR, BURNER, 1/7 HP 120/60
	8.700-739.0	BURNER MOT 12V-WH MSR DC FASCO

	Wayne Burner						
	Wayne Burner Order no.	Description	Fuel Pump	Ignitor	Burner Motor	Burner Fan	Coupling
Replacement	t part cross reference cha	rt	'	1	1	•	'
	8.756-181.0	Burner, MSR 3.75 120V 1T 120V S	8.756-290.0	8.700-803.0	8.756-292.0	8.700-728.0	8.700-822.0
	8.756-412.0	Burner, MSR 13.5VDC 2T 12VDC S	8.756-437.0	9.107-507.0	8.700-739.0	8.756-660.0	8.700-721.0
	8.756-413.0	Burner, EHASR 120V 2T 120V S	8.700-760.0	8.700-802.0	8.756-436.0	8.756-438.0	8.700-776.0
	8.756-480.0	Burner, EHASR 12VDC DO 2T 12VDC S	8.756-437.0	9.107-507.0	8.756-716.0	8.756-726.0	8.756-715.0
	8.756-709.0	Burner, MSR, 230V 1T 230V S	8.700-760.0	8.756-324.0	8.717-830.0	8.700-728.0	8.700-822.0
	8.756-737.0	Burner EHASR 230V 1T 120V S	8.756-290.0	8.756-291.0	8.756-294.0	8.700-730.0	8.700-776.0
	8.756-738.0	Burner, EHASR 120VAC 1T 120V S	8.756-290.0	8.700-802.0	8.756-293.0	8.700-730.0	8.700-776.0
	8.756-756.0	Burner, EHASR 12VDCDO 1T 12VDC S	8.756-437.0	9.107-507.0	8.756-716.0	8.756-730.0	8.756-715.0
	8.756-890.0	Burner , EHASR 12VDC DO 2T 12V S	8.756-437.0	9.107-507.0	8.756-716.0	8.756-726.0	8.756-715.0

SURFACE CLEANERS

SURFACE CLEANERS - A+ - 21" & 24"

Fast, even cleaning for large flat surfaces. Quickly cleans concrete, asphalt, and it removes grime and deposits from tennis courts, ramps and decks. Also great for factory and semi-trailer floors and drive-thrus. Cleans better and faster than a spray wand alone, with no striping. Use with hot or cold water and handles water up to 212°F to disinfect bathrooms and kitchens. Safety lock prevents accidental spraying.

- Two Spinning Nozzles 'Floats' Cleaner Above the Ground
- Circular Design for Zero Wall Clearance
- Stainless-steel Housing and Handle
- Universal Inlet Fitting Kit to Accommodate All Common Configurations
- Reduces Overspray on Walls, Landscaping and Operator
- Two #2.0, 1/8" Nozzles (for machines up to #4.0 nozzles), 25° Nozzles Rated up to 8.0 GPM and 4000 PSI



SURFACE CLEANERS - VAC RECOVERY

■ PSI: 4000 PSI

■ GPM: 10.5

■ Temperature: 210°F

■ Two #2.5, 1/4" Nozzle

- Universal Inlet Fitting Kit to Accommodate All Common Configurations
- Water Recovery with use of vacuum
- 1.5" Vac port
- Requires at Least 3.0 GPM, 2000 PSI



PART NO.	DESCRIPTON	
9 113-972 0	Vac Recovery Surface Cleaner	

A+ 24" VENTURI PUMP SURFACE CLEANER

The classic 24" A+ Surface Cleaner with the added Venturi pump water recovery system and a 16' water recovery hose that allows you to recover water without the need of a vacuum unit. Effectively transfers water and small debris (smaller than 3mm) to a drain or tank.



PART NO.	DESCRIPTON
9.116-064.0	Vac Recovery Surface Cleaner
9.117-613.0	Venturi Pump, Replacement Assembly for A+ 24" SC



OWER SURFACE CLEANERS - GP - FLAT 12", 18" & 20"

DFSCP12 **HANDHELD SURFACE CLEANER**

- PSI: 3500 ■ GPM: 6.5
- Temperature: 180°F
- Inlet M22 Male



DCFSCP SURFACE CLEANER, 18" AND 20"

- PSI: 4000
- GPM: 8.0
- Temperature: 180°F
- Inlet 3/8" FPT
- Includes 1/4" 2.0 Nozzle



PART NO.	DESCRIPTON
9.112-957.0	DFSCP12 GP Surface Cleaner, 12" 3500 PSI Handheld Flat ABS, Complete Assembly
9.112-958.0	DCFSCP18GZ GP Surface Cleaner, 18" 4000 PSI Brush Skirt ABS, 2-Arm, Zerk Fitting, Compensating Gun
9.112-959.0	DCFSCP20GZ GP Surface Cleaner, 20" 4000 PSI Brush Skirt ABS, 2-Arm, Zerk Fitting, Compensating Gun
REPAIR KITS FO	R DCFSCP
9.112-960.0	Trigger Gun Replacement
9.112-961.0	Spraybar 20" with Nozzles (for DCFSCP20)
9.112-962.0	Spraybar 18" with Nozzles (for DCFSCP18)
9.112-963.0	Swivel, Greaseable (for DCFSCP)
9.112-964.0	Swivel Repair Kit, Greaseable (for DCFSCP)

SURFACE CLEANERS - ECONOMY - 8" & 15"

■ PSI: 4000 ■ Min: 2 GPM ■ Max: 10.5 GPM ■ Temperature: 180°F

■ Includes 2 1/4 Size 2.5 Nozzle

■ 15" Surface Cleaner: 1/4 QC Male Plug Inlet

■ 8" Surface Cleaner: 1/4 FPT





PART NO.	DESCRIPTON
9.112-967.0	15" Surface Cleaner with Wheels
9.112-968.0	8" Stainless-steel Surface Cleaner with Handle
REPAIR KITS	
9.113-078.0	Swivel (for 9.112-967.0)
9.113-080.0	Swivel (for 9.112-968.0)
9.113-079.0	Spraybar (for 9.112-967.0)
9.113-081.0	Spraybar (for 9.112-968.0)

SURFACE CLEANERS - 15" DETERGENT DOSING

Brush, 8" (for 9.112-968.0)

Caster Wheel (for 9.112-967.0)

- PSI:
- Min: GPM

9.113-097.0

9.113-732.0

- Max: GPM



PART NO.	DESCRIPTON
9.117-450.0	15" Detergent Dosing Surface Cleaner

SURFACE CLEANERS - WHISPER WASH FLAT

THE "MAXIMA 36"

■ PSI: 2000 - 4000

■ GPM: 4-10

■ Temperature: 212°F

■ RPM: 2500

■ Portable Breakaway Handle

■ Uses 1/4" Nozzle

■ Dimensions: 36" Cover, 77" Handle

■ Weight: 37 lbs.



THE "BIG GUY"

PSI: 2000 - 4000

■ GPM: 4.0 - 10.0

■ Temperature: 212°F

■ Powder-Coated Aluminum Housing

Oversized, Self-lubricating Twin Thrust Bearings

■ 10" Pneumatic Tires, 4" Caster

■ Crafted with Durable Stainless-steel and Aircraft Aluminum

■ Uses 1/4" Nozzle

■ Choice of 2 or 4 Nozzles



PART NO.	DESCRIPTON
8.710-089.0	Maxima 36
8.710-074.0	Whisper Wash Big Guy 2 Nozzles
8.710-075.0	Whisper Wash Big Guy 4 Nozzles
9.109-608.0	Surface Cleaner In-Line Water Filter for Handle
REPAIR KITS	
8.750-604.0	Swivel, Complete Big Guy and Classic
8.701-879.0	Repair Kit, Seal, Big Guy and Classic
8.701-874.0	Spraybar, 4 Nozzle, Big Guy
8.701-876.0	Spraybar, 2 Nozzle, Big Guy
8.701-882.0	Seal Kit: Ultra Clean
8.750-604.0	Complete Swivel Kit: New Style
8.707-653.0	2.5 x 25° 1/4" Nozzle Fits All
9.117-204.0	Replacement Handle, with Trigger Gun, Hose, Big Guy

SURFACE CLEANER NOZZLE RECOMMENDATION

Determine the correct nozzle size for the pressure washer being used with the surface cleaner. Never use a smaller size nozzle as this will wear out the unloader valve on the pressure washer prematurely. The Legacy Undercarriage Cleaner and A+ Surface Cleaners come with nozzles; for other surface cleaners, nozzles must be purchased separately. Threaded nozzles are listed on pages page 197-201 of the catalog, to determine your pressure washer nozzle size refer to chart on page 194. Contact us for additional sizes for surface cleaner spray bars which use

PRESSURE WASHER NOZZLE SIZE	QUANTITY NEEDED	1/8" OR 1/4" MPT
#3.5 and #4.0	2 each	#2.0
#4.5 and #5.0	2 each	#2.5
#5.5 and #6.0	2 each	#3.0
#6.5 and #7.0	2 each	#3.5
#7.5 and #8.0	2 each	#4.0

UNDERCARRIAGE CLEANER

No more crawling under a vehicle. Effortlessly wash away damaging debris from the bottom of your vehicle with the easy to handle and maneuver Legacy Undercarriage Cleaner. Simply connect to your hot or cold water pressure washer to remove road grime, fuel and oil contaminants, snow sludge, and ice. The stainless-steel rotating nozzle assembly requires a 5.5" under vehicle clearance.

■ PSI: 4000

■ GPM: 10.5

■ Temperature: 250°F

■ Four Nozzles:

 $(2) 0^{\circ} #2.0$ (2) 25° #2.0



PART NO.

DESCRIPTON

8.749-303.0 S Undercarriage Cleaner



UNDERCARRIAGE CLEANER & ROOF SURFACE CLEANER

UNDERCARRIAGE CLEANER

- PSI: 4000 PSI
- GPM: 10.5
- Temperature: 210°F
- 1/4 " 2.5 Nozzle
- Universal Inlet Fitting Kit to Accommodate All Common Configurations
- 17cm Plate Height
- 26 lbs.



ROOF SURFACE CLEANER


- PSI: 4000 PSI
- GPM: 10.5
- Temperature: 210°F
- 1/4 " 2.5 Nozzle
- 3/8" QC Socket
- 22 lbs.



PART NO.	DESCRIPTON
9.112-965.0	Undercarriage Cleaner, 20" Stainless-steel
9.112-966.0	Roof Surface Cleaner, 20" ABS
REPAIR KITS	
9.113-083.0	Replacement Gun (for Undercarriage Cleaner)
9.113-074.0	Swivel (for Undercarriage Cleaner)
9.113-076.0	Swivel (for Roof Surface Cleaner)
9.113-075.0	Spraybar (for Undercarriage Cleaner)
9.113-077.0	Spraybar (for Roof Surface Cleaner)
9.113-096.0	Caster Wheels 1.5" (for Undercarriage Cleaner)
9.113-095.0	Caster Wheels 3" (for Undercarriage Cleaner)
9.113-094.0	Caster Wheels 5" (for Roof Surface Cleaner)

WATER BROOM 16"

- PSI: 4000
- GPM: 8.0
- Temperature: 250°F



Requires Wand (sold separately)



PART NO.	DESCRIPTION
8 710-082 0	Water Broom 16"

CURB CLEANER

- Now even heavier duty construction
- PSI: 4000
- Adjustable Height 5'-9"
- 3 Side Nozzles
- 1 Top Nozzle



	1877-13
PART NO.	DESCRIPTION
9.115-327.0	Curb Cleaner
9.116-397.0	Replacement Nozzle

OFFERING 15" 2 IN 1 SURFACE / UNDERCARRIAGE CLEANER





- Low Profile for use with lower clearance vehicles
- PSI: 4000psi
- 3.0gpm.
- Temp: 140 deg



PART NO.	DESCRIPTION	
9.118-124.0	Cleaner, Surface and Undercarriage Combo	

UNDERBODY WAND ASSEMBLY - SELF SERVE



Ideal for rinsing the undercarriage of cars and trucks. Connect directly to a pressure washer. The lightweight underbody wand assembly rolls easily, giving the operator a longer reach.

- PSI: 3000
- Temperature: 300°F
- Inlet/Outlet: 1/4" M x F
- Non-weeping
- Stainless Steel
- ST-601 Inline Trigger Gun & Three 25°, #2, 1/8"
 MEG Nozzles (included)



PART NO. DESCRIPTON

8.755-257.0 Self Serve Underbody Wand Assembly

NÉW-OFFERING CLEANER KIT

CLI	EANER KII		a sel
■ 4 GPM			1
■ 36" 2 Piec wand swiv included		AND IN	
■ "1/4" Plug	inlet		
■ 212 degre	ee temp max	6	
PART NO.	DESCRIPTION		

PART NO.	DESCRIPTION	
9.116-556.0	Underbody Waterbroom Combo - 21"	

NEW UNDERCARRIAGE CLEANER

■ PSI: 4000

■ 1/4" QC Plug Inlet



PART NO.	DESCRIPTON
9.114-996.0	Undercarriage Cleaner Includes (4) 1/4" x 2.0 nozzles

SANDBLAST KIT - TUNGSTEN CARBIDE NOZZLE HEAD - INDUSTRIAL

A Venturi orifice creates a uniform blast pattern, doubles sand velocity and produces up to 45% more work with 20% less sand.



- PSI: 1500 5500
- GPM: 3.0 10.0
- Temperature: 200°F
- Weight: 10 lbs.
- Nozzle Tip (sold separately)

PART NO.	DESCRIPTON
8.701-485.0	Industrial Sand Blast Kit
8.725-620.0	Replacement Carbide Nozzle

DUCT CLEANER



DUCT CLEANER

Designed as an accessory for use with high-pressure pumps or pressure washers. Cleans ducts, chutes, vents, restaurant exhausts, tanks, etc.

Self-rotating and feeding stainless-steel triple bearing system for constant easy turning. Nozzle holders are 1/8" NPTF. Nozzles are sold separately.



- PSI: 4000
- Max Temperature: 250°F
- Inlet Ports 3/8" NPTF
- Weight: 2 lbs.

12" SURFACE CLEANER

Designed for effortless cleaning of small areas, including walls and angled surfaces. High RPM swivel with integrated toggle joint and adjustable tension system.

- PSI: 4000
- Temperature: 250°F
- Weight: 9 lbs.
- 12" Stainless-Steel
- Includes All Items Pictured



PART NO.	DESCRIPTON	PSI
8.712-280.0	Duct Cleaner TXR-2s, Adjustable	4000
8.712-279.0	Duct Cleaner TXR-2s, Fixed	4000
8.749-911.0	Surface Cleaner, 12"	4000
8.712-285.0	Toggle Joint KGK	4000

DUCT CLEANER

- PSI: 4000
- Max Temperature: 250°F
- 10.5 GPM





PART NO.	DESCRIPTON
9.115-324.0	Adjustable 6", Temp. 250° max
9.115-325.0	Fixed 6"
9.115-326.0	Adjustable 3"
9.116-398.0	Replacement Nozzle 1/8" for adjustable 1/8"
9.116-399.0	Replacement Nozzle 1/8" for fixed 1/4"
9.116-400.0	Replacement Swivel for 3' and 6"



SANDBLASTERS - INDUSTRIAL

For the extra-tough cleaning jobs, wet-sandblasting is the dust-free solution. The sandblasters attach to a hot or cold water pressure washer and, using a venturi, mixes sand or other abrasive media with the high-pressure spray to create enough cleaning power to strip paint off concrete and barnacles from a ship's hull. The sandblasting nozzle is made of tungsten carbide for long life. There are two models—a top-of-the-line steel pot with tight-fitting lid or with a probe only.

- Quick-connect coupler for ease in attaching sand probe or pot
- Valve for metering the flow of the media
- Tubed, pneumatic tires for easy maneuvering
- Rating: Super-duty



PART NO.	DESCRIPTION	
8.904-470.0	Sandblaster with Pot (Carbide)	
8.904-472.0	Sandblaster with Probe (Carbide)	

NOTE: Excluded from any dealer freight programs

- Recommended Usage: Heavy
- Attach to any hot or cold water pressure washer with minimum volume of 4 GPM



SANDBLAST HOSE

Heavy-duty spiralite hose available preassembled or by the foot.



- 3/4" spiralite sand hose with air hose locking couplers
- Temperature: -30°F to 130°F

PART NO.	DESCRIPTION	SIZE	
8.711-809.0	Sand, Spiralite /ft	3/4"	
0 711-020 0	Accy Cand Spiralita	2/4" y 2	

TAKT NO.	DESCRIPTION	SIZE
8.711-809.0	Sand, Spiralite /ft	3/4"
8.711-839.0	Assy, Sand, Spiralite	3/4" x 25'
8.711-840.0	Assy, Sand, Spiralite	3/4" x 40'
8.711-811.0	Sand, Spiralite /ft	1"

SANDBLAST HEAD - PROFESSIONAL

- PSI: 3500
- GPM: 10.0
- Temperature: 200°F
- Long-Wearing Carbide Sand Nozzle
- Sand Probe Weight: 6oz..



- Head Weight: 13oz..
- Length: 16"

PART NO.	DESCRIPTON	NOZZLE SIZE	
8.711-242.0	Sandblast Head	3.5	
8.711-243.0	Sandblast Head	4.0	
8.711-244.0	Sandblast Head	4.5	
8.904-403.0	Sandblast Head	5.0	
8.711-245.0	Sandblast Head	5.5	
8.904-404.0	Sandblast Head	6.0	
8.711-247.0	Sand Probe		
8.901-264.0	1/2" ID Polybraid	Tubing, 25'	

SAND NOZZLE

Tungsten Carbide provides maximum durability for sandblasting



- Carbide insert
- Light weight
- Easily changed-30°F to 130°F

PART NO.	DESCRIPTION
8.712-416.0	Carbide Sand Nozzle

SANDBLAST NOZZLE TIPS



- Replacement Tips for Sandblaster Kit
- Use 1/4" Meg 5" Spray Tip

PART NO.	DESCRIPTON
8.707-668.0	4.0 x 5° Tip
8.707-685.0	5.0 x 5° Tip
8.707-696.0	5.5 x 5° Tip
8.707-701.0	6.0 x 5° Tip
8.707-709.0	6.5 x 5° Tip

STEAM LANCE

Completely insulated for maximum protection.

■ Lance with steam nozzle shown

Vented grip full length of lance

PART NO. DESCRIPTION 8.904-444.0 48" with Steam Nozzle 8.904-441.0 48" without Steam Nozzle

FOOT-CONTROLLED PRESSURE VALVE

Operators of sewer and tube cleaning equipment need both hands free to feed or retract the hose in the sewer line. Foot-operated valve allows hands-free control.







8.710-134.0

- PSI: Up to 5000
- GPM: 12.0
- Inlet 3/8", Outlet 1/4"

- Brass Body
- Stainless-steel Valve

PART NO.	DESCRIPTION	PSI	
8.710-134.0	Sewer Cleaner Foot Valve	3000	
8.709-972.0	Foot Valve with ST-2305	5000	
8.701-657.0	Repair Kit - Foot Valve		
8.701-673.0	Repair Kit ST-2305		
8.711-526.0	Kit, 25' Hose, #4.5 Nozzle, Foot Valve		

*Heavy gauge steel construction for durability and stability

SLUDGE PUMP KIT



This tool uses your pressure washer to suck the sludge off the bottom of pits or tanks and eject it through a 1-1/2" (15' long) hose. The suction unit simply attaches to the end of a pressure washer lance with a quick coupler.



- Comes with 15' hose
- Max Pressure:4000PSI
- Max Flow:30GPM



PART NO.	DESCRIPTION
9.117-448.0	Sludge Pump Kit

SLUDGE SUCKER - ST-36 PIT BOSS

Sludge Sucker uses a high-pressure water stream at 1000-3000 PSI to suck the sludge off the bottom of pits or tanks and eject it through a 1-1/2" diameter 15' long hose to a disposal tank.

The base unit attaches to the end of a pressure washer lance with a quick coupler for extension to the bottom of the pit.

Uses a 0° tip for suction / power ejection.



Easy to change for different plumbing system flows and pressures

■ Uses Standard 1/4" MPT Nozzle

PART NO.	DESCRIPTION
8.711-112.0	ST-35 Pit Boss, 5.5 Nozzle, 15' Hose
8.711-110.0	Base Unit Only

*without Hose, Nozzle or Quick Coupler (3/8" Inlet Port)

DRUM PUMPS - RED HEAD

Siphon liquids from higher to lower levels. Simply pump the bellows a few times to prime and start flow. Loosen air lock to stop.



- Drum Pump fits 15-, 30- and 55- Gallon Drums
- Fit 2" Bung Opening
- Excellent for Alkaline and Acidic Chemicals, Diesel Fuel and Oils
- Not for Use with Solvents

PART NO.	DESCRIPTION
8.704-698.0	S Red Hex Head, Heavy-duty
8.704-696.0	S Red Head, Standard-duty
8.704-694.0	Pail Pump, 5 Gallon

DRUM / TANK PUMP - CRANK STYLE

Chemical-resistant, lightweight pump, ideal for dispensing chemicals, pesticides and oils. Polypropylene for most alkalies, dilute acids, pesticides and most oils and solvents. Ryton for extremely aggressive acids, aromatic and aliphatic hydrocarbons.



- 11 oz. Per Revolution
- 6.0 GPM at 70 RPM
- Viton Seals
- Polypropylene Gasket
- Outlet 3/4" Barb Two-piece
- 2" Bung Adapter
- 47" Suction Tube
- Weight: 2.6 lbs.

PART NO.	DESCRIPTION
8.704-700.0	Polypropylene Pump, Standard
8.704-701.0	Ryton Pump, Deluxe
8.700-526.0	Replacement Handles



BRUSHES

Æ

Rotating brush, natural bristle (soft) used for painted surfaces. Nylon bristle (stiff) used for removing scum and grime on fiberglass boats, etc.





- Internal Nozzle: Size 20
- GPM: 8.0

PART NO.	DESCRIPTION			
BRUSH UNIT COMPLETE				
8.709-312.0	Natural			
8.709-314.0	Nylon			
REPLACEMENT	BRUSHES			
8.709-313.0	Natural			
8.709-316.0	Nylon			



8.709-298.0

Truck/Tractor Wash Brush

- Flag-Tipped
- Soft Bristle
- Acme Thread for Super Handles or Broom Handles

PART NO.	DESCRIPTION	
8.709-298.0	S 2-1/2" Bristle with Bumper x 10"	
8.709-303.0	2-1/2" Bristle x 18"	
8.709-304.0	2-1/2" Bristle x 24"	
8.709-305.0	60" Flow Thru Lance*	

*With Acme Thread and Garden Hose Attachment



Deck Scrub Brush -Over / Under

- Not a Flow Thru
- Excellent Chemical Resistance
- Use with Threaded Handle
- Trimmed for Cleaning Hard-to-reach Areas
- Stiff Polypropylene Bristle for Aggressive Cleaning
- Unique Heavy-duty Scrub Brush with Multi-level Angle
- 10" Molded Polypropylene Foam Block does not Warp or Absorb Water

PART NO.	DESCRIPTION
8.709-302.0	Deck Scrub Brush

HANDLES - FIBERGLASS "SUPER HANDLES"

■ Tough, Durable, Lightweight

- No Cracking, Splintering
- No Kinks, Dents
- Safer Around Electrical Hazards
- Super Heavy-duty Aluminum Alloy Threads
- Easy-twist Cam Lock Extension
- Standard 3/4" Acme Thread Fits: Brooms, Brushes, Utility Tools
- Optional Reduction Adapter for 3/4" to Acme Standard

PART NO.	DESCRIPTION
SUPER HANDL	ES
8.709-306.0	48" Length (4')
8.709-307.0	60" Length (5')
8.709-308.0	S 72" Length (6')
SUPER-EXTEN	SION HANDLES
8.709-309.0	4' to 8' Extension
8.709-310.0	6' to 12' Extension
8.709-311.0	8' to 16' Extension
8.700-308.0	Threaded Adapter

FOAMERS - FOAM CANNON

The ideal Foam Generator Application Accessory meters the foaming chemical for customized foam type and applies the foam to match the application.



- PSI Max: 3000
- GPM Max: 4.8
- Temperature: 140°F
- Brass Meter Valve
- High-impact, Glass Filled Body
- Stainless-steel Foam Turbulator
- 1/4" FPT Lance Connect
- Stainless-steel 1.5mm Orifice (#5.5 nozzle equivalent)

PART NO.	DESCRIPTION
8.710-125.0	S Foam Cannon / Injector
8.710-126.0	Foam Cannon / Injector / Bottle
8.704-222.0	Replacement Turbulator Screen
8.749-826.0	Replacement Bottle

BRACKET HOLDER



PART NO.	DESCRIPTION
9.117-839.0	1/4" OC Coupler







- 2 Liter
- Legacy Horizontal and Vertical Adjustable Pattern
- Temperature: 140°F
- Minimum pressure 3000 psi
- Max pressure- 4000 psi

PART NO.	DESCRIPTION
9.114-849.0	1/4" QC Plug inlet
9.117-722.0	Filter 10 PacK

FOAMERS - PF22 MTM HYDRO FOAM CANNON



- PSI Max: 5000
- GPM Max: 5.3
- Temperature: 140°F
- Inlet: 1/4" Q.C. Plug
- 1/4" M22 Adapter (Included)
- 1/4" x 9" Tube for Drawing Chemical
- 3.5 Orifice (1.25 mm) (installed in the foamer body)
- 3.0 orifice (1.1 mm) (included)

PART NO.	DESCRIPTION
8.758-981.0	PF22.2 MTM Hydro Foam Cannon
9.112-494.0	PF22 3pk Replacement Bottle W/Cap
9.112-945.0	PF22 5pk Replacement Bottle W/Cap

NÈW OFFERING FOAM CANNON -WIDE MOUTH 1.5L





- Wide Mouth 1.5 Liter
- A+ 1/4" QC Plug Inlet
- Temperature: 140°F
- Minimum pressure 3000 psi
- Max pressure- 4000 psi

FOAMERS - LEGACY COMPACT



Generates a high-density clinging foam for extended dwell-time to increase chemical action.



- PSI: 2500
- GPM: 1.0 to 5.0
- Temperature: 195°F
- Stainless-steel, Aluminum and Brass
- 5" Long, 1" Diameter
- 4 and 6.5 Nozzle Included

PART NO.	DESCRIPTION		
8.903-998.0	1/8" F Inlet		
8.903-999.0	1/4" F Inlet		

Note: Most cleaning chemicals perform best when applied at 120° - 150° F and can be applied as a foam by adding a foaming agent. See your chemical supplier to obtain the correct product.

FOAMERS - SUTTNER ST-75/76 KITS



Clean with foam and save time as well as use half the chemical. Many sizes and variations available. Ask us for additional size options. Foam injector conveniently attaches after the pump and unloader on your pressure washer.

545

ST-75 FOAM NOZZLE

- PSI: 4000
- Inlet 1/4"
- Weight: .31 lbs.

ST-76 FOAM NOZZLE

- PSI: 3625
- Inlet: 1/2"
- Weight: 1.15 lbs.

ST-160 INJECTOR

- PSI: 5000
- Stainless-steel Housing
- Single Chemical
- Inlet/Outlet: 3/8" F x M
- Weight: .71 lbs.

PART NO.	DESCRIPTION	ORIFICE
9.113-063.0	Kit 1: ST-75 Nozzle & ST160 Injector	2.0-3.5
9.113-064.0	Kit 2: ST-75 Nozzle & ST160 Injector	4.0-5.5
9.113-065.0	Kit 3: ST-75 Nozzle & ST160 Injector	6.5-7.0
9.113-066.0	Kit 4: ST-76 Nozzle & ST160 Injector	7.5-8.5
9.113-067.0	Kit 5: ST-76 Nozzle & ST160 Injector	9.0-12.0

FOAMERS - LAFFERTY AIRLESS 10/20 SS



- Machined Stainless-steel Construction
- Stainless-steel Chemical Check Valve & Quick Disconnects
- Temperature: 180°F Max
- Chemical Tube with Strainer: 10SS: 6" & 20SS 10"
- Color-coded Metering Tips for up to 21 Dilution Ratios
- 0° nozzle for Increased Foam-throw Distance

PART NO.	DESCRIPTION	FLOW RATE @ 2000 PSI	
8.749-908.0	10SS Combo	4.0 GPM	
8.749-909.0	20SS Hose End	6.0 GPM	

FOAMERS - FOAM JET KIT

Long-distance foam applicator. Shoots over 20 feet of dense foam. Suction at 30 feet of height. Varable spray pattern.



- PSI: 5000
- GPM: 5.6
- Temperature: 140°F
- 1/4" Inlet
- 33' Tube

PART NO.	DESCRIPTION
8.750-296.0*	Foam Jet Kit, 5000 PSI, 5.6 GPM
8.750-429.0	Foam Repair Kit, O-Rings/ Stainless-Steel Filter
8.750-430.0	Foam Jet Repair Kit, Hose, Valve & Filter

^{*}Includes tubing and fittings as shown

FOAMERS - ADJUSTABLE WITH TANK

Control the foam spray angle with the variable fan nozzle.



- PSI: 2600
- GPM: 5.3
- Temperature: 140°F
- Horizontal Variable Fan Nozzle
- Foam Control Adjustment Knob

PART NO. DESCRIPTION 8.710-124.0 S Adjustable Foamer with Tank

SPRAYERS - B&G POLY-MOLDED

3-gallon poly-molded sprayer with maximum chemcial resistance.



- Heavy-Duty Design, Economical Price
- Blue Poly-Molded Tank
- Funnel Top Design for Ease-of-filling
- Braided, Reinforced Hose
- Durable Plastic Valve and Extension
- Pin-to-cone Spray Tip Fully Repairable
- Optional Flat-Fan Spray Tips
- Buna Gaskets and Seals

PART NO.	DESCRIPTION	
8.697-172.0	Poly-molded Sprayer	

SPRAYERS - CHAPIN AIR-POWERED





- Pump-up Style
- Heavy-duty Plastic Sprayers for Chemical Applications
- Adjustable Nozzle Mist to Solid Stream
- 2-Gallon Sprayer has 2' Hose and Hand Trigger
- Excellent Chemical Resistance
- Locking Hand Pump Handle Serves as Carrying Handle

PART NO.	DESCRIPTION
8.704-703.0	Thumb Button 3 Pint
8.704-702.0	2-Gallon Sprayer

DISINFECTANT - VITAL OXIDE

Vital Oxide is an EPA registered disinfectant and sanitizer with the following key attributes: Disinfection, Sanitizing, Odor Elimination, Eliminates SARS-CoV-2 (COVID-19), Carpet Sanitization, Allergen Removal, Kills Mold and Mildew, Parvo, Distemper, Tuberculous. Sanitizer dilution is NSF approved as a no rinse sanitizer for non-porous food contact surfaces. (US Only).



- pH: 8.0 9.0
- Color: Clear
- Scent: None
- Dilution: Disinfection: RTUCarpet Sanitizing: 1:5Sanitizing: 1:9
- Foam (1-5): 2
- Phosphate Free

PART NO.	DESCRIPTION	
8.639-560.0	Vital Oxide, 6 x 32 oz	
8.639-558.0	Vital Oxide, 4 x 1 gal	
8.644-292.0	Vital Oxide, 5 gal	
8.642-823.0	Vital Oxide, 15 gal	
8.698-112.0	Vital Oxide, 55 gal	

RAIN SUIT, 2 PIECE



- Heavy-duty, 2-ply Laminated Vinyl (25 mil)
- Jacket and Pants
- Bright Safety Yellow
- Vented for Air Flow

PART NO.	DESCRIPTION	
8.704-666.0	Large	
8.704-667.0	Extra Large	

TAPE - TEFLON® THREAD SEALING



- Big 1/2" x 520" Roll
- Mil Spec #T27730

PART NO.	DESCRIPTION	
8.704-705.0	Thread Sealing Tape	

THREAD LOCK PRODUCTS



- Direct Replacement for LocTite® & Fel-Pro™ Products
- Excellent Lubricant

- Prevents Corrosion and Fretting
- NDTM Anaerobic Adhesives: Liquid Materials that Cure to a Solid, Chemical-resistant Plastic State when Air is Not Present

PART NO.	DESCRIPTION	LOCTITE® EQUIV	BOTTLE SIZE
8.704-644.0	Nut Grade™	242	10 ml
8.704-645.0	Nut Grade™	242	50 ml
8.704-646.0	Nut Grade™	242	250 ml
8.704-648.0	Stud Grade™	271	10 ml
8.704-649.0	Stud Grade™	271	50 ml
8.704-650.0	Penetrating Adhesive (Sealant)	290	10 ml

Nut Grade™ & Stud Grade™ are trademarks of the Oakland Corp. LocTite® is a registered trademark fo the LocTite® Corp.

GLOVES - INDUSTRIAL DUTY

Industrial-grade gloves for most industry-needs – chemical, heat, abrasion protection.



BLACK PVC GLOVE

- 14" PVC Glove
- Lined with Cotton
- Good for Chemical Handling

- Resists alkalines, Acids
- Great as Sandblasting Gloves

PART NO.	DESCRIPTION
8.704-668.0	Glove, Work, Unlined, Leather
8.704-669.0	Black PVC Glove

HAND CLEANER - VICTOR WATERLESS COMMAND-O WITH PUMICE

A unique blend of natural citrus extract (limonene), aloe vera, glycerine, and lanolin, plus medication creates Command-O. Command-O combats the toughest cleaning task including grease, ink, tar, paint, dirt and stains.



- Conditioning agents protect hands and prevent drying, chapping and cracking
- Perfect for those whose hands are exposed to harsh, dirty working conditions
- No petroleum-based solvents

SCALEMASTER

Coil descaler.



■ 12 X 2 Lbs.

PART NO.	DESCRIPTION
8.759-762.0	Scalemaster Descaler 12x2 lbs

8.704-635.0 Command-O Hand Cleaner

with Pumice, 1 gal

HOSE REELS - LEGACY STACKABLE

Hose reels built specifically for contractors who require flexibility on a job site. Stackable reels are supported on both sides of the central hub to accommodate more aggressive applications, such as trailer-mounted.






200' Mild Steel Stackable Hose Reel Options

Reel Cart System








Hose Reel Riser Hose Guide

- Integrated frame adds protection and stacking ability
- Stack up to 3 high
- Heavy-duty powder-coated steel or stainless steel
- Reel and swivel rated up to 6000 PSI and 350°F
- Modular design is able to configure for various needs
- Reversible hand-crank and swivel

PART NO.	DESCRIPTION
9.801-767.0	Stackable Hose Reel, Mild Steel, 100'
9.801-768.0	Stackable Hose Reel, Mild Steel, 200'
OPTIONS	
8.923-415.0	Hose Guide, 100' Reel
8.923-427.0	Hose Guide, 200' Reel
8.923-416.0	Hose Reel Riser
8.923-918.0	Reel Cart System

NOTE: Hose not included

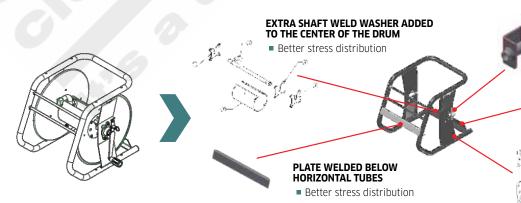

"U" FOLDED PLATE ADDED TO LOCK PIN

■ Torque in welds reduction



BASE PLATE THICKNESS INCREASED

■ Better stress distribution

FOLDS ADDED TO LATERAL PANELS

Better stress distribution

HOSE REELS - LEGACY PIVOT & FIXED BASE

Legacy hose reels were designed for ease of use and durability in commercial pressure washer applications. Offering 100' and 200' reels in both a fixed base and 360 degree rotating base. The oversized reel holds the advertised length plus leaves additional space reducing the difficulty of reeling hose. The unique extended swivel improves the hose connection and reduces hose wear and stress.



Bracket Sockets





Skid Mount







Base Mount

Non-Pivot Reel Brackets





Wall Mount



■ PSI: 5000

- Temperature: 325°F
- 100' 200' Fixed Base
- 100' 200', 360° Rotating Base
- High-Pressure, Double-Seal Swivels
- Reels equipped for 3/8" hose. Easily convertible to 1/2" hose with the change to a 1/2" swivel
- 2-Year Warranty

PART NO.	DESCRIPTION
8.750-485.0	Pivot Reel, 100' x 3/8"
8.750-482.0	Pivot Reel, 200' x 3/8"
8.750-476.0	Fixed Based, 100' x 3/8"
8.750-479.0	Fixed Based, 200' x 3/8"
8.920-142.0	Hose Reel, Trailer Mount, 100'
8.920-143.0	Hose Reel, Trailer Mount, 200'
8.919-430.0	Universal Mount
8.919-794.0	Skid Mount
8.919-437.0	Wall Mount
8.919-434.0	Base Mount
8.919-072.0	Bracket, Universal
8.919-445.0	Bracket, 90°
8.919-441.0	Bracket, 45°
8.919-448.0	Bracket, Vertical
9.121-043.0	Handle, Replacement
NOTE: Hose not incl	uded

HOSE REELS - LEGACY SWIVELS



- PSI: 5000
- Innovative Design
- Stainless-Steel Rotor
- Unique Dual Seal for Extra Long Life
- 2-Year Warranty
- O-Rings; BUNA-N





- PSI: 5000
- Limits Bend and Hose Stress
- Stainless-Steel Rotor
- Unique Dual Seal for Extra Long Life
- 2-Year Warranty
- O-Rings; BUNA-N

PART NO.	INLET X OUTLET
SWIVEL	
9.118-021.0	1/2" M x 3/8" F
8.776-003.0	S 3/8" F x 1/2" F
9.118-023.0	3/8" M x 3/8" F
9.118-024.0	3/8" F x 3/8" F
9.118-025.0	1/2" M x 1/2" F
9.118-026.0	1/2" F x 1/2" F
9.118-027.0	3/8" M x 1/2" F
9.118-028.0	1/2" F x 3/8" F
UNIVERSAL R	EPAIR KIT
8.776-001.0	

PART NO.	INLET X OUTLET	
EXTENDED SWI	VELS	
9.118-020.0	1/2" M x 3/8" F	
9.118-029.0	1/2" F x 3/8" F	
9.118-030.0	3/8" M x 3/8" F	
9.118-031.0	3/8" F x 3/8" F	
9.118-034.0	1/2" F x 1/2" F	
9.118-035.0	1/2" M x 1/2" F	
9.118-032.0	3/8" F x 1/2" F	
9.118-033.0	3/8" M x 1/2" F	
UNIVERSAL REPAIR KIT		

8.776-001.0



HOSE REELS - AP

AP hose reels have been designed to perfectly balance ruggedness and durability with affordability.





- Working PSI: 4000
- Rated Temperature: 225°F
- 3/8" or 1/2" Inlet / Outlet
- Flared Flanges for Maximum Capacity
- Solid Center Core for Maximum Strength
- Rolled, Beaded-Edge Flanges for Maximum Safety
- Easy Mounting Options for Maximum Versatility
- "Posi-Pin" Lock Prevents Unwanted Dereeling
- Heavy-Duty Powder-Coated Steel
- Easy Access External Swivel

PART NO.	HOSE DIAMETER	CAPACITY (FT)	CORE WIDTH	FLANGE WIDTH	FLANGE DIAMETER	OVERALL HEIGHT
8.711-192.0	3/8"	50	4.3	7.9	10.5	13"
9.804-067.0	S 3/8"	100	8.7	12.2	10.5	13"
8.711-199.0	3/8"	150	6.3	10.2	13.0	16.7"
8.711-201.0	1/2"	100	6.3	10.2	13.0	16.7"
8.712-460.0	Replacement Swive	Replacement Swivel for Part No. 8.711-192.0 and 9.804-067.0				
8.712-469.0	Replacement Swive	el for Part No. 8.	711-199.0			
8.754-280.0	Replacement Swive	el for Part No. 8.	711-201.0			
8.700-188.0	Replacement Hand	le				

SWIVEL REPAIR KITS

8.900-855.0

Note: Hose is not included. See page 173 for connector hose.



- Working PSI: 4000
- Rated Temperature: 225°F
- Super-Reinforced Core Won't Collapse!
- Adjustable Brake for Controlled Reel Tension
- Convenient External Swivel

- Manual Rewind Handle Included
- Solid Core Bolts on to Flanges for Extra Strength
- Snap-Lock to Prevent Accidental Dereeling
- Bearings Have Oil Cap for Easy Field Maintenance

PART NO.	HOSE DIAMETER	CAPACITY (FT)	REEL SIZE WIDTH	REEL SIZE DIAMETER
8.711-179.0	3/8"	90	6"	14"
8.711-180.0	3/8"	140	10"	14"
8.711-181.0	3/8"	200	14"	14"
8.711-186.0	1/2"	115	10"	14"
8.711-182.0	3/8"	150	6"	18"
8.711-183.0	3/8"	300	10"	18"
8.711-184.0	3/8"	350	14"	18"
8.711-190.0	1/2"	270	14"	18"
8.715-921.0	Replacement Brake for Part No. 8.711-182.0 and 8.711-183.0			

NOTE: Hose is not included. Interchangeable parts available. Call for pricing. See page 173 for connector hose.

PART NO.	HOSE DIAMETER	DESCRIPTION
8.700-287.0	3/8"	Swivel Repair Kit
8.700-285.0	1/2"	Swivel Repair Kit
8.900-855.0*		Swivel Repair Kit

^{*}For Round Swivels. Replacement Swivels, See page 178-179.

HOSE REELS - COXREELS

Coxreels offer high performance in a very compact and lightweight hand crank or spring-driven hose reel. Perfect for mobile application and permanent floor and wall mount.



8.711-858.0



8.725-347.0



9.802-265.0



8.723-649.0 (Hose and Ball Stop Not Included)

- Rated Up to 4000 PSI
- Temperature: -20°F to 225°F
- Adjustable Drag Brake
- 90° Brass Swivel
- Spring Driven Hose Reel
- Lightweight, Compact Design
- Adjustable Drag Break
- Sturdy U-Shaped Frame
- PSI: Up To 4000
- Rolled edges and ribbed discs provide strength and safety
- Pro-Grade Heavy-Duty Steel
- 2-Year Mfg Limited Warranty

PART NO.	DESCRIPTION	PSI
8.711-858.0	200' x 1/2" (300' x 3/8" with Adapter)	3000
8.725-347.0	100' x 3/8" - Fixed base hose reel	4000
8.711-860.0	100' x 3/8" - Challenger - Hand Crank Reel	4000
9.802-265.0	150' x 3/8" - Challenger - Hand Crank Reel	4000
8.723-649.0	50' x 3/8" - HPL Series - Spring Driven Reel	4000
8.723-718.0	100' x 3/8" - HPL Series - Spring Driven Reel	3000
8.711-591.0	Handle Replacement	
8.711-588.0	Locking Pin Assembly	
8.705-132.0	1/2" to 3/8" Adapter for 8.711-858.0	
8.750-020.0	Ball Stop for 8.723-649.0	
8.711-585.0	Replacement Swivel, 3/8"	
8.711-584.0	Replacement Swivel, 1/2"	
8.711-587.0	Swivel Repair Kit, 3/8"	
8.711-590.0	Swivel Repair Kit, 1/2"	



HOSE REELS - GENERAL PUMP A-FRAME HOSE REELS



- Working PSI: 5000
- Rated Temperature: 250°F
- 1/2" NPT-F Inlet / Outlet
- Heavy Duty Powder Coated Steel
- Jumper/Pigtail Hose Not Included
- Stainless Steel Swivel Included











9.112-948.0

9.112-952.0 (reel not included)

9.112-955.0 (reel not included)

9.112-951.0 (reels not included)

PART NO.	DESCRIPTION	PSI
9.112-948.0	DHRA50150, 150' x 3/8" Black Steel A-frame Hose Reel with Stainless-steel Swivel	5000
9.112-949.0	DHRA50300, 300' x 3/8" Black Steel A-frame Hose Reel with Stainless-steel Swivel	5000
9.112-950.0	DHRA50450, 450' x 3/8" Black Steel A-frame Hose Reel with Stainless-steel Swivel	5000
ACCESSORIES		
9.112-951.0	Hose Reel Stacking Kit, DHRA50150 A-frame c/w 150'/300' Cross Bracket	
9.112-952.0	Hose Guide Kit, DHRA50150 A-frame Hose Reel (reel not included)	
9.112-953.0	Hose Guide Kit, DHRA50300 A-frame Hose Reel (reel not included)	
9.112-954.0	Hose Guide Kit, DHRA50450 A-frame Hose Reel (reel not included)	
9.112-955.0	Hose Reel Cart, A-frame (150', 300', 450') Complete with DP80052 10" Solid PU Wheels (ca	art only)
9.114-894.0	Kit Motor, Drive, Rings DHRA Rewind	
9.114-895.0	KIT, Motor, Controller, DHRA	
9.117-044.0	Hose Reel pin kit for AFrame GP reels	
9.117-520.0	KIT, Brake SS DHRA Reel	

NEW

HOSE REELS - GENERAL PUMP SWIVELS





9.112-946.0

PART NO.	DESCRIPTION	PSI	DESCRIPTION	MATERIAL
9.112-944.0	Swivel (D30001/02 / DHRWM50200)	4000	3/8"	Brass
9.112-945.0	Swivel, Hex Outlet with Arm (DHR50100, DHR50150, 2100357)	5000	3/8" NPT-F	Brass
9.112-946.0	Swivel, A-frame Hose Reels 440A, Bearing with Zerk Fitting, Electro-polished Surface, Viton Seals	5000	1/2" NPT	Stainless-steel
9.112-947.0	Swivel, A-frame Hose Reels 440A, Bearing with Zerk Fitting, Electro-polished Surface, Viton Seals	5000	3/8" NPT-F	Stainless-steel
9.114-676.0	Repair Kit for DHRA Hose Reel Swivel			

PROMOTE YOUR BRAND!

CALL YOUR SALES REP FOR DETAILS AND PRICING





Legacy

Private Label Fuel/ Water Separator

- 10 Micron Filtration
- Spin-On Convenience
- Water-Separation Chamber
- 1/4" FPT Inlet / Outlet

for Private Label items

■ Easy Drain Water / Sediment Bowl

PN: 8.725-306.0 (Base part number)*
*A new part number will be created

OTHER PRODUCTS
INCLUDE:
HOSES, COUPLERS AND
FILTERS. ASK YOUR
SPRAYMART REP FOR
MORE INFO!

ORDER TODAY! Contact your Spraymart Account Representative: **1-800-752-0177**

For other private labeled parts and accessories available through Spraymart, just ask your Spraymart Sales Rep!



LEGACY "BEST" SPRAY GUN



Ergonomically designed to be the most comfortable gun on the market.



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 21 oz.

PART NO.		DES
8.751-213.0	5	"Be

CRIPTION

st" Spray Gun

Unitized Valve Kit 8.701-673.0

ECONOMY TRIGGER GUN







- PSI: 5000
- GPM: 12

- Temperature: 300°F
- 3/8" Female Inlet x 1/4" Outlet
- Weight: 23 oz.
- Private Label this Gun Ask your sales rep

PART NO.	DESCRIPTION
9.113-082.0	A+ Trigger Gun
9.113-100.0	Unitized Valve Kit

LEGACY "INDUSTRIAL" SPRAY GUN



Featuring a comfortable grip to reduce user fatigue.



- PSI: 5000
- GPM: 10.4
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 19.84 oz.

PART NO.

DESCRIPTION

8.751-214.0

"Industrial" Spray Gun

8.751-119.0

Valve Kit

A+ RELAXED TRIGGER GUN





- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" Female Inlet x 1/4" Outlet
- Weight: 23 oz.
- Private Label this Gun Ask your sales rep

MV925 TRIGGER GUN

Economical easy pull trigger gun.



- PSI: 4500
- GPM: 8
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 16.08 oz.

PART NO.	DESCRIPTION
8.754-907.0	MV925

A+ GUN

PART NO.





DESCRIPTION 9.117-659.0 A+ Relaxed Trigger Gun

- PSI: 5000 ■ GPM: 12
- Temperature: 300°F
- 3/8" Female Inlet x 1/4" Outlet
- Weight: 23 oz.
- Private Label this Gun Ask your sales rep

9.117-524.0 A+ Relaxed Trigger Gun with Stainless Steel Swivel

M407 TRIGGER GUN



- PSI: 4000
- GPM: 7
- Temperature: 250°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 13.4 oz.

PART NO. DESCRIPTION 8.750-247.0 M407 Trigger Gun

GIANT TRIGGER GUNS

The original "heavy-weight".





PSI: 5000

■ GPM: 10

Temperature: 300°F

■ 3/8" FPT Inlet x 1/4" FPT Outlet

Weight: 29.28 oz.

PART NO.	DESCRIPTION	
8.710-394.0	21290C - Brass Outlet	
8.710-392.0	21250B - Stainless-Steel Outlet	
8.722-172.0	Repair Kit for Giant 212990C	

CERAMIC UNITIZED BALL VALVE SUTTNER W



- Ceramic Ball
- Highly Resistant Against Nearly All Soaps and Acids
- Fits in ST-2300, 2305, 2605, 2700 Spray Guns as a Repair Kit

PART NO.	DESCRIPTION
8.749-907.0	Ceramic Unitized Ball Valve

ST-2720 SUTTNER TRIGGER GUN SUTTNER W

Designed for operators and applications with longer periods of cleaning time. Featuring the Relax-Action™ German engineered technology reduces trigger pulling force by 40% and holding force up to 90% compared to usual competitors spray gun.



- PSI: 1800
- GPM: 21.0
- Temperature: 300°F
- 3/8" Female NPT Inlet x 1/4" Female NPT Outlet
- Weight: 20 oz.

PART NO.	DESCRIPTION	
8.723-667.0	ST-2720 Gun	

ST-2305 SUTTNER TRIGGER GUN SUTTNER W

Easy pull trigger.



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 16.22 oz.

PART NO.	DESCRIPTION
8.758-457.0	ST-2305 Spray Gun, Safety Orange

ST-810 SUTTNER TRIGGER GUN

Excellent for truck and fleet washing applications.





- PSI: 2000
- GPM: 8
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 19.5 oz.

PART NO.	DESCRIPTION
8.710-372.0	ST-810 Gun

ST-2605 SUTTNER TRIGGER GUN SUTTNER

Relax action design.



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 21 oz.

PART NO.	DESCRIPTION	
8.710-376.0	ST-2605	
8.701-673.0	Unitized Valve	

ST-2305 SUTTNER TRIGGER GUN SUTTNER W

Extreme durability with easy pull trigger and ceramic ball in valve for higher chemical resistance.



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 21 oz.

PART NO.	DESCRIPTION	
8.710-386.0	ST-2305	
8.701-673.0	Unitized Valve	
8.701-674.0	Unitized Weep Valve	

ST-2000 SUTTNER TRIGGER GUN SUTTNER W

15° offset angle thru gun for easier overhead use. The handle style for "Big Hands".



- PSI: 5000
- GPM: 10.4
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 26 oz.

PART NO.	DESCRIPTION
8.710-388.0	ST-2000
8.751-119.0	Unitized Valve - 5000 PSI
8.701-665.0	Unitized Weep Valve



ST-1500 SUTTNER TRIGGER GUN SUTTNER W



The perennial favorite for general pressure washer applications.




- PSI: 5000
- GPM: 10.4
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 20.5 oz.

PART NO.	DESCRIPTION	
8.710-384.0	S ST-1500	
8.710-385.0	ST-1500 with Weep	
8.751-119.0	Unitized Valve - 5000 PSI	
8.701-665.0	Unitized Weep Valve	

ST-2700 SUTTNER TRIGGER GUN SUTTNER W







- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 21 oz.

PART NO.	DESCRIPTION	
8.710-389.0	ST-2700	
8.701-658.0	Unitized Valve	

ST-2315 SUTTNER TRIGGER GUN SUTTNER W



Extreme durability with easy pull trigger.



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 20.8 oz.

PART NO.	DESCRIPTION
9.106-073.0	ST-2315, Ceramic Ball Valve for Chemical and Acid Resistance

PA TRIGGER GUN

Great for truck and fleet wash.



- PSI: 3200
- GPM: 8
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 10 oz.

PART NO.	DESCRIPTION
8.710-440.0	RL20

Compact feel for smaller hands.



- PSI: 5000
- GPM: 10.5
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 26 oz.

PART NO.	DESCRIPTION
8.710-377.0	RL30-YG5000
8.704-616.0	Repair Kit



- PSI: 5000
- GPM: 10.5
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 27.5 oz.

PART NO.	DESCRIPTION
8.710-378.0	Vega 5000
8.704-615.0	Repair Kit

Easy pull and easy to hold with matching blue lance.





- PSI: 5650
- GPM: 8
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 23.3 oz.
- Blue Vent Grip, Stainless-steel Lance has 1/4" BSP Threads



RL-56 Gun



PART NO.	DESCRIPTION
9.802-227.0	RL-56 Blue Gun and Wand (nozzle protector not included)
8.710-446.0	RL-56 Blue Gun
8.710-645.0	40" Stainless-Steel Lance, blue vent grip (with nozzle protector)
8.704-610.0	Repair Kit, RL-55/RL-56

PA LINEAR GUN

Ergonomic design minimizes fatigue for operator.



- PSI: 4500
- GPM: 10.5
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 19.2 oz.

PART NO.	DESCRIPTION
8.752-080.0	PA Linear Gun
9.801-398.0	PA Linear Gun Repair Kit

ML320

Excellent light-duty gun.





- PSI: 2320
- GPM: 6.6
- Temperature: 212°F
- 1/4" M Inlet x 1/4" F Outlet
- Weight: 8.82 oz.

PART NO.	DESCRIPTION
8.757-839.0	ML320

SUTTNER TRIGGER GUN



15° offset angle thru gun for easier overhead use.



- PSI: 4000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 23 oz.

PART NO.	DESCRIPTION
8.710-370.0	ST-601
8.751-119.0	Unitized Valve - 5000 PSI

GP LOCKING TRIGGER GUN





- PSI: 5000
- GPM: 10.5
- Temperature: 320°F
- 3/8" NPT-F Inlet x 1/4" NPT-F Outlet
- Weight: 22.4 oz.

PART NO.	DESCRIPTION
9.113-653.0	DGE5010SL

BIG GUN





■ GPM: 53

■ Temperature: 210°F

■ 3/4" FPT Inlet x 1/2" FPT Outlet

Weight: 47.5 oz.



■ PSI: 7250

■ GPM: 21

■ Temperature: 210°F

■ 1/2" Stainless-Steel FPT Inlet / Outlet

■ Weight: 60.3 oz.

Model RL84 "Big Black Gun"

PART NO.	DESCRIPTION	
8.740-165.0	Model RL204	
8.749-327.0	Repair Kit - Model RL204	
8.710-445.0	Model RL84	
8.750-459.0	Repair Kit - RL84	

OPEN GUNS

Flow through design offers less downtime for repair

AP1000 OPEN GUN

Durable glass reinforced handle. Tubular flow-thru intervals for high pressure and efficiency.



- PSI: 4000
- GPM 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 16.7 oz.

PART NO.	DESCRIPTION
8.710-396.0	AP1000 Open Gun
8.750-951.0	AP1000 Weep Gun with Blue, Lock

MV 925 OPEN GUN

Just plain comfortable!



- PSI: 4060
- GPM 8
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 12.3 oz.

PART NO.	DESCRIPTION	
8.754-988.0	MV925 without trigger	

ST-1500H OPEN GUN





- PSI: 5000
- GPM 10.4
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 20.5 oz.

PART NO. DESCRIPTION

8.710-383.0 ST-1500 Open Gun

FLOW-THRU GUN



PART NO.	DESCRIPTION	
8.710-400.0	Full Black Grip 3/8" FPT x 1/4" FPT	
GUN HANDLE	WITH 18" LANCE	
8.710-403.0	Slim Red Grip 1/4" M x 1/4" F	
8.710-404.0	Full Red Grip 3/8" F x 1/4" M	

AP DUMP GUN







PART NO.	DESCRIPTION	WEIGHT
8.710-405.0	Dump Gun 16" Lance	45.15 oz.
8.710-406.0	Dump Gun 40" Lance	59.61 oz.
8.704-169.0	Repair Kit	



DUAL LANCES

Dual lances allow for easy switching between high pressure cleaning and low pressure chemical application (chemical injector required). Stainless steel pipes give increased life when applying variable Ph products.

VP DUAL LANCE

Superlite stainless-steel with nozzle guard and 1/4" stainless-steel outlet tubing.



bushing

PART NO. **DESCRIPTION 8.711-308.0** \$\inf 41''

Fully insulated

Interpump Dual Lance. Excellent for downstream injector





20	Duai	venteu	Lance
9.1	14-03	2.0	

DUa	Lan	ce	
_		40	_

- GPM: 10.5
- Temp: 284°F
- Side Handle Valve Side Handle Valve 1/4" QC Nozzle Adjustment
- 1/4" Male Inlet
- 1/4" Dual Outlet

Deluxe Dual Lance

- GPM: 10.5
- Temp: 284°F
 - Adjustment
- 1/4" Male Inlet
- 1/4" Dual Outlet
- 1/4" QC Brass Coupler, Brass Soap Nozzle

Dual Vented Lance

- GPM: 10.5
- Temp: 284°F
- Holder
- 1/4" Soap Nozzle included
- 1/4" MPT inlet *(Does not include male inlet OC

PART NO.	DESCRIPTION
DUAL LANCE	
8.710-612.0	36" Standard
8.710-621.0	72" Extended
DELUXE DUAL LA	NCE
8.904-281.0	72" Deluxe Extended
DUAL VENTED LA	ANCE
9.114-032.0	36" Dual Vented
REPAIR KIT	
8.900-135.0	Valve Repair Kit

DUAL LANCES



8.710-724.0 AL 333 Basic Lance

- 3650 PSI
- GPM: 10.5
- Temperature: 300°F
- 1/4" Male Inlet
- 1/4" F NPT Dual Outlets
- 40" Molded Grip
- 1/8" Zinc-plated Tubes

AL344LS VP Lance

- 4000 PSI
- GPM: 10.5
- Temperature: 302°F

mecune

- 1/4" Male Inlet
- Stainless Steel Seat & 40" Vented Grip
- 1/4" Stainless-steel Tubes
- 1/4" & 1/8" F NPT **Dual Outlets**
- (QC nozzles not included)

AL344LS VPKIT - Premium

Includes: 1/4" OC & Soap Nozzle, Nozzle Protector and Valve Cover

AL344LS VPKIT - Standard

Nozzle Protector and Valve Cover only

PART NO.	DESCRIPTION
DUAL LANCE	
8.710-724.0	40 " AL333 Basic Dual Lance
8.710-722.0	40" AL344LS-VPKIT Standard Dual Lance
8.904-360.0*	40" AL344LS-VPKIT Premium Dual Lance with 1/4" QC Brass Inlet Plug
REPAIR KIT	
8.720-548.0	AL333 Repair Kit
9.803-267.0	AL344 Repair Kit

*Model includes a hardened-steel QC inlet plug.





SUTTNER DUAL LANCES

High-pressure, thin-wall tubing and zinc / chromate finish.



ST-54 with Side Handle

- PSI: 4000 or 4500
- GPM: 10
- Temperature: 300°F

ST-53 with Knob

SUTTNER W

- 38" Total Length, Molded Grip
- Weight: 42 oz.

PART NO.	DESCRIPTION	
8.710-613.0	ST-53 with Knob (4000 PSI)	
8.710-614.0	ST-54 with Side Handle (4500 PSI)	
8.701-594.0	Repair Kit (ST-53)	
8.900-153.0	Clamp Kit (ST-53/54)	
8.701-602.0	Repair Kit (ST-54)	

44" ZINC PLATED WAND

Includes: Coupler and handle..

- PSI: 5000
- Temperature: 300°F.



PART NO.	DESCRIPTION
8.783-040.0	44" with 5000 psi

LEGACY SQUARE MOLDED GRIP LANCES



High-quality chrome-plate finish. Solid molded polymer construction and handle with hollow-rib for increased heat dissipation.



- PSI: 5250
- Temperature: 300°F

■ GPM: 12

1/4" Male Inlet and Outlet

PART NO.		DESCRIPTION
8.752-898.0	S	Lance, Molded, 12"
8.752-899.0*	S	Lance, Molded, 20"
8.752-900.0	5	Lance, Molded, 24"
8.752-901.0	S	Lance, Molded, 28"
8.752-902.0*	S	Lance, Molded, 36"
8.752-903.0	S	Lance, Molded, 48"
8.752-904.0	5	Lance, Molded, 60"
8.752-905.0*	S	Lance, Molded, 79"
*DENE \/EDGIGN		WARLE Call managements there for a minimum and the senden

*BENT VERSION AVAILABLE Call representative for pricing and to order.

LEGACY OVAL MOLDED GRIP LANCES



A comfortable grip reducing fatigue and a stainless-steel or highquality chrome-plated finish. Solid molded polymer construction and handle with hollow-rib for increased heat dissipation.



- PSI: 5250
- Temperature: 300°F
- Bent or Straight lance options
- 1/4" Male Inlet and Outlet

PART NO.		DESCRI	PTION			
STAINLESS-ST	EEL					
8.752-882.0	5	Lance,	Molded,	12"		
8.752-883.0*		Lance,	Molded,	20"		
8.752-884.0*	S	Lance,	Molded,	24"		
8.904-301.0		Lance,	Molded,	24",	Bent	15°
8.752-885.0		Lance,	Molded,	28"		
8.904-302.0		Lance,	Molded,	28",	Bent	15°
8.752-886.0*	5	Lance,	Molded,	36"		
8.904-303.0		Lance,	Molded,	36",	Bent	15°
8.752-887.0	5	Lance,	Molded,	48"		
8.904-304.0		Lance,	Molded,	48",	Bent	15°
8.752-888.0*	S	Lance,	Molded,	60"		
8.752-889.0*	5	Lance,	Molded,	79"		
8.904-306.0		Lance,	Molded,	79",	Bent	15°
CHROME-PLAT	ΓED					
8.752-890.0	S	Lance,	Molded,	12"		
8.752-891.0		Lance,	Molded,	20"		
8.752-892.0*	5	Lance,	Molded,	24"		
8.752-893.0		Lance,	Molded,	28"		
8.752-894.0	5	Lance,	Molded,	36"		
8.752-906.0	S	Lance,	Molded,	36",	with	handle
8.904-324.0		Lance, Bent 1	Molded, 5°	36",	with	handle,
8.752-895.0	5	Lance,	Molded,	48"		
8.752-907.0	S	Lance,	Molded,	48",	with	handle
8.752-896.0	5	Lance,	Molded,	60"		
8.752-897.0	5	Lance,	Molded,	79"		
*RENT VEDSION	۸۱/۸	II ADIE	Call ropro	conta	tivo fo	r pricing and to order

 $\begin{tabular}{ll} \textbf{*BENT VERSION AVAILABLE} & \textbf{Call representative for pricing and to order.} \end{tabular}$

STAINLESS STEEL LANCE

1/2" Hydro Excavating Lances



- Plated Steel
- Temperature: 300°F.
- 1/2" Male Inlet and Outlet

PART NO.	DESCRIPTION
9.118-070.0	60" with 4000 psi
9.118.071.0	72" with 4000 psi



PART NO.	DESCRIPTION
15 DEG BENT	
9.113-700.0	Molded 36" SS 6000 PSI
9.113-701.0	Molded 48" SS 6000 PSI
STRAIGHT	
9.113-704.0	Molded Grip 48" SS Lance 6000 PSI
9.113-705.0	Molded Grip 36" SS Lance, 6000 PSI

AP UNINSULATED LANCES

Stainless-steel or corrosion-resistant, bright zinc-plated lances made with 1/4" high-pressure, lightweight, thin-wall tubing and superior strength rolled threads.

■ PSI: 4100 ■ Temperature: 300°F

PART NO.	DESCRIPTION
STAINLESS-STEI	EL
8.710-623.0	Length, 12"
8.710-624.0*	Length, 20"
8.904-285.0	Length 20", Bent 15°
8.710-625.0*	Length, 24"
8.904-286.0	Length 24", Bent 15°
8.710-626.0	Length, 28"
8.710-627.0	Length, 36"
8.710-628.0	Length, 48"
8.710-629.0	Length, 60"
8.710-630.0	Length, 78"
ZINC-PLATED	
8.710-631.0	Length, 12"
8.710-632.0	Length, 20"
8.710-633.0	Length, 24"
8.710-634.0*	Length, 36"
8.710-635.0*	Length, 48"
8.710-636.0	Length, 60"
8.904-297.0	Length 60", Bent 15°
8.710-637.0	Length, 78"
8.904-298.0	Length 78", Bent 15°

*BENT VERSION AVAILABLE Call representative for pricing and to order.

LEGACY VENTED LANCES

Stainless-steel or high-quality chrome-plate finish with molded glass-filled polyamide handle for heat dissipation with hollow insulators for increased heat venting.



PART NO.	DESCRIPTION
STAINLESS-STE	EL
8.752-868.0	Lance, Vented, 20"
8.752-869.0	Lance, Vented, 24"
8.752-871.0	Lance, Vented, 36"
8.752-872.0	Lance, Vented, 48"
8.752-873.0	Lance, Vented, 60"
8.752-874.0	Lance, Vented, 79"
CHROME-PLATE	ED
8.752-875.0	Lance, Vented, 20"
8.752-876.0	Lance, Vented, 24"
8.752-878.0	Lance, Vented, 36"
8.752-879.0	Lance, Vented, 48"
8.752-880.0	Lance, Vented, 60"
8.752-881.0	Lance, Vented, 79"

SUTTNER PUSH AND PULL LANCE



Vented grip can be pushed and pulled up to 90°. For hard to reach applications, such as gutters, fenders, trucks and heavy equipment.



PART NO.	DESCRIPTION
8.710-711.0	ST-85 Push and Pull Lance
8.710-720.0	Handle, Side

BIG STAINLESS-STEEL LANCES & SIDE HANDLES

For big guns! Complete with an adjustable handle and coupler for 1/4" MPT nozzle and high-pressure stainless-steel pipe.



PART NO.	DESCRIPTION	PSI
8.904-083.0	40" Wand with Handle	4050
8.710-411.0	39", Stainless-steel, 300°F, Inlet 1/2" MNPT, Outlet 1/4" FMPT ST-3600	8700

LANCE HANDLES / ACCESSORIES



Vented grip, side handle with nut, and vented grip with side handle, can be user-attached to uninsulated lances or 1/4" steel pipe. Detachable and reusable!



PART NO.	DESCRIPTION
8.710-717.0	Vent Grip Only (14" long)
8.904-357.0	Grip with Side Handle

SUTTNER W

PART NO.	DESCRIPTION	
8.710-716.0	Vent Grip Only (14" Long) ST-9	
8.710-719.0	Grip with Side Handle	
8.710-720.0	Side Handle with Nut	

MV LANCE HANDLE





- Use On All 1/4" Lances
- Easily Positioned without Removal of Nozzle

PART NO.	DESCRIPTION	
8.704-162.0	1/4" Lance Handle	

GUTTER CLEANER ATTACHMENT

Easily quick connect to any lance or extension wand to clean gutters or hard to reach areas. The angle improves reach and expands cleaning capabilities. For use with 5.0 or larger nozzle.



- PSI: 3500
- Temperature: 200°F
- Zinc-Plated
- Inlet 1/4" F Socket
- Oulet 1/4" M Plug

PART NO.	DESCRIPTION
8.711-324.0	1/4" Nipple x 1/4" QC

FIBERGLASS TELESCOPING WANDS

High-quality telescoping wand can reach up to 24' with three sizes to choose from. A lightweight wand that is balanced under pressure.



- PSI: 4000
- GPM: 10.5
- Temperature: 195°F
- 6' 12' Wand Shown





Telescoping Wand

PART NO.	DESCRIPTION
8.710-589.0	6'-12'
8.710-590.0	6'-18'
8.710-591.0	8-24'
8.700-059.0	Strap and Belt Shoulder Harness
8.711-324.0	Gutter Cleaning Attachment
8.723-896.0	TS12 Replacement Gun
8.710-595.0	TS18 Replacement Gun
8.739-434.0	TS24 Replacement Gun

SPRAY-FLEX™ FLEX WAND

Access difficult spots easily. Great for cleaning engines, roofs, eaves, or underneath almost anything! Holds its shape under pressure.

- - PSI: 3000 or 5000
 - Temperature: 190°F
 - 90° Flexibility
 - 12" 1/4" NPT x 1/4" NPT

PART NO.	DESCRIPTION
8.710-597.0	3000 PSI
8.710-596.0	5000 PSI

FLEX LANCES

Save on broken wand repairs! Flexes a full 180° and returns. preventing bent lances and broken hose. Ideal for self-serve car wash bays.



- PSI: 2500
- Industrial-Grade
- Temperature: 200°F
- Galvanized Pipe Ends Polyurethane Flex Section

PART NO.	DESCRIPTION	
8.710-598.0	\$ 18", 1/4" MPT x 1/4" MPT	
8.710-603.0	21", 1/4" MPT x 1/8" FPT	
8 710-604 0	24" 1/4" MPT x 1/8" FPT	

HOBBY GUN, LANCE AND HOSE

Don't turn away hobby-unit owners. Complete replacement hose, gun and lance.



Insulated Lance with Gun

- PSI: 4500
- GPM: 8
- Temperature: 320 F
- 3/8" NPT Inlet

Lance with Coupler

- PSI: 3000
- Temperature: 140 F

Lance with 3 Hi/Low Varifan Nozzle

- PSI: 2000
- GPM: 5.5

- 1/4" x 25" Thermoplastic
- PSI: 3600
- Temperature: 140 F

■ 1/4" QC Brass Socket

■ 1/8" 40x65 brass soap nozzle

Weight: 39 oz.

PART NO.	DESCRIPTION	
8.754-769.0	Insulated Lance with Gun	
8.753-272.0	18" Lance with #3 Hi / Low Varifan Nozzle	
8.753-423.0	1/4"x25" Thermoplastic, 22mm both ends	
NOTE: See page 17	O for more Hobby Hose	



GUN, DUAL LANCE COMBO

- PSI: 5000
- GPM: 12
- Temperature: 300°F
- Stainless Steel Seat
- 1/4" Stainless Steel Tubes

PART NO.	DESCRIPTION
8.930-771.0	40" with 5000 psi 12 GPM gun



MV925 GUN

- PSI: 4500
- GPM: 12

164

PART NO.	DESCRIPTION
8.754-381.0	???

LEGACY INDUSTRIAL GUN AND LANCE COMBO



Gun and lance combo with 36" square-molded grip lance and 1/4" quick coupled socket. Includes nozzle protector.



- PSI: 5000
- GPM: 10.4
- Temperature: 300°F
- Zinc-Plated Steel Tubes
- Stainless-Steel Seat
- Weight: 39 oz.

PART NO.	DESCRIPTION	
8.904-095.0	Legacy Gun and Lance with 3/8" MPT QC Inlet	

MV925 GUN AND LANCE COMBO

Gun and lance combo with pre-assembled 36" square grip lance.



- PSI: 4500
- 1/4" FPT QC Socket Installed on Outlet of Lance
- GPM: 8.0
- 3/8" MPT QC Nipple Installed on Inlet of Gun

PART NO. **DESCRIPTION** S MV925 Gun 8.928-442.0

MV925 GUN, LANCE AND HOSE COMBO

Gun, lance and hose combo with 36" square grip lance and 50' hose.



- PSI: 4000
- 3/8" MPT OC Nipple Installed on Inlet of Gun
- 1/4" FPT QC Socket Installed on Outlet of Lance
- GPM: 8
- R1 4000 PSI 3/8" x 50' Black Hose
- 3/8" FPT QC Sockets Installed on Hose

PART NO. DESCRIPTION 8.928-443.0 MV925 Gun

HOSE - LEGACY HIGH-PRESSURE



For use with hot or cold-water pressure washers. The Legacy hose is built to exceed the EN1829-2 Standard and will provide superior abrasion resistance that will increase the life of the hose.

Both single-and double-wire braid hoses come with durable 8" bend restrictors on both ends. The Legacy hose has a "bite-the -wire" coupling that grips the hose better than any other design and is far superior to the "compression fittings" used on conventional hoses.

- Easily Identified: Permanently embossed identification makes for easy tracing and owner protection.
- This heavy duty hose is reinforced with braided, high tensile steel wire and a very durable cover.

Pressure Wash 6000 2WB --< 3:5" [a.s.-...] \$200; PU

HOSE - 1-WIRE



- Rated to 250°F
- Smooth impression, oil resistant tube and Black Hose Guard at both ends

PART NO.	LENGTH	PSI
3/8" MPT SWI	VEL X 3/8" MPT SOL	.ID, 3/8" ID
8.925-176.0	3/8" x 15' ID	4000
8.925-150.0	3/8" x 25' ID	4000
8.925-156.0	S 3/8" x 50' ID	4000
8.925-161.0	S 3/8" x 75' ID	4000
8.925-165.0	S 3/8" x 100' ID	4000
8.925-170.0	3/8" x 150' ID	4000
8.925-350.0	3/8" x 200' ID	4000
8.925-378.0	Case of 75 (8.92 3/8" x 50' Hoses	
8.925-449.0	Case of 40 (8.92 3/8" x 100' Hose	
3/8" MPT SWI	VEL X 3/8" MPT SWI	IVEL, 3/8" ID
8.925-364.0	3/8" x 50' ID	4000
8.925-365.0	3/8" x 75' ID	4000
8.925-167.0	S 3/8" x 100' ID	4000
8.925-367.0	3/8" x 150' ID	4000
8.925-368.0	3/8" x 200' ID	4000
1/4" MPT SWI	VEL X 1/4" MPT, SOL	LID, 1/4" ID
8.925-143.0	1/4" x 25' ID	4000
8.925-144.0	1/4" x 30' ID	4000
8.925-145.0	1/4" x 50' ID	4000
8.925-146.0	1/4" x 75' ID	4000
8.925-147.0	1/4" x 100' ID	4000
1/2" MPT SWI	VEL X 1/2" MPT SOL	.ID
8.925-236.0	50' ID	3000
8.925-237.0	75' ID	3000
8.925-238.0	100' ID	3000
BLACK WRAPE	PED HOSE SWXSW	
8.925-279.0	3/8" x 25' ID	4000

HOSE - 2-WIRE



- Rated to 250°F
- Smooth impression, oil resistant tube and **Red Hose Guard** at both ends

PART NO.	SIZE	PSI	
3/8" MPT SWIV	EL X 3/8" MPT 5	SOLID, 3/8" ID	
8.928-542.0	3/8" x 15'	6000	
8.925-180.0	3/8" x 25'	6000	
8.925-184.0	3 /8" x 50'	6000	
8.925-225.0	3/8" x 75'	6000	
8.925-229.0	3/8" x 100'	6000	
8.925-232.0	3/8" x 150'	6000	
8.925-369.0	3/8" x 200'	6000	
8.925-382.0	Case of 75 (8 3/8" x 50' Ho		
8.925-450.0	Case of 40 (8 3/8" x 100' H		
3/8" MPT SWIV	'EL X 3/8" MPT 9	SWIVEL, 3/8" ID	
8.925-311.0	3/8" x 25'	6000	
8.925-313.0	3 /8" x 50'	6000	
8.925-314.0	3/8" x 75'	6000	
8.925-316.0	3/8" x 100'	6000	
8.925-325.0	3/8" x 200'	6000	
1/2" MPT SWIV	EL X 1/2" MPT 9	SOLID	
8.925-247.0	1/2" x 50'	5000	
8.925-249.0	1/2" x 75'	5000	
8.925-253.0	5 1/2" x 100'	5000	
BLACK WRAPP	ED HOSE SWXS	0	
9.113-847.0	3/8" x 50'	6000	
9.113-848.0	3/8" x 100'	6000	

1,000 FOOT REELS

9.113-139.0	3/8" Hose R1	4000 PSI	Black
9.113-140.0	3/8" Hose R2	6000 PSI	Black
9.113-141.0	1/4" Hose R1	4000 PSI	Black

Note: Full Reel - 1000 ft per reel, hose only. Max of 3 incremental cuts per reel, industry standard. Call your sales representative for pricing.

HOSE - LEGACY 1- & 2-WIRE WITH COUPLERS OR M22 ENDS



- Temperature: 250°F
- Coupler and Plug Included
- 3/8" ID Solid / Swivel & Swivel / Swivel options available



PART NO. L	.ENGTH	DESCRIPTION	PSI	APPROX WT (LBS.)
3/8" BLACK HOSE,	R1			
8.928-928.0 5	50' 3/8" ID	Solid X Swivel	4000	13.0
8.928-929.0 1	100' 3/8" ID	Solid X Swivel	4000	24.0
8.930-772.0 5	50'	Swivel X Swivel	4000	13.0
8.930-773.0 1	100'	Swivel X Swivel	4000	24.0
8.931-290.0 5	50'	M22 Fittings	4000	
8.931-291.0 1	100'	M22 Fittings	4000	
8.931-292.0 3	30'	M22 Fittings	4000	
3/8" BLACK HOSE,	R2			
8.928-930.0 5	50' 3/8" ID	Solid X Swivel	6000	18.0
8.928-931.0 1	100' 3/8" ID	Solid X Swivel	6000	33.0
8.930-774.0 5	50'	Swivel X Swivel	6000	18.0
8.930-775.0 1	100'	Swivel X Swivel	6000	33.0
8.931-293.0 5	50'	M22 Fittings	6000	
8.931-294.0 1	100'	M22 Fittings	6000	
8.931-295.0 3	30'	M22 Fittings	6000	

HOSE - GRAY NON-MARKING 1 & 2-WIRE - WITH & WITHOUT COUPLERS

- Tough, Abrasive Resistant Wrapped Cover
- Oil Resistant Non-Marking
- For use with Hot or Cold Water



PART NO.	LENGTH	DESCRIPTION	PSI	APPROX WT (LBS.)
3/8" GRAY HOSE	LLITUIII	DESCRIPTION	131	ALL NOV MI (FD2.)
9.114-440.0	50' 3/8" ID	3/8" GRAY HOSE- SO x SW	R1 - 4200	12
9.114-441.0	100' 3/8" ID	3/8" GRAY HOSE- SO x SW	R1 - 4200	24
9.116-070.0	200' 3/8" ID	SO/SW	R1 - 4200	
9.114-442.0	50' 3/8" ID	3/8" GRAY HOSE- SO x SW	R2 - 6000	19
9.114-443.0	100' 3/8" ID	3/8" GRAY HOSE- SO x SW	R2 - 6000	36
9.116-071.0	200' 3/8" ID	SO/SW	R2 - 6000	
9.117-687.0	150' 3/8" ID	SW/SW	R1 - 4200	
9.117-688.0	150' 3/8" ID	SW/SW	R2 - 6000	
9.117-689.0	50' 3/8" ID	SW/SW	R1 - 4200	
9.117-690.0	100' 3/8" ID	SW/SW	R1 - 4200	
9.117-691.0	50' 3/8" ID	SW/SW	R2 - 6000	
9.117-692.0	100' 3/8" ID	SW/SW	R2 - 6000	
9.117-700.0	75' 3/8" ID	SW/SW	R2 - 6000	
9.117-701.0	75' 3/8" ID	SW/SW	R1 - 6000	
9.118-118.0	200' 3/8" ID	SO x SW	R1 - 6000	
9.118-140.0	600' 3/8" ID	No Ends	4200	
3/8" GRAY HOSE	W/ COUPLERS	& PLUGS		
9.115-117.0	50' 3/8" ID	Brass QCs	R1 - 4200	13
9.115.118.0	100' 3/8" ID	Brass QCs	R1 - 4200	25
9.116-085.0	200' 3/8" ID	Brass QCs	R1 - 4200	
9.115-119.0	50' 3/8" ID	SS QCs	R2 - 6000	20
9.115-120.0	100' 3/8" ID	SS QCs	R2 - 6000	37
9.116-086.0	200' 3/8" ID	SS QCs	R2 - 6000	

LIGHTWEIGHT GRAY HOSE

- Tough, Abrasive Resistant Wrapped Cover
- Oil Resistant Non-Marking
- For use with Hot or Cold Water
- Approximately 30% lighter than our standard heavy duty R2 Gray Wrapped Hose



PART NO.	LENGTH	DESCRIPTION	PSI
3/8" GRAY HOSE			
9.117-745.0	50' 3/8" ID	SO x SW	R2 - 6000
9.117-746.0	100' 3/8" ID	SO x SW	R2 - 6000
9.117-747.0	50' 3/8" ID	SS QC	R2 - 6000
9.117-748.0	100' 3/8" ID	SS QC	R2 - 6000
9.118-116.0	200' 3/8" ID	SO x SW	R2 - 6000
9.118-117.0	250' 3/8" ID	SO x SW	R2 - 6000
9.117-790.0	150' 3/8" ID	SO x SW	R2 - 6000

GRAY HOSE FITTINGS

Swivel and Solid fit all gray hoses



PART NO.	DESCRIPTION
9.118-141.0	Swivel Crimp Fitting (Flts all gray hoses)
9.118-142.0	Solid Crimp Fitting (FIts all gray hoses)
9.118-143.0	R1 3/8" Ferrule (Fits R1 Hose and R2 LW hoses)
9.118-144.0	R2 3/8" Ferrule (Fits only R2 hoses)

HOSE - LEGACY 1-WIRE SMOOTH COVER, NON-MARKING



- Temperature: 250°F
- 1/4" & 3/8" Smooth Non-Marking
- 3/8" MPT Solid X 3/8" Swivel Ends



PART NO.	LENGTH	PSI	APPROX WT (LBS.)
3/8" SMOOTH YE	LLOW HOSE		
8.901-800.0	50' x 3/8" ID	3000	12.0
8.901-802.0	75' x 3/8" ID	3000	17.0
8.901-804.0	100' x 3/8" ID	3000	23.0
8.757-441.0	500' Reel	3000	115.0
3/8" SMOOTH BL	UE HOSE		
8.739-148.0	50' x 3/8" ID	3000	12.0
8.739-149.0	75' x 3/8" ID	3000	17.0
8.739-150.0	100' x 3/8" ID	3000	23.0
8.739-369.0	150' x 3/8" ID	3000	34.0
8.925-296.0	200' x 3/8" ID	3000	45.0
8.757-442.0*	500' Reel	3000	115.0
3/8" SMOOTH GR	AY HOSE		
8.749-935.0	50' x 3/8" ID	3000	13.0
8.749-936.0	100' x 3/8" ID	3000	25.0
8.757-443.0*	500' Reel	3000	125.0
1/4" SMOOTH BL	UE HOSE		
8.901-796.0	50' x 1/4" ID	3000	8.0
8.901-798.0	100' x 1/4" ID	3000	16.0

*Full Reel - 500 ft per reel, hose only. Max of 3 incremental cuts per reel, industry standard.

HOSE - LEGACY 1- & 2-WIRE, NON-MARKING

■ Temperature: 250°F

■ Blue Smooth Non-Marking



PART NO.	LENGTH	PSI	APPROX WT (LBS.)
3/8" SMOOTH B	LUE HOSE - R2		
8.739-229.0	50' R2	4500	17.0
8.739-231.0	100' R2	4500	33.0
8.925-320.0	150' R2	4500	
8.757-438.0*	500' Reel	4500	165.0
1/2" SMOOTH B	LUE HOSE - R1		
8.925-300.0	1/2" x 75'	3000	25.0
8.757-439.0*	500' Reel	3000	167.0

^{*}Full Reel - 500 ft per reel, hose only. Max of 3 incremental cuts per reel, industry standard.

HOSE - A+ 1-WIRE GRAY SMOOTH COVER, NON-MARKING

■ Temperature: 250°F

■ 3/8" MPT Swivel x 3/8" MPT Solid





PART NO.	LENGTH	DESCRIPTION	PSI	APPROX WT (LBS.)
3/8" SMOOTH C	OVER, GRAY H	OSE		
8.921-617.0	3/8" x 25'	4K Gray A+ SOXSW	4000	6.0
8.921-618.0	3/8" x 50'	4K Gray A+ SOXSW	4000	11.0
8.921-619.0	3/8" x 75'	4K Gray A+ SOXSW	4000	17.0
8.921-620.0	3/8" x 100'	4K Gray A+ SOXSW	4000	33.0
8.752-156.0*	600' Reel	4K Gray A+	4000	165.0

^{*}Full Reel - 600 ft per reel, hose only. Max of 3 incremental cuts per reel, industry standard. Call your sales representative for pricing.

HOSE - A+ 1- & 2-WIRE WITH COUPLING AND PLUG, NON-MARKING





- Temperature: 250°F
- Couplers and Plug Included
- 3/8" MPT Swivel x 3/8" MPT Solid

PART NO.	LENGTH	PSI	APPROX WT (LBS.)			
3/8" 1-WIRE BLUE HOSE						
8.928-971.0	50' x 3/8" ID	4000	13.0			
8.928-972.0	100' x 3/8" ID	4000	23.0			
3/8" 2-WIRE BLUE HOSE						
8.928-973.0	50' x 3/8" ID	6000	18.0			
8.928-974.0	100' x 3/8" ID	6000	33.0			

HOSE - A+ / TUFF-FLEX - 1-WIRE SMOOTH COVER

- Temperature: 250°F
- 50% Greater Flexibility







PART NO.	LENGTH	PSI	APPROX WT (LBS.)	
3/8" TUFF-FLE	X 1-WIRE BLUE HOSE			
8.921-149.0	25' x 3/8" ID	4000	6.0	
8.921-150.0	S 50' x 3/8" ID	4000	11.0	
8.921-151.0	75' x 3/8" ID	4000	17.0	
8.921-152.0	S 100' x 3/8" ID	4000	23.0	
8.753-316.0	600' Reel*	4000	138.0	

^{*}Please contact your sales rep to place a bulk hose (reel) order. Full reel will be priced by the foot. These reels are various sizes approximately 600' with a max of 3 incremental cuts, industry standard.

HOSE - A+ / TUFF-FLEX - 2-WIRE SMOOTH COVER

- Temperature: 250°F
- 50% Greater Flexibility

- 3/8" MPT Swivel x 3/8" MPT Solid
- Smooth impression, maximum oil-resistant tube and cover



PART NO.	LENGTH	PSI	APPROX WT (LBS.)
3/8" TUFF-FLEX	2-WIRE BLUE HOSE		
8.921-153.0	25' x 3/8" ID	6000	9.0
8.921-154.0	50' x 3/8" ID	6000	18.0
8.921-155.0	75' x 3/8" ID	6000	24.0
8.921-156.0	100' x 3/8" ID	6000	33.0
8.753-319.0	600' Reel*	6000	198.0

^{*}Please contact your sales rep to place a bulk hose (reel) order. Full reel will be priced by the foot. These reels are various sizes approximately 600' with a max of 3 incremental cuts, industry standard.

PRESSURE LOOP - 2-WIRE

The 1/4" ID pressure lines solid / swivel for most any application. The 3/8" ID pressure loops have 1/2" female JIC swivels on both ends for typical unloader connection hose.



- 1/4" ID Pressure Loop
- 1/4" ID Two-Wire, 6000 PSI
- 1/4" MPT Swivel x 1/4" MPT Temperature: 250°F Solid

PART NO.	LENGTH	PSI
1/4" PRESSURE L	00P	
8.918-180.0	16" x 1/4" ID	6000
8.918-182.0	26" x 1/4" ID	6000
8.918-183.0	28" x 1/4" ID	6000
8.918-419.0	36" x 1/4" ID	6000
8.918-187.0	42" x 1/4" ID	6000



- JIC Pressure Loop
- 1/2" Female JIC Swivels -Each End
- Temperatures: 250°F (3/8" Pressure Loop) 275°F (1/2" Pressure Loop)
- 3/8" ID Two-Wire, 6000 PSI

PART NO.	LENGTH	PSI	
3/8" JIC PRESS	URE LOOP		
8.918-210.0	16" x 3/8" ID	6000	
8.918-422.0	20" x 3/8" ID	6000	
8.918-423.0	22" x 3/8" ID	6000	
8.918-424.0	25" x 3/8" ID	6000	
8.918-425.0	29" x 3/8" ID	6000	
8.918-426.0	32" x 3/8" ID	6000	
8.918-427.0	36" x 3/8" ID	6000	
8.918-212.0	42" x 3/8" ID	6000	
1/2" JIC PRESS	URE LOOP		
8.918-224.0	20" x 1/2" ID	5000	
8.918-225.0	28" x 1/2" ID	5000	
8.918-228.0	46" x 1/2" ID	5000	
8.918-230.0	70" x 1/2" ID	5000	

HOSE - WHITEWATER® COMBINATION STEAM HOSE

GOOD/YEAR

Good up to 3000 PSI - 250°F or 2500 PSI - 325°F



- Single High-Tensile Steel Wire Braid
- High Temperature Bend Restrictors - Both Ends
- Seamless Innertube
- Solid 3/8" or 1/2" MPT Connectors - Both Ends (Swivel Ends NOT Available)
- Oil-Resistant Cover

PART NO.	LENGTH	PSI
3/8" STEAM HOS	SE	
8.901-598.0	25'	3000
8.901-601.0	50'	3000
8.901-603.0	75'	3000
8.901-604.0	100'	3000
8.930-657.0	200'	3000
8.705-643.0*	500' Reel	3000
1/2" STEAM HOS	SE	
8.901-721.0	25'	2500
8.901-723.0	50'	2500
8.901-724.0	75'	2500
8.901-725.0	100'	2500
8.705-678.0*	500' Reel	2500

*Full Reel - 500 ft per reel, hose only. Max of 3 incremental cuts, industry standard.

PULSE HOSE



- PSI Working Pressure: 1300
- 3/8" MPT On Both Styles
- Available with either plug-end or open-flow with solid / swivel connects

PART NO.	LENGTH	DESCRIPTON
8.711-151.0	18"	with Plug End, Working PSI: 1300 PSI
8.711-153.0	24"	with Plug End, Working PSI: 1300 PSI
8.711-155.0	28"	Solid / Swivel - Open, Working PSI: 1300 PSI
8.711-157.0	36"	Solid / Swivel - Open, Working PSI: 1300 PSI

HOSE BEND RESTRICTORS



- Temperature: 325°F
- Used on Hose Assemblies
- Non-Slip Sure Fit
- Easy Installation
- Top-Quality Molded Fit Bend Restrictors
- Fits snugly to prevent kinks near the connectors
- Insulated Rubber

PART NO.	LENGTH	COLOR
1 WIRE		
8.705-479.0	5.3" x 1/4"	Black Vinyl
8.705-476.0	6" X 3/8"	Black Vinyl
8.740-104.0	24.0" x 3/8"	Black Vinyl
8.756-784.0	8.0" X 1/2"	Black Vinyl
2 WIRE		
8.756-735.0	1/2" x 8"	Red Vinyl
8.705-478.0	6.0" x 3/8"	Red Vinyl
8.711-846.0	24.0" x 3/8"	Red Vinyl
8.705-480.0	7.0" x 3/8"	Red Vinyl
COMBO - HIGH T	ЕМР	
8.705-483.0	6.5" x 3/8" ID	Gray Vinyl
8.705-482.0	6.5" x 1/2" ID	Black Rubber

HOBBY HOSE

Replacement hose for most hobby pressure washers sold by retailers.

- PSI Working Pressure: 2250
- PSI Burst Pressure: 9000
- Thermoplastic Cover
- Fiber-braid Reinforcement
- M22 x 1.5 Fitting Inlet



- 14 mm Seal Cone Fits Generac, Excell and Kärcher
- 15 mm Seal Cone Fits Campbell, MI-T-M

PART NO.	LENGTH	SEAL CONE	ID
8.705-485.0	25'	14mm	1/4"
8.705-487.0	25'	15mm	1/4"
8.753-423.0	25'	22mm	1/4"

GARDEN HOSE - APEX QUALITY



■ Rated For Cold-Water Use

Assemblies Complete With

Bend Restrictor

The essential product for pressure washing

- 5/8" or Larger ID For Full Flow
- Choice of Commercial or Heavy-Duty Grade
- Reinforced hose for flexibility and strength in all weather
- Commercial grade has machined octagonal "wrench tight" fittings

PART NO.	LENGTH	GRADE	COLOR	
8.704-786.0	50' x 5/8" ID	Com	Gray	
8.704-787.0	100' x 5/8" ID	Com	Gray	
ALL RUBBER REI	NFORCED HOT	WATER	HOSE - 160°F	
8.704-790.0	50' x 5/8" ID	Com	Red	
8.704-791.0	50' x 3/4" ID	Com	Red	
See page 184 for ga	rden hose fitting	S		

AG HOSE - ORANGE PVC-RIBBED - BULK

Braid-reinforced PVC hose designed specifically for AG / Pest Control and Lawn Spraying applications.

- Max PSI: 600
- Max Temperature: 160°F
- Color: Orange
- Tough Ribbed Cover
- Bulk hose standard in 300' single length coils
- Resists Abrasion and UV Rays
- Does Not Include Ends or Bend Restrictors

PART NO.	LENGTH	PSI
3/8" HOSE - ORA	NGE	
8.705-527.0	300' Coil, Single, Uncut Length	600
8.901-384.0	50' Bulk	600
8.901-385.0	100' Bulk	600
1/2" HOSE - ORA	NGE	
8.705-523.0	300' Coil, Single, Uncut Length	600
8.901-377.0	50' Bulk	600
8.901-379.0	100' Bulk	600
3/4" HOSE - ORA	NGE	
8.705-531.0	300' Coil Single, Uncut Length	600

GARDEN HOSE - COLD WEATHER



- High-Quality Brass Fittings
- Heated Hose with 110 Plug
- Thermostatically controlled heating element is activated at +/- 35°F temperature and turned off at +/- 40°F ambient temperature
- Use only with a UL approved GFCI outlet or extension
- PVC material FDA-approved for potable water
- 5/8" x 50 ft

PART NO.	LENGTH	DESCRIPTION
8.749-944.0	5/8" x 50'	Cold Weather Garden Hose

See page 184 for garden hose fittings

AG HOSE - COMPLETE ASSEMBLY

Braid-reinforced PVC hose designed specifically for AG / Pest control spraying applications. Assembled with ends or bend restrictors.



- Max PSI: 600
- Max Temperature: 160°F
- Color: Orange
- Tough Ribbed Cover
- Resists Abrasion and UV Rays
- Includes Ends and 8" Black Bend Restrictors on Each End

PART NO.	LENGTH	DESCRIPTION	
8.928-576.0	3/8" x 100'	SO x SW	
8.928-577.0	3/8" x 100'	SW x SW	
8.928-578.0	3/8" x 50'	SO x SW	
8.928-579.0	1/2" x 50'	SO x SW	
8.928-580.0	1/2" x 100'	SO x SW	
8.928-581.0	1/2" x 300'	SO x SW	

TUBING - CLEAR REINFORCED PVC

Multi-use, industrial-grade tubing with high-resistance to chemicals, solvents and fuel.



- Reinforced With Polyester Cord
- Huge Selection of Sizes and Lengths
- 4-to-1 Burst Safety Factor

PART NO.	ID X OD	WP AT 70°F	LENGTH
8.901-257.0	1/4" x 3/8"	250	50'
8.704-751.0	1/4" x 3/8"	250	100'
8.704-752.0	S 1/4" x 3/8"	250	300'
8.901-260.0	3/8" x 1/2"	175	25'
8.901-261.0	3/8" x 1/2"	175	50'
8.901-262.0	3/8" x 1/2"	175	100'
8.704-753.0	3/8" x 1/2"	175	300'
8.901-265.0	1/2" x 3/4"	175	50'
8.704-754.0	1/2" x 3/4"	175	100'
8.704-755.0	S 1/2" x 3/4"	175	300'
8.901-267.0	5/8" x 7/8"	175	25'
8.901-268.0	5/8" x 7/8"	140	50'
8.901-269.0	5/8" x 7/8"	140	100'
8.704-756.0	5/8" x 7/8"	140	300'
8.901-271.0	3/4" x 1"	140	25'
8.901-272.0	3/4" x 1"	140	50'
8.704-757.0	3/4" x 1"	140	100'
8.704-758.0	3/4" x 1"	140	300'
8.901-273.0	1" x 1-1/4"	75	25'
8.901-274.0	1' x 1-1/4"	75	50'
8.901-275.0	1" x 1-1/4"	75	100'
8.704-759.0	1" × 1-1/4"	75	200'

See page 185 for hose clamps

CRIMP FITTINGS



PART NO.	SIZE	HOSE
8.724-027.0	3/8" MPT, Solid	3/8"
8.724-028.0	3/8" MPT, Swivel	3/8"
8.724-029.0	1/2" FJIC, Solid	3/8"
8.706-759.0	3/8" FPT, Swivel	3/8"

COUPLINGS - FIELD ATTACHABLE

Designed and build your own hose or adapt and repair hose in the field (no crimper required).





PART NO.	ID X MPT
1-WIRE BRAIL	O HOSE COUPLINGS
8.705-493.0	S 1/4" x 1/4", Solid
8.705-495.0	1/4" x 1/4", Swivel
8.705-496.0	3/8" x 1/4", Solid
8.705-497.0	S 3/8" x 3/8", Solid
8.705-498.0	S 3/8" x 3/8", Swivel
8.705-500.0	1/2" x 1/2", Solid
8.705-501.0	1/2" x 1/2", Swivel
2-WIRE BRAIL	O HOSE COUPLINGS
8.705-502.0	1/4" x 1/4", Solid
8.705-503.0	1/4" x 1/4", Swivel
8.705-505.0	S 3/8" x 3/8", Solid
8.705-506.0	S 3/8" x 3/8", Swivel
8.705-507.0	1/2" x 1/2", Solid
8.705-508.0	1/2" x 1/2", Swivel

TUBING - CLEAR PVC



- "Box Pak" 100 ft
- Temperature: 25°F to 150°F
- Very Flexible, Non-Reinforced
- Self-dispensing Box Packaging

PART NO.	ID X OD	WP AT 70°F	
8.901-279.0	1/4" x 3/8"	55	
8.704-766.0	1/2" x 5/8"	30	

TUBING - HEAVY-DUTY VINYL

This clear vinyl tubing is heavier duty than the rest! Thick wall resists kinking. Available in clear or clear-reinforced polyester braid. Comes in 1/4" & 3/8" ID x 1/2" OD.



- Very Flexible
- 100' Rolls
- Temperature: -10 to 150°F

PART NO.	ID X OD	PSI	DESCRIPTION
9.113-131.0	1/4" x 1/2"	50	Clear Vinyl
9.113-132.0	1/4" x 1/2"	250	Braided Vinyl
9.113-133.0	3/8" x 1/2"	100	Clear Vinyl

CONNECTOR HOSE - 2' - 10'

Hose come with One Solid x One Swivel MPT crimp fitting on each end.



■ PSI: 4000 - 6000

PART NO.	LENGTH	PSI	HOSE COL	OR
3/8" ULTIMA -	1-WIRE WITI	HOUT BEN	D RESTRICT	ORS
8.918-253.0	2'	4000	Black	
8.918-255.0	3'	4000	Black	
8.918-257.0	4'	4000	Black	
8.918-259.0	5'	4000	Black	
8.918-261.0	6'	4000	Black	
8.918-263.0	7'	4000	Black	
8.918-265.0	8'	4000	Black	
8.918-267.0	9'	4000	Black	
8.918-269.0	10'	4000	Black	
1/4" ULTIMA -	1-WIRE WITI	HOUT BEN	D RESTRICT	ORS
8.918-240.0	2'	4000	Black	
8.918-241.0	3'	4000	Black	
8.918-242.0	4'	4000	Black	
8.918-243.0	5'	4000	Black	
8.918-245.0	6'	4000	Black	

FLEX LINE BYPASS / SUPPLY LINE HOSE

This industrial PVC hose looks and feels like rubber and has a black seamless inner tube. The tough abrasion resistant outer cover is polyester braid reinforced and as a burst rate of three times the rated working pressure.



- Reinforced Tough Outer Cover
- Excellent for Use as Supply Lines or Bypass

PART NO.	ID X OD	WP AT 70°F	LENGTH
RED COVER, HEA	AVY WALL		
8.901-281.0	3/8" x .634"	300	50'
8.704-762.0	3/8" x .634"	300	500'
8.901-282.0	1/2" x .792"	250	50'
8.704-764.0	1/2" x .792"	250	500'
8.901-284.0	3/4" x 1.14"	160	50'
8.704-765.0	3/4" x 1.14"	160	300'
RED COVER- STA	NDARD WALL		
9.106-578.0	1/4"	160	500'
BLUE COVER, ST	ANDARD WALL		
8.704-779.0	1/4"	250	475'

■ Temperatures: 250°F (1/4" & 3/8" Connector Hoses) 275°F (1/2" Connector Hose)

PART NO.	LENGTH	PSI	HOSE COLOR
3/8" ULTIMA -	2-WIRE - WIT	гноит ве	ND RESTRICTORS
8.918-271.0	S 2'	6000	Black
8.918-273.0	3'	6000	Black
8.918-276.0	4'	6000	Black
8.918-278.0	5'	6000	Black
8.918-280.0	S 6'	6000	Black
8.918-282.0	7'	6000	Black
8.918-284.0	\$ 8'	6000	Black
8.918-420.0	9'	6000	Black
8.918-288.0	5 10'	6000	Black
3/8" ULTIMA -	2-WIRE - WIT	TH BEND F	RESTRICTORS
8.918-272.0	2'	6000	Black
8.918-275.0	3'	6000	Black
8.918-277.0	4'	6000	Black
8.918-209.0	5'	6000	Black
8.918-281.0	6'	6000	Black
8.918-283.0	7'	6000	Black
8.918-285.0	8'	6000	Black
8.918-287.0	9'	6000	Black
8.918-289.0	10'	6000	Black
1/2" ULTIMA -	2-WIRE - WIT	ГНОИТ ВЕ	ND RESTRICTORS
8.918-292.0	2'	5000	Black
8.918-294.0	3'	5000	Black
8.918-296.0	4'	5000	Black
8.918-298.0	5'	5000	Black
8.918-300.0	6'	5000	Black
8.918-301.0	7'	5000	Black
8.918-302.0	8'	5000	Black
8.918-303.0	9'	5000	Black
8.918-304.0	10'	5000	Black

CONNECTOR HOSE

Hose comes with solid MPT crimp fittings on both ends.

PART NO.	LENGTH	PSI
3/8" ULTIMA -	1-WIRE WITH	OUT BEND RESTRICTORS
8.918-333.0	12'	4000
8.918-334.0	13'	4000
8.918-338.0	15'	4000
8.918-340.0	16'	4000
8.918-342.0	17'	4000
8.918-344.0	18'	4000
8.918-348.0	20'	4000
3/8" ULTIMA -	1-WIRE WITH	BEND RESTRICTORS ONE END
8.919-123.0	12'	4000
8.918-335.0	13'	4000
8.918-339.0	15'	4000
8.918-349.0	20'	4000
1/4" BLUE - 1-1	WIRE WITHOU	IT BEND RESTRICTORS
8.918-389.0	13'	3000
8.918-391.0	14'	3000
8.918-393.0	15'	3000
8.918-395.0	16'	3000
8.918-397.0	17'	3000
8.918-399.0	18'	3000
8.918-401.0	19'	3000
8.918-403.0	20'	3000
8.918-409.0	23'	3000
8.918-411.0	24'	3000
8.918-413.0	25'	3000

PART NO.	LENGTH	PSI			
3/8" BLUE - 1-WIRE WITHOUT BEND RESTRICTORS					
8.918-360.0	12'	3000			
8.918-366.0	15'	3000			
8.919-124.0	16'	3000			
8.918-369.0	17'	3000			
8.918-371.0	18'	3000			
8.918-375.0	20'	3000			
3/8" BLUE - 1-W	IRE WITH BEND RI	ESTRICTORS ONE END			
8.918-367.0	15'	3000			
8.918-368.0	16'	3000			
8.918-372.0	18'	3000			
8.918-376.0	20'	3000			
1/4" BLUE - 1-W	IRE WITH BEND RI	ESTRICTORS ONE END			
8.918-388.0	12'	3000			
8.918-390.0	13'	3000			
8.918-392.0	14'	3000			
8.918-404.0	20'	3000			

SEWER HOSE

Super Flexible Sewer Line Hose. Hose and couplings have small outside diameter, allowing hose and nozzles to fit through sewer line. Sewer line has Super Tough polyether cover over ultra-flexible nylon tube. 1/8" sewer nozzle and hose will operate through many 1-1/2" lines.

- Temperature: 160°F
- Nylon Tube
- 1.5 GPM Optimum Flow 1/8" 2.5 GPM Optimum Flow 1/4"

- Ideal for cleaning lateral lines, drains & tanks
- Thermoplastic Polyurethane black cover that is oil, weather, ozone, and abrasion resistant
- Nozzles Not Included



PART NO.	DESCRIPTION
1/8" HOSE - 4800	PSI, 1/4" INLET, 1/8" OUTLET
8.705-602.0	1/8" x 50'
8.705-603.0	1/8" x 100'
1/4" HOSE - 2600) PSI, 1/4" INLET, 1/4" OUTLET
8.705-607.0	1/4" x 50'
8.705-608.0	1/4" x 100'
1/4" HOSE - 4400	PSI, 1/4" INLET, 1/4" OUTLET
8.705-610.0	1/4" x 50'
8.705-611.0	1/4" x 100'
8.705-613.0	1/4" x 200'



Q.C. SOCKETS & PLUGS - LEGACY - Legacy BRASS & STEEL

Brass Couplers, designed for 4000 PSI and extended durability. Affordable and rugged all in one.



- PSI Max: 4000
- Pecision Brass Design
- Unrestricted Free-Flow

PART NO.	DESCRIPTION	
9.802-164.0	5 1/4" FPT Brass Socket	
9.802-166.0	\$ 3/8" FPT Brass Socket	
8.707-166.0	1/2" FPT Brass Socket	
9.802-165.0	1/4" MPT Brass Socket	
9.802-169.0	\$\ 3/8" MPT Brass Socket	
8.707-167.0	1/2" MPT Brass Socket	

Steel Nipples, hardened steel combined with zinc yellow chromate plating holds up to the harshest environments.



- PSI Max: 4000
- Zinc-Plated
- Hardened Steel

PART NO.	DESCRIPTION
8.707-136.0	5 1/4" FPT Steel Plug
9.802-170.0	3/8" FPT Steel Plug
8.707-165.0	1/2" FPT Steel Plug
8.707-139.0	1/4" MPT Steel Plug
9.802-171.0	3/8" MPT Steel Plug
8.707-164.0	1/2" MPT Steel Plug

Q.C. SOCKETS & PLUGS - LEGACY - Legacy STAINLESS-STEEL



- PSI: 6000
- 303 Stainless-Steel
- Chemical-Resistant

PART NO.	DESCRIPTION		
8.707-110.0	5 1/4" MPT Stainless-steel Socket		
8.707-135.0	3/8" MPT Stainless-steel Socket		
8.707-140.0	5 1/4" MPT Stainless-steel Plug		
8.707-152.0	S 3/8" MPT Stainless-steel Plug		
8.707-103.0	5 1/4" FPT Stainless-steel Socket		
8.707-125.0	3/8" FPT Stainless-steel Socket		
8.707-138.0	5 1/4" FPT Stainless-steel Plug		
8.707-144.0	\$ 3/8" FPT Stainless-steel Plug		
9.114-991.0	1/2" FPT Stainless-steel Socket		
9.114-992.0	1/2" MPT Stainless-steel Socket		
9.118-159.0	1/2" FPT, Stainless Steel Nipple		
9.118-160.0	1/2" MPT, Stainless Steel Nipple		

O-RINGS

O-Rings for Legacy, AP, Hansen, Foster, Parker and quick-coupler brands.



- EPDM to 280°F
- Buna to 210°F
- Viton to 300°F

PART NO.	QC SIZE	BULK PART NO.*
EPDM QC		
8.701-981.0	1/8"	
9.802-098.0	1/4"	9.114-431.0*
9.802-102.0	3/8"	9.114-432.0*
BUNA QC		
8.702-015.0	1/4"	9.114-433.0*
8.702-017.0	3/8"	9.114-434.0*
8.702-021.0	1/2"	
VITON QC		
8.702-084.0	1/4"	9.114-435.0*
8.702-088.0	3/8"	9.114-436.0*
8.702-090.0	1/2"	

^{*}Pack of 1000

Q.C. SOCKETS & PLUGS - FOSTER







- Unrestricted Bore for Free Flow
- Resists Plug Deformation When Pressure Spikes Occur and Withstands Pump Pulse
- Brass 5200 PSI
- Steel & Stainless Steel 5500 PSI

PART NO.	DESCRIPTION	TYPE
SOCKETS		
8.756-030.0	1/4" Male	Brass
8.756-031.0	1/4" Female	Brass
8.756-032.0	3/8" Male	Brass
8.756-033.0	3/8" Female	Brass
8.756-034.0	1/2" Female	Brass
PLUGS		
8.756-035.0	1/4" Male	Steel
8.756-036.0	1/4" Female	Steel
8.756-037.0	3/8" Male	Steel
8.756-038.0	3/8" Female	Steel
8.756-039.0	3/8" Male	Stainless-steel
8.756-040.0	3/8" Female	Stainless-steel
8.756-041.0	1/2" Male	Steel
8.756-042.0	1/2" Female	Steel

Q.C. SOCKETS & PLUGS - SNAPTITE SERIES

Snaptite Quick Sockets and Plugs are precision-built for extreme high pressure.

■ PSI Max: 11,000

■ Temperature: -40°F to 205°F





■ Zinc Chromate

PART NO.	DESCRIPTION	ТҮРЕ
SOCKET		
8.707-115.0	1/4" FPT	Zinc Chromate
8.707-116.0	1/4" MPT	Zinc Chromate
9.802-167.0	3/8" FPT	Zinc Chromate
PLUG		
8.707-117.0	1/4" FPT	Zinc Chromate
8.707-121.0	1/4" MPT	Zinc Chromate
9.802-168.0	3/8" FPT	Zinc Chromate
8.707-120.0	3/8" MPT	Zinc Chromate
SEAL, U-PACK		
9.804-043.0	1/4"	Zinc Chromate
8.706-712.0	3/8"	Zinc Chromate

Q.C. SOCKETS & PLUGS - ST SERIES

	STEEL PLUG	BRASS PLUG	STAINLESS-STEEL
SERIES	PSI	PSI	PSI
1/8"	2600	2500	4200
1/4"	5500	5200	6700
3/8"	3500	2700	6300
1/2"	2700	2200	3000
3/4"	1700	1700	1700

PART NO.	DESCRIPTION	TYPE
SOCKETS		
8.709-463.0	3/4" MPT	Brass
8.709-462.0	3/4" FPT	Brass
8.709-566.0	3/8" MPT	Stainless-steel
8.709-564.0	3/8" FPT	Stainless-steel
8.709-457.0	1/2" FPT	Stainless-steel
PLUGS		
8.709-478.0	1/8" MPT	Steel, Zinc-plated
8.709-479.0	1/8" FPT	Steel, Zinc-plated
8.709-502.0	3/4" MPT	Steel, Zinc-plated
8.709-509.0	3/4" FPT	Steel, Zinc-plated
8.709-486.0	1/4" MPT	Hardened Stainless-steel
8.709-488.0	1/4" FPT	Hardened Stainless-steel
8.709-480.0	1/2" MPT	Hardened Stainless-steel
8.709-481.0	1/2" FPT	Hardened Stainless-steel



Q.C. SOCKETS & PLUGS - M22 - TWIST SEAL

Allows U.S. standard hose to connect to 22 mm European fittings.



- PSI Max: 4000
- GPM: 7.8
- Temperature Max: 302°F
- Internal O-Ring Seal
- Machined-brass Body
- High-Impact Plastic Knob
- Not Threaded

PART NO.	DESCRIPTION	TYPE
8.709-522.0	1/4" FPT	Machined-brass Body
8.709-530.0	3/8" FPT	Machined-brass Body
9.802-173.0	1/4" MPT	Machined-brass Body
8.709-526.0	3/8" MPT	Machined-brass Body

Plugs are made of heavy-duty machined-brass for a safe and leakfree connection.









PART NO.	DESCRIPTION	ТҮРЕ
8.709-540.0	1/4" FPT	Machined-brass Body
8.709-546.0	3/8" FPT	Machined-brass Body
8.709-536.0	1/4" MPT	Machined-brass Body
8.707-185.0	3/8" MPT	Machined-brass Body
9.115-009.0	M22 X M22	Machined Brass body

O.C. SOCKETS & PLUGS - EXTENDED TWIST SEAL



- PSI: 3600
- GPM: 11
- Temperature: 300°F
- Double O-Ring Seal
- Machined-Brass Body
- High-Impact Plastic Knob

PART NO.	DESCRIPTION	PSI MAX
8.709-535.0	1/4" FPT x M22, Female, Coupler	3600
8.709-555.0	1/4" FPT x M22, Male, Plug	3600

Q.C. SOCKETS & PLUGS - M22 - TWIST SEAL

Couples U.S. standard pipe threads to 22 mm European fittings found on imported pressure washers.









Sockets

■ PSI Max: 4000, GPM: 7.8

- Temperature Max: 302°F
- 3.9 to 4.2 Oz. Weight
- Internal O-ring with back ring seal assures no-leak operation
- Oversized High-Impact Plastic Knob
- Machined-Brass Body

PART NO.	DESCRIPTION TYPE	
8.709-524.0	1/4" FPT	Machined-brass Body
8.709-531.0	3/8" FPT	Machined-brass Body
8.709-534.0	1/2" FPT	Machined-brass Body
8.709-521.0	1/4" MPT	Machined-brass Body
8.709-528.0	3/8" MPT	Machined-brass Body
8.709-533.0	1/2" MPT	Machined-brass Body







Plugs

PART NO.	DESCRIPTION	ТУРЕ
8.709-548.0	3/8" FPT	Machined-brass Body
8.709-553.0	1/2" FPT	Machined-brass Body
8.709-539.0	1/4" MPT	Machined-brass Body
8.709-551.0	1/2" MPT	Machined-brass Body

Q.C. SOCKETS & PLUGS- M22 - QUICK DISCONNECT





Part # 8.709-554.0

- PSI: 4000
- Temperature: 175°F
- EPDM O-Rings
- Machined-brass Body

PART NO.	DESCRIPTION
8.709-554.0	3/8" QC Coupler X M22 M
8.709-601.0	3/8" Plug X M22 F
9.114-604.0	3/8" QC Coupler X M22 F



O-Rings - M22, VIton

PART NO.	DESCRIPTION
8.704-036.0	O-rings, M22 Viton
8.704-037.0	Back Ring, 2.4 x 9.3
8.756-782.0	O-rings (EPDM)

KEW STYLE QC'S



PART NO.	DESCRIPTION	PSI
9.113-655.0	KEW Style Plug Male	4000
9.113-654.0	Adapter	3600

Q.C. SOCKETS & PLUGS - DOUBLE SHUT-OFF





8.709-556.0

- Quick disconnect without drips and leaks
- Indispensable for in-plant multiple station systems
- Machined-construction brass, zinc-plated steel or stainless steel

PART NO.	DESCRIPTION	I TYPE	PSI MAX
SOCKETS			
8.709-556.0	1/8" FPT	Brass	3000
8.756-043.0	1/4" FPT	Brass	2700
8.709-559.0	3/8" FPT	Brass	2200
8.709-560.0	1/2" FPT	Brass	2250
8.709-561.0	1/2" FPT	Stainless- steel	4250
8.709-562.0	3/4" FPT	Brass	2000
PLUGS			
8.709-580.0	1/8" FPT	Brass	3000
8.709-583.0	3/8" FPT	Brass	2200
8.756-044.0	1/4" FPT	Brass	2700
8.709-584.0	1/2" FPT	Brass	2250
8.709-582.0	3/8" FPT	Steel, Zinc	4000

O-RING REPLACEMENTS



- Nitrile Up to 210°F
- Use Viton for 230°F and Above

Replacement O-Rings

PART NO.	DESCRIPTION TYPE	MAX TEMP
8.701-994.0	1/8" O-ring Nitrile	Up To 210°F
8.702-015.0	1/4" O-ring Nitrile	Up To 210°F
8.702-017.0	3/8" O-ring Nitrile	Up To 210°F
8.702-021.0	1/2" O-ring Nitrile	Up To 210°F
8.702-084.0	1/4" O-ring Viton	230°F +
8.702-088.0	3/8" O-ring Viton	230°F +
8.702-090.0	1/2" O-ring Viton	230°F +
8.702-023.0	3/32" O-ring Nitrile*	230°F +
* For Kit 1		

Q.C. SOCKETS & PLUGS - A+ BRASS

Designated for 4000 PSI and extended durability. EPDM O-rings as standard. Affordable and rugged all in one.





PART NO.	DESCRIPTION	PSI	
8.750-695.0	1/4" Socket FPT	4000	
8.750-696.0	1/4" Socket MPT	4000	
8.750-697.0	3/8" Socket FPT	4000	
8.750-698.0	3/8" Socket MPT	4000	

SWIVELS - 90°

Excellent for car wash booms and hose reels. Remarkable value, comparable to best swivels made.



- PSI: 4000
- Temperature: 225°F
- Forged-Brass Body
- Nitrile O-Ring

PART NO.	DESCRIPTION	PSI MAX
8.712-460.0	3/8" M x 3/8" F	4000
8.712-461.0	3/8" F x 3/8" F	4000
8.712-462.0	1/2" M x 1/2" F	4000
8.712-463.0	1/2" F x 1/2" F	4000
8.712-464.0	1/2" M x 3/8" F	4000
8.712-469.0	3/8" F x 3/4" M w 3/8" Inside thread	4000
8.900-855.0	Repair Kit	4000

SWIVELS - RIGHT ANGLE



8.712-449.0

- PSI Max: 3000 (Brass)
- PSI Max: 5000 (Stainless-Steel)
- Temperature: 300°F
- 360° Swivel Rotation



8.712-448.0

PART NO.	DESCRIPTION	TYPE
8.712-448.0	3/8" Swivel	Stainless- steel
8.712-450.0	3/8" Swivel	Brass
8.712-449.0	1/2" Swivel	Brass
8.700-287.0	3/8" Repair Kit for 8.712-448.0, 8.712-450.0	
8.700-285.0	1/2" Repair Kit for 8.7	12-449.0



SWIVELS - STAINLESS-STEEL, HIGH-PRESSURE



Perfect for Hose to Trigger Gun Swivel connection



- GPM Max: 15
- MAX PSI: 5000
- Temperature: 250° F
- Viton Seals

PART NO.	DESCRIPTION	PSI
9.113-294.0	3/8 MPT X FPT	5000

SWIVELS - STAINLESS-STEEL, HIGH-PRESSURE AND ECONOMY BRASS



- GPM Max: 10.5 (Stainless-Steel) 7.8 (Brass)
- Temperature: 320°F (Stainless-Steel) 195°F (Brass)
- Highly Resistant to Harsh Chemicals
- "Live" Swivel at Full Pressure
- Weight: 6 oz..

PART NO.	DESCRIPTION	PSI
8.712-456.0	1/4" M x F, Swivel - SS	5600
8.712-455.0	3/8" M x F, Swivel - SS	5600
8.712-443.0	3/8" M x F, Swivel - Brass	3600
8.704-096.0	Repair Kit for 8.712-456.0 8.712-455.0),

SWIVELS - GUN - MOSMATIC



Made of corrosion-resistant material and stainless-steel, selflubricated bearings, the new gun swivel offers highest-quality Swissmade craftsmanship.



- PSI: 4000
- Temperature: 250°F
- GPM: 30

PART NO.	DESCRIPTION
8.712-467.0	1/4" NPTF, Gun Swivel
8.712-466.0	3/8" NPTF. Gun Swivel

SWIVELS - STAINLESS-STEEL BALL BEARING



- PSI Max: 3500
- Temperature: 180°F
- Hardened, Stainless-Steel Body
- Nitrile Buna Seals
- M x F NPT Thread
- Ball-bearing design ensures free swivel action under pressure
- Suitable for extended-wear applications

PART NO.	DESCRIPTION	GPM
8.712-457.0	1/4" Stainless-steel	6.8
8.712-458.0	3/8" Stainless-steel	10.6
8.712-459.0	1/2" Stainless-steel	27.0
8.700-461.0	Repair Kit for 8.712-459.	0

SWIVELS - STAINLESS-STEEL





- PSI: 4000
- Temperature: 200°F
- All Stainless Construction
- Teflon® Swivel Ring
- Rebuildable
- 3/8" In and Out

PART NO.	DESCRIPTION
8.712-446.0	3/8" MPT x FPT
8.712-447.0	3/8" FPT x FPT

SWIVELS - BALL BEARING

Swivels freely even at maximum pressure level noted below.







- Brass and Stainless-steel Materials
- Inline & 90 Degree Options

8.712-479.0

PART NO.	DESCRIPTION	PSI MAX	
INLINE SWIVELS			
8.712-438.0	1/4" MPT x FPT	2000	
8.712-439.0	1/4" MPT x FPT	3500	
8.712-440.0	3/8" MPT x FPT	2000	
8.712-441.0	3/8" MPT x FPT	3500	
90° SWIVELS			
8.712-479.0	1/4" 90°	3500	
8.700-263.0	Rebuild Kit		

SWIVELS - A+ LONG BODY STYLE





- PSI: 3000
- Brass Housing
- Stainless-Steel Flow-Through Bolt
- Close-tolerance fit ensures leakproof seal
- Teflon® Ring Provides Free Swivel

PART NO.	DESCRIPTION	TYPE
8.904-551.0	3/8" MPT x FPT*	Brass
8.904-552.0	3/8" FPT x FPT*	Brass

^{*} Long Body Style

ADAPTERS - BRASS



■ FPT X MPT

PART NO.	DESCRIPTION	TYPE	
8.705-186.0	1/8" x 1/8"	Brass	
9.803-054.0	1/4" x 1/8"	Brass	
8.705-188.0	1/4" x 1/4"	Brass	
8.705-185.0	3/8" x 1/8"	Brass	
9.804-007.0	3/8" x 1/4"	Brass	
8.705-190.0	3/8" x 3/8"	Brass	
8.705-192.0	1/2" x 1/4"	Brass	
8.705-191.0	1/2" x 3/8"	Brass	
9.802-148.0	1/2" x 1/2"	Brass	
8.705-194.0	3/4" x 1/2"	Brass	
8.705-195.0	3/4" x 3/4"	Brass	

BUSHINGS - BRASS



■ FPT X MPT

PART NO.	DESCRIPTION	ТҮРЕ
9.803-564.0	1/4" x 1/8"	Brass
8.705-129.0	3/8" x 1/4"	Brass
9.804-015.0	3/8" x 1/8"	Brass
9.802-135.0	1/2" x 1/4"	Brass
8.705-132.0	1/2" x 3/8"	Brass
8.705-133.0	3/4" x 3/8"	Brass
9.802-136.0	3/4" x 1/2"	Brass
180	Prices effective Ja	ın. 1, 2024. Specifications, product

HEX COUPLINGS - BRASS



PART NO.	DESCRIPTION	ТҮРЕ
8.705-150.0	1/8" F	Brass
8.705-151.0	1/4" F	Brass
8.705-152.0	3/8" F	Brass
8.705-153.0	1/2" F	Brass
8.705-154.0	3/4" F	Brass

HEX COUPLINGS - REDUCING - BRASS



PART NO.	DESCRIPTION	ТУРЕ
8.705-155.0	1/4" x 1/8" F	Brass
8.705-156.0	3/8" x 1/4" F	Brass
8.705-157.0	1/2" x 1/4" F	Brass
8.705-158.0	1/2" x 3/8" F	Brass
8.705-159.0	3/4" x 1/2" F	Brass

HEX NIPPLES - DOUBLE - BRASS



PART NO.	DESCRIPTION	TYPE
8.705-224.0	1/8" x 1/8" M	Brass
9.802-108.0	1/4" x 1/4" M	Brass
8.705-228.0	3/8" x 3/8" M	Brass
9.803-989.0	1/2" x 1/2" M	Brass
8.705-233.0	3/4" x 3/4" M	Brass
8.705-234.0	1" x 1" M	Brass

HEX REDUCING NIPPLES - BRASS



PART NO.	DESCRIPTION	TYPE
8.630-575.0	1/4" x 1/8" M	Brass
8.705-223.0	3/8" x 1/8" M	Brass
8.705-227.0	3/8" x 1/4" M	Brass
8.705-229.0	1/2" x 1/4" M	Brass
9.803-276.0	1/2" x 3/8" M	Brass
9.803-556.0	3/4" x 1/2" M	Brass



NIPPLES - BRASS - OPEN & CLOSE





Close Nipple

PART NO.	DESCRIPTION	TYPE	
8.705-201.0	1/8" Close	Brass	
8.705-204.0	1/4" Close	Brass	
8.705-211.0	3/8" Close	Brass	
9.802-109.0	1/2" Close	Brass	
8.705-220.0	3/4" Close	Brass	
8.705-202.0	1/8" x 1-1/2"	Brass	
8.705-203.0	1/8" x 2-1/2"	Brass	
8.705-205.0	1/4" x 1-1/2"	Brass	
8.705-206.0	1/4" x 2"	Brass	
8.705-207.0	1/4" x 2-1/2"	Brass	
8.705-212.0	3/8" x 1-1/2"	Brass	
8.705-213.0	3/8" x 2-1/2"	Brass	
8.705-214.0	3/8" x 3"	Brass	
8.705-217.0	1/2" x 1-1/2"	Brass	
8.705-218.0	1/2" x 3"	Brass	
8.705-221.0	3/4" x 2"	Brass	
8.705-222.0	3/4" x 3"	Brass	

SWIVELS - JIC



9.802-151.0

PART NO.	DESCRIPTION	ТҮРЕ
9.802-153.0	1/4" Barb x 1/4" JIC FP	T Brass
9.802-151.0	\$ 1/2" Barb x 1/2" JIC FP	T Brass
9.802-152.0	3/4" Barb x 3/4" JIC FP	T Brass
9.802-048.0	\$\frac{1}{2}\text{" JIC FPT x 3/8\text{" MPT}}	Γ Steel
8.706-315.0	1/2" JIC FPT x 1/2" MPT	Γ Steel

NIPPLES - JIC X-PIPE



PART NO.	DESCRIPTION
8.706-265.0	1/2" JIC x 1/4" FPT
9.802-037.0	1/2" JIC x 3/8" FPT
9.802-036.0	1/2" JIC x 3/8" MPT
9.802-038.0	1/2" JIC x 1/2" MPT

ELBOWS - 90° - BRASS









PART NO.	DESCRIPTION	TYPE
8.705-160.0	1/8" FPT	Brass
8.705-161.0	1/4" FPT	Brass
9.802-113.0	3/8" FPT	Brass
9.803-265.0	1/2" FPT	Brass
8.705-164.0	3/4" FPT	Brass
8.705-169.0	1/4" x 1/4" MPT	Brass
8.705-171.0	3/8" x 3/8" MPT	Brass
8.705-173.0	1/2" x 1/2" MPT	Brass
9.802-129.0	1/2" JIC x 3/8" MPT	Brass
9.802-131.0	1/2" JIC x 1/2" MPT	Brass
REDUCING ELI	BOWS	
8.705-165.0	1/4" FPT x 1/8" FPT	Brass
8.705-166.0	3/8" FPT x 1/4" FPT	Brass
8.705-168.0	1/4" x 1/8" MPT	Brass
8.705-167.0	3/8" x 1/8" MPT	Brass
8.705-170.0	3/8" x 1/4" MPT	Brass
8.705-172.0	1/2" x 3/8" MPT	Brass

ELBOWS - STREET-BRASS





PART NO.	DESCRIPTION	TYPE
90° STREET ELBO	ows	
8.705-174.0	1/8" M x F	Brass
9.803-839.0	1/4" M x F	Brass
9.802-114.0	3/8" M x F	Brass
9.802-115.0	1/2" M x F	Brass
9.803-555.0	3/4" M x F	Brass
45° STREET ELBOWS		
8.705-180.0	1/8" M x F	Brass
8.705-181.0	1/4" M x F	Brass
8.705-182.0	3/8" M x F	Brass
8.705-183.0	1/2" M x F	Brass
8.705-184.0	3/4" M x F	Brass

TEES - FPT - FORGED-BRASS



PART NO.	DESCRIPTION	ТУРЕ
8.705-246.0	1/8" F	Brass
8.705-247.0	1/4" F	Brass
8.705-248.0	3/8" F	Brass
9.802-117.0	1/2" F	Brass
8.705-251.0	3/4" F	Brass

TEES - BRANCH-BRASS



■ FPT x FPT x MPT Pipe Run

PART NO.	DESCRIPTION	TYPE	
9.802-120.0	1/4"	Brass	
8.705-254.0	3/8"	Brass	
8.705-255.0	1/2"	Brass	

TEES - STREET-BRASS



■ FPT x FPT x MPT Pipe Run

PART NO.	DESCRIPTION	ТУРЕ
9.802-121.0	1/4"	Brass
8.705-257.0	3/8"	Brass
9.802-122.0	1/2"	Brass
8.705-259.0	3/4"	Brass

CROSSES - FPT - BRASS EXTRUDED



PART NO.	DESCRIPTION	ТУРЕ
8.705-196.0	1/4"	Brass
8.705-197.0	3/8"	Brass
8.705-198.0	1/2"	Brass
8.705-199.0	3/4"	Brass

NIPPLES -JIC - BRASS



9.802-128.0



8.706-894.0

PART NO.	DESCRIPTION	ТҮРЕ
8.706-872.0	1/2" JIC x 1/4" MPT	Brass
9.802-127.0	1/2" JIC x 3/8" MPT	Brass
9.802-128.0	1/2" JIC x 1/2" MPT	Brass
8.706-877.0	1/2" JIC x 3/4" MPT	Brass
8.706-894.0	1/2" JIC x 1/2" FPT	Brass
8.706-896.0	1/2" JIC x 1/4" FPT	Brass
8.706-897.0	1/2" JIC x 3/4" FPT	Brass
8.706-899.0	3/4" JIC x 3/4" Pipe MPT	Brass
8.706-971.0	1/2" JIC x 3/4" GHF	Brass

BARBS - PUSH-N-LOCK





Normally requires no clamps

Barb x Barb

	no ciamps	
PART NO.	DESCRIPTION	TYPE
BARB X MPT		
8.705-069.0	1/4" x 1/8"	Brass
8.705-070.0	1/4" x 1/4"	Brass
8.705-071.0	1/4" x 3/8"	Brass
8.705-072.0	3/8" x 1/8"	Brass
8.705-073.0	3/8" x 1/4"	Brass
8.705-074.0	3/8" x 3/8"	Brass
8.705-075.0	3/8" x 1/2"	Brass
8.705-076.0	3/8" x 3/4"	Brass
8.705-077.0	1/2" x 1/4"	Brass
9.802-156.0	1/2" x 3/8"	Brass
8.705-079.0	1/2" x 1/2"	Brass
8.705-080.0	1/2" x 3/4"	Brass
8.705-081.0	5/8" x 3/8"	Brass
8.705-082.0	5/8" x 1/2"	Brass
8.705-083.0	5/8" x 3/4"	Brass
8.705-084.0	3/4" x 1/2"	Brass
8.705-085.0	3/4" x 3/4"	Brass
BARB X BARB		
8.705-064.0	1/4" x 1/4"	Brass
8.705-065.0	3/8" x 3/8"	Brass
8.705-066.0	1/2" x 1/2"	Brass
8.705-067.0	5/8" x 5/8"	Brass
8.705-068.0	3/4" x 3/4"	Brass



HOSE BARBS - BRASS CHECK BARBS



- 1/4" MPT x 1/4" Barb
- Brass Body
- Buna or Viton Check Ball

PART NO.	DESCRIPTION	TYPE
8.904-389.0	Check Hose Barb - Viton	Brass Body

HOSE BARBS - SWIVEL - LOW PRESSURE

Swivels easily at low pressure to eliminate twists and tangles in chemical or water lines.



- PSI Max: 300
- Temperature: 210°F
- Brass MPT base with steel hose barb

PART NO.	DESCRIPTION	ТҮРЕ
8.705-050.0	1/4" x 1/4"	Brass MPT, Steel Hose Barb
8.705-052.0	3/8" x 3/8"	Brass MPT, Steel Hose Barb
8.705-053.0	1/2" x 1/2"	Brass MPT, Steel Hose Barb

HOSE BARBS - ORIFICED

Inexpensive way to create suction on inlet side of pump



- 3/8" MPT x 5/8" Barb
- Used in-line from float tank to pump
- One-Piece, Machined-Brass
- Standard orifice 5/32" drill up to 3/8" to fit your need

PART NO.	DESCRIPTION	TYPE
8.705-093.0	Orificed Hose Barb	Machined Brass

DRAIN COCKS



PART NO.	DESCRIPTION
8.705-060.0	1/4" Fuel Drain with Tee Handle

HOSE BARBS - BRASS



■ 90° Barb x MPT, Barb x MPT, & Barb x FPT



Barb x MPT

PART NO.	DESCRIPTION	TYPE	
90° BARB X MPT			
9.802-142.0	1/4" x 1/8"	Brass	
9.802-143.0	1/4" x 1/4"	Brass	
8.705-118.0	3/8" x 1/4"	Brass	
8.705-119.0	3/8" x 3/8"	Brass	
8.705-120.0	3/8" x 1/2"	Brass	
8.705-121.0	1/2" x 1/4"	Brass	
8.705-122.0	1/2" x 3/8"	Brass	
8.705-123.0	1/2" x 1/2"	Brass	
8.705-125.0	5/8" x 3/8"	Brass	
8.705-126.0	5/8" x 1/2"	Brass	
BARB X MPT			
8.705-097.0	1/8" x 1/4"	Brass	
9.802-137.0	1/4" x 1/8"	Brass	
9.802-138.0	1/4" x 1/4"	Brass	
8.705-102.0	1/4" x 3/8"	Brass	
8.705-108.0	1/4" x 1/2"	Brass	
8.705-098.0	3/8" x 1/8"	Brass	
8.705-104.0	3/8" x 1/4"	Brass	
8.705-105.0	3/8" x 3/8"	Brass	
8.705-103.0	3/8" x 1/2"	Brass	
8.705-100.0	3/8" x 3/4"	Brass	
8.705-110.0	1/2" x 1/4"	Brass	
8.705-106.0	1/2" x 3/8"	Brass	
8.705-109.0	1/2" x 1/2"	Brass	
8.705-111.0	1/2" x 3/4"	Brass	
8.705-107.0	5/8" x 3/8"	Brass	
9.802-140.0	5/8" x 1/2"	Brass	
8.705-113.0	5/8" x 3/4"	Brass	
8.705-114.0	3/4" x 1/2"	Brass	
8.705-115.0	3/4" x 3/4"	Brass	
BARB X FPT			
8.706-949.0	1/4" x 1/4"	Brass	

PLUGS - HEX HEAD



PART NO.	DESCRIPTION
8.705-236.0	1/8"
8.705-238.0	1/4"
8.705-240.0	3/8"
9.803-673.0	1/2"
8.705-244.0	3/4"

PLUGS - ALLEN HEAD



PART NO.	DESCRIPTION	
9.803-051.0	1/8"	
9.802-124.0	1/4"	
8.705-241.0	3/8"	
8.705-243.0	1/2"	

LOCKNUT FITTINGS - HEX-HEAD PLUGS



PART NO.	DESCRIPTION
8.705-041.0	1/8"
8.705-042.0	1/4"
8.705-043.0	3/8"
8.705-044.0	1/2"
8.705-045.0	3/4"

GARDEN HOSE FITTINGS





8.705-034.0





■ MGH = Male Garden Hose

■ FGH = Female Garden Hose

■ Heavy-Duty, Machined-brass Fittings











8.709-460.0	9.804-016.0	9.802-145.0	8.705-087.0	9.117-454.0
PART NO.	DESCR	IPTION		
SWIVEL FIT	TINGS - 3/4"	FGH		
8.705-032.0	1/4" N	1PT		
8.901-292.0	3/8" N	1PT		
8.901-291.0	1/2" N	1PT		
8.705-033.0	1/2" F	PT (S-1)		
9.802-146.0		GH Swivel wi MPT Strainer	th	
8.705-034.0	3/4" F	PT (S-2)		
8.705-035.0	3/4" F	GH (S-3)		
8.705-008.0	1/2" B	arb		
8.705-009.0	5/8" B	arb		
8.705-010.0	3/4" B	arb		
GARDEN HO	SE QUICK CO	OUPLERS		
8.709-460.0	Femal	e Hose Couple	er	
8.709-508.0	Male I	Hose Plug		
GARDEN HO	SE ACCESSO	RIES		
8.705-016.0	Garde	n Hose Washe	r	
9.804-016.0	S Filter	Screen Washe	r (30-mesh)	
SOLID FITTI	NGS			
8.705-024.0	3/4" N	MGH x 3/8" MF	PT	
9.802-145.0	3/4" N	MGH x 1/2" MF	PT	
8.705-026.0	3/4" N	MGH x 3/4" MF	PT	
8.705-019.0	3/4" F	GH x 1/2" FP7	_	
8.705-020.0	3/4" F	GH x 3/4" FP1	_	
8.705-022.0	3/4" F	GH x 1/2" MP	Т	
8.705-023.0	3/4" F	GH x 3/4" MP	T	
8.705-018.0		GH x 3/4" FGI ess-steel)	1	
HOSE BARB	FITTINGS			
8.705-086.0	3/8" B	arb x 3/4" M0	SH	
8.705-087.0	1/2" B	arb x 3/4" M0	ΣH	
8.705-088.0	5/8" B	arb x 3/4" M0	ΣH	
8.705-089.0	3/4" B	arb x 3/4" M0	3H	
8.705-091.0	3/8" B	arb x 3/4" FG	Н	
8.705-092.0	1/2" B	arb x 3/4" FG	Н	
8.705-094.0	5/8" B	arb x 3/4" FG	Н	
8.705-095.0	3/4" B	arb x 3/4" FG	Н	
HOSE CONN	ECTOR WITH	I TENSION SP	RING	
9.117-454.0	3/4" F	GH Inlet, 1/2	" M Outlet	

3/4" F GH Inlet, 3/8" M Outlet



HOSE CLAMPS

WARNING: LOW-PRESSURE USE ONLY!



- Not for Use on Pressure Washer Discharge Hose
- Stainless-Steel Band and Housing
- Screw Clamp Gear Tensions



- Nylon "Speedi-Clamp" Tightens with a Snap
- Releases with a Twist
- Pack of 50

PART NO.	BAND	OD	MIN	- MAX	
SCREW CLAMPS					
9.802-200.0	4 mm	5/16"	.25	63	
8.710-456.0	5 mm	5/16"	.38	88	
8.710-457.0	10 mm	5/16"	.50	- 1.06	
8.710-458.0	H8	1/2"	.44	91	
8.710-459.0	H10	1/2"	.56	- 1.06	
8.710-460.0	H12	1/2"	.69	- 1.25	
8.710-461.0	H16	1/2"	.7	- 1.50	
8.710-464.0	H32	1/2"	1.56	- 2.50	
6.390-126.0	Red Spring Clamp		.466	54	
8.709-116.0	Green Spring Clamp		.40	48	
SPEEDI-CLAMPS	- PACKS OF 50				
8.904-167.0	1/4" ID Speed	li-Clamp)		
8.904-168.0	3/8" ID Speed	li-Clamp)		

ADAPTERS - HIGH PSI - STEEL



■ MPT x FPT

PART NO.	DESCRIPTION	PSI	ТҮРЕ
8.705-356.0	1/4" x 1/4"	6000	Steel
8.705-357.0	1/4" x 3/8"	6000	Steel
9.804-553.0	3/8" x 3/8"	6000	Steel
8.706-302.0	3/8" x 1/2"	6000	Steel
8.705-360.0	1/2" x 1/2"	6000	Steel
8.705-361.0	1/2" x 3/4"	6000	Steel
8.705-362.0	3/4" x 3/4"	6000	Steel

COUPLINGS - HEX - HIGH PSI - STEEL

- Up to 6000 PSI Working Pressure (18,000 PSI Burst)
- Attractive Zinc-Plated Protective Coating
- U.S. Standard Taper Pipe Threads

COUPLINGS - HEX - HEAVY WALL STEEL



■ FPT x FPT

PART NO.	DESCRIPTION	PSI
HEX COUPLINGS		
8.705-364.0	1/4" × 1/4"	6000
8.705-366.0	3/8" x 3/8"	6000
8.706-141.0	1/2" x 1/2"	5000
8.705-371.0	3/4" x 3/4"	5000
REDUCING COUP	PLINGS	
8.705-365.0	3/8" x 1/4"	6000
8.705-367.0	1/2" x 3/8"	5000
8.705-368.0	1/2" x 1/4"	5000
8.705-370.0	3/4" x 1/2"	4000

NIPPLES - HEX - HIGH PSI - STEEL



■ MPT X MPT

PART NO.	DESCRIPTION	PSI	
9.802-010.0	1/4" x 1/4"	6000	
9.802-011.0	3/8" x 3/8"	6000	
9.802-012.0	1/2" x 1/2"	6000	
8.705-380.0	3/4" x 3/4"	6000	
9.802-022.0	3/8" x 1/4"	6000	
8.705-375.0	1/2" x 1/4"	6000	
8.705-376.0	1/2" x 3/8"	6000	
8.705-379.0	3/4" x 1/2"	6000	

ELBOWS - 45°



■ FPT X FPT

PART NO.	DESCRIPTION
8.706-278.0	3/8" x 3/8", 45°

ELBOWS - STREET - HIGH PSI - STEEL



■ MPT x FPT

PART NO.	DESCRIPTION	PSI	
9.802-029.0	1/4" x 1/4"	6000	
9.804-080.0	1/4" x 3/8"	6000	
9.802-030.0	3/8" x 3/8"	6000	
8.705-384.0	3/8" x 1/2"	6000	
9.803-045.0	1/2" x 1/2"	6000	
8.705-386.0	1/2" x 3/4"	6000	
8.705-387.0	3/4" x 3/4"	6000	

TEES - STREET TEE - HIGH PSI - STEEL



■ FPT x FPT x MPT Pipe Run

PART NO.	DESCRIPTION	PSI	
8.705-428.0	1/4"	5000	
9.802-033.0	3/8"	4500	
9.802-034.0	1/2"	3000	
8.705-431.0	3/4"	3000	

ELBOWS - HIGH PSI - STEEL



PART NO.	DESCRIPTION	PSI
FART NO.	DESCRIPTION	F3I
8.706-176.0	1/4" x 1/8" FPT	4500
8.705-393.0	1/4" x 1/4" FPT	5000
8.705-394.0	1/4" x 3/8" FPT	4500
9.802-023.0	3/8" x 3/8" FPT	4500
8.705-396.0	3/8" x 1/2" FPT	3000
8.705-397.0	1/2" x 1/2" FPT	3000
8.705-398.0	1/2" x 3/4" FPT	4000
8.705-399.0	3/4" x 3/4" FPT	4000
9.802-039.0	1/2" JIC x 3/8" MPT	5000
9.802-040.0	1/2" JIC x 1/2" MPT	5000
9.802-130.0	1/2" JIC x 1/4" MPT	5000
8.706-906.0	1/2" JIC x 3/4" FPT	5000

CROSSES - 4 CONNECTS - HIGH PSI - STEEL



PART NO.	DESCRIPTION	PSI
8.705-418.0	1/4" FPT	5000
8.705-419.0	3/8" FPT	4500
8.705-420.0	1/2" FPT	3000
8.705-421.0	3/4" FPT	3000

TEES - 3 CONNECTS - HIGH PSI - FORGED



PART NO.	DESCRIPTION	PSI	
8.705-412.0	1/4" FPT	5000	
8.705-414.0	3/8" FPT	4500	
8.706-216.0	1/2" FPT	3000	
8.705-417.0	3/4" FPT	3000	
8.706-213.0	1/4" MPT	5000	

REDUCING BUSHING - HIGH PSI - STEEL



■ MPT x FPT

PART NO.	DESCRIPTION	PSI	TYPE
9.802-046.0	3/8" x 1/4"	6000	Steel
8.705-423.0	1/2" x 1/4"	6000	Steel
9.802-045.0	S 1/2" x 3/8"	6000	Steel
8.705-426.0	3/4" x 1/2"	6000	Steel

HEX PIPE PLUGS - HIGH PSI - STEEL



PART NO.	DESCRIPTION	PSI	TYPE
9.803-530.0	1/4" MPT	6000	Steel
8.705-433.0	3/8" MPT	6000	Steel
8.705-434.0	1/2" MPT	6000	Steel
8.705-435.0	3/4" MPT	6000	Steel



GALVANIZED PIPE FITTINGS

- Pressed-Steel Fittings external galvanized for excellent chemical resistance
- NOT recommended for highpressure piping applications
- Ideal for supply line (city water pressure) applications working pressure rating of 125 PSI

ELBOWS - STREET - 90° - GALVANIZED



PART NO.	DESCRIPTION	
8.705-407.0	1/4" MPT x FPT	
8.705-408.0	3/8" MPT x FPT	
8.705-409.0	1/2" MPT x FPT	
8.705-410.0	3/4" MPT x FPT	

TEES - BANDED - 3 CONNECTS - GALVANIZED



PART NO.	DESCRIPTION
8.705-456.0	1/4" FPT x FPT x FPT
8.705-458.0	3/8" FPT x FPT x FPT
8.705-459.0	1/2" FPT x FPT x FPT
8.705-461.0	3/4" FPT x FPT x FPT

COUPLINGS - GALVANIZED



PART NO.	DESCRIPTION
8.705-436.0	1/4" FPT x FPT
8.705-437.0	3/8" FPT x FPT
8.705-438.0	1/2" FPT x FPT
8.705-439.0	3/4" FPT x FPT

ELBOWS - 90° - GALVANIZED



PART NO.	DESCRIPTION	
8.705-405.0	1/2" FPT x FPT	
8.705-406.0	3/4" FPT x FPT	

NIPPLES - PIPE - MPT - HIGH PSI - ZINC



PART NO.	DESCRIPTION	PSI	TYPE
9.803-043.0	2" x 1/4"	6000	Zinc
8.705-441.0	3" x 1/4"	6000	Zinc
8.705-443.0	2" x 3/8"	6000	Zinc
8.705-985.0	3" x 3/8"	6000	Zinc
8.705-446.0	2" x 1/2"	6000	Zinc
9.802-014.0	3" x 1/2"	6000	Zinc
8.705-996.0	5" x 1/2"	6000	Zinc
8.705-450.0	2" x 3/4"	6000	Zinc
8.705-451.0	3" x 3/4"	6000	Zinc
8.705-452.0	4" x 3/4"	6000	Zinc
8.705-453.0	6" x 3/4"	6000	Zinc

FILTERS - CHEMICAL - "THE BIG ONE"



Larger, heavier, and with more filtering area than competitors' filters.



- Corrosion-resistant Plastic
- Stepped 1/4" & 3/8" Hose Barb
- Weighted to Hold onto Bottom of Tank

PART NO.	DESCRIPTION
8.709-938.0	with Check Valve
8.709-939.0	without Check Valve

FILTERS - CHEMICAL - BRASS



50-mesh, stainless-steel screen. Removable mesh for easy cleaning. Heavy-duty, one-piece brass body holds the filter on the bottom of tank.



- 1/4" Hose Barb
- Stainless-Steel Check Ball

PART NO.	DESCRIPTION
8.707-058.0	with Check Valve
8.709-934.0	without Check Valve

FILTERS - CHEMICAL - BRASS / PLASTIC

Polypropylene and brass construction.



■ 7 mm Hose Barb

PART NO.	DESCRIPTION
8.709-935.0	with Check Valve
9.802-160.0	without Check Valve

FILTERS - CHEMICAL LINES WITH FILTER



■ 6-Foot Long, 1/4" Clear Vinyl Tubing

PART NO.	DESCRIPTION	PSI
8.903-991.0	Chemical Line, Filter with Check Valve	Brass Filter
8.903-993.0	Chemical Line, Filter with Check Valve	Plastic Filter
8.903-996.0	Chemical Line, Filter without Check Valve	Plastic Filter

FILTERS - IN-LINE - HEAVY-DUTY



- PSI Max: 145
- GPM Max: 8
- Temperature Max: 140°F
- 1/2" Female x Male
- 50-Mesh Screen
- Unbreakable Reinforced Nylon Cap

PART NO.	DESCRIPTION	PSI
8.709-974.0	Filter	145
8.709-975.0	Filter with Auxiliary Bypass Port	145
8.704-172.0	Replacement Filter	145

FILTERS - IN-LINE - ALL METAL

Diecast aluminum body & cover with a black anodized finish.





- PSI Max: 580
- GPM Max: 6.6
- Temperature Max: 195°F
- 38-Mesh Screen
- 1/2" Female x Male

PART NO.	DESCRIPTION	PSI
8.709-976.0	All Metal In-Line Filter	170

FILTERS - IN-LINE - GREEN-CAP

The original Green-Cap!



- PSI Max: 145
- GPM Max: 6
- 50-Mesh Stainless Screen
- Aluminum Housing with a Plastic Cap
- 1/2" FPT Inlet
- 1/2" MPT Outlet
- Two 1/2" MPT Bypass Ports

PART NO.	DESCRIPTION	MAX PSI
8.709-961.0	Green Cap Filter	145
8.701-383.0	Replacement Screen	145
8.701-382.0	Replacement Cap	145
8.702-034.0	Replacement O-Ring	145

FILTERS - CLEAR BOWL



- Low-Profile Style
- MPT Inlet and Outlet
- White Nylon Body
- Clear Bowl
- Stainless-Steel Screen
- L3" L x 1-3/4" W x 2-3/8" H

PART NO.	DESCRIPTION	COLOR
8.709-962.0	1/4", 40-Mesh Screen	Clear Bowl
8.709-963.0	1/4", 80-Mesh Screen	Clear Bowl
8.709-964.0	3/8", 40-Mesh Screen	Clear Bowl
8.709-965.0	3/8", 80-Mesh Screen	Clear Bowl
8.709-966.0	1/2", 40-Mesh Screen	Clear Bowl
8.709-967.0	1/2", 80-Mesh Screen	Clear Bowl
8.700-563.0	80-Mesh Replacement	Screen
8.700-564.0	40-Mesh Replacement	Screen



FILTERS - IN-LINE - CAN-TYPE





- 40- or 80-Mesh Filtration
- Heavy-duty molded plastic with stainless-steel screen
- Hanger tab standard on 3/8", 1/2" and 3/4"
- Choose Black or Clear Filter Cans

PART NO.	DESCRIPTION	COLOR	
40-MESH FILTERS			
8.709-982.0	3/8" Hanger Tab	Black	
8.709-986.0	1/2" Hanger Tab	Black	
8.709-990.0	S 3/4" Hanger Tab	Black	
8.709-994.0	1" Hanger Tab	Black	
8.710-001.0	1-1/4" Hanger Tab	Black	
8.710-003.0	1-1/2" Hanger Tab	Black	
8.709-983.0	3/8" Hanger Tab	Clear	
8.709-987.0	1/2" Hanger Tab	Clear	
8.709-991.0	S 3/4" Hanger Tab	Clear	
8.709-996.0	1" Hanger Tab	Clear	
8.710-002.0	1-1/4" Hanger Tab	Clear	
8.710-004.0	1-1/2" Hanger Tab	Clear	
80-MESH FILT	ERS		
8.709-988.0	1/2" Hanger Tab	Black	
8.709-992.0	3/4" Hanger Tab	Black	
8.709-995.0	1" Hanger Tab	Black	
8.710-005.0	1-1/4" Hanger Tab	Black	
8.709-999.0	1-1/2" Hanger Tab	Black	
8.709-989.0	1/2" Hanger Tab	Clear	
8.709-993.0	S 3/4" Hanger Tab	Clear	
8.709-997.0	1" Hanger Tab	Clear	
8.710-006.0	1-1/4" Hanger Tab	Clear	
8.710-000.0	1-1/2" Hanger Tab	Clear	

PART NO.	DESCRIPTION	COLOR
IN-LINE CAN-TY	PE FILTER PARTS - 3/8", 1	1/2", 3/4"
8.700-555.0	Gasket	
8.700-557.0	Viton Gasket	
8.700-559.0	Bowl	Black
8.700-560.0	Bowl	Clear
8.700-565.0	40-Mesh Screen, Blue	
8.700-567.0	80-Mesh Screen, White	
8.700-569.0	1/2" Top with Tab	
8.700-570.0	3/4" Top with Tab	
IN-LINE CAN-TY	PE FILTER PARTS - 1", 1-1	/4", 1-1/2"
8.700-556.0	Gasket	
8.700-558.0	Viton Gasket	
8.700-566.0	1", 40-Mesh Screen	
8.700-576.0	1-1/2", 40-Mesh Screen	1
8.700-568.0	1", 80-Mesh Screen	
8.700-577.0	1-1/4", 80-Mesh Screen	1
8.700-578.0	1-1/2", 80-Mesh Screen	1
8.700-571.0	1" Filter Top	
8.700-573.0	1", 1-1/4", 1-1/2" Bowl	Black
8.700-574.0	1", 1-1/4", 1-1/2" Bowl	Clear

STRAINERS - Y TRAP











8.710-145.0	8.710-146.0	8.710-147.0
■ Stainless-Steel Screen	■ Weighted	to hold at bo

- Combination 1/2", 3/4" Hose Barb
- Weighted to hold at bottom of tank or source
- PART NO. DESCRIPTION

 8.710-145.0 3/8" NPT x 3/4" GH

 8.710-147.0 3/8" NPT x 3/4" GH
 with 1/4" Bypass

 8.710-144.0 1/2" NPT x 3/4" GH

 8.710-146.0 1/2" NPT x 3/4" GH with 1/3"
 Bypass



- PSI Max: 170
- Temperature Max: 194°F
- Brass Bodies and Cap
- FPT Inlet and Outlet
- Stainless-Steel 50-Mesh Cylinder Screen

PART NO.	DESCRIPTION	MAX PSI
8.709-956.0	1/4" FPT Brass Bodies and Cap	170
8.709-957.0	3/8" FPT Brass Bodies and Cap	170
8.709-958.0	1/2" FPT Brass Bodies and Cap	170
8.709-959.0	3/4" FPT Brass Bodies and Cap	170
8.709-960.0		170

FOOT / CHECK VALVE

Includes backflow check and perforated screen, prevents damage to pump or control valves.



- Removable Stainless-Steel Screen
- Spring-Loaded Check Valve
- Cast-Brass Bodies
- FPT Outlet

PART NO.	DESCRIPTION	TYPE
8.709-388.0	1/2" Foot Check Valve and Screen	
8.709-390.0	1" Spring Check Valve	Brass

FOOT VALVES - SUCTION - ST35 / ST35R

Weighted to hold at bottom of tank or source.



- Stainless-Steel Screen
- Combination 1/2", 3/4" Hose Barb

PART NO.	DESCRIPTION	ТҮРЕ
8.709-970.0	Suction Foot Valve	
	with Check Valve	Screen

STRAINERS / TANK SCREEN

Use for tank drain or chemical line.



- Stainless-Steel Screen -40 or 50 Mesh
- PVC Base attaches to nipple or tubing

PART NO.	DESCRIPTION	MESH
8.710-008.0	1/4" FPT	50
8.710-010.0	3/8" FPT	50
8.710-011.0	1/2" FPT	40
9.802-162.0	1/2" FPT	50
8.710-013.0	3/4" FPT	40
8.710-014.0	3/4" FPT	50
8.710-015.0	1" FPT	40
8.710-016.0	1-1/2" FPT	40

FILTERS - IN-LINE - NOZZLE - HIGH-PRESSURE

Protect your turbo nozzle from damage caused by debris in the water flow.







8.709-979.0

■ PSI Max: 5000

■ 1/4" MPT Outlet

■ Temperature: 300°F

■ 100 Mesh Screen

PART NO.	DESCRIPTION	TYPE
8.709-978.0	1/4" FPT Inlet x 1/4" MPT Outlet	Brass
8.709-979.0	1/4" QC Inlet x 1/4" MPT Outlet	Brass
8.710-149.0	1/4" QC Inlet x 1/4" MPT Outlet	416 SS
8.710-150.0	1/4" MPT Inlet x 1/4" MPT Outlet	Brass
8.704-234.0	Replacement filter for 8.709-978.0 / 8.709-979.0	
8.701-201.0	Replacement filter for 8.710-149.0 / 8.710-150.0	

FILTERS - FUEL

In-line, disposable.





8.709-942.0

9.802-211.0

PART NO.	DESCRIPTION	TYPE	
9.802-211.0	5 1/4" Inlet / Outlet	Plastic	
8.709-942.0	1/4" Inlet / Outlet	Metal	
8.709-943.0	3/8" Inlet / Outlet	Plastic	



FILTERS - HIGH-VOLUME

Molded plastic housing.



- PSI Max: 125
- GPM Max: 12 at 50 Micron
- GPM Max: 10 at 5 or 20 Micron
- 3/4" FPT Inlet and Outlet
- 14-1/2" Tall x 5-1/2" Port to Port

PART NO.	DESCRIPTION	MAX PSI
8.710-017.0	Housing only	125
8.753-552.0	Mounting Bracket / Hardware	125
8.700-581.0	Replacement O-ring	125



- Pleated Ployester / Polypropylene Core
- Recommended for large flow, low- pressure applications (up to 60 PSI)

PART NO.	DESCRIPTION	GPM
ULTRA FINE FII	LTER ELEMENTS	
8.710-019.0	5 Micron	10
8.710-020.0	20 Micron	10
8.710-021.0	50 Micron	12



 Recommended for maximum filtration with reduced flow requirements (up to 130 PSI)

PART NO.	DESCRIPTION	GPM	4
SYNTHETIC STR	ING WOUND ELEM	ENTS	
8.710-022.0	5 Micron	4	
8.710-023.0	20 Micron	5	
8.710-024.0	50 Micron	6	

FILTERS - FUEL - CLEAR BOWL



- Aluminum Housing
- Non-replaceable 120 mesh stainless-steel screen
- 1/4" x 1/4"
- Clear Acrylic Bowl

PART NO. DESCRIPTION 8.709-948.0 S Complete Unit

FILTERS - FUEL / WATER SEPARATOR - LEGACY





- 10 Micron Filtration
- Spin-On Convenience
- Water-Separation Chamber
- 1/4" FPT Inlet / Outlet
- Easy Drain Water / Sediment Bowl

PART NO.		DESCRIPTION	>		
8.725-306.0	S	Complete Unit			
8.725-307.0*	S	Element Only			

*Order 24 for a full case

FILTERS - BLUE TOP







PART NO.	DESCRIPTION	TYPE
HOUSING		
8.753-559.0	Housing, 5", 1/2" F-F	
8.753-561.0	Housing, 5", 1" F-F	
8.753-562.0	Housing, 10", 1/2" F-F	
8.753-563.0	Housing, 10", 3/4" F-F	
CARTRIDGE		
8.753-564.0	Cartridge, 10" Poly Thread	Disposable
8.753-565.0	Cartridge, 5" Poly Thread	
8.753-566.0	Cartridge, 10" Nylon Mesh	Washable
8.753-567.0	Cartridge, 5" Nylon Mesh	

FILTERS - FUEL ELEMENT - GENERAL



- Can Type
- GPM Max: 10
- 10 Micron Flitration
- Inexpensive Replacement
- Wool Felt Element

PART NO. DESCRIPTION
8.709-950.0 Selement Only - 1A-30

FILTERS - FUEL / WATER SEPARATOR - RACOR



Racor

The "Max" fuel system protector.



- 10 Micron Filtration
- Spin-On Convenience
- Water-Separation Chamber
- 1/4" FPT Inlet / Outlet
- Easy Drain Water / Sediment Bowl

PART NO	DESCRIPTION
9.802-212.0	Complete Unit
8.709-953.0	S Element
8.700-553.0	Plastic Bowl



FILTERS - FUNNEL - RACOR

■ GPM: 3.9

■ Telfon-Coated, Stainless-Steel Filter

 Separates Free Water and Contaminates from Gasoline / Diesel / Kerosene

PART NO. DESCRIPTION
8.709-955.0 Racor Filter Funnel

SEWER / TUBE CLEANING NOZZLES - ST-49 & "MINI"









0 -forward, 3 back ports



1 -forward, 4 back ports



1 -forward, 3 back ports





0 -forward, 3 back ports



0 -forward, 2 side ports

The reverse jets on the fixed and rotary nozzles pull the hose through the tube or sewer line and blast debris from line or tube walls.

- PSI: 4200
- Physically Small for Cornering Ability
- Corrosion-resistant Stainless-steel Construction
- Backward Ports Drive the Nozzle Forward and Flush Debris
- Orifice Size Indicated on Non-rotating Styles
- Forward Ports Blast into Pipe and Breaks Up Clogs and Debris
- Rotating Style Adds Extra Agitation and Surface Cleaning

PART NO.	NOZZLE	ORIFICE SIZE	O.D.	PORTS		
NON-ROTATING "MINI" SEWER NOZZLES						
8.710-875.0	1/8"	4.5	.580"	0-Forward, 3 Back		
8.710-874.0	1/8"	5.5	.580"	1-Forward, 3 Back		
8.710-878.0	1/4"	4.5	.730"	1-Forward, 3 Back		
8.710-876.0	1/4"	5.5	.730"	1-Forward, 3 Back		
8.710-877.0	1/4"	6.0	.730"	1-Forward, 4 Back		
8.710-880.0	1/4"	7.5	.730"	1-Forward, 4 Back		
8.710-879.0	1/4"	8.0	.730"	1-Forward, 3 Back		
8.710-881.0	1/4"	12	.730"	1-Forward, 3 Back		
8.710-885.0	3/8"	4.0	.920"	1-Forward, 3 Back		
8.710-884.0	3/8"	5.5	.920"	1-Forward, 3 Back		
8.710-886.0	3/8"	8.5	.920"	1-Forward, 4 Back		
8.710-883.0	3/8"	12	.920"	1-Forward, 4 Back		
8.710-882.0	3/8"	14	.920"	1-Forward, 4 Back		

- PSI: 4000
- Rotating Sewer Nozzle

- Adds Extra Agitation
- Back Jet Only

PART NO.	ROTATING NOZZLE	ORIFICE SIZE	PORTS				
ST-49 ROTATING SEWER NOZZLES							
8.710-899.0	1/8"	5.5	0-Forward, 3 Back				
8.710-898.0	1/4"	5.5	0-Forward, 3 Back				
8.710-900.0	1/4"	8.0	0-Forward, 3 Back				
8.710-887.0	1/4" Duct Cleaner*	5.5	0-Forward, 2 Side				

^{*}Duct Cleaner jet to sides instead of reverse

SEWER / TUBE CLEANING NOZZLES

- PSI: 5000
- Corrosion-resistant Stainless-steel

- One Forward Orifice
- Three Rear Orifices



PART NO.	FPT	SIZE
8.710-905.0	1/8"	5.0
8.710-906.0	1/8"	5.5
8.710-907.0	1/8"	6.0
8.710-908.0	1/4"	6.5
8.710-909.0	1/4"	7.0
8.710-910.0	1/4"	9.5


NOZZLE SIZE SELECTION CHART

Determine the nozzle size by the pressure washer's GPM @ PSI (gallons per minute @ a specific pounds per square inch). If the nozzle size is too small, your equipment can be damaged. If the nozzle size is too large, cleaning ability is compromised. Nozzle fan degree does not effect nozzle size selection.

STANDARD NOZZLE SIZE	HOLE SIZE		POUN	DS PE	R SQUA	RE INC	:H (PSI)												P
			500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000	4500	5000
2	.034"/0.86mm		0.71	0.87	1.00	1.12	1.22	1.32	1.41	1.50	1.58	1.66	1.73	1.80	1.87	1.94	2.00	2.12	2.24
2.5	.042"/1.07mm		0.88	1.08	1.25	1.40	1.53	1.65	1.77	1.88	1.98	2.07	2.17	2.25	2.34	2.42	2.50	2.65	2.80
3	.043"/1.09mm		1.06	1.30	1.50	1.68	1.84	1.98	2.12	2.25	2.37	2.49	2.60	2.70	2.81	2.90	3.00	3.18	3.35
3.5	.048"/1.22mm		1.24	1.52	1.75	1.96	2.14	2.32	2.47	2.63	2.77	2.90	3.03	3.15	3.27	3.39	3.50	3.71	3.91
4	.052"/1.32mm		1.41	1.73	2.00	2.24	2.45	2.65	2.83	3.00	3.16	3.32	3.46	3.61	3.74	3.87	4.00	4.24	4.47
4.5	.055"/1.40mm		1.59	1.95	2.25	2.52	2.76	2.98	3.18	3.38	3.56	3.73	3.90	4.06	4.21	4.36	4.50	4.77	5.03
5	.057"/1.45mm		1.77	2.17	2.50	2.80	3.06	3.31	3.54	3.75	3.95	4.15	4.33	4.51	4.68	4.84	5.00	5.30	5.59
5.5	.06"/1.52mm		1.94	2.38	2.75	3.07	3.37	3.64	3.89	4.13	4.35	4.56	4.76	4.96	5.14	5.33	5.50	5.83	6.15
6	.062"/1.57mm		2.12	2.60	3.00	3.35	3.67	3.97	4.24	4.50	4.74	4.97	5.20	5.41	5.61	5.81	6.00	6.36	6.71
6.5	.064"/1.63mm		2.30	2.81	3.25	3.63	3.98	4.30	4.60	4.88	5.14	5.39	5.63	5.86	6.08	6.29	6.50	6.89	7.27
7	.067"/1.70mm		2.47	3.03	3.50	3.91	4.29	4.63	4.95	5.25	5.53	5.80	6.06	6.31	6.55	6.78	7.00	7.42	7.83
7.5	.070"/1.78mm		2.65	3.25	3.75	4.19	4.59	4.96	5.30	5.63	5.93	6.22	6.50	6.76	7.02	7.26	7.50	7.95	8.39
8	.072"/1.83mm		2.83	3.46	4.00	4.47	4.90	5.29	5.66	6.00	6.32	6.63	6.93	7.21	7.48	7.75	8.00	8.49	8.94
8.5	.074"/1.88mm		3.01	3.68	4.25	4.75	5.21	5.62	6.01	6.38	6.72	7.05	7.36	7.66	7.95	8.23	8.50	9.02	9.50
9	.076"/1.93mm		3.18	3.90	4.50	5.03	5.51	5.95	6.36	6.75	7.12	7.46	7.79	8.11	8.42	8.71	9.00	9.55	10.06
9.5	.078"/1.98mm		3.36	4.11	4.75	5.31	5.82	6.28	6.72	7.13	7.51	7.88	8.23	8.56	8.89	9.20	9.50	10.08	10.62
10	.080"/2.03mm		3.54	4.33	5.00	5.59	6.12	6.61	7.07	7.50	7.91	8.29	8.66	9.01	9.35	9.68	10.00	10.61	11.18
11	.083"/2.11mm		3.89	4.76	5.50	6.15	6.74	7.28	7.78	8.25	8.70	9.12	9.53	9.92	10.29	10.65	11.00	11.67	12.30
12	.087"/2.21mm		4.24	5.20	6.00	6.71	7.35	7.94	8.49	9.00	9.49	9.95	10.39	10.82	11.22	11.62	12.00	12.73	13.42
12.5	089"/2.26mm		4.42	5.41	6.25	6.99	7.65	8.27	8.84	9.38	9.88	10.36	10.83	11.27	11.69	12.10	12.50	13.26	13.98
13	.091"/2.31mm	GPM	4.60	5.63	6.50	7.27	7.96	8.60	9.19	9.75	10.28	10.78	11.26	11.72	12.16	12.59	13.00	13.79	14.53
15	096"/2.44mm	<u></u>	5.30	6.50	7.50	8.39	9.19	9.92	10.61	11.25	11.86	12.44	12.99	13.52	14.03	14.52	15.00	15.91	16.77
20	.109"/2.77mm	MINCT	7.07	8.66	10.00	11.18	12.25	13.23	14.14	15.00	15.81	16.58	17.32	18.03	18.71	19.36	20.00	21.21	22.36
25	.125"/3.18mm	Ī	8.84	10.83	12.50	13.98	15.31	16.54	17.68	18.75	19.76	20.73	21.65	22.53	23.39	24.21	25.00	26.52	27.95
30	.141"/3.58mm	PER	10.61	12.99	15.00	16.77	18.37	19.84	21.21	22.50	23.72	24.87	25.98	27.04	28.06	29.05	30.00	31.82	33.54
40	.156"/3.96mm		14.14	17.32	20.00	22.36	24.49	26.48	28.28	30.00	31.62	33.17	34.64	36.06	37.42	38.73	40.00	42.43	44.72
50	.172"/4.37mm	GALLONS	17.68	21.65	25.00	27.95	30.62	33.07	35.36	37.50	39.53	41.46	43.30	45.07	46.77	48.41	50.00	53.03	55.90
60	.188"/4.78mm	Ġ	21.21	25.98	30.00	33.54	36.74	29.69	42.43	45.00	47.43	49.75	51.96	54.08	56.12	58.09	60.00	63.64	67.08

NOZZLE FAN SELECTION

Select the nozzle degree or spray angle, based on your application. Standard nozzle degrees - 0°, 15°, 25° and 40°. Using the wrong nozzle degree can damage the surface you are cleaning.

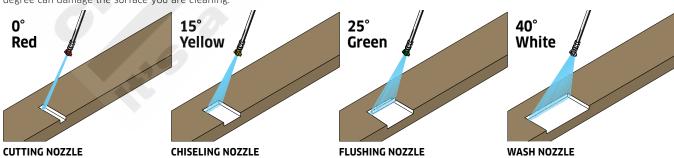

Delivers a concentrated stream that can gouge or cut. It can cut stubborn stains from concrete and other hard surfaces.

Working at a 45° angle, this nozzle works like a scraper, stripping paint, grease and grime from hard surfaces.

Most commonly used nozzle for cleaning dirt from siding, well as wet sweeping leaves.

Wide spray to wash and rinse large areas quickly. Usually safe for sidewalks and metal furniture as most surfaces, including aluminum siding, windows and vehicles.

NOZZLE SETS - LEGACY - QC 4 & 5 PACKS - COLOR-CODED

1/4" Quick Coupler Nozzle Kits

- Hardened stainless-steel, one-piece body for long lifeC
- High-impact, uniform, flat-spray pattern



4/PK (0°, 25°, 40° and Soap)



5/PK (0°, 15°, 25°, 40° and Soap)

- Color-coded by spray angle
- Includes 40 x 65 soap nozzle

PART NO.	NOZZLE SIZE	DESCRIPTION
4/PK (0°, 25°, 40°	AND SOAP)	
8.726-117.0	3.0	4 pack Nozzle Kit
9.104-028.0	3.25	4 pack Nozzle Kit
8.726-119.0	3.5	4 pack Nozzle Kit
8.726-120.0	4.0	4 pack Nozzle Kit
8.726-121.0	4.5	4 pack Nozzle Kit
8.726-122.0	5.0	4 pack Nozzle Kit
8.726-123.0	5.5	4 pack Nozzle Kit
8.726-124.0	6.0	4 pack Nozzle Kit
8.726-125.0	6.5	4 pack Nozzle Kit
5/PK (0°, 15°, 25°	, 40° AND SOA	P)
9.104-024.0	3.0	5 pack Nozzle Kit
9.104-016.0	3.25	5 pack Nozzle Kit
8.726-128.0	3.5	5 pack Nozzle Kit
9.104-030.0	4.0	5 pack Nozzle Kit
8.726-130.0	4.5	5 pack Nozzle Kit
8.726-131.0	5.0	5 pack Nozzle Kit
8.726-132.0	5.5	5 pack Nozzle Kit
8.726-133.0	6.0	5 pack Nozzle Kit
8.726-134.0	6.5	5 pack Nozzle Kit

NOZZLES - LEGACY - QC - 1/4" COLOR-CODED

Quick connect, Color-coded, hardened stainless nozzle. Fits most 1/4" quick couplers. Rated for 4000 PSI.





ORIF	ICE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°
QC N	OZZLES	5			
		RED	YELLOW	GREEN	WHITE
3.0	S	8.723-576.0	8.902-482.0	8.902-484.0	8.902-485.0
3.25	S	8.708-538.0	8.708-539.0	8.708-540.0	8.708-541.0
3.5	S	8.723-577.0	8.726-104.0	8.708-526.0	8.902-487.0
3.75		8.708-527.0	8.708-528.0	8.708-529.0	8.708-530.0
4.0	S	8.708-531.0	8.708-532.0	8.708-533.0	8.708-534.0
4.5	S	8.723-578.0	8.708-535.0	8.708-536.0	8.708-537.0
5.0	S	8.726-105.0	8.726-106.0	8.726-107.0	8.726-108.0
5.5	S	8.723-579.0	8.902-492.0	8.708-542.0	8.902-493.0
6.0		8.726-109.0	8.726-110.0	8.726-111.0	8.726-112.0
6.5		8.726-113.0	8.726-114.0	8.726-115.0	8.726-116.0

PART NO.	ORIFICE	DEGREE			
QC SOAP NOZZLES					
8.723-636.0	40	65°			

NOZZLE SETS - GP - QC 4 & 5 PACKS - COLOR-CODED

Nozzle sets of quick coupler nozzles





- 4-pack Set : 0°, 15°, 25° and 40°
- 5-pack also includes one 40 x 65° soap nozzle.

PART NO.	NOZZLE SIZE							
4/PK (0°, 15°,	4/PK (0°, 15°, 25° AND 40°)							
8.708-712.0	S 3.5							
8.708-713.0	S 4.0							
8.708-714.0	S 4.5							
8.708-715.0	S 5.0							
8.708-716.0	S 5.5							
8.708-717.0	S 6.0							
8.708-718.0	S 6.5							

PART NO.	NOZZLE SIZE	
5/PK (0°, 15°,	25°, 40° AND SOAP)	
9.104-014.0	S 3.5	
8.708-721.0	\$ 4.0	
9.104-015.0	\$ 4.5	
8.708-723.0	\$ 5.0	
8.708-724.0	S 5.5	
8.708-725.0	\$ 6.0	
8.708-726.0	6.5	

NOZZLES - QC - 1/4" - Q-STYLE





- Rated for 5000 PSI
- Quick-coupled
- Color-coded
- Hardened stainless nozzles fit most 1/4" quick couplers

	RED	YELLOW	GREEN	WHITE	
ORIFICE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°	
2.0	8.708-644.0	8.712-322.0	8.708-645.0	8.708-652.0	
2.5	8.708-647.0	8.708-648.0	8.708-649.0	8.708-651.0	
3.0	S 9.802-287.0	8.712-333.0	8.712-334.0	8.712-335.0	
3.5	S 9.802-291.0	8.712-338.0	8.712-339.0	8.712-340.0	
4.0	9 .802-295.0	8.712-346.0	8.712-347.0	8.712-348.0	
4.5	9.803-810.0	8.712-350.0	8.712-351.0	8.712-352.0	
5.0	S 9.802-299.0	8.712-354.0	8.712-355.0	8.712-356.0	
5.5	S 9.802-303.0	8.712-358.0	8.712-359.0	8.712-360.0	
6.0	S 9.802-307.0	8.712-362.0	8.712-363.0	8.712-364.0	
6.5	\$ 8.708-681.0	8.708-682.0	8.708-683.0	8.708-684.0	
7.0	9.803-800.0	9.803-801.0	9.803-802.0	9.803-803.0	
7.5	8.708-689.0	8.708-690.0	8.708-691.0	8.708-692.0	
8.0	8.708-693.0	8.708-694.0	8.708-695.0	8.708-696.0	
8.5	8.708-697.0	8.708-698.0	8.708-699.0	8.708-700.0	
9.0	8.708-701.0	8.712-379.0	8.708-703.0	8.712-381.0	
10.0	8.708-705.0	8.708-706.0	8.708-707.0	8.708-708.0	

NOZZLES - MEG - 1/4" - M-STYLE

Hardened stainless-steel nozzle insert ensures consistent, accurate orifice size





- 1/4" male pipe thread nozzles
- Rated up to 5000 PSI
- 303 Series Stainless-steel

ORIFICE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°	
2.5	-	8.708-569.0	8.708-650.0	8.708-570.0	
3.0	\$ 8.708-572.0	8.711-370.0	8.708-574.0	8.708-575.0	
3.5	8.708-576.0	8.708-577.0	8.708-578.0	8.708-579.0	
4.0	\$ 8.708-580.0	8.708-581.0	8.708-582.0	8.708-583.0	
4.5	\$ 8.708-584.0	8.708-585.0	8.708-586.0	8.708-587.0	
5.0	\$ 8.708-588.0	8.708-589.0	8.708-590.0	8.708-591.0	
5.5	S 8.708-592.0	8.708-593.0	8.708-594.0	8.708-595.0	
6.0	8.708-596.0	8.708-597.0	8.708-598.0	8.708-599.0	
6.5	8.708-600.0	8.708-601.0	8.708-602.0	8.708-603.0	
7.0	8.708-604.0	8.708-605.0	8.708-606.0	8.708-607.0	
7.5	8.708-608.0	8.708-609.0	8.708-610.0	8.708-611.0	
8.0	8.708-612.0	8.708-613.0	8.708-614.0	8.708-615.0	
8.5	8.708-616.0	8.708-617.0	8.708-618.0	8.708-619.0	
9.0	8.708-620.0	8.708-621.0	8.708-622.0	8.708-623.0	
10.0	8.708-624.0	8.708-625.0	8.708-626.0	8.708-627.0	


NOZZLES - SOAP NOZZLES

Ideal for low-pressure chemical applications





Large #40 Orifice



PART NO.	ORIFICE	DEGREE
1/4" QC		
9.802-311.0	40	65°
8.708-711.0	50	15°
1/8" MEG		
8.708-410.0	40	65°
1/4" MEG		
8.708-268.0	40	65°
8.708-277.0	50	15°

NOZZLE HOLDER GROMMET





2ND STORY NOZZLE KIT, 2 PK.





PART NO. 9.114-995.0

S

DESCRIPTIONNozzle Kit, 2 pk.

NOZZLES - MEG - 1/4" MALE THREADS



1/4" male pipe thread meg nozzles, rated up to 4000 PSI. Hardened stainless-steel nozzle ensures consistent, accurate orifice size.



- PSI: 4000
- Orifice Recessed for Protection
- Flow-Rated Tolerance of + 2% at 70°F
- Hard-edge pattern, light center requires overlap to cover center
- 400 Series Stainless-steel

ORIFICE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°
2.0	8.707-637.0	8.707-640.0	8.707-643.0	8.707-648.0
2.5	8.707-646.0	8.707-650.0	8.707-653.0	8.707-652.0
3.0	8.707-655.0	8.707-657.0	8.707-659.0	8.707-661.0
3.5	8.707-662.0	8.707-664.0	8.707-666.0	8.707-667.0
4.0	8.707-669.0	8.707-671.0	8.707-673.0	8.707-675.0
4.5	8.707-678.0	8.707-679.0	8.707-680.0	8.707-681.0
5.0	8.707-683.0	8.707-686.0	8.707-688.0	8.707-691.0
5.5	8.707-694.0	8.707-695.0	8.707-697.0	8.707-698.0
6.0	8.707-700.0	8.707-702.0	8.707-703.0	8.707-705.0
6.5	8.707-708.0	8.707-710.0	8.707-711.0	8.707-712.0
7.0	8.707-713.0	8.707-715.0	8.707-716.0	8.707-717.0
7.5	8.707-718.0	8.707-719.0	8.707-721.0	8.707-722.0
8.0	8.707-723.0	8.707-726.0	8.707-727.0	8.707-729.0
8.5	8.707-734.0	8.707-735.0	8.707-736.0	8.707-738.0
9.0	8.707-739.0	8.707-741.0	8.707-743.0	8.707-746.0
10.0	8.707-747.0	8.707-751.0	8.707-754.0	8.707-756.0
11.0	8.707-760.0	8.707-761.0	8.707-762.0	8.707-763.0
12.0	8.707-764.0	8.707-766.0	8.707-767.0	8.707-768.0
12.5	8.707-769.0	8.707-770.0	8.707-771.0	8.707-772.0
13.0	8.707-773.0	8.707-774.0	8.707-776.0	8.707-778.0
15.0	8.707-782.0	8.707-787.0	8.707-789.0	8.707-790.0
20.0	8.707-795.0	8.707-800.0	8.707-802.0	8.707-804.0
25.0	8.707-807.0	8.707-811.0	8.707-812.0	8.707-813.0
30.0	8.707-814.0	8.707-817.0	8.707-818.0	8.707-819.0
40.0	8.707-821.0	8.707-824.0	8.707-826.0	8.707-827.0
50.0	8.707-828.0	8.707-830.0	8.707-832.0	8.707-833.0
60.0	8.707-834.0	8.707-835.0	8.707-837.0	8.707-838.0

PART NO.	NOZZLE SIZE
VANE	
8.700-561.0	1/4" Small 2.0 - 20.0 Meg

NOZZLES - MEG - 1/8" - "WASHJET"



1/8" male pipe thread meg nozzles, rated up to 4000 PSI. Hardened stainless-steel nozzle ensures consistent, accurate orifice size.



- PSI: 4000
- Orifice Recessed for Protection
- Flow-Rated Tolerance of + 2% at 70°F
- Hard-edge pattern, light center requires overlap to cover center
- 400 Series Stainless-steel

ORIFICE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°
2.0	\$ 8.707-529.0	8.707-536.0	8.707-537.0	8.707-538.0
2.5	-	8.707-539.0	8.711-465.0	
3.0	8.707-540.0	8.707-542.0	8.707-543.0	8.707-544.0
3.5	-	8.707-545.0	8.707-546.0	
4.0	\$ 8.707-547.0	8.707-549.0	8.707-550.0	8.707-551.0
4.5	8.707-552.0	8.707-554.0	8.707-556.0	
5.0	8.707-558.0	8.707-559.0	8.707-561.0	8.707-564.0
5.5	8.707-567.0	8.707-568.0	8.707-569.0	8.707-570.0
6.0	8.707-571.0	8.707-572.0	8.707-573.0	8.707-575.0
6.5	8.707-577.0	8.707-578.0	8.707-579.0	8.707-581.0
7.0	8.707-582.0	8.707-584.0	8.707-585.0	8.707-586.0
7.5	8.707-588.0	8.707-589.0	8.707-591.0	8.707-592.0*
8.0	8.707-593.0	8.707-594.0	8.707-595.0	8.707-596.0
8.5	8.707-598.0	8.707-599.0	8.707-600.0	8.707-601.0
9.0	8.707-602.0	8.707-604.0	8.707-605.0	8.707-607.0
9.5	- /	8.707-609.0	8.707-610.0	8.707-611.0
10.0	8.707-612.0	8.707-613.0		8.707-616.0
11.0	8.707-618.0	8.707-619.0	8.707-620.0	-
12.0		-	-	8.707-623.0
15.0		8.707-626.0	8.707-627.0	-

NOZZLES - OC "WASH JET"

"QC" or Quick Connect Hardened Stainless Meg Nozzle, fits most 1/4" quick couplers. Rated for 4000 PSI..






- PSI: 4000
- Temperature: 300°F
- Flow-Rated Tolerance of + 2%
- Hardened Stainless-Steel
- Fits Hansen and Parker Quick-Couplers

ORIFICE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°
	RED	YELLOW	GREEN	WHITE
2.0	-	8.708-415.0	8.708-416.0	
3.0	8.708-417.0	8.708-418.0	8.708-419.0	8.708-420.0
3.5	8.708-422.0	8.708-423.0	8.708-424.0	8.708-425.0
4.0	8.708-427.0	8.708-428.0	8.708-429.0	8.708-430.0
4.5	8.708-431.0	8.708-432.0	8.708-433.0	8.708-434.0
5.0	8.708-435.0	8.708-436.0	8.708-437.0	8.708-438.0
5.5	8.708-439.0	8.708-440.0	8.708-441.0	8.708-442.0
6.0	8.708-443.0	8.708-444.0	8.708-445.0	8.708-446.0
6.5	8.708-447.0	8.708-448.0	8.708-449.0	8.708-450.0
7.0	8.708-451.0	8.708-452.0	8.708-453.0	8.708-454.0
7.5	8.708-455.0	8.708-456.0	8.708-457.0	8.708-458.0
8.0	8.708-459.0	8.708-460.0	8.708-461.0	8.708-462.0
9.0	- //	8.708-463.0	8.708-464.0	8.708-465.0
10.0	8.708-467.0	8.708-468.0	8.708-469.0	8.708-470.0
12.0	-			8.708-474.0

NOZZLES - 1/4" VEEJET - BROAD SPRAY STAINLESS-STEEL







- PSI: 5 Min 500 Max
- Vee Jet Nozzle
- 303 Stainless-Steel
- GPH: 10.61 to 106 GPH (11.15 to 112 ml/sec)

NOZZLE	ORIFICE DIAMTER	PART NO. 50°	PART NO. 65°	PART NO. 80°	PART NO. 95°	PART NO. 100°
1.0	.026	\$ 8.708-074.0	8.708-075.0	8.708-076.0	8.708-078.0	8.708-079.0
1.5	.031	8.708-085.0	8.708-086.0	8.708-087.0	8.708-089.0	8.708-090.0
2.0	.036	8.708-095.0	8.708-096.0	8.708-097.0	8.708-099.0	8.708-101.0
3.0	.043	8.708-108.0	8.708-109.0	8.708-110.0	8.708-112.0	8.708-114.0
4.0	.047	8.708-121.0	8.708-122.0	8.708-123.0	8.708-125.0	8.708-127.0
5.0	.053	S 8.708-133.0	8.708-134.0	8.708-136.0	8.708-138.0	8.708-140.0
6.0	.058	8.708-148.0	8.708-149.0	8.708-151.0	-	8.708-157.0
7.0	.063	8.708-162.0	-	8.708-164.0	-	8.708-165.0
8.0	.067	8.708-172.0	8.708-173.0	8.708-175.0	8.708-177.0	8.708-179.0

NOZZLES - 1/4" VEEJET - LOW-PRESSURE - BRASS

1/4" male pipe thread Vee Jet nozzles, brass inexpensive alternative for applications up to 500 PSI.





- PSI: Up to 500 PSI
- Feather Edge for Wide Coverage
- Allows Overlap for Even Application
- 1/4" MPT Connects
- Excellent for low-pressure chemical and acid applications
- Uniform spray distribution with flow rates from .012 to 1237 GPM

NOZZLE SIZE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°	PART NO. 50°	PART NO. 65°	
15	8.708-203.0	8.708-204.0	8.708-206.0	8.708-208.0	8.708-210.0	8.708-212.0	
20	\$ 8.708-218.0	8.708-222.0	8.708-225.0	8.708-228.0	8.708-230.0	8.708-232.0	
30	\$ 8.708-242.0	8.708-244.0	8.708-246.0	8.708-249.0	8.708-251.0	8.708-253.0	
40	\$ 8.708-258.0	8.708-260.0	8.708-262.0	8.708-264.0	8.708-266.0	8.708-268.0	
50	\$ 8.708-275.0	8.708-277.0	8.708-279.0	8.708-280.0	8.708-282.0	8.708-284.0	
60	8.708-289.0	8.708-290.0	8.708-292.0	8.708-294.0	8.708-296.0	8.708-297.0	
70	8.708-302.0	8.708-304.0	8.708-306.0	8.708-308.0	8.708-309.0	8.708-310.0	

NOZZLE SYSTEM - TIP JET

"Tip-Jet" Nozzle Systems are versatile nozzling systems for everyday or specialized applications. Flat spray, full cone, hollow cone and solid stream patterns, metering orifices and atomizing tips are all available in the Tip-Jet system. Capacities range from .55 to 20 GPM.



- PSI: 4000
- Neat and simple tip change
- Strainers Available
- Hardened stainless-steel tips with vanes for maximum spray integrity
- Body components available in brass, zinc-plated steel or stainless-steel

ORIFICE	PART NO. 0°	PART NO. 15°	PART NO. 25°	PART NO. 40°
3.0	8.708-016.0	8.708-017.0		-
4.0	8.708-019.0	8.708-020.0	8.708-021.0	8.708-022.0
4.5	8.708-023.0		-	8.708-026.0
5.0	8.708-027.0	8.708-028.0	-	8.708-030.0
5.5	8.708-031.0	8.708-032.0	-	-
6.0	8.708-035.0	8.708-036.0	8.708-037.0	8.708-038.0
6.5	8.708-039.0		8.708-040.0	8.708-041.0
7.0	9/05	8.708-043.0	8.708-044.0	8.708-045.0
10.0	8.708-058.0		8.708-060.0	8.708-061.0

NOZZLE SYSTEM - TIP JET NOZZLE BODIES

Tip-Jet Nozzle Bodies, MPT inlet connections in 1/4" sizes. All outlet connections are 11/16" - 16 male thread to fit Tip-Jet tip retainers and adapters.





PART NO.	DESCRIPTION	ТҮРЕ
8.707-886.0	MPT 1/4"	Nylon
8.707-898.0	MPT 1/4"	Brass
8.707-899.0	MPT 1/4"	Stainless-steel

NOZZLES - SOAP



"Black" Soap Nozzles are brass with a large #40 orifice. Ideal for low-pressure chemical applications.

PART NO.	SIZE	NOZZLE DEGREE
8.708-478.0	40	25°
8.708-479.0	S 40	65°

NOZZLE SYSTEM - TIP JET ADAPTER CAPS



Tip-Jet Adapter Caps, similar to tip retainers, but have FPT connections for in-line applications.

PART NO.	DESCRIPTION	ТҮРЕ
8.707-919.0	MPT 1/8"	Brass
8.707-921.0	MPT 1/4"	Brass

NOZZLE SYSTEM - TIP JET RETAINER



Tip Retainer 18 mm thread, fits vent grip lance.

PART NO.	DESCRIPTION
8.710-901.0	Hex Tip Retainer

NOZZLE SYSTEM - TIP JET RETAINER CAPS



Tip-Jet Retainer Caps, fits all Tip-Jet nozzle bodies, holds spray tips and metering orifices firmly in place.

PART NO.	DESCRIPTION	ТҮРЕ
8.707-915.0	Hex	Brass
8.707-888.0	Hex	Stainless-steel

NOZZLE SYSTEM - TIP JET STRAINERS



Tip-Jet Strainers fit into nozzle body cavity to stop nozzle clogging.


PART NO.	DESCRIPTION	
8.725-693.0	100-Mesh	

NOZZLES - LEGACY REVOLUTION J



Legacy is proud to offer the Revolution rotary nozzle. This turbo rotary nozzle is rated for up to 4350 PSI at 185°F. Turning at an astounding 4,000 RPM, the Revolution delivers faster and deeper cleaning action for the same price of 3000 PSI rotary nozzles.





Legacy's Revolution is the best of both worlds: deep cleaning impact of a 0° nozzle with the fast cleaning of a widecoverage fan spray nozzle.

- Greater Cleaning Power
 Engineered to increase
 impact pressure by more
 than 10 times that of
 conventional nozzles
- Longer Operating Life
 The Revolution's operating life is extended significantly by its wear-resistant ceramic nozzle and bearing ring
- More Durable and Versatile The Revolution features an extra-resilient housing protector and is capable of handling a stream up to 4350 PSI at 185°F

PART NO.	ORIFICE	PSI	
NOZZLE			
9.302-242.0	S 3.5	4350	
9.302-243.0	\$ 4.0	4350	
9.302-244.0	\$ 4.0 \$ 4.5	4350	
9.302-245.0	\$ 5.0	4350	
9.302-246.0	S 5.5	4350	
9.302-247.0	\$ 6.5	4350	
9.302-248.0	5 7.0/8.0	4350	
9.302-249.0	S 12.0	4350	
REPAIR KIT			
2.884-972.0	3.5		
2.883-824.0	4.0		
9.302-231.0	4.5		
2.883-823.0	5.0		
2.883-822.0	5.5		
9.302-234.0	6.5		
2.883-474.0	7.0-8.0		
2.884-975.0	10.0		
2.884-051.0	12.0		

NOZZLES - A+ / AP REVOLUTION TURBO

AP Revolution Turbo Nozzle is rated for up to 5000 PSI at 212°F. High-impact nozzle at unbelievable pricing!



- Forged Brass
- Precision Ceramic
- Durable Rubber Cover







3000	PSI
------	-----

PART NO.	ORIFICE	PSI
	ORIFICE	P31
NOZZLE		
8.726-056.0	3.5	3000
8.726-057.0	\$ 4.0	3000
8.726-058.0	\$ 4.5	3000
8.726-059.0	5.0	3000
8.726-060.0	5 5.5	3000
8.726-061.0	6.0	3000
8.726-068.0	3.5	4000
8.726-069.0	\$ 4.0	4000
8.726-070.0	4.0 4.5 5.0 5.5 6.0 3.5 4.0 4.5 5.0 5.5	4000
8.726-071.0	5.0	4000
		4000
8.726-073.0	6.0	4000
8.726-080.0	3.5	5000
8.726-081.0	\$ 4.0	5000
8.726-082.0	4.0 4.5	5000
8.726-083.0	5.0	5000
8.726-084.0	5.5	5000
8.726-085.0	6.0	5000

000 PSI	5000 PSI

PART NO.	ORIFICE	PSI	
REPAIR KIT			
8.726-062.0	3.5	3000	
8.726-063.0	4.0	3000	
8.726-064.0	4.5	3000	
8.726-065.0	5.0	3000	
8.726-066.0	5.5	3000	
8.726-067.0	6.0	3000	
8.726-074.0	3.5	4000	
8.726-075.0	4.0	4000	
8.726-076.0	4.5	4000	
8.726-077.0	5.0	4000	
8.726-078.0	5.5	4000	
8.726-079.0	6.0	4000	
8.726-086.0	3.5	5000	
8.726-087.0	4.0	5000	
8.726-088.0	4.5	5000	
8.726-089.0	5.0	5000	
8.726-090.0	5.5	5000	
8.726-091.0	6.0	5000	

TURBO NOZZLE - ST-559



NOZZLES - TURBO - A+ NOZZLE KIT





- Temperature: 190°F
- 1/4" FPT Inlet
- 8700 PSI

PART NO.	ORIFICE	ТҮРЕ
9.106-853.0	2.0	Tungsten Carbide
8.754-735.0	4.0	Tungsten Carbide
8.754-736.0	5.0	Tungsten Carbide



 PART NO.
 DESCRIPTION
 PSI

 8.928-444.0
 A+ Turbo Nozzle #4 Kit
 4000

NOZZLE PROTECTOR - ST-10

Ideal to protect sensitive surfaces against damage. Hard plastic body is stable enough to tightly hold nozzle adapter for heavy-duty use.



- Temperature: 300°F
- 1/4" FPT Inlet / Outlet

PART NO.	DESCRIPTION	ТҮРЕ	
8.723-668.0	Red / Black	Zinc-plated	
8.723-669.0	Black / Gray	Stainless-steel	

SUTTNER V

NOZZLES - MV ROTOJET 3700 & 5800 TURBO


0° impact, 25° pattern, no gears - no teeth - no bearings. Exclusive design of the Rotojet 3700 / Rotojet 5800 eliminates start up impact and damage to internal nozzle.

- High-Strength, Forged Brass
- Precision Ceramic Orifice and Matching Race



ROTOJET 3700 PSI

- Temperature: 210°F
- PSI: 1150 Min 3700 Max

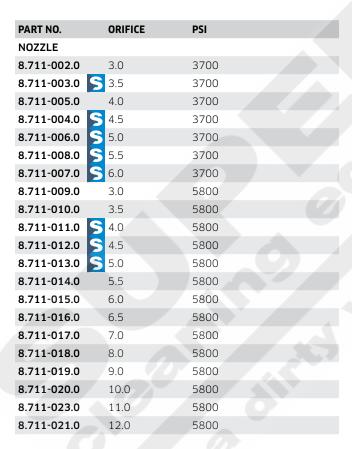

- Durable Rubber / Plastic Cover
- 1/4" BSPP *Note: British pipe thread compatible in-line filters are 8.709-979.0 and 8.709-978.0



ROTOJET 5800 PSI (MUST START WITH NOZZLE DOWN)

- Temperature: 200°F
- PSI: 2600 Min 5800 Max

PART NO.	ORIFICE	PSI	
REPAIR KIT			
8.704-039.0	3.0	3700	
8.704-038.0	3.5	3700	
8.704-040.0	4.0	3700	
8.704-041.0	4.5	3700	
8.704-042.0	5.0	3700	
8.704-043.0	5.5	3700	
8.704-044.0	6.0	3700	
8.704-066.0	3.5	5800	
8.704-067.0	4.0	5800	
8.704-068.0	4.5	5800	
8.704-069.0	5.0	5800	
8.704-070.0	5.5	5800	
8.704-071.0	6.0	5800	
8.704-072.0	6.5	5800	
8.704-073.0	7.0	5800	
8.704-074.0	8.0	5800	
8.704-075.0	9.0	5800	
8.704-076.0	10.0	5800	
8.704-077.0	11.0	5800	
8.704-078.0	12.0	5800	

NOZZLES - 3650 & 5100 PSI TURBO

Provides great impact and cleaning power

■ Temperature: 212°F







Turbo Nozzle PSI: 2600 Min - 5100 Max

PART NO.	ORIFICE	PSI	
NOZZLE			
8.711-105.0	3.0	3650	
8.711-097.0	3.5	3650	
8.711-098.0	4.0	3650	
8.711-099.0	4.5	3650	
8.711-100.0	5.0	3650	
8.711-101.0	5.5	3650	
8.711-102.0	6.0	3650	
8.711-096.0	6.5	3650	
8.711-103.0	7.0	3650	
8.711-104.0	8.0	3650	
8.711-086.0	3.0	5100	
8.711-087.0	3.5	5100	
8.711-088.0	4.0	5100	
8.711-089.0	4.5	5100	
8.711-090.0	5.0	5100	
8.711-091.0	5.5	5100	
8.711-092.0	6.0	5100	
8.711-093.0	6.5	5100	
8.711-094.0	7.0	5100	
8.711-095.0	8.0	5100	

PART NO.	DESCRIPTION
REPAIR KIT - TI	JRBO NOZZLES 3650 AND 5100 PSI
8.749-913.0	Repair Kit 3.5
8.749-914.0	Repair Kit 4.0
8.749-915.0	Repair Kit 4.5
8.749-916.0	Repair Kit 5.0
8.749-917.0	Repair Kit 5.5
8.749-920.0	Repair Kit 7.0
8.749-921.0	Repair Kit 8.0

NOZZLES - ST-357 & ST-457 TURBO



- 1/4" FPT
- Forged Brass



ST-357 PSI: 1150 Min - 3652 Max Temperature: 190°F

■ Precision Ceramic Orifice





ST-457 - 6000 PSI PSI: 2600 Min - 6000 Max Temperature: 212°F

PART NO.	ORIFICE	PSI
NOZZLE		
8.710-986.0	3.0	3625
8.710-987.0	3.5	3625
8.710-989.0	4.0	3625
8.710-988.0	4.5	3625
8.710-991.0	5.0	3625
8.710-993.0	5.5	3625
8.710-992.0	6.0	3625
8.711-072.0	3.0	6000
8.711-073.0	3.5	6000
8.711-074.0	4.0	6000
8.711-075.0	4.5	6000
8.711-076.0	5.0	6000
8.711-077.0	5.5	6000
8.711-078.0	6.0	6000
8.711-079.0	7.0	6000
8.711-080.0	8.0	6000
8.711-081.0	10.0	6000
REPAIR KIT		
8.701-570.0	3.0	3625
8.701-569.0	3.5	3625
8.701-564.0	4.0	3625
8.701-562.0	4.5	3625
8.701-565.0	5.0	3625
8.701-568.0	5.5	3625
8.701-566.0	6.0	3625
8.701-572.0	3.0	6000
8.701-571.0	3.5	6000
8.701-573.0	4.0	6000
8.701-574.0	4.5	6000
8.701-575.0	5.0	6000
8.701-576.0	5.5	6000
8.701-577.0	6.0	6000
8.701-578.0	7.0	6000
8.701-579.0	8.0	6000
8.701-580.0	10.0	6000

NOZZLES - TURBO - IDK & DK SERIES - DIRT KILLER

 $4700\;\mbox{maximum}$ PSI, a popular model providing great impact and cleaning power.



8.712-429.0

- Temperature Max: 180°F
- 1/4" Inlet
- IDK Series: Commonly used for Water Blasting and Heavy Duty Cleaning of Concrete, Steel, etc.
- DK Series: Commonly used for warehouse floors, wash rooms, alleyways etc.

PART NO.	SERIES	ORIFICE	PSI	
NOZZLE				
8.712-429.0	DK	045	3200	
8.740-148.0	IDK	055	4700	
REPAIR KIT				
8.701-160.0	DK Kit	045	3200	
8.701-161.0	IDK Kit	055	4700	

NOZZLES - TURBO MV ROTATING SOFT / HARD

The cleaning efficiency of a high-pressure rotating nozzle with the feature of changing from a hard spray for concrete to a soft spray for wood by simply pushing or pulling the finger protected nozzle.



PSI: 3700

Temperature: 200°F

PART NO.	ORIFICE	PSI
8.711-055.0	045	3700

COUPLERS - LANCE & NOZZLE COUPLERS

Changes MPT lance to FPT for mounting MPT nozzles.





PART NO.	DESCRIPTION
BRASS	
8.705-150.0	1/8" x 1/8"
8.705-155.0	1/4" x 1/8"
8.705-151.0	1/4" x 1/4"
STEEL	
8.710-713.0	1/8" x 1/8"
8.710-712.0	1/4" x 1/8"
8.710-714.0	S 1/4" x 1/4"

NOZZLES - ROTOJET 2500

Economy turbo nozzle.



- PSI Max: 2000
- Temperature Max: 140°F
- 1/4" FPT Inlet
- Weight: 5.4 oz..
- Great for economy washers

PART NO.	ORIFICE	PSI	
8.711-026.0	3.0	2500	
8.711-027.0	3.5	2500	

NOZZLES - ZRMAX & ZROTOMAX ROTATING



- PSI: Up to 5800 Max
- Temperature Max: 176°F
- 1/4" FPT Inlet



- Weight: 9 oz..
- Replaceable Stainless-Steel Orifices

PART NO.	DESCRIPTION	STD NOZZLE EQUIV	GPM	PSI
8.711-035.0	ZROTOMAX1	4.5	2.1 - 2.6	1450 -3500
8.711-036.0	ZROTOMAX2	5.5	2.9 - 4.0	1450 -3500
8.711-037.0	ZROTOMAX3	6.5	4.2 - 5.5	1450 -3500
8.711-038.0	ZRMAX581	4.5	2.3 - 4.7	5800
8.711-039.0	ZRMAX583	6.5	3.3 - 6.6	5800
8.701-532.0	Repair Kit			

NOZZLES - A+ MULTI-FAN

Adjust from maximum Impact Zero Stream to 80° wideangle spray with a twist of the nozzle body.





- PSI: 3000
- Temperature: 300°F
- 1/4" FPT Connect
- Stainless-Steel Replaceable Orifices
- Stainless-Steel Deflector .

PART NO.	ORIFICE	COLOR
8.710-932.0	3.0	Yellow
8.710-933.0	3.5	White
8.710-934.0	4.0	Blue
8.710-935.0	4.5	Brown
8.710-936.0	5.0	Green
8.710-937.0	5.5	Light Blue
8.710-942.0	8.0	-

NOZZLE FILTERS - 1/4" HIGH-PRESSURE

Turbo nozzle protector.



8.709-978.0

8.709-979.0





- PSI Max: 5000
- GPM: 8.0
- Temperature: 300°F



8.710-149.0

- 1/4" MPT Outlet
- 100-Mesh SS Screen
- TYPE PART NO. INLET OUTLET 8.709-978.0 Brass 1/4" FPT 1/4" MPT 8.709-979.0 Brass 1/4" QC 1/4" MPT 8.710-149.0 416 SS 1/4" QC 1/4" MPT 8.710-150.0 Brass 1/4" MPT 1/4" MPT 8.704-234.0 Replacement Filter for 8.709-978.0 / 8.709-979.0 8.701-201.0 Replacement Filter for 8.710-149.0 / 8.710-150.0

SS NOZZLE FILTER



- PSI Max: 5000
- 1/4" MPT Outlet
- Temperature Max: 300°F
- Weight:

PART NO.	GPM	PSI	
9.117-449.0	8.0	5000	

NOZZLES - DUO-REG

Duo-Reg nozzles are designed for industrial use in ALL applications. Easy push / pull, low-to-high pressure change, and easy-turn to adjust from 0° to 80° fan pattern.



- PSI: 3200
- GPM: 8.0
- Temperature: 300°F
- 1/4" FPT Connect
- Stainless-Steel Replaceable Orifices
- Tough Glass-Filled Nylon Cover
- Compact Size: 3-3/8" Long, 1-3/16" Diameter
- Weight: 5.7 oz..

PART NO.	ORIFICE	COLOR	
8.710-959.0	3.0	Yellow	
8.710-960.0	3.5	White	
8.710-961.0	4.0	Blue	
8.710-962.0	4.5	Brown	
8.710-963.0	5.0	Green	
8.710-964.0	5.5	Sky	
8.710-965.0	6.0	Black	
8.710-966.0	6.5	Dark Green	

REPLACEMENT ORIFICES

Replacement orficies for Duo-Reg and Multi-fan nozzles.



PART NO.	ORIFICE
8.701-448.0	1.20 MM = 3.0 GPM

NOZZLE HOLDER / HEAD - ST-56 ROLLOVER

SUTTNER W



- PSI Max: 3600
- GPM: 8
- Temperature: 300°F
- 1/4" FPT Inlet and Outlet
- Brass Body
- Glass-Filled Polyimide Cover

PART NO.	DESCRIPTION	PSI
8.710-895.0	Rollover Nozzle Head	3600

NOZZLE HOLDER - ST-51N ADJUSTABLE



Nozzle holder allows water to be diverted around the fixed orifice nozzle, dropping the pressure and allowing the chemical injector to operate.



- PSI Max: 3600
- Temperature Max: 300°F
- GPM Max: 8.0
- Attaches to 1/4" MPT Lance
- Accepts 1/4" Meg Nozzles
- Weight: 5.9 oz.

PART NO.	DESCRIPTION	PSI
8.710-889.0	ST-51N	3600

NOZZLE HOLDER - ST-330 -SWIVELING



Perfect For cleaning hard-to-reach areas. Nozzle position locks with pressure.



- PSI: 5070
- GPM: 10
- Temperature: 300°F
- Stainless-Steel
- 1/4" Female Inlet

PART NO.	DESCRIPTION
8.749-905.0	Outlet 1/4" FNPT
8.749-906.0	Outlet 1/4" Male

NOZZLES - HL250 VARI HI-LOW ANGLE



Push / Pull for easy change between high- and low-pressure; simple twist to adjust 0° - 80° spray fan pattern.



- PSI Max: 4050
- Temperature: 195°F
- 1/4" FPT Inlet
- Weight: 4 oz..
- Glass-Filled Nylon Cover
- Stainless-Steel Replaceable Orifice

PART NO.	ORIFICE	COLOR
8.710-972.0	2.0	Light Green
8.710-973.0	2.5	Pink
8.710-974.0	3.0	White
8.710-975.0	3.5	Brown
8.710-976.0	4.0	Dark Yellow
8.710-977.0	4.5	Blue
8.710-978.0	5.0	Purple
8.710-979.0	5.5	Dark Red
8.710-980.0	6.0	Dark Green
8.710-982.0	7.0	Orange
8.710-983.0	8.0	Silver

NOZZLE HOLDER - DOUBLE

Up to 10 GPM flow for low side pressure, 250 PSI.



- PSI Max: 3200
- Temperature Max: 195°F
- 1/4" Female Inlet, Two Female Outlets
- Heavy Nickel-Plate
- Chemical-Resistant
- Stainless-Steel Ball
- Machined-Brass Body
- New Ball Guide and Seat

PART NO.	DESCRIPTION	PSI
8.710-897.0	S Double Nozzle Head	3200

NOZZLE HOLDER - PIVOT





- Allowable 120° Pivoting
- Works with standard quick connect nozzles
- 1/4" Quick Connect plug x 1/4" Quick Connect Socket

PART NO.	DESCRIPTION	PSI	
9.114-868.0	S Pivoting Nozzle	4000	

X-JET LONG RANGE NOZZLE

Includes 15' Hose with In-Line Shut-Off Valve and Color-Coded Proportioners.





- Projects Water and Chemical Up To 40'
- Chemicals Bypass Pump, Lance, Hose and Gun For Damage Protection

	0.710 474.0	
PART NO.	DESCRIPTION	GPM
9.105-617.0*	#16 X-Jet Long Range Nozzle, 2500-4000 PSI	6.5
8.710-472.0	#13 M5 X-Jet Variable Fan, 2500- 4000 PSI, Long Range Nozzle, 4.5 gpm	4.5
8.710-474.0*	#9 X-Jet Long Range Nozzle, 2000-3000 PSI	3.5
8.710-475.0*	#13 X-Jet Long Range Nozzle, 2500-4000 PSI,	4.5
8.710-473.0	#9 M5 X-Jet Variable Fan, 2000-3000 PSI, Long Rangle Nozzle	3.5

^{*}Includes Close Range Nozzle

JROD MULTI-NOZZLE HOLDER

A handy tool that allows switching quickly between four different nozzles on one spray gun wand. Works great for changing between foam and water, reaching multiple height levels, or altering the intensity of the spray without having to carry around several individual nozzles



- 304 Stainless-steel
- Nozzles

304 Stainless-steel	Turns each nozzle into
Fits 1/4" NPT-M Thread	a Quick-connect Tip

PART NO.	DESCRIPTION	
9 112-496 0	IRod Multi-Nozzle Holder	

JROD MULTI-NOZZLE HOLDER



- Stainless-steel
- Fits 1/4" NPT-M Thread Nozzles
- Turns each nozzle into a Quick-connect Tip

PART NO.	DESCRIPTION
9.115-330.0	2-way JRod Multi-Nozzle Holder
9.115-396.0	4-way JRod Multi-Nozzle Holder

NOZZLE HOLDER



■ 5 hole mountable

PART NO.	DESCRIPTION	PSI
9.117-451.0	5 Hole Mountable	



PART NO.	DESCRIPTION
9.112-956.0	DSN14F Steam Nozzle, 1/4" NPT-F Drill-to-Size Brass with 2.0 Opening

NOZZLES - STEAM





Steam Nozzle

- PSI: 1450
- Steam Nozzle 1/4" F

Flat Steam Nozzle

- Steam Blank 3/8" M
- One-Piece Brass

PART NO.	DESCRIPTION
8.710-958.0	Flat Stream Nozzle, 1.5 mm
8.710-957.0	Steam Nozzle, Drill to Size
8.904-374.0	Nozzle, Drilled to 1.6 mm
8.712-415.0	Steam Nozzle, Drilled to 5/64"

NOZZLES - ADJUSTABLE

Compact, full-feature unit weighs only 4.3 oz., same functions as ST-51N.



- PSI Max: 3650
- Temperature Max: 300°F
- GPM Max: 8.0
- Machined-Brass Body
- Nylon Adjustment Knob
- 1/4" FPT Inlet / Outlet

PART NO.	DESCRIPTION	PSI
8.710-891.0	Adjustable Nozzle	3650

NOZZLES - GUM REMOVAL

Removes gum on concrete using a series of O degree jets



4	

PART NO.	DESCRIPTION
9.115-328.0	Gum Remover, QC, .05 Red
9.115-329.0	Gum Remover, QC, .08 Red

NOZZLES - LONG DISTANCE



- PSI Max: 5000
- Temperature: 250°F
- Inlet 1/4" NPT-M
- 10 GPM
- Cleans surfaces from longer distances
- Robust stainless steel construction



PART NO.	DESCRIPTION
9.116-521.0	Nozzle, Long Distance #2.0
9.116-522.0	Nozzle, Long Distance #2.5
9.116-523.0	Nozzle, Long Distance #3.0
9.116-524.0	Nozzle, Long Distance #3.5
9.116-525.0	Nozzle, Long Distance #4.0
9.116-526.0	Nozzle, Long Distance #4.5
9.116-527.0	Nozzle, Long Distance #5.0
9.116-528.0	Nozzle, Long Distance #5.5
9.116-529.0	Nozzle, Long Distance #6.0
9.116-530.0	Nozzle, Long Distance #6.5
9.116-531.0	Nozzle, Long Distance #7.0
9.116-532.0	Nozzle, Long Distance #7.5
9.116-533.0	Nozzle, Long Distance #8.0
9.116-534.0	Nozzle, Long Distance #8.5
9.116-535.0	Nozzle, Long Distance #9.0
9.116-536.0	Nozzle, Long Distance #10.0

NOZZLE HOLDER - ROLLOVER - TWIST TYPE

Holds two meg nozzles on opposite sides for positive change from chemical application to high-pressure rinse.



- PSI Max: 1000
- Temperature: 180°F
- Nickel-Plated Brass Body

PART NO.	DESCRIPTION	PSI
8.710-893.0	Dual 1/4" FPT In / Out	1000
8.900-022.0	Repair Kit	1000

NOZZLE PROTECTOR / COUPLER



- Protect Nozzles and Finished Surfaces
- Deep Nozzle Recess
- Tough Plastic Protector
- 1/4" FPT Coupler Inlet

PART NO.	NOZZLE	
8.710-866.0	1/8"	
8.710-867.0	1/4"	

NOZZLE PROTECTOR - SLIP-ON

A durable, easy-to-use nozzle protector. Plastic rubber compound flexible and tough!



- 1-1/2" Diameter at Flare-End Slip-On to Lance
- Slip-Fits Standard Lances
- 2-1/2" Long
- Weight: 1.2 oz..

Attach Nozzle Coupler

- and Nozzle
- Slide protector forward for complete nozzle protection

PART NO.	DESCRIPTION
8.710-868.0	Slip-on Nozzle Protector

FOAMERS - LEGACY COMPACT



Generates a high-density clinging foam for extended dwell time to increase chemical action.



- PSI Max: 2500
- Temperature Max: 195°F
- GPM Max: 1-5
- 4 and 6.5 Nozzle Included
- 5" Long, 1" Diameter
- Stainless-Steel, Aluminum and Brass

PART NO.	DESCRIPTION	PSI
8.903-998.0	1/8" F Inlet	2500
8.903-999.0	1/4" F Inlet	2500

Note: Most cleaning chemicals perform best when at 120° - 150° F and can be applied as a foam by adding a foaming agent. See your chemical supplier to obtain the correct products.

FOAMERS - FOAM CANNON

The ideal foam generator application accessory meters the foaming chemical for customized foam type and applies the foam to match the application.



- PSI Max: 3200
- Temperature Max: 140°F
- GPM Max: 6.5
- Brass Meter Valve
- 1/4" FPT Lance Connect
- High-Impact Glass-Filled Body
- Stainless-Steel 1.5 mm Orifice (#5.5 Nozzle Equivalent)
- Stainless-Steel Foam Turbulator

PART NO.	DESCRIPTION
8.710-125.0	S Foam Cannon / Injector
8.710-126.0	Foam Cannon / Injector / Bottle
8.704-222.0	Replacement Turbulator Screen



LEGACY HD PUMP - THE MOST DURABLE PUMP ON THE MARKET

Legacy_{HD}

Legacy HD heavy-duty, high pressure pumps are the outcome of years of research and development, resulting in a number of upgrades over previous pump models. Premium, long-life components and design features make the Legacy HD pump a standout among other high-pressure pumps. Tests prove it holds up better in rugged working conditions.

 Stronger crankcase housing with thicker aluminum cross members and mounting feet for added strength. Oil level dispstick is vented allowing for heat expansion. Oil level sight glass allows for quick and easy oil inspection.

- Crankcase features longer overall length to ensure less stress on all parts and a longer life of the pump.
- Super-strong, two-piece connecting rods designed with double-feeder grooves to maximize lubrication for a dramatically cooler running pump.

Premium European-quality tapered roller bearings on both the drive-side and opposite drive-side of the pump allow for heavier and demanding loads while greatly reducing noise levels and heat build-up.



- Dacromet[®] finish on manifold bolts adds extra rust protection.
- Revolutionary forged-brass heads with exclusive "deep-well-sealing" valve caps eliminate any head pressure effects to the valve cap and valve cap thread.
- High-temperature, long life U-seals correctly fitted for each pump.
- Precision-ground and highly-polished solid ceramic plungers designed and manufactured to withstand dramatic temperature and pressure spikes.
- Polished stainless-steel plunger rod reduces friction heat for a smoother and cooler operation.

 Precision machined crankshafts for easy assembly and disassembly.
 Solid-shaft models have a full 55 mm shaft length to easily accept pulley and sheaves.

LEGACY HD PUMP - GX SERIES

The most durable pump on the market.





PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)		
GX SERIES: 1/2" INLET X 3/8" OUTLET									
8.921-661.0	GX5450R	5.4	5000	17.0	1740	24 mm	43		
8.921-662.0	GX5450L	5.4	5000	17.0	1740	24 mm	43		
GX SERIES: 3/4" B	SP INLET X 1/2	BSP OUT	TLET						
8.920-597.0	GX9536.2R	9.5	3625	23.6	1740	25 mm	38		
8.920-598.0	GX9536.2L	9.5	3625	23.6	1740	25 mm	38		
8.920-599.0	GX1036.2R	10.4	3625	25.8	1740	25 mm	38		
8.920-600.0	GX1036.2L	10.4	3625	25.8	1740	25 mm	38		
8.920-602.0	GX1622.2R	15.8	2200	23.8	1740	25 mm	38		
8.920-603.0	GX1622.2L	15.8	2200	23.8	1740	25 mm	38		
8.752.809.0	GX8043.2	7.9	4350	23.5	1740	25 mm	38		

LEGACY HD PUMP - GM SERIES

Legacy_{HD}

■ Belt Drive

■ 1/2" Inlet x 3/8" Outlet



PART NO.	MODEL NO.	GPM		HP	RPM	SHAFT	WT (LBS.)
8.751-197.0	GM3540R.3 GM4030R.3	3.5	4000	9.5	1850	24 mm	22
8.751-198.0	GM4030R.3	4	3000	8.2	1000	24 mm	22
	GM4035R.3						
8.751-201.0	GM4035L.3-Left	4.8	3500	7.5	1500	24 mm	22
8.751-202.0	GM5030R.3	5.1	3000	13.5	1550	24 mm	22
8.751-203.0							
8.751-244.0	GM6035R.3 GM6035L.3	5.6	3500	13.5	1740	24 mm	22
8.751-245.0	GM6035L.3	5.6	3500	13.5	1740	24 mm	22

LEGACY HD PUMP - GT SERIES

Legacy_{HD}

■ Belt Drive

■ 1/2" Inlet x 3/8" Outlet



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)
8.921-723.0							
8.921-724.0	GT6036.2R	6.0	3600	14.8	1450	25 mm	39
8.921-725.0							
8.921-726.0	GT5636.2R	5.6	3600	13.8	1450	24 mm	39
8.921-727.0	GT5636.2L	5.6	3600	13.8	1450	24 mm	39

LEGACY PUMP - GBP & GB SERIES

Legacy

■ Belt Drive

■ 1/2" Inlet x 3/8" Outlet



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)
8.929-708.0	GBP3030R	3.0	3000	6.2	1650	24 mm	14.5
8.929-754.0	GBP3030L	3.0	3000	6.2	1650	24 mm	14.5
8.929-713.0	GBP4025R	4.0	2500	6.8	1550	24 mm	14.5

LEGACY HD PUMP - READY TO GO SERIES

Legacy

■ Belt or Direct Drive

 Includes a pump, unloader, thermal protector, bypass loop hose, garden hose inlet with filter and quick coupler.



PART NO.	MODEL NO.	DRIVE	GPM	PSI	RPM	SHAFT	UNLOADER
8.924-458.0	GP3035G	Direct	3.0	3500	3400	3/4" Hollow	VRT3
8.924-459.0	GP3535G1	Direct	3.5	3500	3400	1" Hollow	VRT3
8.924-460.0	GS4040G.3	Direct	4.0	4000	3400	1" Hollow	VRT3
8.924-461.0	GB3030R	Belt	3.0	3000	1650	24 mm	VRT3
8.924-462.0	GM3540R.3	Belt	3.5	4000	1850	24 mm	VRT3
8.924-463.0	GM3840R.3	Belt	3.8	4000	1740	24 mm	VRT3



LEGACY PUMP - HFR SERIES

Legacy

■ Belt Drive

■ Rated up to 149°F

■ 3/4" Outlet



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	INLET	WT (LBS.)
8.751-677.0	HFR40FR	10.5	4100	28.7	1450	40 mm	1"	106
8.751-678.0	HFR60FR	15.7	4100	43.0	1450	40 mm	1"	106
8.751-680.0	HFR80FL	20.9	4100	57.3	1450	40 mm	1"	106
8.751-681.0	HFR80FR	20.9	4100	57.3	1450	40 mm	1"	106
8.751-689.0	HFR80SR	21.1	2175	30.5	2175	40 mm	1-1/4"	106
8.751-693.0	HFR120SR	31.7	2175	46.1	2175	40 mm	1-1/4"	106

LEGACY PUMP - HHP SERIES

"Ecobrass" pump head: environment-friendly brass alloy with very high mechanical properties equivalent to Stainless-steel 316.

Legacy

■ Belt Drive

■ Rated up to 149°F

■ 3/4" Inlet x 1/2" Outlet



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)
8.751-682.0	HHP25SL	6.6	7250	32.6	1000	40 mm	112
8.751-694.0	HHP4150R	10.8	7250	53.7	1450	40 mm	112

LEGACY PUMP - NMT SERIES

Legacy

- Belt Drive
- 1/2" Inlet x 3/8" Outlet
- NMT1520SCWR: Rated up to 149°F Nickel Plated
- NMT2120ESR: Rated up to 185°F Stainless-steel - 316L



PART NO. MODEL NO. GPM PSI HP **RPM SHAFT** WT (LBS.) 8.754-110.0 NMT1520SCWR 4.8 3000 9.9 1200 24 mm 21 8.754-112.0 NMT2120ESR 6.6 3000 12.8 1740 24 mm 26

1

LEGACY PUMP - NLT SERIES

8.754-112.0

Legacy

■ Belt Drive

- 1/2" Inlet x 3/8" Outlet
- Double Shaft Pump

■ Rated up to 149°F



PART NO.	MODEL NO.	GPM PSI	HP	RPM	SHAFT	WT (LBS.)
8.755-731.0	NLT2525S	7.9 3625	19.6	1200	25 mm	41

LEGACY HD PUMP - GS SERIES

Legacy_{HD}

■ Direct Couple-to-gas Engine

■ 1/2" Inlet x 3/8" Outlet



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)
8.751-205.0							
8.751-206.0	GS3540G.3	3.5	4000	11.0	3400	1" Hollow	23
8.751-207.0	GS4040G.3	4.0	4000	13.0	3400	1" Hollow	23
8.751-208.0	GS5030G.3	5.0	3000	16.0	3400	1" Hollow	24.5

LEGACY HD PUMP - GP & GPP SERIES

Legacy_{HI}

■ Direct Couple-to-gas Engine

■ 1/2" Inlet x 3/8" Outlet



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)
8.929-711.0	GPP2535G	2.5	3500	6.0	3400	3/4" Hollow	16.75
8.929-709.0	GPP3035G	3.0	3500	7.2	3400	3/4" Hollow	16.75
8.929-710.0	GPP3035G1	3.0	3500	7.2	3400	1" Hollow	18

LEGACY HD PUMP - GF & GFP SERIES

Legacy_{HD}

- Direct Couple-to-electric Motor
- 1/2 14 BSPP-F Inlet x 3/8-19 BSPP-F Outlet

■ NEMA 56C Frame



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)
8.929-707.0	GFP2030S	2.1	3000	4.3	1725	5/8" Hollow	17
8.929-714.0	GFP2830S	2.8	3000	5.8	1725	5/8" Hollow	17
8.929-712.0	GFP3530F	3.5	3000	7.2	3450	3/4" Hollow	17

LEGACY HD PUMP - FOG NEMA SERIES

Legacy_{HD}

- Direct Couple-to-electric Motor
- 3/8 19 BSPP-F Inlet x 3/8-19 BSPP-F Outlet

■ Rated up to 149°F

■ NEMA 56C Frame



PART NO.	MODEL NO.	GPM	PSI	HP	RPM	SHAFT	WT (LBS.)
8.754-501.0	FOG1214R	1.2	1450	1.2	1740	5/8" Hollow	12
8.754-502.0	FOG1914R	1.9	1450	1.9	1740	5/8" Hollow	12
8.754-503.0	FOG2514R	2.5	1450	2.5	1740	5/8" Hollow	12
9.117-512.0	FOG0610CR	1.6	1450	1.9	1450	5/8" Hollow	12.5



LEGACY PUMP - TML SERIES

Legacy

- Belt Drive
- Rated up to 149°F



- 1/2" Inlet x 3/8" Outlet
- Industrial Triplex Plunger Pump with AI Connecting Rods

■ Compare to General Pumps: TS Series AR Pumps: RK Series

PART NO.			PSI	RPM	SHAFT	WT (LBS.)	
8.703-382.0	TML-3053	5.3	3000	1450	24 mm	18.9	
8.703-457.0	Pump Rail Set	t (Kit)					

Note: Can be run at 1750 RPM. Please note the pump ships without rails

LEGACY PUMP - TTV SERIES



- Belt Drive
- Rated up to 149°F

- 3/4" Inlet x 3/8" Outlet
- Heavy industrial Triplex Plunger Pump with AI Connecting Rods

■ Compare to General Pumps: TS Series AR Pumps: RK Series



PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT	WT (LBS.)
8.703-387.0	TTV-3555	5.5	3500	1450	24 mm	18.9
8.703-388.0	TTV-3563	6.3	3500	1450	24 mm	20

Note: Can be run at 1750 RPM. Please note the pump ships without rails

LEGACY PUMP - KKV SERIES



- Belt Drive
- Rated up to 149°F

- 1" Inlet x 1/2" Outlet
- Heavy industrial Triplex Plunger Pump with AI Connecting Rods



PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT	WT (LBS.)
8.703-391.0	KKV-3087	8.7	3000	1725	30 mm	39.6

Please note the pump ships without rails

LEGACY PUMP - WJG SERIES

Legacy

- Direct Drive
- Rated up to 149°F
- SAE Flange

- 3/8" Inlet x 3/8" Outlet
- Triplex Plunger Pump with Bronze Connecting Rods

■ Compare to General Pumps: TS Series AR Pumps: XTV Series



PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT	WT (LBS.)
8.703-342.0	WJG-2525	2.5	2500	3450	3/4" Hollow	13.2

LEGACY PUMP - WJH-F & WJH SERIES

WJH-F Series

- Direct Drive
- Rated up to 149°F
- NEMA Flange
- 3/8" Inlet x 3/8" Outlet
- Triplex Plunger Pump with Bronze Connecting Rods
- Compare to General Pumps: TS Series AR Pumps: XTV Series

WJH Series

- Direct Drive
- Rated up to 149°F
- NEMA Flange
- 3/8" Inlet x 3/8" Outlet
- Triplex Plunger Pump with AI Connecting Rods
- Compare to General Pumps: T and TT Series AR Pumps: XTA Series



PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT	WT (LBS.)
WJH-F SERIES						
8.703-346.0	WJH-2525-F	2.5	2500	3450	5/8" Hollow	13.2
WJH SERIES						
8.703-348.0	WJH-2121	2.1	2100	1725	5/8" Hollow	13.2
8.703-349.0	WJH-2132	3.2	2100	1725	5/8" Hollow	13.2

LEGACY PUMP - WMG SERIES



- Direct Drive
- Rated up to 149°F
- SAE Flange

- 1/2" Inlet x 3/8" Outlet
- Triplex Plunger Pump with Bronze Connecting Rods
- Compare to General Pumps: TS Series AR Pumps: XMV Series




PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT	WT (LBS.)
8.703-351.0	WMG-2530	3.0	2500	3450	3/4" Hollow	14.7



LEGACY PUMP - WMG 1 SERIES

Legacy

- Direct Drive
- Rated up to 149°F
- SAE Flange



■ Premium Triplex Plunger Pump with Bronze Connecting Rods

■ Compare to General Pumps: TX Series AR Pumps: XMV Series



PART NO.	MODEL NO.		PSI	RPM	SHAFT	WT (LBS.)
8.703-356.0	WMG-3540	4.0	3500	3450	1" Hollow	14.7

LEGACY PUMP - TMH SERIES

Legacy

- Direct Drive
- NEMA Flange
- 1/2" Inlet x 3/8" Outlet
- Rated up to 149°
- Industrial Triplex Plunger Pump with Al Connecting Rods

■ Compare to General Pumps: EZ Series AR Pumps: RKA Series



PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT	WT (LBS.)
8.703-375.0			3000	1725	1-1/8" Hollow	18.9
8.703-376.0	TMH-3040	4.0	3000	1725	1-1/8" Hollow	18.9
8.703-377.0	TMH-3050	5.0	3000	1725	1-1/8" Hollow	18.9
8.703-378.0	TMH-3055	5.5	3000	1725	1-1/8" Hollow	18.9

LEGACY PUMP





PART NO.	GPM	PSI	RPM	SHAFT	DESCRIPTION	
HORIZONTAL F						
8.930-514.0*	S 2.6	3000	3400	3/4"		
VERTICAL PUN	1P					
8.925-069.0	S 2.6	3000	3400	7/8"	With Garden Hose Fitting Inlet	
*Nicks: Can be use					226	

^{*}Note: Can be used to replace Comet pumps listed on page 236.

PUMP RAILS - LEGACY & LEGACY HD



PART NO.	DESCRIPTION
8.717-577.0	Rails for Models: FGP, FOG, GF, GB, GBP, GM, GP, GPP, GS, GT, GX, HFR, HY, NLT, & NMT
9.802-744.0	Mounting Bolts for Models: FGP, FOG, GF, GB, GBP, GM, GP, GPP, GS, GT, GX, HFR, HHP, HY, NLT, & NMT

LEGACY PUMP REPAIR TOOL KIT





9.802-954.0 pump repair tool kit shown.

PART NO.	DESCRIPTION
9.802-954.0	Legacy Pump Repair Tool Kit (For all models except GB, GP, GP1, GF)
8.756-590.0	Legacy Pump Repair Tool Kit for Normal Maintenance (For models: GB, GP, GP1 and HY)
8.756-717.0	Legacy Pump Repair Tool Kit for Oil Seal Maintenace (For models: GB, GP, GP1 and HY)
8.758-163.0	Legacy Packing & Pulling Pump Repair Tool Kit (For models: GT.2 & GX.2)

PART NO.	DESCRIPTION
9.802-564.0	Guide, Oil Seal Inserter, Plunger Rod GT-GX-GH
9.802-581.0	Piston, Oil Seal Inserter, Plunger Rod GT-GX-GH
9.802-580.0	Piston, Oil Seal Inserter, Plunger Rod GM-GD-GG-GE-GS
9.802-563.0	Guide, Oil Seal Inserter, Plunger Rod GM-GD-GG-GE-GS
9.802-566.0	Guide, Oil Seal Insert, Crankshaft GM-GD-GG-GE-GS
9.802-568.0	Piston Seal Extractor
9.802-579.0	Piston, Seal Inserter, Manifold GM-GS
9.802-573.0	Guide, Seal Inserter, Manifold GM-GS

PART NO.	DESCRIPTION
9.802-578.0	Piston, Seal Inserter, Manifold GT
9.802-572.0	Guide, Seal Inserter, Manifold GT
8.751-396.0	Guide, Seal Inserter, Manifold GD-GE-GG
8.751-397.0	Piston, Seal Inserter, ManifoldGD-GE-GG-GH-GX
8.751-405.0	Guide, Seal Inserter, Manifold GH-GX
8.751-403.0	Screwdriver Flathead
9.802-574.0	Box, Plastic Tool Box



LEGACY PUMP REPAIR KITS



		NO. OF PIECES	QTY NEEDED PER PUMP
8.703-458.0 Kit 10 WJH Packing / Hea	der / Brass Assy, 18 mm	21	1
8.703-459.0 Kit 12 WM - H&L Packing only, 18 mm	Kit WJH Packing / Header	15	1
8.703-462.0 Kit 40 KKV Check Valves	/ O-ring Kit	12	1
8.932-979.0 Kit 42 APR.S Unloader Va	lve Seal Kit	3	1
8.900-701.0 Kit 60 V-Packing, 15 mm F&G Packing / Hea	Legacy Pump WJH, WJH - der only, 15 mm	12	1
	Set 15 mm 18 PX WJH - der / Brass, 15 mm	18	1
8.703-464.0 Kit 63 WMH&L Check Val	ve / O-ring Kit	12	1
8.703-465.0 Kit 64 HG / WJ / WM Plur	nger Oil Seal Kit	3	1
8.703-466.0 Kit 65 TM Plunger Oil Sea	l Kit	3	1
8.703-467.0 Kit 66 HG / WJ Valve Cap	/ O-ring, M18 x 1.5 Kit	12	1
8.703-468.0 Kit 67 WM / TM / TTV Val	ve Cap / O-ring, M27 x 1.5	12	1
8.703-469.0 Kit 68 WM - F&G Packing	/ Brass Assy Kit, 15 mm	21	1
8.703-470.0 Kit 69 TM - F&G Packing	Brass Assy, 15 mm	21	1
8.703-471.0 Kit 70 WM - H&L Packing	/ Brass Assy Kit, 18 mm	21	1
8.703-472.0 Kit 71 TM - H&L Packing	Brass Assy Kit, 18 mm	24	1
8.703-474.0 Kit 73 WM - F&G Packing	only Kit, 15 mm	15	1
8.703-475.0 Kit 74 TM - F&G Packing 0	only Kit, 15 mm	15	1
8.703-476.0 Kit 76 TM - H&L Packing	only Kit, 18 mm	18	1
8.703-479.0 Kit 79 WM-G 1" Accessory	y Seals Kit	8	1
8.703-483.0 Kit 84 HG / WJ Check Val	ve / O-ring	12	1
8.703-485.0 Kit 86 TTV-KTV Packing /	Brass Assy Kit, 20 mm	24	1
8.703-488.0 Kit 89 TTV-KTV Packing o	nly Kit, 20 mm	18	1
8.703-489.0 Kit 90 KKV Packing only	Kit L90, 22 mm	18	1
8.703-492.0 Kit 93 HDL Check Valve /	O-ring	12	1
8.703-493.0 Kit 94 HDL Valve Contain	ment Kit L94	24	1
8.900-703.0 Kit 95 HDL Packing only	Kit L90, 18 mm	18	1
8.703-494.0 Kit 96 HDL Packing / Bras	ss Assy Kit, 18 mm	24	1
8.703-498.0 Kit 123 TM-TTV-KTV Check	Valve / O-ring Kit	12	1
8.703-499.0 Kit 124 WM - F&G Check V	alve / O-ring Kit	12	1
8.703-501.0 Kit 127 TTV Accessory Oil	Seal Kit	10	1

ADMIRAL PUMP REPAIR KITS

For the following Admiral pumps: WE Series, XD Series, XLS Series, CA Series, WG Series, XLE Series, XLG Series, C Series, IB Series.

PART NO.	KIT NO.	DESCRIPTION	QTY NEEDED PER PUMP
8.900-631.0	Kit AP1	Check Valves (for WE, WG, WEL, XL Series, XD Small Brass Head)	1
8.900-633.0	Kit AP4	Oil Seals 15 mm Plunger Rod (for WE, WG and WEL Series)	1
8.900-634.0	Kit AP5	Oil Seals 18 mm Plunger Rod (for XL Series)	1
8.900-636.0	Kit AP7	Male Adapter Rings, 18 mm (for WEL, XLE and XLS Series)	1
8.900-637.0	Kit AP8	V-Packing Seals, 18 mm (for WE and WG Series)	1
8.900-643.0	Kit AP14	Brass Packing Gland, Two Piece, 18 mm (For XLE and XLS Series)	1
8.900-644.0	Kit AP15	V-Packing Seals, Two Piece, 18 mm (for XLE and XLS Series)	1
8.900-645.0	Kit AP16	Super U-Packing Seals, 18 mm (for XLG Series only)	1
8.900-646.0	Kit AP17	Complete Plunger Seal, Two Piece, 18 mm (for XLE and XLS Series)	3
8.900-647.0	Kit AP18	Complete Plunger Seal, Super-U, 18 mm (for XLG Series only)	3
8.900-648.0	Kit AP19	Brass Packing Gland, Super-U, 18 mm (for XLG Series only)	1
8.900-653.0	Kit AP24	V-Packing Seals, 15 mm, Two Piece (for WE-T and WG-T Series)	1
8.900-654.0	Kit AP25	V-Packing Seals, 18 mm, Two Piece (for WE-T Series only)	1
8.900-666.0	Kit AP38	"Super U" Packing (for XD 20 mm)	1
8.900-676.0	Kit AP52	Check Valve Assemblies (for IB-1000 Series and CA Series)	1
8.900-680.0	Kit AP57	Male Adapter Rings, 45 mm (for IB-1000 Series C and CA Series)	1
8.900-682.0	Kit AP59	V-Packing Seals, 45 mm (for IB-1000 Series C and CA Series)	1
8.900-683.0	Kit AP61	Glands (45 mm), Brass Packing (for IB-1019, 1032, 1037, C and CA Series)	1



LEGACY HD PUMP REPAIR KIT SELECTION CHART

FOR Legacy_{HD}

Use the selection chart below and on the following 2 pages to find the correct and quantity repair kits needed for a specific Legacy HD Pump Model.

PUMP MODEL	SEAL KIT (QTY / PUMP)	COMPLETE SEAL KIT (QTY / PUMP) INCLUDES BRASS	CERAMIC PLUNGER KIT (QTY / PUMP)	VALVE KIT (QTY / PUMP)	PLUNGER OIL SEAL KIT (QTY / PUMP)
FOG0614R	N/A	8.754-575.0 (3)	8.754-576.0 (3)	8.754-577.0 (6)	8.754-578.0 (1)
FOG1214R	N/A	8.754-575.0 (3)	8.754-576.0 (3)	8.754-577.0 (6)	8.754-578.0 (1)
FOG1914R	N/A	8.754-575.0 (3)	8.754-576.0 (3)	8.754-577.0 (6)	8.754-578.0 (1)
FOG2514R	N/A	8.754-575.0 (3)	8.754-576.0 (3)	8.754-577.0 (6)	8.754-578.0 (1)
GB3030L	8.754-856.0 (1)	8.758-081.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GB3030R	8.754-856.0 (1)	8.758-081.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GB4025L	8.754-856.0 (1)	8.758-081.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GB4025R	8.754-856.0 (1)	8.758-081.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GBP3030R	8.759-015.0 (1)	8.929-348.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GBP3030L	8.759-015.0 (1)	8.929-348.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GBP4025R	8.759-015.0 (1)	8.929-348.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GD3025	8.725-356.0 (1)	8.725-357.0 (3)		9.803-936.0 (1)	9.803-937.0 (1)
GD3030	8.725-354.0 (1)		9.803-934.0 (3)	9.803-936.0 (1)	9.803-937.0 (1)
GD4020.1	8.725-356.0 (1)	8.725-357.0 (3)		9.803-936.0 (1)	9.803-937.0 (1)
GE2020F.1	8.725-354.0 (1)		9.803-934.0 (3)	9.803-936.0 (1)	9.803-937.0 (1)
GE2020S.1	8.725-356.0 (1)	8.725-357.0 (3)		9.803-936.0 (1)	9.803-937.0 (1)
GE2825F.1	8.725-354.0 (1)		9.803-934.0 (3)	9.803-936.0 (1)	9.803-937.0 (1)
GE2825S.1	8.725-356.0 (1)	8.725-357.0 (3)		9.803-936.0 (1)	9.803-937.0 (1)
GE3525F.1	8.725-354.0 (1)		9.803-934.0 (3)	9.803-936.0 (1)	9.803-937.0 (1)
GF2030F	8.754-860.0 (1)	8.725-357.0 (3)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GF2030S	8.754-856.0 (1)		8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GF2830F	8.754-860.0 (1)	8.758-083.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GF2830S	8.754-856.0 (1)	8.758-081.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GF3530F	8.754-860.0 (1)	8.758-0830 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GFP2030S	8.759-015.0 (1)	8.929-348.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GFP2830S	8.759-015.0 (1)	8.929-348.0 (1)	8.754-858.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GFP3530F	8.759-031.0 (1)	8.758-218.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GG2530G.1	8.725-354.0 (1)	8.758-081.0 (1)	9.803-934.0 (3)	9.803-936.0 (1)	9.803-937.0 (1)
GG3030G.1	8.725-354.0 (1)	8.758-083.0 (1)	9.803-934.0 (3)	9.803-936.0 (1)	9.803-937.0 (1)
GG3035G1.1	8.725-354.0 (1)		9.803-934.0 (3)	9.803-936.0 (1)	9.803-937.0 (1)
GG4030G1.1	8.725-354.0 (1)		9.803-934.0 (3)	9.802-604.0 (1)	9.802-606.0 (1)
GH5050			9.802-629.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM3540.2	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM3540.3	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM4030.2	8.725-362.0 (1)	8.758-086.0 (1)	9.802-620.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM4030.3	8.725-362.0 (1)	8.758-086.0 (1)	8.751-238.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM4035.2	8.725-360.0 (1)	8.758-085.0 (1)	9.802-629.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM4035.3	8.725-360.0 (1)	8.758-085.0 (1)	8.751-237.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM5030.2	8.725-362.0 (1)	8.758-086.0 (1)	9.802-620.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM6035.2	8.725-360.0 (1)	8.758-085.0 (1)	9.802-629.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GM6035.3	8.725-360.0 (1)	8.758-085.0 (1)	8.751-237.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GP2535G	8.754-860.0 (1)	8.758-083.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GP3035G	8.754-860.0 (1)	8.758-083.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)

LEGACY HD PUMP REPAIR KIT SELECTION CHART (CONTINUED)

FOR Legacy HD

Use the selection chart below and on the preceeding and following page to find the correct and quantity repair kits needed for a specific Legacy HD Pump Model.

PUMP MODEL	SEAL KIT (QTY / PUMP)	COMPLETE SEAL KIT (QTY / PUMP) INCLUDES BRASS	CERAMIC PLUNGER KIT (QTY / PUMP)	VALVE KIT (QTY / PUMP)	PLUNGER OIL SEAL KIT (QTY / PUMP)
GP3035G1	8.754-860.0 (1)	8.758-083.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GP3535G1	8.754-860.0 (1)	8.758-083.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GP4035G1	8.754-860.0 (1)	8.758-083.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GPP2535G	8.759-031.0 (1)	8.758-218.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GPP3035G	8.759-031.0 (1)	8.758-218.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GPP3035G1	8.759-031.0 (1)	8.758-218.0 (1)	8.754-862.0 (3)	8.754-859.0 (1)	9.803-937.0 (1)
GS3040G.2	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GS3040G.3	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GS3540G.2	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GS3540G.3	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GS4040G.2	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GS4040G.3	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GS5030G.2	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GS5030G.3	8.725-358.0 (1)	8.758-087.0 (1)	8.933-023.0 (3)	9.802-603.0 (1)	9.802-609.0 (1)
GT4540.2L	8.753-821.0 (1)	8.758-061.0 (1)	8.753-823.0 (3)	8.753-824.0 (1)	9.802-606.0 (1)
GT4540.2R	8.753-821.0 (1)	8.758-061.0 (1)	8.753-823.0 (3)	8.753-824.0 (1)	9.802-606.0 (1)
GT5635.1	8.916-488.0 (1)	8.916-322.0 (3)	9.802-607.0 (3)	9.802-603.0 (1)	9.802-606.0 (1)
GT5636.2L	8.753-821.0 (1)	8.758-061.0 (1)	8.753-823.0 (3)	8.753-824.0 (1)	9.802-606.0 (1)
GT5636.2R	8.753-821.0 (1)	8.758-061.0 (1)	8.753-823.0 (3)	8.753-824.0 (1)	9.802-606.0 (1)
GT6036.2L	8.753-821.0 (1)	8.758-061.0 (1)	8.753-823.0 (3)	8.753-824.0 (1)	9.802-606.0 (1)
GT6036.2R	8.753-821.0 (1)	8.758-061.0 (1)	8.753-823.0 (3)	8.753-824.0 (1)	9.802-606.0 (1)
GX1025.1	8.725-364.0 (1)	8.725-365.0 (3)	9.802-614.0 (3)		9.802-606.0 (1)
GX1036.2L	8.916-487.0(1)	8.757-937.0 (1)	8.752-839.0 (3)	8.753-349.0 (1)	9.802-606.0 (1)
GX1036.2R	8.916-487.0 (1)	8.757-937.0 (1)	8.752-839.0 (3)	8.753-349.0 (1)	9.802-606.0 (1)
GX1225.1	8.725-364.0 (1)	8.725-365.0 (3)	9.802-614.0 (3)		9.802-606.0 (1)
GX1622.2L	8.752-845.0 (1)	8.757-938.0 (1)	8.752-840.0 (3)	8.717-589.0 (1)	9.802-606.0 (1)
GX1622.2R	8.752-845.0 (1)	8.757-938.0 (1)	8.752-840.0 (3)	8.717-589.0 (1)	9.802-606.0 (1)
GX5450L	8.753-512.0 (1)	8.757-939.0 (1)	8.753-514.0 (3)	8.753-515.0 (1)	9.802-606.0 (1)
GX5450R	8.753-512.0 (1)	8.757-939.0 (1)	8.753-514.0 (3)	8.753-515.0 (1)	9.802-606.0 (1)
GX8030.1	8.725-364.0 (1)	8.725-365.0 (3)	9.802-614.0 (3)		9.802-606.0 (1)
GX8043R.2	8.916-488.0 (1)	8.757-936.0 (1)	8.752-838.0 (3)	8.753-349.0 (1)	9.802-606.0 (1)
GX9536.2L	8.916-487.0 (1)	8.757-937.0 (1)	8.752-839.0 (3)	8.753-349.0 (1)	9.802-606.0 (1)
GX9536.2R	8.916-487.0 (1)	8.757-937.0 (1)	8.752-839.0 (3)	8.753-349.0 (1)	9.802-606.0 (1)
HFR105SL	8.754-245.0 (1)	8.754-244.0 (3)	8.754-242.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR105SR	8.754-245.0 (1)	8.754-244.0 (3)	8.754-242.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR120SL	8.754-245.0 (1)	8.754-244.0 (3)	8.754-242.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR40FL	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR40FR	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR40SL	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR40SR	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR60FL	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR60FR	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR60SL	8.754-231.0 (1)	8.754.232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)



LEGACY HD PUMP REPAIR KIT SELECTION CHART (CONTINUED)

FOR Legacy_{HD}

Use the selection chart below and on the preceeding 2 pages to find the correct and quantity repair kits needed for a specific Legacy HD Pump Model.

PUMP MODEL	SEAL KIT (QTY / PUMP)	COMPLETE SEAL KIT (QTY / PUMP) INCLUDES BRASS	CERAMIC PLUNGER KIT (QTY / PUMP)	VALVE KIT (QTY / PUMP)	PLUNGER OIL SEAL KIT (QTY / PUMP)
HFR60SR	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR80FL	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-234.0 (1)	8.754-235.0 (1)
HFR80FR	8.754-231.0 (1)	8.754-232.0 (3)	8.754-233.0 (3)	8.754-234.0 (1)	8.754-235.0 (1)
HFR80SL	8.754-245.0 (1)	8.754-244.0 (3)	8.754-242.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HFR80SR	8.754-245.0 (1)	8.754-244.0 (3)	8.754-242.0 (3)	8.754-243.0 (1)	8.754-235.0 (1)
HHP25SL	8.754-236.0 (1)	8.754-237.0 (3)	8.754-246.0 (1)	8.754-241.0 (1)	8.754-235.0 (1)
HHP25SR	8.754-236.0 (1)	8.754-237.0 (3)	8.754-246.0 (1)	8.754-241.0 (1)	8.754-235.0 (1)
HHP2750R	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HHP30SL	8.754-236.0 (1)	8.754-237.0 (3)	8.754-246.0 (1)	8.754-241.0 (1)	8.754-235.0 (1)
HHP30SR	8.754-236.0 (1)	8.754-237.0 (3)	8.754-246.0 (1)	8.754-241.0 (1)	8.754-235.0 (1)
HHP3650L	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HHP3650R	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HHP38FL	8.754-236.0 (1)	8.754-237.0 (3)	8.754-246.0 (1)	8.755-233.0 (1)	8.754-235.0 (1)
HHP38FR	8.754-236.0 (1)	8.754-237.0 (3)	8.754-246.0 (1)	8.755-233.0 (1)	8.754-235.0 (1)
HHP4150L	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HHP4150R	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HHP5040L	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HHP5040R	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HHP5750L	8.754-236.0 (1)	8.754-240.0 (3)	8.754-246.0 (1)	8.754-247.0 (1)	8.754-235.0 (1)
HY1515	8.754-980.0 (1)	8.754-981.0 (3)	8.754-983.0 (1)	8.754-577.0 (1)	9.803-937.0 (1)
HY1520	8.754-980.0 (1)	8.754-981.0 (3)	8.754-983.0 (1)	8.754-577.0 (1)	9.803-937.0 (1)
NMT1520CWR	8.754-252.0 (1)	8.754-253.0 (3)	8.751-238.0 (1)	9.802-603.0 (1)	8.754-261.0 (1)
NMT1520SCWR	8.754-252.0 (1)	8.754-253.0 (3)	8.751-238.0 (1)	9.802-603.0 (1)	8.754-261.0 (1)
NMT2120CWR	8.754-252.0 (1)	8.754-253.0 (3)	8.751-238.0 (1)	9.802-603.0 (1)	8.754-261.0 (1)
NMT2120ESR	8.754-239.0 (1)	8.754-229.0 (3)	8.754-256.0 (1)	8.754-230.0 (6)	8.754-261.0 (1)
NLT2525S	8.916-488.0 (1)	8.755-740.0 (3)	8.752-838.0 (3)	8.753-824.0 (1)	9.802-606.0 (1)

LEGACY HD PUMP REPAIR - SEAL KITS



PART NO.	QTY NEEDED PER PUMP
8.725-356.0	1
8.725-358.0	1
8.725-360.0	1
8.725-362.0	1
8.725-358.0 8.725-360.0 8.725-362.0 8.725-364.0 8.916-487.0	1
8.916-487.0	1
8.752-845.0	1
8.753-512.0	1
8.753-821.0	1
8.754-231.0	1
8.754-236.0	1

PART NO.	QTY NEEDED PER PUMP
8.754-239.0	1
8.754-245.0	1
8.754-252.0	1
8.754-856.0	\$ 1 \$ 1
8.754-860.0	S 1
8.759-015.0	1
8.759-031.0	1
8.916-488.0	S 1

LEGACY HD PUMP REPAIR - COMPLETE KITS

FOR Legacy HD

PART NO.	QTY NEEDED PER PUMP
8.725-357.0	3
8.725-357.0 8.725-365.0 8.758-061.0	3
8.758-061.0	1
8.754-229.0	3
8.754-240.0	3
8.754-575.0	3
8.755-740.0	3
8.757-936.0 8.757-937.0	1
8.757-937.0	1
8.757-938.0	1

PART NO.	QTY NEEDED PER PUMP
8.757-939.0	1
8.758-061.0	S 1
8.758-081.0	S 1
8.758-083.0	\$ 1 \$ 1 \$ 1 \$ 1 \$ 1
8.758-085.0	S 1
8.758-086.0	S 1
8.758-087.0	S 1
8.758-218.0	1
8.916-322.0	S 3
8.929-348.0	1

LEGACY HD PUMP REPAIR - CERAMIC PLUNGER KITS

FOR Legacy HD

PART NO.	QTY N	EEDED PER PUN	ИΡ	
8.751-237.0	S	3		
8.751-238.0	S	3		
8.752-838.0		3		
8.752-839.0	S	3		
8.752-840.0		3		
8.753-514.0		3		
8.753-823.0	S	3		
8.754-233.0		3		
8.754-242.0		3		
8.754-246.0		1		

PART NO.	QTY NEEDED PER PUMP
8.751-238.0	1
8.754-858.0	3
8.754-862.0	3
8.933-023.0	3
8.933-023.0 9.802-607.0 9.802-614.0	3
9.802-614.0	3
9.802-620.0	3
9.802-629.0	3
9.803-934.0	3

LEGACY HD PUMP REPAIR - VALVE KITS

Legacy_{no}

PART NO.	QTY NEEDED PER PUMP
8.717-589.0	1
8.753-349.0	S 1
8.753-515.0	\$ 1 \$ 1 \$ 1
8.753-824.0	5 1
8.758-229.0	1
8.758-230.0	1

PART NO.	QTY NEEDED PER PUMP
8.754-577.0	6
8.754-859.0	S 1 S 1
9.802-603.0	S 1
9.802-604.0	S 1
9.803-936.0	S 1



LEGACY HD PUMP REPAIR - PLUNGER OIL SEAL KITS

FOR Legacy_{HD}

PART NO.	QTY NEEDED PER PUMP
9.802-606.0	1
8.754-235.0	1
8.754-578.0	1

PART NO.	QTY NEEDED PER PUMP				
9.802-606.0	S 1				
9.802-609.0	S 1				
9.803-937.0	S 1				

INTERPUMP / GENERAL PUMP - SOLID-SHAFT PUMPS











8.702-629.0

8.702-635.0

8.702-703.0

8.702-704.0

PART NO.	MODEL NO.	INTERPUMP MODEL NO.	GP MODEL NO.	GPM	PSI	RPM	SHAFT DIA
8.753-482.0			TSS1021	5.6	1700	1450	24 mm
8.753-483.0			TSS1511	4.0	3500	1450	24 mm
8.702-629.0	102048	WS92	TS921	5.9	1800	1450	24 mm
8.702-625.0	102046	W92	T921	5.0	1700	1050	24 mm
8.702-622.0	102042	WS82	TS821	5.6	1500	1450	24 mm
8.702-636.0	102058	WS101	TS1011	4.0	2000	1450	24 mm
8.702-635.0	102056	W131	T1011	4.5	2000	1125	24 mm
8.702-646.0	102076	WS133	TS1331	3.5	2100	1450	24 mm
8.702-645.0	102074	WS132	TS1321	4.75	2100	1450	24 mm
8.702-643.0	102072	W132	T1321	5.5	2100	1150	24 mm
8.702-650.0	102084	WS151		4.0	3500	1450	24 mm
8.702-649.0	102082	W151	T1511	4.5	2500	1125	24 mm
8.702-654.0	102088	W162	T1621	5.0	2500	1050	24 mm
8.702-665.0	102105	W201	T2011	4.5	3000	1125	24 mm
8.702-667.0	102110	WS201	TS2011	4.0	3000	1450	24 mm
8.702-670.0	102115G	WS202	TS2021	4.5	3500	1125	24 mm
8.702-701.0	102170	W995	T9951	3.4	1300	1750	24 mm
8.702-703.0	102176	W997	T9971	4.0	2000	1750	24 mm
8.702-704.0	EP1812S	T991- W99	T9971	4.0	2500	1750	
8.702-687.0	102140	W913	T9131	4.0	1900	1750	24 mm
8.702-690.0	102150	W921	T9211	4.0	2900	1750	24 mm
8.702-693.0	102152	W928	T9281	4.0	4000	1750	24 mm
8.702-695.0	102154	T5050	T5050	5.0	5000	1845	24 mm
8.702-661.0	102097	-	TT9111	3.0	1500	1750	24 mm
8.702-630.0	102049	WW93	TT931	2.9	1500	2800	24 mm
8.702-628.0	102047	WW94	TT941	3.43	1300	2800	24 mm
8.702-663.0	102102	WW944	TT9441	4.4	2500	3400	24 mm
*D I D							

INTERPUMP / GENERAL PUMP - TX SOLID-SHAFT PUMP







PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA
8.702-741.0	TX1510S34	4.0	3000	3400	24 mm

INTERPUMP / GENERAL PUMP - SERIES "44" (EZ SERIES) SOLID-SHAFT PUMP







PART NO.	INTERPUMP MODEL NO.	GP MODEL NO.	GPM	PSI	RPM	SHAFT DIA
8.702-766.0	W956	EZ2536S	3.6	2500	1750	24 mm
8.702-768.0	W959	EZ2542S	4.2	2500	1750	24 mm
8.702-773.0	W186	EZ3040S	4.0	3000	3400	24 mm
8.702-782.0	-	EZ4040S34	4.0	4000	3400	24 mm

Note: For Direct-Drive Mounting see flanges on page 240

INTERPUMP / GENERAL PUMP - TSF SOLID-SHAFT PUMP







PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA
8.702-740.0	TSF2021	7.0	3600	1450	24 mm
8.702-736.0	TSF2221	10.2	3000	1750	24 mm
8.702-737.0	TSF2421	12.0	2500	1750	24 mm

INTERPUMP / GENERAL PUMP - LARGE FRAME SOLID-SHAFT PUMP







PART NO.	INTERPUMP MODEL NO.	GP MODEL NO.	GPM	PSI	RPM	SHAFT DIA
8.702-612.0	W4A	T41A	12.0	900	650	35 mm
8.702-640.0	WS104	TS1041	8.0	1600	1450	35 mm
8.702-652.0	WS153	TS1531	8.0	2175	1450	35 mm

INTERPUMP / GENERAL PUMP - CAR WASH SOLID-SHAFT PUMP







PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA	SHIP WT
8.702-754.0	CW2040	5.0	2500	1250	24 mm	30 lbs.
8.702-745.0	CW3040	5.0	3000	1250	24 mm	32 lbs.
9.107-630.0	HTCK3623S	21.0	1500	1150	30 mm	80 lbs.



INTERPUMP / GENERAL PUMP - HOLLOW-SHAFT



■ Direct Drive



8.702-711.0




■ Flanged for direct couple to gasoline or electric motors

PART NO.	INTERPUMP MODEL NO.	GP MODEL NO.	GPM	PSI	RPM	SHAFT DIA
COUPLE TO GAS	OLINE MOTOR	lS				
8.702-711.0	WW906G	TT9061G	2.1	1400	3400	3/4"
8.702-682.0		TT1540GBF	4.0	1500	3400	3/4"
8.702-673.0		TT2028GBF	2.8	2000	3400	3/4"
8.702-674.0		TT2035GBF	3.5	2000	3400	3/4"
COUPLE TO ELEC	TRIC MOTORS	5				
8.702-708.0	W905E	T9051E	2.1	1400	1750	5/8"
8.702-710.0	WW906E	TT9061E	2.1	1400	3400	5/8"
8.702-713.0	WW907E	TT9071E	2.8	1500	3400	5/8"
8.702-677.0	-	TT9111EBF	3.0	1500	1750	5/8"
8.702-679.0	-	TT2021EBF	2.1	2000	3400	5/8"
8.702-680.0	. 🗸	TT2028EBF	2.8	2000	3400	5/8"
8.702-681.0	-	TT2035EBF	3.5	2000	3400	3/4"

INTERPUMP / GENERAL PUMP - EZ SERIES HOLLOW-SHAFT



■ Direct Drive






PART NO.	INTERPUMP MODEL NO.	GP MODEL NO.	GPM	PSI	RPM	SHAFT DIA			
COUPLE TO G	COUPLE TO GASOLINE MOTORS								
8.702-764.0	WW961EZG	EZ3040G	4.0	2500	3400	1"			
8.702-776.0		EZ4030G34	3.0	4000	3400	1"			
8.702-778.0	- 40	EZ4035G34	3.5	4000	3400	1"			
8.702-779.0	-	EZ4040G34	4.0	4000	3400	1"			
COUPLE TO E	LECTRIC MOTORS	5							
8.702-758.0	W956EZE	EZ2536E	3.6	2500	1750	1-1/8"			
8.702-759.0	W959EZE	EZ2542E	4.2	2500	1750	1-1/8"			
8.702-761.0	W950EZE	EZ2545E	2.5	2500	1750	1-1/8"			
8.702-760.0	W953EZE	EZ2555E	5.5	2500	3400	1-1/8"			
8.702-780.0	-	EZ4035E	3.5	4000	3400	1-1/8"			

INTERPUMP / GENERAL PUMP - TX SERIES HOLLOW-SHAFT



■ Direct Drive





PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA	SHIP WT
8.702-784.0	TX1810E179	3.2	2000	1750	1-1/8"	30 lbs.
8.702-785.0	TX1812E179	3.8	2000	1750	1-1/8"	32 lbs.

INTERPUMP / GENERAL PUMP KIT SELECTION CHART

Use the selection chart below to find the correct repair kit for the specific Interpump / General Pump model.



PUMP MODEL	VALVES	OIL SEAL PISTON	PACKINGS	PACKINGS WITH BRASS	CERAMIC	VALVE CAPS	PISTON	BOLTS HEAD RINGS	CRANK OIL SEAL
TX1510S34	Kit 123	Kit 159	Kit 160	Kit 166	52040009	Kit 124	52040009	-	JEAL
TX1810E179	Kit 123	Kit 159	Kit 160	Kit 160	44040109	Kit 124 Kit 124	52040009		
TX1810E179	Kit 123	Kit 159	Kit 161	Kit 167	44040109	Kit 124 Kit 124	52040009		
TSF2021		Kit 133	Kit 101			66130041		-	Kit 3
	Kit 169			Kit 171	66040009		66040109		
TSF2221	Kit 169	Kit 2	Kit 172	Kit 173	66040109	66130041	66040109	-	Kit 3
TSF2421	Kit 169	Kit 2	Kit 181	Kit 182	66040409	66130041	66040409	- I/i+ 21	Kit 3 104641
T9721	Kit 1	Kit 23	Kit 19	Kit 27	50040409	Kit 4	Kit 6	Kit 21	
T9731	Kit 1	Kit 23	Kit 19	Kit 27	50040409	Kit 4	Kit 6	Kit 21	104637 104641
T731	Kit 1	Kit 23	Kit 19	Kit 27	50040409	Kit 4	Kit 6	Kit 21	
T991	Kit 1	Kit 23	Kit 19	Kit 27	50040409	Kit 4	Kit 6 Kit 6	Kit 21	104641
T9951	Kit 1	Kit 23	Kit 19	Kit 27	50040409	Kit 4		Kit 21	104641
T9971	Kit 1	Kit 23	Kit 19	Kit 27	50040409	Kit 4	Kit 6	Kit 21	104641
T921	Kit 1	Kit 2	Kit 148	Kit 29	47040509	Kit 4	Kit 6	Kit 11	Kit 3
T1011	Kit 1	Kit 2	Kit 69	Kit 28	47040409	Kit 4	Kit 6	Kit 7	Kit 3
T1321	Kit 1	Kit 2	Kit 148	Kit 29	47040509	Kit 4	Kit 6	Kit 11	Kit 3
T9211	Kit 1	Kit 2	Kit 69	Kit 28	47040409	Kit 4	Kit 6	Kit 7	Kit 3
T9281	Kit 1	Kit 2	Kit 109	Kit 112	47040856	Kit 106	Kit 107	Kit 108	Kit 3
T4251	Kit 122	Kit 44	Kit 77	Kit 78	61040056	Kit 122	47040056	Kit 7	Kit 32
T5050	Kit 150	Kit 2	Kit 109	Kit 151	47040856	Kit 150	47040856	Kit 108	Kit 3
TS1021	Kit 1	Kit 2	Kit 69	Kit 28	47040409	Kit 4	Kit 6	Kit 7	Kit 3
TS1011	Kit 1	Kit 2	Kit 69	Kit 28	47040856	Kit 4	Kit 6	Kit 7	Kit 3
TS1041	Kit 62	Kit 37	Kit 69	Kit 82	47040409	98231200	Kit 54	Kit 7	Kit 32
TS1321	Kit 1	Kit 2	Kit 148	Kit 29	47040509	Kit 4	Kit 6	Kit 11	Kit 3
TS1511	Kit 1	Kit 2	Kit 69	Kit 28	47040409	Kit 4	Kit 6	Kit 7	Kit 3
TS1531	Kit 62	Kit 37	Kit 69	Kit 82	47040409	98231200	Kit 54	Kit 7	Kit 32
TS2011	Kit 1	Kit 2	Kit 69	Kit 28	47040409	Kit 5	Kit 6	Kit 7	Kit 3
TS2021	Kit 1	Kit 2	Kit 69	Kit 28	47040409	Kit 5	Kit 6	Kit 7	Kit 3
TT9111	Kit 1	Kit 83	Kit 141	Kit 140	51040109	Kit 84	51040109	-	104641
TT941	Kit 1	Kit 83	Kit 97	Kit 96	51040009	Kit 84	51040109	-	104641
TT9441	Kit 1	Kit 23	Kit 88	Kit 92	52040009	Kit 4	Kit 6	-	104641
TT2028	Kit 1	Kit 83	Kit 97	Kit 96	051040009		-	-	104637
TT2035	Kit 1	Kit 83	Kit 97	Kit 96	51040009	Kit 84	-	-	104637
TT9061	Kit 1	Kit 83	Kit 97	Kit 96	51040009	Kit 84	-	-	104637
TT9071	Kit 1	Kit 83	Kit 97	Kit 96	51040009	Kit 84	-	-	104637
F725 425	I/:+ 122	IV:+ 22	I/:+ 127	I/:+ 1 2 1	4.40.40.100	I/:+ 1 2 4		I/:+ 120	104640
EZ2542E	Kit 123	Kit 23	Kit 127	Kit 131	44040109	Kit 124	-	Kit 129	104649
EZ2545E	Kit 123	Kit 23	Kit 88	Kit 130	52040009	Kit 124	-	Kit 90	104649
EZ3035G	Kit 123	Kit 23	Kit 88	Kit 130	52040009	Kit 124	52040009	Kit 90	104649
EZ3040G	Kit 123	Kit 23	Kit 88	Kit 130	52040009	Kit 124	52040009	Kit 90	104649
EZ3040S	Kit 123	Kit 23	Kit 88	Kit 130	52040009	Kit 124	52040009	Kit 90	104644
T9051EBF	Kit 1	Kit 83	Kit 97	Kit 96	52040009	Kit 84	51040009	-	104644
EZ2542S	Kit 123	Kit 23	Kit 127	Kit 131	44040109	Kit 124	44040109	Kit 129	104644
EZ3042S	Kit 123	Kit 23	Kit 127	Kit 131	44040109	Kit 124	44040109	Kit 129	104644
ES4040S34	Kit 123	Kit 23	Kit 153	Kit 156	44040266	Kit 124	44040266	Kit 155	104644
EZ3030G34	Kit 123	Kit 23	Kit 88	Kit 130	52040009	Kit 124	52040009	Kit 90	104649
EZ3045G	Kit 123	Kit 23	Kit 88	Kit 130	52040009	Kit 124	52040009	Kit 90	104649
EZ4035G34	Kit 123	Kit 23	Kit 153	Kit 156	44040266	Kit 124	44040266	Kit 155	104649
TS1331-B	Kit 123	Kit 2	Kit 69	Kit 28	47040409	Kit 4	Kit 6	Kit 7	Kit 3
T1631	Kit 1	Kit 24	Kit 148	Kit 29	47040509	Kit 4	Kit 6	Kit 11	-
CW1012	Kit 62	Kit 37	Kit 113	Kit 67		-	Kit 74	Kit 65	Kit 32



INTERPUMP / GENERAL PUMP KITS - GENUINE

We stock a complete selection of original Interpump / General Pump repair kits. See previous page for our kit selection chart.



■ Complete selection of repair kits

PART NO.	KIT.	DESCRIPTION	PART NO.	KIT.	DESCRIPTION
8.702-798.0	1	Valve	8.702-882.0	92	Piston Seal
8.702-800.0	2	Piston, Rod Oil Seal	8.702-886.0	96	Packing Assy
8.702-801.0	3	Crankshaft Oil Seal	8.702-887.0	97	Packing
8.702-802.0	4	Valve Cap	8.702-893.0	102	Unloader Maintenance
8.702-803.0	5	Valve Cap	8.702-897.0	106	Valve Cap
8.702-805.0	6	Piston Bolt	8.702-898.0	107	Piston Bolt, Pump T9281
8.702-804.0	6A	Washer for Piston Bolts	8.702-900.0	109	16 mm, Intermed Ring
8.702-806.0	7	Head Ring	8.702-901.0	110	16 mm, Intermed Ring
8.702-116.0	8	HP Old Style, 20 mm Packing	8.702-903.0 8.702-904.0		16 mm, Packing Assy Packing Assy
8.702-115.0	8	New Style	8.702-908.0		Packing
8.900-442.0	8	Old Style, Packing Kit	8.702-909.0		Packing
8.900-444.0	9	Packing Spacer	8.702-912.0		Valves
8.702-809.0	10	Retainer, 20 mm Packing			Valve, EZ3040
8.702-810.0	11	22 mm Head Ring	8.702-914.0		Valve, 223040 Valve Cap and O-Ring for
8.702-811.0	12	22 mm Packing	8.702 314.0	124	EZ Pump
8.702-813.0	15	Packing Adapter	8.702-917.0	127	Packing, EZ2542S
8.702-814.0	16	24 mm Packing	8.702-919.0	129	Head Ring, EZ Series
8.702-817.0	19	20 mm HP Packing	8.702-920.0	130	Packing Complete
8.702-818.0	19	New Style	8.702-921.0	131	EZ Pump
8.702-820.0	20	20 mm, Intermed. Ring	8.702-928.0	140	Packing Assy, T9111
8.702-821.0	21	20 mm Head Ring	8.702-929.0	141	Packing Assy
8.702-823.0	23	Piston, Rod Oil Seal	8.702-930.0	148	22 mm Packing
8.702-824.0	24	Piston, Rod Oil Seal	8.702-932.0	150	Valve, General T5050
8.702-826.0	27	20 mm, Packing Assy	8.702-933.0	151	Packing Retainer
8.702-829.0	28	20 mm, Packing Assy	8.702-934.0	153	Packing Kit
8.702-830.0	29	22 mm, Packing Assy	8.702-936.0	156	13 mm Packing
8.702-834.0	37	Piston, Rod Oil Seal	8.702-937.0	159	Oil Seal
8.702-836.0	38	36 mm Packing	8.702-938.0	160	Short Packing
8.702-847.0	58	K5 Maintenance	8.702-939.0	161	Packings
8.702-849.0	60	K5, Complete Rebuild	9.841-673.0	163	Seal Retainer
8.702-851.0	62	Valve	9.841-638.0	165	Int Ring
8.702-853.0	64	Packing w/ Intermed. Rings	8.702-942.0	166	Long Kit 1
8.702-854.0	65	30 mm, Head Ring	8.702-943.0	167	Packing Assy
8.702-857.0	69	20 mm Packing with Restop	8.702-945.0	169	Valve Kit
8.702-858.0	70	K7 Maintenance	8.702-946.0	170	LP Seal Kit and HP Seal
8.702-859.0	71	Intermed Ring with Restop	8.702-947.0	171	Packings
8.702-860.0	72	Maintenance Kit	8.702-948.0	172	Low / High Packing
8.702-864.0	77	20 mm Packing with Restop	8.702-949.0	173	Packings, Kit 176 & Kit 180
8.702-872.0	83	Oil Seal	8.702-950.0	174	Seal Kit
8.702-873.0	84	Valve Cap	8.702-951.0	175	16MM Seal Kit
8.702-874.0	85	Complete Packing	8.702-952.0	176	18 mm Packing
8.702-875.0	86	Packing Retainer	8.702-953.0	180	18 mm Packing
8.702-877.0	88	Packing, EZ3040G	8.702-954.0	181	LP Seal Kit and HP Seal
8.702-879.0	90	Head Ring	8.702-955.0	182	Packings, Kit 196 & Kit 197

INTERPUMP / GENERAL PUMP KITS - GENUINE (CONTINUED)



PART NO.	KIT.	DESCRIPTION
8.702-956.0	196	15 mm HP Packing
8.702-957.0	197	18 mm HP Packing
8.702-958.0	201	Valve kit
8.702-959.0	202	Packing Kit
8.723-512.0	212	Kit 212
8.702-962.0	226	15 mm Packing

PART NO.	KIT.	DESCRIPTION	
8.702-961.0	220	Hot Seals & Valves	
9.105-490.0	269	Kit 269	
9.105-449.0	277	18 MM Packing	
9.105-450.0	271	Seals	
8.756-374.0	290	20 mm Packing	

CERAMIC PLUNGERS





■ Precision-ground, high-polish, solid ceramic plungers, designed for long life even under constant use.

PART NO.	GENERAL PUMP PART NO.	SIZE
8.703-185.0	51040109	18 mm
8.703-187.0	52040009	15 mm, EZ Series
8.703-190.0	47040409	20 mm
8.703-191.0	44040109	18 mm, EZ Series
8.703-192.0	47040509	22 mm
8.900-575.0	51040166	18 mm, TP Series
8.703-194.0	47040856	16 mm, 47 Series
8.703-195.0	50040409	20 mm, T Series 49
8.703-198.0	44040266	13 mm, EZ Series
8.703-200.0	76040209	45 mm
8.703-767.0	66040109	22 mm, TSF2221
8.703-768.0	66040409	24 mm
8.701-400.0	51040009	15 mm, T21
9.106-229.0	59040009	20 mm



AR TRIPLEX CERAMIC PLUNGER PUMPS



■ Direct Drive



8.702-498.0



8.702-513.0



8.702-550.0

PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA	SHIP WT
GAS ENGINE FLA						
8.702-494.0	XTV3G22D-F7	3.0	2200	3400	3/4"	11 lbs.
8.702-498.0	XMV3G30D-F24	3.0	3000	3400	1"	19 lbs.
8.702-495.0	XMV3G25D-F25	3.0	2500	3400	3/4"	19 lbs.
8.702-542.0	XMV35G25D-F25	3.5	2500	3400	3/4"	19 lbs.
8.702-602.0	RKV4G37D-F24	4.0	3700	3400	1"	21 lbs.
8.702-582.0	RKV4G40HD-F24	4.0	4000	3400	1"	21 lbs.
9.108-219.0	RMV2.5G30	2.5	3000	3400	3.4"	7.5 lbs.
SOLID-SHAFT MODELS						
8.702-506.0	XTA3G22N	3.0	2200	1750	24 mm	11 lbs.
8.715-307.0	XMA3.5G25N	3.5	2500	1750	24 mm	18 lbs.
8.702-593.0	RKA4G3ON	4.0	3000	1750	24 mm	19 lbs.
8.702-597.0	RKA4G4OHN	4.0	4000	1750	24 mm	21 lbs.
ELECTRIC FLANG	ED MODELS					
8.702-550.0	XTV2G15EBA-F8	2.1	1500	3400	5/8"	10 lbs.
8.702-551.0	XTV3G16E-F8	3.0	1600	3400	5/8"	10 lbs.
8.702-500.0	XTV3G22E-F8	3.0	2200	3400	5/8"	11 lbs.
8.702-515.0	XTA3G22E-F8	3.0	2200	1750	5/8"	11 lbs.
8.702-514.0	XTA3G16EBA-F8	3.0	1600	1750	5/8"	10 lbs.
8.702-591.0	RKA4G20E-F17	4.0	2000	1750	1-1/8"	21 lbs.
8.702-592.0	RKA4G30E-F17	4.0	3000	1750	1-1/8"	21 lbs.

AR DIRECT DRIVE PUMPS









9.113-119.0 9.113-106.0 9.113-103.0

PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA	SHIP WT
DIRECT DRIVE G	AS PUMPS					
9.113-101.0	RCV3G27D-F7	3.0	2700	3400	3/4"	11 lbs.
9.113-102.0	RCVU3G27D-F7-EZ	3.0	2700	3400	3/4"	11 lbs.
9.113-116.0	RCV25G27D-F7	2.5	2700	3400	3/4"	11 lbs.
9.113-118.0	RCV35G25D-F8	5.0	2500	3400	5/8"	11 lbs.
9.113-119.0	RCV3G27D-VR54-PKG	3.0	2700	3400	1"	11 lbs.
9.113-121.0	RKV35G40HD-F24	3.5	4000	3400	1"	21 lbs.
9.113-122.0	RKV45G40HD-F24	4.5	4000	3400	1"	21 lbs.
9.113-123.0	RKV5G40HD-F24	5.0	4000	3400	1"	21 lbs.
DIRECT DRIVE E	LECTRIC PUMPS					
9.113-106.0	RK1828HN	4.75	4000	1450	24 mm	20 lbs.
9.113-111.0	RCA2G22E-F8	2.0	2200	1750	5/8"	11 lbs.
9.113-112.0	RCA35G16E-F8	3.5	1600	1750	5/8"	11 lbs.
9.113-114.0	RCA3G25E-F8	3.0	2500	1750	24 mm	11 lbs.
9.113-117.0	RCV2G25E-F8	2.0	2500	3400	5/8"	11 lbs.
9.113-124.0	RRA35G30E-F17	3.5	3000	1750	1-1/8"	18 lbs.
9.113-125.0	RRA3G30E-F17	3.0	1700	1750	1-1/8"	18 lbs.
COMMERICAL P	UMPS					
9.113-103.0	RG1528HN	4.0	4000	1450	24 mm	27.5 lbs.
9.113-104.0	RG2125HN	5.5	3650	1450	24 mm	27.5 lbs.
9.113-105.0	RK1528HN	4.0	4000	1450	24 mm	20 lbs.
9.113-107.0	RKA4G40HN-CR	4.0	4000	1750	24 mm	20 lbs.
9.113-108.0	RRA55G26E-F17	5.5	3000	1750	1-1/8"	18 lbs.
9.113-109.0	RRV4G40-VRT-PKG	4.0	3600	3400	1"	20 lbs.
9.113-110.0	XWL50.20NB	13.0	3000	1450	22 mm	34 lbs.
9.113-113.0	RCA35G25N	3.5	2500	1750	24 mm	10 lbs.
9.113-115.0	RCA3G25N	3.0	2500	1750	24 mm	10 lbs.
9.113-120.0	RKA35G40HN	3.5	4000	1750	24 mm	20 lbs.
9.113-126.0	RRA4G40N	4.0	4000	1750	24 mm	17 lbs.
9.113-127.0	RRA55G30N	5.5	3000	1750	24 mm	17 lbs.
9.113-129.0	RRV35G40HD-F24	3.5	4000	3400	1"	18 lbs.
9.113-130.0	RRV3G36D-F24	3.0	3600	3400	1"	18 lbs.
9.113-106.0	RK1828HN	4.75	4000	1450	24 mm	20 lbs.



AR PUMP REPAIR KIT SELECTION CHART

Use the following chart to find AR Repair Kits by pump model number. See next page for AR kit part numbers. We also stock a broad selection of non-kit AR repair parts.



PUMP MODEL	WATER SEALS	CHECK VALVES	OIL SEALS	PISTON KIT	PISTON GUIDE	SUPPORT RINGS	HOT KIT
ΛΓΧ	ARO02798	AR002869	AR002797	AR002596	AR1980180 ea	AR1980190 ea	-
WLX	AR002800	AR002869	AR002797	AR002596	AR1980180 ea	AR1980190 ea	-
XT-15MM	AR001866	AR001864	AR001872-N ver AR002725-H/D	AR002628	AR1260151 ea	AR1520120 ea	AR002815
XT-18MM	AR001874	AR001864	AR001872-N ver AR002726-H/D	AR002629	AR1260450 ea	AR1320340 ea	AR002816
XTA-15MM	AR001866	AR001864	AR001860-E ver	AR002628	AR1260151 ea	AR1520120 ea	AR002815
XTA-18MM	AR001874	AR001864	AR001860-E ver	AR002629	AR1260450 ea	AR1320340 ea	AR002816
XTV	AR002520	AR001864	AR001860-D, E ver AR001872-N ver	AR002628	AR1260151 ea	AR1520120 ea	AR002815
XM-15MM	AR002741	AR001864	AR002786-N ver AR1780100 ea R	AR002544	AR1780090 ea F	AR002740	AR002030-V
XM-18MM	AR002747	AR001864	AR002786-N ver AR1780120 ea R	AR002545	AR1780110 ea F	AR002745	AR002029-V
XMA-15MM	AR002741	AR001864	AR002786-N ver AR1780100 ea R	AR002544	AR1780090 ea F	AR002740	AR02776
XMA-18MM	AR002747	AR001864 AR002787-E ver	AR002786-N ver AR1780120 ea R	AR002545	AR1780110 ea F	AR002745	AR002777
XMV	AR002741	AR001864 AR002787-D ver	AR002786-N ver AR1780100 ea R	AR002544	AR1780090 ea F	AR002740	AR02817
XRC-18MM	AR001857	AR002864	AR001855-N ver	AR002546	AR13800900 ea	AR001829	AR002819
XRC-20MM	AR001887	AR002864	AR001855-N ver	AR002547	AR1380150 ea	AR001815	AR002820
XRCA-18MM	AR001857	AR002864	AR001855-N ver	AR002546	AR13800990 ea	AR001829	AR002819
XRCA-20MM	AR001887	AR002864	AR001855-N ver AR001856-E ver	AR002547	AR1380150 ea	AR001815	AR002820
XRCV	AR001857	AR001828	AR001856-D, E ver	AR002546	AR1380090 ea	AR001829	AR002819
RK-18MM	AR001857	AR002864	AR001855-N ver	AR002547	AR1380090 ea	AR001829	AR0042213
RK-20MM	AR001887	AR002864	AR001855-N ver	AR002546	AR1380150 ea	AR001815	AR002820
RKA-18MM	AR001857	AR002864	AR001855-N	AR002546	AR1380090 ea	AR001829	AR0042213
RKA-20MM	AR001887	AR002864	AR001855-N ver	AR002547	AR1380090 ea	AR001515	AR002820
RKV	AR001857	AR001828	AR001856	AR002546	AR1380150 ea	AR001829	AR0042213
XW-20MM	AR002782	AR002780	AR002781	AR002542	AR2784 ea	-	AR002778
XW-22MM	AR002783	AR002780	AR002781	AR002543	AR002785	-	AR002779
XWA-20MM	AR002782	AR002780	AR002781	AR002542	AR002784	-	AR002778
XWA-22MM	AR002783	AR002780	AR002781	AR002543	AR002785	-	AR002779
SXW-18MM	AR002874	AR002871	AR002873	AR002548	AR002875	-	-

AR PUMP KITS



Original factory-direct repair kits. See previous page for kit selection chart. Don't see what you're looking for? Give us a call. We stock a broad selection of AR replacement parts. AR piston kits contain all that you need to repair broken pistons, O-rings, washers, nuts, plungers...YOU GET IT ALL!



PART NO.	MODEL NO.	KIT DESCRIPTION
8.720-575.0	AR001815	Piston
8.720-581.0	AR001828	Valve
8.720-582.0	AR001829	Ring, Support, XRA / XRV*
8.720-583.0	AR001830	Repair, AR 2882, O-Rings Only
8.720-585.0	AR001842	Piston, XRA / XRV*
8.720-586.0	AR001843	Piston, XRA, XR
8.720-592.0	AR001855	Oil Seal, XRA*
8.720-593.0	AR001856	Oil Seal, XRV
8.720-594.0	AR001857	Packing, XRA / XRV*
8.720-596.0	AR001860	Seal, Oil, XTV*
8.720-597.0	AR001864	Valve Kit
8.720-599.0	AR001866	Water Seals
8.720-602.0	AR001872	Oil Seal
8.720-604.0	AR001874	Packing
8.720-606.0	AR001887	Water Seals
8.720-632.0	AR002544	Piston, XM*
8.720-633.0	AR002546	Piston XRCA / XRCV
8.720-644.0	AR002628	AR Piston #2628
8.720-651.0	AR002740	Support Ring, XM*
8.720-652.0	AR002741	Water Seal, XM*
8.720-655.0	AR002747	Packing, XMA* 18 mm
8.720-658.0	AR002776	Hot / Dry Cup
8.720-661.0	AR002780	Valve, XWA8G30N-SX
8.720-662.0	AR002781	Seal, XWA8G30N-SX
8.720-663.0	AR002782	Piston Seal, XWA8G30N-SX
8.720-667.0	AR002786	Oil Seals, XMA35G25N
8.720-668.0	AR002787	Oil Seals
8.720-684.0	AR002864	Valve Kit, RK*
8.702-623.0	AR002278	Hot Pack Kit
9.105-742.0	AR42476	Water Seal Kit -RCV-RCVU

*Sorios



CAT TRIPLEX PUMPS



■ Direct Drive







8.702-381.0



8.702-464.0



9.113-051.0







9.113-046.0



9.109-786.0



8.702-436.0

PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA	SHIP WT
SOLID SHAFT M	IODELS					
8.702-440.0	530	5.0	2500	1100	24 mm	26 lbs.
8.702-449.0	660	10.0	3000	1429	30 mm	44 lbs.
9.113-045.0	700	4.7	5000	1750	24 mm	29 lbs.
8.702-429.0	310	4.0	2200	950	20 mm	20 lbs.
8.702-381.0	310S	4.0	2200	950	20 mm	20 lbs.
8.702-464.0	5CP3120	4.5	3500	1750	20 mm	20 lbs.
9.113-051.0	5CP3120CSS	4.5	3500	1645	20 mm	20 lbs.
8.702-465.0	5CP5120	5.0	3000	1415	20 mm	20 lbs.
9.113-052.0	5CP5140CSS	5.5	3500	1500	20 mm	20 lbs.
DIRECT DRIVE ELECTRIC FLANGED MODELS						
9.113-048.0	4DX20ER	2.0	2000	3450	5/8"	11 lbs.
9.113-049.0	4DX27ER	2.7	2000	3450	5/8"	11 lbs.
9.113-053.0	5SP30ELU	3.0	3000	1750	1-1/8"	13.2 lbs.
9.113-054.0	5SP35ELU	3.5	2500	1750	1-1/8"	13.2 lbs.
9.113-055.0	5SP40ELU	4.0	2000	1750	1-1/8"	13.2 lbs.
DIRECT DRIVE	GAS FLANGED MODELS					
9.113-046.0	4DNX25GSI	2.5	3000	3450	3/4"	11 lbs.
9.113-047.0	4DNX27GSI	2.7	3000	3450	3/4"	11 lbs.
9.113-050.0	4DX29GUIF	2.9	2600	3450	3/4"	14 lbs.
9.109-786.0	4SPX32G1I	3.2	3000	3450	1"	18 lbs.
9.113-057.0	67DX39G1I	3.9	4000	3450	1"	18 lbs.
8.702-436.0	66DX35G1I	3.5	4000	3400	1"	27 lbs.
8.702-435.0	66DX40G1I	4.0	4000	3400	1"	27 lbs.
9.113-056.0	66DX40GG1	4.0	4000	3400	1"	27 lbs.

COMET PUMPS AND PUMP KITS

For use in homeowner or light commercial-duty pressure washers.

- One-Piece Bronze Connection Rods
- Built-in Unloader



■ Increased surface area for lower operating temperatures Ultra High-Pressure Head



PART NO.	MODEL NO.	GPM	PSI	RPM	SHAFT DIA	INLET/OUTLET
8.702-576.0	AXD 3020 G	2.75	2000	3400	3/4" Hollow	3/4" FGH/3/8" MPT
8.715-286.0	AXD 2427 G	2.5	2700	3400	3/4" Hollow	3/4" FGH/3/8" MPT

Comet kits and parts are available for any Comet model. Call with model number for quick and accurate service.

PART NO.	MODEL NO.
8.721-902.0	Piston, 15 mm, FWD
8.718-556.0	Seal Kit, LWD, HP
8.721-979.0	Packing Kit, FWS / FWD
8.721-985.0	Seal Kit Oil, LW Series, Hollow
8.721-986.0	Seal Kit, ZWD4030G
8.721-987.0	Seal Kit, Hollow Shaft Pumps
8.721-989.0	Seal Kit, AXD2020
8.721-988.0	Seal Kit, AXD3020
8.750-711.0	Seal Kit, BXD2020 E
8.721-996.0	Valve Kit ZWD / FWS / FWD / HW / FW / LW
8.721-997.0	Valve Kit, AXD 3020
8.725-562.0	Valve Kit, BXD 2020

COMET PUMPS & PUMP KITS- MC25-GR (WITH GEAR REDUCER)

Perfect for Soft Wash, Ag Spraying, Lawn Care, Nursery, Pest Control, Mold Removal & Insulation applications.



COMIT TO



- Twin Diaphragm, Low Pressure
- DURAphragm Technology
- Features Anodized Aluminum body for corrosion resistance
- Buna Diaphragm/Seals
- 3/4" Hydraulic Drive
- Includes Adjustable Pressure Regulator, manual dump lever & rails

PART NO.	GPM	PSI	RPM	SHAFT DIA	INLET/OUTLET	BYPASS
9.113-711.0	6.1	362	650	3/4"	3/4" / 3/8"	1/2"

PISTON PUMPS - HYPRO





8.702-156.0

- Temperature Max: 140°F (except 5321)
- Temperature Max: 180°F (for 5321)
- Cast Iron Body
- Stainless-Steel Check Valves
- Complete with Base or Torque Arm
- Buna Cups
- 1/2 NPT Ports

PART NO.	HYPRO	GPM	PSI	RPM	
SOLID SHAFT					
8.702-158.0	5320	2.0	500	1750	
8.702-161.0	5321	2.2	1000	1750	
8.702-167.0	5330	3.0	500	1750	
HOLLOW SHAFT					
8.702-156.0	5315	1.5	500	1750	
8.702-152.0	Injector	Head 53	21 / 532	24 Pump	

PUMP PARTS AND TOOLS

For 5300 Series pumps.



 A necessity for working on 5300 Series pumps Rugged Construction







Valve Seat Tools

Piston Repair Kit

Valve Cage Tools

PART NO.	DESCRIPTION
8.722-629.0	Piston Repair Kit, Model 5320 Pump
8.722-641.0	Check Valve Kit, All 5300 Pumps
8.712-510.0	Valve Cage Tool
8.712-512.0	Valve Seat Tool
Note: Piston Repair	Kits have Buna Seal

PUMP PACKING & SEAL KITS -GENERIC - A+



UPC, General Pump and Interpump replacement kits. Time-tested, quality parts meet or exceed factory specifications.



PART NO.	DESCRIPTION
8.900-438.0	S Kit 1, Check Valve
8.900-440.0	Kit 2, Oil Seal
8.900-441.0	Kit 3, Crankshaft Oil Seal
8.900-442.0	Kit 8, New Style Packing Kit
8.900-443.0*	Kit 8, V-Packing
8.900-444.0*	Kit 9, Intermed Packing
8.900-447.0*	Kit 12, V-Packing
8.900-463.0	Kit 23, Crankcase Oil Seal
8.900-464.0	Kit 24, Crankcase Oil Seal
8.900-466.0*	Kit 27, Plunger Repair
8.900-468.0*	S Kit 28, Plunger Repair
8.900-471.0*	Kit 29, Plunger Repair
8.900-485.0	Kit 83, Oil Seal
8.900-492.0	Kit 97, Packing

*These are old style kits to replace components in Interpump / General pumps with two brown Buna-V packings (pumps built before the change was made to restop ring and black low-pressure seals).

JETTER PULSE VALVES





 Replaces valve cap to create pulsation action, to move nozzle in pipe cleaning applications.

PART NO.	DESCRIPTION
8.755-228.0	For Legacy GB / GF / GP Series
8.755-229.0	For Legacy GM Series / GS Series
8.755-230.0	For Legacy GT Series
8.755-231.0	For Legacy GX Series, 4350 PSI
8.712-249.0	For GP 47 Series Pump
8.712-250.0	For GP TT Pumps

ACCUMULATOR - PULSE DAMPENER

Pulse dampener.





■ Precharge Pressure PSI: 580 ■ Temperature Max: 180°F

PART NO.	PSI	CAPACITY INLET	
8.711-145.0	3100	21.4 CU" 1/2" F	
8.711-146.0	3100	6.1 CU" 3/8" F	
8 711-1 <i>4</i> 7 0	4400	2.5.CU" 3/8" F	

INTERPUMP / GENERAL PUMP - V-PACKING INSERTION TOOL KIT



- Contains inserting tools for installing 20 mm, 22 mm and 24 mm V-packings in the packing gland
- Prevents damage to sealing surfaces

PART NO.	DESCRIPTION	
8.712-519.0	V-Packing Kit	
9.109-643.0	V-Packing Kit, 15mm and 18mm, 63 Series	

PUMP TOOLS - EXTRACTOR PLIERS & DENTAL PICK



- Indispensable for Pump Repair
- Excellent for removing O-rings, seals, and more
- 6" Long Dental Pick
- Stainless-Steel
- Knurled Handle
- Double-End

PART NO.	DESCRIPTION
8.707-467.0	Dental Pick
9.802-568.0	Pliers, Seal Extractor

PUMP PACKING EXTRACTOR HAMMER & SOCKETS

Virtually unbreakable sockets will pull packings from Interpump, General and other brand pumps.

Easy to use: Slide-Hammer (shown below) attaches to slotted socket which expands inside the packing gland. The slide hammer then pops the packing gland brass out of the head to facilitate easy seal repairs without damage to brass support rings.



PART NO.	DESCRIPTION
SLIDE HAMMER	
8.712-513.0	Hammer Only
SOCKETS FOR RE	GULAR SLIDE HAMMER
8.712-516.0	18 mm Socket
8.712-515.0	15 mm Socket
8.712-517.0	20 mm Socket
8.712-518.0	22 mm Socket
8.712-520.0	25 mm Socket
LARGE SLIDE HAI	MMER
8.712-521.0	Large Slide Hammer
SOCKETS FOR LA	RGE SLIDE HAMMER
8.712-523.0	30 mm Socket
8.712-524.0	38 mm Socket
8.712-525.0	45 mm Socket

INTERPUMP PACKING / EXTRACTION



Expansion tool inserts into packing gland to remote lodged packing components



PART NO.	DESCRIPTION
8.712-522.0	Extractor Only
EXPANSION SOC	KETS FOR EXTRACTOR ABOVE
8.712-526.0	15 mm, Ref Kit 86 and 97
8.712-528.0	20 mm, Ref Kit 8 and 19
8.712-530.0	24 mm, Ref Kit 16

Note: 15 mm Expansion Sockets also Fit Admiral Pump W-Series Pumps.



PUMP OIL





- Quality mineral base lubricating oil ideal for use in high pressure piston precision plunger pumps.
- Blended with wear, rust and foam inhibitors.
- Available in 10W30 & 10W40

PART NO.	DESCRIPTION
8.923-425.0	S Pump Oil 10W40, Quart
8.901-077.0	S Pump Oil 10W30, Quart
8.901-080.0	Pump Oil 10W30, Case (12 Quarts)

GEAR BOX LUBE





- A premium-quality lubricating oil fortified with additives to reduce friction, foaming and corrosion.
- Ideal for use in heavy industrial applications requiring hydraulic based lubricant.

PART NO.	DESCRIPTION		
8.756-854.0	Pump Lube, Quart		
9.808-016.0	Case Lot, Qty 12		

PUMP LUBE





- A multi-viscosity SAE 80W 90 lubricant with anti-friction, anti-foaming and corrosioninhibitor additives.
- Use in Admiral Geared Speed Reducers and Interpump / General RS99, RS151, PTO and other high-speed gear boxes.

PART NO.	DESCRIPTION
8.756-728.0	Gear Lube, 2-1/2 Gallons

GP PUMP PACKING / EXTRACTION KIT - COMPLETE





- 13 mm 24 mm in a Carrying Case
- Slide Hammer
- 13 mm, 15 mm, 18 mm, 20 mm, 22 mm and 24 mm Sockets
- Fits General Pumps

PART NO.	DESCRIPTION
8.723-619.0	Puller & Packaging Kit

GEAR REDUCTION



Fits Legacy, Admiral, Bertolini, GP, Interpump, Comet, Udor & Hawk. Please be sure to check with your representative to ensure the proper gearbox for your pump.



- Engine-to-Pump Drive Units
- 2.18 to 1 Reduction Ratio
 (3,675 Eng. RPM = 1,750 Pump RPM)
- Engine Shaft Size = .0984", 1", 1-1/8" & 3/4"
- 18-24HP Range, Input Shaft =1", Output Shaft= 24mm, 87mm Flg. Mout.

	model
PART NO.	DESCRIPTION
8.710-332.0	24 mm Pump x 1-1/8" Engine
8.710-333.0	30 mm Pump x 1" Engine
8.715-344.0	25 mm Pump x 1" Engine, B18
8.715-342.0	24 mm Pump x 1" Engine, B18
8.749-925.0	24 mm Pump x 0.984" / 25 mm Engine, B18
8.749-922.0	24 mm Pump x 3/4" Engine, B5
8.754-767.0	25 mm Pump x 1-1/8" Engine, B24
8.710-334.0	30 mm Pump x 1-1/8" Engine
8.710-336.0	24 mm Pump x 1-1/8" Engine
9.115-049.0	YGR1000P 18-24HP

ANTI-SEIZE COMPOUND

Recommended for all metal-to-metal, power-drive assemblies. Facilitates removal after use.



- Copper-Graphite or Nickel
- Copper-graphite high-torque for high temperature to 1800°F
- Nickel continues to work up to 2400°F
- Stops rust, galling and seizure on pulley / shaft or gear / shaft interfaces

PART NO.	DESCRIPTION
8.704-638.0	Blister Pack, 1 application, Copper - Graphite
8.704-641.0	8 oz. Brush Top Can - Nickel

GEARED REDUCTION UNITS - INTERPUMP / GENERAL PUMP



For use with 1450 RPM Interpump, General Pumps & Admiral A-W99.

■ Eliminates Belts, Pulleys and Belt Guards



RS99:

2.4:1 Gear Reduction (3480 Engine RPM = 1450 RPM Pump) for 3-5 HP Briggs, Honda-Tecumseh-Kohler with 3/4" Shaft. ■ Engine-to-Pump Drive Units

■ Improve Efficiency



RS151:

2.2:1 Gear Reduction (3190 Engine RPM = 1450 RPM Pump) for 7-18 HP Briggs, Honda Engines with 1" or 1-1/8" Shaft (must specify). Use with the appropriate size: "WS" Series Interpump, "TS" Series General Pump.

PART NO.	ENGINE SHAFT	
RS-99		
8.710-321.0	3/4"	
RS-151		
8.710-322.0	1"	

PTO GEARED MULTIPLIER



- 1 to 1.9 Speed Multipler
- 1-3/8" Splined Shaft (Same shaft as standard tractor PTO)
- 540 RPM PTO speed multiplied to 1,026 RPM at pump shaft
- For Pumps with a 24 mm Shaft

PART NO.	DESCRIPTION	10
8.710-319.0	Gear Multiplier	

PUMPTECH PUMP

The Pumptech Pump is a twin plunger design originally used on the Hotsy model Sport 500.



- PSI Max: 1000
- GPM Max: 2.0

PART NO.	DESCRIPTION
8.715-240.0	Pump-Sport 500
8.707-369.0	Bearing/Cam Assembly
8.707-370.0	Seal Kit with Plunger
8.700-187.0	Check Valve Kit

FLANGES - LEGACY



Legacy

 Direct attachment of Legacy Pumps to NEMA Standard C-Face Motors.

PART NO.	NEMA FRAME	PUMP SERIES
8.754-098.0	184 TC / 215 TC	GM
8.754-099.0	184 TC / 215 TC	GT-GX

FLEX COUPLERS - LEGACY





- Pump shaft couplers.
- Direct-drive self-adjusting resilient coupling Legacy pumps to NEMA Standard Motor Shafts.

PART NO.	MOTOR DRIVE COUPLING	PUMP SERIES
8.754-100.0	1-1/8" x 24 mm	GM
8.754-101.0	1-3/8" x 24 mm	GM
8.754-103.0	1-3/8" x 25 mm	GT-GX

FLANGES - INTERPUMP / GENERAL PUMP







 Direct attachment of Interpump / General Pumps to NEMA Standard C-Face Motors.

PART NO.	NEMA FRAME	PUMP FRAME SIZE	
8.709-613.0	56 / 145TC	56 / 145TC	
8.709-615.0	184TC*	184TC*	
8.709-616.0	215TC**	215TC**	
*W995 / GD **\	V913 / GM		

FLEX COUPLERS - INTERPUMP /





24 mm pump shaft couplers. Direct-drive flex coupling 24 mm Interpump / General and Admiral XLS Series pumps to NEMA Standard Motor Shafts.

PART NO.	NEMA FRAME	DRIVE SHAFT
2-PIECE COUPLE	R	
8.709-617.0	56 A	5/8"
8.709-619.0	145T	7/8"
8.709-621.0	184 T	1-1/8"
8.709-624.0	215 T	1-3/8"
8.709-869.0	Gas (Aluminum)	1"
8.701-262.0	Rubber Bumper -	Replacement



PUMP TECHNICAL INFORMATION

Correct pump installation is essential for optimum performance. It is recommended that the pump flow capacity be oversized for the actual flow required. For optimum running of the system, the water circulated through the regulating valve should not exceed 10-15% of the pump flow. Recirculating too much water can generate heat in the supply tank increasing the cavitation risk.

FREQUENTLY ASKED QUESTIONS

How much should you reduce the pump RPM to achieve a lower flow capacity?

Required RPM = Expected Capacity x
$$\frac{\text{Max RPM Allowed}}{\text{Max Allowed Capacity}}$$

What diameter of pulley must I use to achieve the correct pump RPM?

What if I cannot change the engine / motor pulley?

If the engine / motor is running at a lower RPM than the maximum pump RPM allowed, what will be the pump flow capacity?

What is the approximate power required to achieve the maximum performances allowed?

Required Electric Motor HP
$$\frac{PSI \times GPM}{1460}$$
 = Electric Motor HP

Required Gas Engine HP $\frac{PSI \times GPM}{1460}$ × 1.30 = Gas Motor HP

CONDITIONS TO PREVENT PUMP CAVITATION

Minimum difference in height HZ (Pos / Neg) between pump and water level.

The minimum inlet pressure value of the pump is limited by the cavitation phenomenon. Cavitation is the forming of vapor bubbles when the local pressure is below the vapor pressure of the liquid. Bubbles flow together with the liquid and when they reach a higher pressure area, they collide, generating abnormal stresses that are extremely dangerous to the pump components. To avoid the risk of cavitation, it is necessary that the pump installation is correct.

YAMADA PUMPS



Air-powered double diaphragm pump, "Reliable Performance Since 1905". The answer to difficult product transfer problems. Air-drive allows freedom from electrical hazards or explosion-proof motor requirements. Choose from various wetted-parts materials to customize the pump to the chemical being pumped. Yamada's smaller pumps are often used for pumping car wash chemical for 'low-pressure' functions. The 1/2" pump is also ideal for rapidly pumping oil, soap, etc., from 55 gallon barrels. Larger pumps are used for high-volume product transfer. Since all pumps are designed without rotating parts, they can also handle abrasive liquids such as ceramic slip, sand slurry or enamel frit without damage. Have a unique challenge? Call us for help!





8.702-180.0

8.702-183.0

- PSI: 100
- Temperature: 180°F
- Environmentally-Friendly Non-Lube Air Valve
- Automatic Start/Stop
- Non-Stalling Air Valve Positive Switching Every Stroke and Won't Ice Up
- Outside Accessible Air Valve:
 Easy Inspection & Maintenance
- Bolted Flange Connections: Leak-free & Easy Maintenance

- Built-in Abrasion and Chemical-Resistance
- Virgin Diaphragm Material Lasts
 Twice as Long as Other Pumps
- With 20-100 PSI Drive Air: 1/4" Model Delivers 3.4 GPM 1/2" Model Delivers 15 GPM 3/4" Model Delivers 19.5-27.3 GPM 1" Model Delivers 35.7-48.3 GPM
- Infinitely Variable Flow Control Regulated by Opening or Closing Discharge Side Valve and/or Fluctuating Air Supply

PART NO.	INTAKE AND DISCHARGE	AIR INLET W/BALL VALVE	AIR EXHAUST W/B-I MUFFLED	PUMP BODY	DIAPHRAGM MATERIAL	MAX FLOW @ 100 PSI	MAX SOLID
8.702-180.0	1/4" FPT	1/4" FPT	3/8" FPT	Poly	Teflon®	3.4 GPM	N/A
8.702-201.0	3/8" FPT	1/4" FPT	3/8" FPT	Poly	Santoprene®	6 GPM	1/32"
8.702-182.0	1/2" FPT	1/4" FPT	3/8" FPT	Poly	Hytrel®	15 GPM	1/32"
8.702-183.0	1/2" FPT	1/4" FPT	3/8" FPT	Poly	Santoprene®	15 GPM	1/32"
8.702-184.0	1/2" FPT	1/4" FPT	3/8" FPT	Poly	Teflon®	15 GPM	1/32"
8.702-190.0	3/4" FPT	1/4" FPT	3/4" FPT	Poly	Teflon®	27.3 GPM	1/16"
8.702-192.0	1" FPT	3/8" FPT*	3/4" FPT	Poly	Neoprene	48.3 GPM	3/16"
8.702-193.0	1" FPT	3/8" FPT*	3/4" FPT	Poly	Hytrel®	48.3 GPM	3/16"
8.702-194.0	1" FPT	3/8" FPT*	3/4" FPT	Poly	Teflon®	48.3 GPM	3/16"
8.702-202.0	1-1/2" FPT	1/2" FPT*	3/4" FPT	Alum	Buna-N	116 GPM	9/32"

^{*}With air-cock instead of ball valve

YAMADA PUMPS DIAPHRAGM KITS



To minimize downtime, Yamada pumps are designed for quick, trouble-free maintenance. Pump diaphragms, balls and seats can be replaced in 20 minutes or less and with little chance of leaks commonly associated with other diaphragm pumps.

■ Kits include everything required for routine maintenance



PART NO.	MATERIAL	PUMP SIZE	YAMADA PUMP NO.
8.703-277.0	Teflon [®]	1/4"	100381
8.703-278.0	Hytrel [®]	1/2"	100383
8.703-279.0	Santoprene	1/2"	100384
8.703-281.0	Teflon [®]	1/2"	100385
8.703-283.0	Buna	3/4"	100392
8.932-947.0	Teflon [®]	3/4"	100394
8.703-285.0	Hytrel®	1"	100397
8.703-286.0	Teflon [®]	1"	100398
8.703-320.0	Buna	1-1/2"	100415

Note: Individual Components (O-rings or Diaphragms Only, For Example) Also Available. Call For Pricing and Delivery.



UNLOADER VALVES - UU1 UNIVERSAL

The Legacy Universal Unloader is unique in that it allows for height or width adjustments making it ideal for any pump.





- PSI: 3500
- GPM: 6.0
- Temperature: 195°F
- Forged-Brass Body
- 1/2" NPT Inlet

- 3/8" NPT Outlet
- Stainless-Steel and low friction, wear-resistant plunger
- Weight: 16.1 oz.
- Pantent US 8,313,311 B2`


PART NO. **DESCRIPTION**

9.175-018.0 S Legacy Universal Unloader (UU1)

Note: Legacy Universal Unloader (UU1) will not fit Legacy Pump GF 3530F










- 1.- Turn the connector clockwise direction to make it shorter.
- 2.- Turn the connector counterclockwise direction to make it longer.







UNLOADER VALVES - VBT SERIES

A trapped pressure direct mount unloader valve.



- GPM: 6.6
- Temperature: 195°F
- Weight: 1.95 oz.
- Brass, Stainless, Buna-N

PART NO.	DESCRIPTION	CONNECTION	PSI	FITS PUMP
8.754-703.0	Universal, VBT Direct Mount	3/8" FPT Inlet x 3/8" MPT Outlet	1500	FOG
8.754-696.0	Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	3000	LB, LP, LF
8.754-700.0	Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	4000	LB, LP, LF
8.754-701.0	Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	4000	LB, LP, LF
8.754-702.0	Universal, VBT Direct Mount	1/2" FPT Inlet x 3/8" MPT Outlet	4000	LM, LS

UNLOADER VALVES - APR SERIES

Integral Automatic Pressure Regulator for Admiral Pumps: WE - WG - WEL - XLS - XLE - XLG bolt on for Admiral and Legacy pumps. Trapped-pressure regulator specifically designed for use on the Admiral plunger pumps. Integral inlet, bypass and outlet eliminate the need for bypass hose.



- PSI: 3200
- GPM: 6.0
- Temperature: 195°F
- Forged-Brass Body
- 3/8" MPT Oulet
- Stainless-Steel Plunger and Seat Valve
- Weight: 29 oz.

8.703-401.0

PART NO.	DESCRIPTION	INLET
8.703-401.0	APR.I 25-Brass / Black	3/8"
9.802-365.0	APR.I 30-Brass / Black	1/2"
8.900-760.0	Seal Repair Kit	3/8"

UNLOADER VALVES - VR54/56

Basic valves, premium performance.





- Temperature: 194°F
- Forged-Brass Body
- Stainless-Steel Seat and Piston
- 3/8" MPT Inlet, Outlet & 3/8 FPT Bypass

VR54 Black Regulator / Unloader

- PSI: 2030
- Max PSI: 2175 PSI
- VR54 Red Regulator / Unloader
- PSI: 2610
- Max PSI: 2900 PSI
- VR56 Regulator / Unloader
- PSI: 3625
- Max PSI: 3400 PSI

■ GPM: 8.0

■ GPM: 8.0

■ Weight: 13.7 oz.

Weight: 15 oz.

- GPM: 8.0
- Weight: 15 oz.

Repair Kits

■ For Use with VR54/VR56 Regulator/Unloaders

PART NO.	DESCRIPTION	
8.753-028.0	VR54 Black with Knob	
8.753-029.0	VR54 Red with Knob	
8.753-017.0	VR56 with Knob	

UNLOADER VALVES - VR53



- PSI: 3630
- GPM: 8.0
- Temperature: 194°F
- 3/8" FPT Inlet and Outlet, 1/4" FPT Bypass
- Adjustable Pressure Setting Nut
- Heavy-Duty Forged-Brass Body
- Stainless-Steel Ball and Valve Seat
- High-Temperature Viton Seals
- Adjustable Upper-Pressure Limit Lock

PART NO.	DESCRIPTION	PSI	GPM
8.753-027.0	VR53 without Knob	3630	8
8.753-026.0	VR53 with Knob	3630	8

UNLOADER VALVES - VR56 VBA35 SERIES



Commonly used on Legacy HD Pumps.



VBA35

- PSI: 3500
- GPM: 6.6

VB56

- PSI: 3650
- GPM: 8.0

PART NO.	DESCRIPTION	PSI	GPM	
VBA35 FOR L	EGACY HD MODELS			
9.803-899.0	GG, GD, GE	3500	6.6	
9.803-900.0	S GM, GS	4000	6.6	

UNLOADER VALVES - VB3

Commonly used on Legacy HD Pumps.



VB3

- PSI: 3200
- GPM: 6.5
- 3/8" NPT Inlet and Outlet and Bypass

PART NO.	DESCRIPTION	PSI	GPM
VBA35 FOR LEGA	CY HD MODELS		
8.725-384.0	VB3 3/8" NPT	3200	6.5



UNLOADER VALVES - VRT3 SERIES



Basic valves, premium performance.



- GPM: 8.0
- Temperature: 200°F
- Forged-Brass Body
- Stainless Internals
- 3/8" Inlet, Outlet, Bypass
- EZ Start models do not have dual inlets

PART NO.	DESCRIPTION	PSI	GPM
8.750-297.0	Yellow Spring	2320	8.0
8.750-298.0	Blue Spring	3630	8.0
8.750-299.0	S Black Spring	4500	8.0
8.750-300.0	S Black with EZ Start	4500	8.0
8.750-955.0	Black with Switch	4500	8.0
8.750-956.0	S Black with Knob Switch	4500	8.0
8.750-821.0	Blue Spring w/o Knob	3630	8.0
REPAIR KITS			
8.750-709.0	Kit for Blue & Yellow Spring Unloaders	2320 / 3630	8.0
8.750-710.0	Kit for Black Spring Unloaders	4500	8.0
9.802-694.0	Old Style VRT3 Kit-605,606,607	Up to 4500	8.0

UNLOADER VALVES - VRT100 HIGH-VOLUME SERIES





- GPM: 26.4
- Temperature: 194°F
- 1/2"FPT, Inlet, Outlet & Bypass
- Stainless Internals
- Forged-Brass Body

PART NO.	DESCRIPTION	PSI	GPM
8.753-726.0	Blue with Knob	Up to 5075	26.4
8.753-443.0	Yellow without Knob	Up to 2760	26.4
8.753-444.0	Blue without Knob	Up to 5075	26.4
8.753-727.0	Blue with Microswitch 120 / 240 VAC - without Knob		26.4
8.753-728.0	VRT100 Repair Kit	Up to 5075	26.4

UNLOADER VALVES -PULSAR RV SERIES



- GPM: 8.0
- Temperature: 195°F
- Pulsar RV Blue Rated 4050 PSI, Max PSI: 4500
- Pulsar RV White Rated 2300 PSI, Max PSI: 2600



- All Stainless-Steel Valves
- Pressure Actuated
- Forged Body
- 3/8" FPT Inlet, Outlet
- Two 3/8" FPT Bypass Ports

PART NO.	DESCRIPTION	GPM
8.754-867.0	Pulsar RV, White, with Knob	8.0
8.754-870.0	Repair Kit- Pulsar RV	8.0
8.754-866.0	Pulsar RV, Blue, without Knob	8.0
8.754-868.0	Pulsar RV, Blue, with Knob	8.0
8.754-869.0	Pulsar RV, Blue, with Knob & Switch	8.0
8.759-000.0	Unloader Valve with Switch	10.5

UNLOADER VALVES - PULSAR RZ - FLOW SENSITIVE






- PSI Max: 4050
- Temperature: 140°F
- Weight: 3.8 lbs.
- 1/2" FPT Inlet, Outlet
- 1/2" FPT Bypass Ports

PART NO.	DESCRIPTION	PSI	
9.117-544.0	Flow Sensitive 5.3- 21GPM Max 4	4050	

UNLOADER VALVES - VB7 SERIES





- PSI Max: 3650
- Temperature: 195°F
- Weight: 19.7 oz.

PART NO.	DESCRIPTION	PSI
8.712-741.0	without Knob, 3/8 MPT Inlet, 3/8 FPT Outlet & Bypass	3650
8.904-580.0	w/ Knob, 2.1 Fixed Inj., 3/8 MPT Inlet & Outlet	3650
8.704-488.0	Repair Kit	
8.712-735.0	Knob Only	

UNLOADER VALVES - VB8 SERIES





- 8 GPM
- 3200 MIN-3650 PSI Max
- Temp- 195 Deg

PART NO.	DESCRIPTION	
9.802-362.0	w/ Knob & Switch, 5 Amp Microswitch, 3/8" MPT Inlet, 3/8" FPT Outlet & Bypass	
8.757-462.0	w/o Knob, 3/8" MPT Inlet, 3/8" FPT Outlet	

UNLOADER VALVES - VB130/135 SERIES



Trapped Pressure Unloader for the 51 & 60 Series pumps. Fits CAT 2SF pumps as well as others.



- PSI Max: 2600
- Temperature: 195°F
- 3/8" MPT Inlet and Outlet
- 3/8" FPT Bypass
- Stainless-Steel Plunger
- Stainless-Steel Valve Seat
- Weight: 14.7 oz.

PART NO.	DESCRIPTION	TEMP
8.712-739.0	VB 130 Without Knob	195°F
8.904-579.0	VB-135- with Knob, Banjo Connection, Hollow Screw Fitting	195°F
9.802-006.0	Repair Kit	195°F
8.712-735.0	Knob Only	195°F

UNLOADER VALVES - VB85 / 280 SERIES



Fits CAT 2SF pumps and other pumps. This pressure sensitive regulating unloader is designed for single or multiple pumps, weep or multi-nozzle systems.



- GPM: 21
- Temperature: 200°F
- Pressure Actuated
- Forged-Brass Body
- Stainless-Steel Plunger and Seat
- 1/2" FPT Inlet, Outlet, Bypass
- Weight: 45 oz.

PART NO.	DESCRIPTION	PSI	GPM	MAX PSI
8.751-964.0	VB85/ YUB21405, Blue Spring	4050	21	4500
8.751-963.0	VB85/ YUW21235, White Spring	2300	21	2600

UNLOADER VALVES - VB80 / 400 STAINLESS-STEEL



■ GPM: 21.0

- Forged Stainless-Steel Body

Rated PSI: 5800, Max PSI: 6500

- All Stainless-steel Valve Parts
- Viton Seals
- 1/2" FPT Inlet, Outlet, Bypass

PART NO.	DESCRIPTION	GPM	TEMP
8.712-656.0	VB 80/400 - YU2158	21	195°F
9.802-007.0	Repair Kit	21	195°F

UNLOADER VALVES - VB200 HIGH-VOLUME SERIES

Fits CAT 2SF pumps and other pumps.

- PSI: 2175
- GPM: 52.5
- Temperature: 194°F
- Steel and Brass Body
- Large Plastic Knob (Removable)
- Lock Nut on Pressure Adjustment
- 1" FPT Inlet, Outlet, **Bypass**
- Two 5/16" 18 Bolt Mounting Ports
- Hexagonal shaped check valve to avoid jamming
- Weight: 73.5 oz.

PART NO.	DESCRIPTION	PSI	GPM
8.712-754.0	VB 200 without Knob	2200	52.5
8.712-755.0	VB 200 with Knob	2200	52.5
9.117-632.0	VB200 Viton Oring without Knob		
8.704-583.0	Repair Kit	2200	52.5

UNLOADER VALVES - VB350 / VB7 SERIES

Bigger. Stronger. Faster - 5650 PSI.



- Rated PSI: 5075
- GPM: 10.0
- Temperature Max: 195°F
- Forged-Bronze Body
- Stainless-Steel
- Plunger and Valve Seat
- 3/8" FPT Outlet
- 1/2" F Bypass
- 3/8" MPT Inlet, 1/4" Gauge Port
- Weight: 31 oz.

PART NO.	DESCRIPTION	TEMP
9.802-360.0	Unloader, Red Knob (YU5075K)	195°F
9.800-106.0	Repair Kit, Red Knob	195°F
8.704-499.0	Repair Kit, Old VB 350	195°F





UNLOADER VALVES - VB75 / VB135 SERIES



■ VB75

■ Rated PSI- 3200,

Max PSI 3650

Temperature:

■ 1/2" FPT Inlet,

1/4" FPT Gauge

195°F

The VB75 is an integrated unloader for Interpump and General Pump with 7.8 GPM - 3600 PSI max pressure. The VB135 fits Interpump "WW" Series pumps and General "TT" Series pumps with 6.5 GPM - 2600 PSI max pressure.

Port 195°F

3/8" FPT ■ 3/8" FPT Inlet. Oulet and 3/8" MPT Outlet

Bypass

- Weight: 19.7 oz.
- VB135
- Rated PSI: 2300, Max PSI: 2600
- Temperature:
- 6.5 GPM
 - Stainless Internals
 - Forged-Brass Body
 - Weight: 22.9 oz.

UNLOADER VALVES -CONTROL SET "W" SERIES



Integrated Regulator & Unloader designed exclusively to fit Interpump & General Pump pumps.



- Mounts directly on pump inlet and outlet: internal bypass loop
- Pressure Actuated: "Instant-On"
- 3/8" MPT Inlet & Outlet, 1/4" HB (8.712-638.0, 8.712-643.0)
- 1/2" FPT Inlet, 3/8" MPT Outlet, 1/4" HB (8.712-644.0, 8.712-642.0, 8.712-647.0)
- Integrated Injector - Optional
- Pressure and flow-engineered for specific pump models

PART NO.	MODEL	GPM	PSI	PUMP	
"W" SERIES UNL	OADERS	WITHOU	JT INJECT	TORS	
8.712-638.0	W1	3.0	1600	W905	
8.712-643.0	W2	4.5	3000	W997	
8.712-644.0	W2-L	6.0	3000	W201	
"W" SERIES UNL	OADERS	WITH IN	IJECTORS	1	
8.712-642.0	W2-1	4.5	3000	W997	
8.712-645.0	W2L-1	4.5	3000	W201	
8.712-647.0	W2L-2	6.0	3000	WS202	

PART NO. DESCRIPTION **VB75** 8.712-742.0 VB75 Direct Mount Control Set for EZ, 47, 60, 63 & W151 Series 8.704-488.0 Seal Kit 8.712-735.0 Knob Only 8.705-934.0 1/2" Bolt with Hole **VB135** 8.712-659.0 VB135- Direct Mount Control Set for WW & TT Series Pumps 8.712-735.0 Knob Only 9.802-006.0 VB 135 Repair Kit 8.705-935.0 3/8" Bolt with Hole

UNLOADER VALVES - VB9 / VB10 TRAPPED PRESSURE SERIES





Rated PSI: 3200

- GPM: 8.0
- Instant Pressure Response
- Hex-Shaped Nonstick Check Valve
- 3/8" FPT Inlet, Outlet, Bypass
- Brass Valve Body / Stainless Ball

- and Seat
- Knob Included
- VB9 Panel Mountable
- Reduces trapped pressure to 25% of operating pressure when unloading; allows easier gun trigger

	pull
PART NO.	DESCRIPTION
8.712-736.0	VB9 with Knob - YVB9K
8.715-462.0	VB9 with Knob and Pressure Switch - YVB9KMS2
8.715-489.0	VB9 with Check Valve and Pressure Switch - YVB9KMSS
8.712-745.0	VB10 with Knob - YU3678
8.704-548.0	Repair Kit VB9
8.704-561.0	Repair Kit VB10

UNLOADER VALVES - KITS FOR K / ZK SERIES





Repair Kits for all K3, K5, K7 and K9 models.

	-, -,
PART NO.	DESCRIPTION
8.702-847.0	K5/K58 Maintenance Kit
8.702-849.0	K5/K60 Rebuild Kit
8.705-045.0	K5 Back Nut 3/4" NPT
8.702-858.0	K7/K70 Repair Kit
8.702-911.0	K9/K121 Repair Kit

UNLOADER VALVE - FLOW SENSITIVE





- Rated PSI: 4060
- GPM: 21.0
- 1/2" F Bypass
- Temperature Max: Weight: 2.87 lbs.. 185°F
- Forged-Bronze Body

PART NO.	DESCRIPTION	ТЕМР
9.116-794.0	ZH288 Green Spring	185°F

UNLOADER VALVES - K / ZK SERIES

Unloaders relieve line pressure in bypass mode.









ZK3 / ZK5

- Temp: 165°F
- 3/8" FPT Inlet
- ZK3: 1500 PSI ZK5: 3000 PSI

ZK1

- Temp: 165°F
- 3/8" FPT Inlet
- 3600 PSI
- GPM: 2.3 10.8

ZK7

- Temp: 165°F
- 3/8" FPT Inlet
- 3500 PSI
- GPM: 2.11 10.8

ZK9

- Temp: 165°F
- 1/2" FPT
- 5800 PSI
- GPM 2.5 TO 13.2

PART NO.	MODEL	GPM	OUTLET	
ZK1				
8.712-602.0	ZK138	2.30 - 10.80	3/8" M	
8.712-601.0	ZK1	2.30 - 10.80	1/2" M	
ZK3				
8.712-603.0	ZK3.0	2.10 - 3.00	3/8" M	
8.712-605.0	ZK3.1	3.00 - 3.22	3/8" M	
8.712-607.0	ZK3.2	4.22 - 5.55	3/8" M	
8.712-609.0	ZK3.3	5.00 - 6.50	3/8" M	
8.712-604.0	ZK3.0	2.10 - 3.00	1/2" M	
8.712-606.0	ZK3.1	3.00 - 4.22	1/2" M	
8.712-608.0	ZK3.2	4.22 - 5.55	1/2" M	
8.712-610.0	ZK3.3	5.00 - 6.50	1/2" M	
ZK5				
8.712-611.0	ZK5.1	3.00 - 4.22	3/8" M	
8.712-613.0	ZK5.2	4.22 - 6.60	3/8" M	
8.712-615.0	ZK5.3	6.60 - 10.83	3/8" M	
8.712-612.0	ZK5.1	3.00 - 4.22	1/2" M	
8.712-614.0	ZK5.2	4.22 - 6.60	1/2" M	
8.712-616.0	ZK5.3	6.60 - 10.83	1/2" M	
8.715-478.0 Bypass plate for ZK3 / ZK5				
Note: 1. Use 8.705-045.0 back but on hypass pipple when mounting 1/2"				

Note: 1. Use 8.705-045.0 back nut on bypass nipple when mounting 1/2" bypass line on ZK3 and ZK5 series. 2. Use restricted .156-.225 ID orifice in bypass line for smoother operation / pressure balancing.

ZK7				
8.712-617.0	ZK7.0	2.11 - 3.00	3/8" M	
8.712-618.0	ZK7.1	3.00 - 4.22	3/8" M	
8.712-619.0	ZK7.2	4.22 - 6.60	3/8" M	
8.712-620.0	ZK7.3	6.60 - 10.8	3/8" M	
8.701-389.0	ZK7 - #1	l Bypass Orific	e 2.5 mm	
Z 9				
8.712-621.0	ZK9	2.50 - 13.20	1/2" M	

UNLOADER VALVES - HM MODEL





- Pressure Adjustable: 0-3000 PSI
- Flow Range: 1.4 to 10.8 GPM
- Temperature: 185°F
- 3/8" FPT Inlet, Bypass, 3/8" MPT Outlet
- Excess Flow Bypassed to Maintain Selected Pressure
- Operates on Single / Multiple Gun Systems
- Brass Body, Stainless-Steel Valve & Seat

PART NO.	DESCRIPTION	PSI GPM
8.712-622.0	HM Regulator / Unloader	7 0-3000 1.3-10.8
8.702-860.0	Repair Kit #72	0-3000 1.3-10.8

UNLOADER VALVES - HYPRO-STYLE



- PSI: 400 to 1500
- GPM: 5.0
- Temperature: 180°F
- 3/8" MPT Inlet and Outlet
- Buna Seals
- Weight: 8 oz.

PART NO.	PRESSURE	BYPASS	GPM	
8.712-689.0	200-500	1/4" FPT	5.0	
8.712-690.0	400-1000	1/4" FPT	5.0	
8.712-691.0	800-1500	1/4" FPT	5.0	
8.712-692.0*	400-1000		5.0	
8.722-643.0	Repair Kit fo	r All		

^{*}Bypass port not threaded, closed coupled

UNLOADER VALVES - YU HIGH VOLUME



- GPM: 21.0
- Temperature: 200°F
- 1/2" FPT Inlet and Outlet
- Two 1/2" FPT Bypass Ports
- Forged-Brass Body
- Stainless-Steel Internals

YU-21235 YELLOW SPRING

■ PSI: 2300

Rated Pressure: 2600 Max

YU-21405 GREEN SPRING

■ PSI: 4050

Rated Pressure: 4500 Max

PART NO.	DESCRIPTION	PSI
8.753-326.0	YU-21235 Yellow Spring	2600
9.116-794.0	YU-21405 Green Spring	4500



UNLOADER VALVES - ST-230

SUTTNER W

UNLOADER VALVES - ST-280





- PSI: 500 3600 PSI
- GPM: 8.0
- Temperature: 200°F
- 1/4" FPT Inlet and Bypass
- Mounts Off-Line No Line Restrictions
- Brass Body, Stainless-Steel Piston & Seat
- Weight: 14 oz.

PART NO.	DESCRIPTION	GPM	TEMP	
8.712-628.0	ST-230	8	200°F	
8.757-359.0	Repair Kit	8	200°F	

NOTE: Tamper proof wire and seal are not included



- PSI: 500 4060
- GPM: 8.0
- Temperature: 175°F
- Brass Housing, Stainless-Steel Valve
- 3/8" FPT Inlet, Outlet and 1/4" FPT Bypass
- Weight: 22.5 oz.

PART NO.	DESCRIPTION	PSI	GPM
8.712-674.0	ST-280	3600	8
8.701-654.0	Piston Seal Kit "C"	3600	8
8.701-653.0	Check Valve Kit "A"	3600	8

UNLOADER VALVES - ST-261 SERIES





ST-261/S



ST-261/1





SUTTNER W

ST-261 Bypass Switch Only

ST-261 STANDARD

- PSI Regulation: 0-3600
- GPM: 1.0 8.0
- Temperature: 176°F
- 3/8" FPT Inlet & Outlet 1/4" FPT Bypass
- Stainless-Steel Plunger and Seat
- Forged-Brass Body and Viton Seals
- Weight: 22.5 oz.

ST-261 / S UNLOADER WITH BYPASS ST-261 / I - UNLOADER WITH CHEMICAL INJECTORS ST-261 / SI UNLOADER WITH SWITCH AND INJECTOR

- Micro Switch Specs; 115 VAC, 5A / 230 VAC, 3A
- Temperature: 176°F
- 3/8" FPT Inlet & Outlet 1/4" FPT Bypass & Aux Port
- Siphon Rate- 10-1
- Switches at full bypass flow
- Wired N/C (may be wired N/O)

ST-261 BYPASS SWITCH (ONLY)

- Field-Mountable
- 10 AMP, 115 / 230V
- Switches at full bypass flow
- Wired N/C (may be wired N/O)

PART NO.	DESCRIPTION	PSI	GPM	
ST-261 STANDAI	RD			
8.712-681.0	ST-261 STD	0-3600	8	
8.701-627.0	Repair Kit "B"	0-3600	8	
8.701-650.0	Outlet Check Kit "A"	0-3600	8	
ST-261 / S- UNL	OADER WITH BYPASS M	IICRO SWITCH		
8.712-685.0	ST-261 / S	500-3625	8	
8.701-647.0	Switch Seal Kit			
ST-261 / I- UNLO	DADER WITH CHEMICAL	. INJECTORS		
8.712-682.0	ST-261 / I / 1.8 mm	500- 3650	1.50-2.25	
8.712-683.0	ST-261 / I / 2.1 mm	500- 3650	2.25-3.35	
8.712-684.0	ST-261 / I / 2.4 mm	500- 3650	3.35-5.00	
8.900-159.0	Injector Repair Kit without Barb			
8.701-648.0	Injector Repair Kit wi	th Barb		
ST-261 / SI- UNL	OADER WITH MICRO S	NITCH & INJEC	TORS	
8.712-686.0	ST-261 / SI-1		1.50-2.25	
8.904-577.0	ST-261 / SI-3		3.35-5.00	
ST-261 BYPASS MICRO SWITCH & KIT				
8.712-629.0	Complete Micro Switc	h Assembly		
8.701-647.0	Seal Kit - Micro Switc	h		

UNLOADER VALVES - AR BOLT-ON





- PSI Rated Pressure: 2600
- Fits RC, XT & XM Series Pumps
- 1/2" F Inlet
- 3/8" M Outlet

PART NO.	DESCRIPTION	GPM	BYPASS
8.712-582.0	AR20608	3.0-	Aluminum,
	(4/B)	5.5	No Injector
8.712-564.0	AR20821	2.0-	Aluminum,
	(3/B)	5.0	No Injector
8.712-573.0	AR20890	2.0-	Aluminum, 2.0
	(4/B)	3.0	Adj Injector
8.712-576.0	AR21039	2.0-	Brass 2.0
	(4/B)	3.0	Adj Injector
8.712-575.0	AR21040	3.0-	Brass 2.2
	(4/B)	4.0	Adj Injector
8.720-676.0	Seal Kit (4/B)	

Note: AR has discontinued the Combiset unloaders. Use Mini-Mate unloaders as replacements. For 22 mm twist coupler outlet models, add Part No. 8.709-546.0 (3/8" x 22 mm) to injector outlet.

UNLOADER VALVES - GYMATIC -3/B & VR35 3/B SERIES







- PSI Rated Pressure: 3650
- GPM: 3.0-5.5
- Fits RK, RR, SXM, XM Series Pumps
- 3/8" M Outlet

PART NO.	DESCRIPTION	INLET
8.712-565.0	AR20242 (3/B)	1/2" F without Injector
8.712-563.0	AR20242G (3/B)	3/4" GHT & Filter, without Injector
8.712-574.0	AR20081 (3/B)	1/2" M Fixed Injector, 1.8 mm
8.712-567.0	AR20082 (3/B)	1/2" M Fixed Injector, 2.0 mm
8.712-568.0	AR20399 (3/B)	1/2" M Adj Injector, 1.8 mm
8.712-569.0	AR20400 (3/B)	1/2" F Adj Injector, 2.0 mm
8.720-642.0	AR2611 (3/B)	Repair Kit

AR21669 - VR35 3/B

- 3/8" M ■ PSI Max: 4000 ■ Brass Bypass ■ GPM: 5.0 ■ 1/2" M Inlet ■ Without Injector
- AR24760 VR35 3/B
- 3/8" M Outlet ■ PSI Max: 4000 ■ Brass Bypass ■ GPM: 5.0 ■ 1/2" F Inlet ■ Without Injector

PART NO.	DESCRIPTION	INLET	OUTLET
8.712-583.0	AR21669	1/2" M	3/8" M
8.720-903.0	AR24760	1/2" F	3/8" M

UNLOADER VALVES - 22900A PRESSURE ACTUATED SERIES





- Minimum PSI: 375 (Max PSI Listed Below)
- GPM: 2.2 13.0
- Temperature: 160°F
- Bellville Spring Washers Minimize Spikes
- Forged-Brass Bodies Stainless Ball and Seat
- Four 1/4" Side Ports **Enchance Versatility**
- 1/2" FPT Inlet, Outlet and Bypass Ports
- Weight: 57.3 oz.

PART NO.	MODEL NO.	MAX GPM		SPRING
8.712-709.0	22910A	13	800	Silver
8.712-710.0	22911A	13	1400	Yellow
8.712-711.0	22912A	13	2400	Red
8.712-708.0	22913A	13	3000	Orange
8.722-137.0	Repair Kit-	0120	99	

UNLOADER VALVES - APM PRESSURE ACTUATED SERIES







- Temperature: 160°F
- Unloads pressure in entire system when in bypass
- Forged-Brass Bodies
- Stainless-Steel Seat



8.712-706.0

- 3/8" FPT Inlet
- 3/8" FPT Outlet
- 1/4" FPT Bypass & Gauge Port

PART NO.	MODEL NO.	GPM	PSI
8.712-705.0	22760APM	8	145-3045
8.712-706.0	22765APM	5	580-4000



UNLOADER VALVES -FLOW-ACTUATED



Designed for any pump that fits within the flow and pressure range of the unloader.

- Temperature: 160°F
- Unloads pressure in entire system when in bypass
- Forged-Bronze Body, Stainless-Steel Seat
- 3/8" FPT Inlet, 3/8" MPT Outlet
- 1/2" FPT Bypass

PART NO.	MODEL NO.	GPM	PSI	
8.712-698.0	22650	3.0-4.5	0-3000	
8.712-701.0	22654A	3.5-4.8	3000-4000	
8.712-702.0	22655	4.5-5.5	0-3000	
8.712-703.0	22656	4.5-6.5	0-3000	
8.722-204.0	Seal Kit- 22	2666		

PRESSURE RELIEF VALVES -



For use as a backup to an unloader or main relief in an open system without a trigger operated spray gun.



- S-R Safety Valve: PSI: 3000 GPM: 1.3 to 10.0 3/8" M Inlet, 1/4" F Outlet
- S-3 Safety Valve: PSI: 500 to 10,000 GPM: 2.6 to 26.4 1/2" M Inlet, Side Discharge
- Bypass and Outlet
- Stainless-Steel Plunger and Seat
- Machined-Brass Bodies
- Adjustable Pop-Off Protection

PART NO.	DESCRIPTION	TEMP	
8.711-215.0	S-R Valve/ ZKSR	165°F	
8.711-227.0	S-3 Valve/ ZKS3	284°F	

UNLOADER VALVES - MG4000 SERIES

"The world's best unloader value" with a choice of PSI: 1500, 3000 or 4500.



- PSI: Up to 4500 PSI
- GPM: 10.0
- Temperature: 200°F
- Forged-Brass Body
- 3/8" FPT Inlet, Outlet and Bypass
- Auxiliary 1/4" Outlet
- Can be panel mounted
- Pressure limit indicated with color coded ring

PART NO.	DESCRIPTION	GPM	PSI
WITHOUT KNOB			
8.712-715.0	Yellow	10	1500
8.712-724.0	Black	10	4500
WITH KNOB			
8.712-716.0	Yellow	10	1500
8.712-719.0	Red	10	3000
8.712-725.0	Black	10	4500
8.704-567.0	Repair Kit- 46	3104K	



MG4000 WITH MICROSWITCH

- 15 Amp Microswitch
- Panel Mountable
- Use for time-delay shutdown or as burner control
- Can be used as Normally Open (NO) or Normally Closed (NC)

PART NO.	DESCRIPTION	GPM	PSI
8.712-720.0	Red	15	3000
8.712-714.0	Blue	15	4000
8.712-727.0	Black	15	4500

PRESSURE RELIEF VALVES - TIMAX



- PSI Max: 870
- GPM Max: 53
- 3/4" F Inlet, 1/2" F, 1" F Bypass
- 1" FPT Bypass
- Brass-Body, Stainless-Steel Piston and Seat



PART NO.	DESCRIPTION	GPM	PSI
8.712-624.0	Timax Regulator Valve	53	870
8.702-844.0	Repair Kit		

NOTES: Lever control manual dump for bypass to relieve line pressure

PRESSURE RELIEF VALVES -VS 200 / 180. HIGH PSI



Prompt and effective damping against pressure spikes



- Rated PSI: 2600, Max PSI: 2900
- GPM: 52.5
- Temperature: 194°F
- 3/4" FPT Inlet x 1/2" FPT Bypass
- Weight: 29.4 oz.

PART NO.	MODEL NO.	GPM
8.712-753.0	VS 200/180	52.5
8.704-582.0	Repair Kit	

PRESSURE RELIEF VALVES -VS 350, HIGH PSI



Prompt and effective damping against pressure spikes. Perfect For Multiple Gun Applications as well.



- PSI: 5600
- Rated PSI: 5100
- GPM: 6.5
- Temperature: 195°F
- 3/8" FPT Inlet. Outlet and Bypass
- Weight: 16.8 oz.

PART NO.	MODEL NO.	GPM	PSI
8.712-756.0	VS 350	6.5	5600

PRESSURE RELIEF VALVES - VS 220





- PSI Max: 3600
- Rated PSI: 3200
- GPM: 6.3
- Temperature: 200°F
- Two 3/8" FPT inlets
- 3/8" FPT Outlet and Bypass
- Forged-Bronze Body
- Stainless-Steel Plunger and Seat Valve
- Compact Design
- Weight: 14.2 oz.

PART NO.	MODEL NO.	GPM	PSI
8.712-737.0	VS220	6.3	3600

PRESSURE RELIEF VALVES -VS 500. HIGH PSI






- PSI Max: 8100
- Rated PSI: 7250
- GPM: 21
- Suitable to be utilized as a safety valve
- Temperature: 195°F
- Internals: Stainless-steel
- Brass Body and Fittings
- 1/2" FPT Inlet and 3/8" FPT Bypass
- Weight: 14.2 oz.

PART NO.	MODEL NO.	GPM	PSI
8.712-757.0	VS 500	21	8100

REGULATING RELIEF VALVE







- Adjustable Pressure: 200-2000 PSI
- GPM: 7
- Temperature: 200°F
- 3/8" FPT Inlet, Outlet and Bypass
- Flow-Thru Design for Smooth Operation
- Machined-Brass Body and Knob
- Stainless-Steel Plunger and Seal

PART NO.	DESCRIPTION	GPM	PSI
8.712-625.0	Relief Valve	7	200-2000

UNLOADER VALVES -MOUNTING BLOCK



End vibraton-caused fitting failure.



- GPM: 12
- Mounting Hardware Included
- Machine Block Brass or Steel

PART NO.	DESCRIPTION	MATERIAL	PSI
8.904-568.0	S 3/8" x 3/8"	Brass	5500
8.904-567.0	1/2" x 1/2"	Brass	5500
9.802-870.0	3/8" x 3/8"	Steel	
9.802-871.0	1/2" x 1/2"	Steel	



CHEMICAL INJECTORS - AMERIMAX SERIES



The higher rate injector. Our best seller!



- PSI: 3500
- Brass Housing
- Stainless-steel Orifice & Spring
- Fully Adjustable Metering Valve
- 3/8" MPT Inlet, Outlet
- 1/4" Hose Barb

PART NO.	DESCRIPTION	GPM	PSI
STANDARD			
8.904-192.0	"0"	1.0-2.0	3500
8.904-193.0	"1"	2.0-3.0	3500
9.803-998.0	"2"	3.0-5.0	3500
8.904-194.0	"3"	5.0-8.0	3500
8.900-040.0	Repair Kit Stainless-steel Che	eck Ball	
"ACID" INJECTOR	WITH SPECIAL INL	ET CHEC	K VALVE
8.904-202.0	"1A"	2.0-3.0	3500
8.904-203.0	"2A"	3.0-5.0	3500
8.904-204.0	"3A"	5.0-8.0	3500
8.700-536.0	Ceramic Ball for 8.904-203.0		
8.900-041.0	Acid Repair Kit*		
*Ceramic Check Bal			

CHEMICAL INJECTORS - STAINLESS-STEEL



- PSI: 5000
- Stainless-Steel

PART NO.	DESCRIPTION	GPM	PSI
9.802-217.0	Non-Adjustable, Injector Only	3.0-5.0	5000

CHEMICAL METERING VALVES - ST-61 SUTTNER W



- Max Temperature: 140°F
- GPM: .27
- 1/4" Hose Barb
- Teflon® Seals
- Glass-Filled Polyamide Body and Valve Parts
- Adjusts From Off to Full Flow
- Snap-on attachment to ST-60, ST-62, ST-261/1

PART NO.	DESCRIPTION
8.710-777.0	ST-61, 1/4" Hose Barb, Teflon® Seals

CHEMICAL INJECTORS -AMERIMAX SERIES - QUICK-COUPLED ASSEMBLIES

Legacy

Assembled for added convenience - quick couples to unloader outlet and quick couples hose to injector outlet.



- Top quality quick couplers: 3/8" Plug Inlet 3/8" Socket Outlet
- 6" industrial-grade poly-braid reinforced tubing (will not collapse, resists crimping, high-chemical tolerance)
- Heavy-duty brass chemical filter with check valve prevent loss of prime

	prevent 1033 or prime			
PART NO.	DESCRIPTION	GPM		
AMERIMAX "QC	TI CONTRACTOR OF THE PROPERTY			
8.904-195.0	Quick-Coupled "0"	1.0-2.0		
8.904-196.0	Quick-Coupled "1"	2.0-3.0		
8.904-197.0	Quick-Coupled "2"	3.0-5.0		
8.904-199.0	Quick-Coupled "3"	5.0-8.0		
8.900-040.0	Repair Kit Stainless-steel Check	Ball		
AMERIMAX ACI	D "QC"			
8.904-206.0	Quick-Coupled "1A"	2.0-3.0		
8.904-207.0	Quick-Coupled "2A"	3.0-5.0		
8.904-208.0	Quick-Coupled "3A"	5.0-8.0		
8.900-041.0	Acid Repair Kit*			
*Ceramic Check Ba	all			

CHEMICAL INJECTORS - ST-60 SERIES

SUTTNER W

Requires ST-61 Metering Valve to regulate the chemical injection rate.



- Forged-Brass Body
- Siphon Rate: 10:13/8" MPT Inlet
- Compact SizePSI: 3600
- 3/8" FPT Outlet

PART NO.	DESCRIPTIO	ON GPM	ORIFICE
8.710-476.0	ST 60/0	1.50-2.25	1.8 mm
8.710-477.0	ST-60/1	2.25-3.25	2.1 mm
8.710-478.0	ST-60/2	3.25-5.00	2.4 mm
8.701-648.0	Repair Kit	with Barb-"F"	

CHEMICAL INJECTORS - FIXED



- Max PSI: 4500 190° F
- GPM: 3.0 8.0 Hose Barb 1/4"
- 3/8" FPT Inlet & Outlet

PART NO.	MODEL NO.	GPM	PSI
8.710-489.0	G.P. #100775	3.0 to 5.0	4500
8.710-490.0	G.P. #100776	5.0 to 8.0	

CHEMICAL INJECTORS - ST-64, UP STREAM

SUTTNER W

Apply soap at high pressure. Restricts waterflow to create suction. Used on Pressure Pro Equipment as well as other major manufacturers.

- PSI: 140
- Temperature: 160°F



- 3/4" FGH Inlet, 3/4" MGH Outlet
- Chemical strainer and 4' PVC tubing included
- Adjustable with ST-61 Metering Valve
- Locking Waterflow Adjustment

PART NO.	MODEL NO.	GPM	PSI
8.710-482.0	ST-64 Up Stream Injector	1.5-4.0	140
8.710-483.0	ST-64 Up Stream Injector	4.0-7.0	140

CHEMICAL INJECTORS - ROBOKIM

- Rated PSI: 3200 Max PSI: 3500
- Max Temperature: 210°F
- 3/8" MPT Inlet, Outlet

SUTTNER W


■ 1/4" Hose Barb

- Stainless-Steel Orifice
- Stainless-Steel Inlet Check Valve Components

1

PART NO.	MODEL NO.	GPM	PSI	ORIFICE	
ROBOKIM WITH PLASTIC METER KNOB					
8.710-497.0	Chemical Injector "0"	2.1-2.9	3500	2.0 mm	
8.710-498.0	Chemical Injector "1"	2.9-4.0	3500	2.2 mm	
8.710-499.0	Chemical Injector "2"	4.0-5.5	3500	2.5 mm	
8.710-500.0	Chemical Injector "3"	5.5-10.8	3500	2.75 mm	
8.704-708.0	Repair Kit, RoboKim				

CHEMICAL INJECTORS -ST-62 VARIABLE





- Max PSI: 36500
- GPM: 2.0 8.0
- Forged-Brass Body
- 3/8" FPT Inlet & Outlet

PART NO.	MODEL NO.	GPM	PSI
8.710-485.0	ST-62	8	3600
8.701-648.0	Repair Kit with Barl	o-"F"	

CHEMICAL INJECTORS - ROBOKIM QUICK-COUPLED ASSEMBLIES



- Quick-Couplers: 3/8" QC Plug Inlet 3/8" QC Socket Outlet
- 6" industrial-grade poly-braid reinforced tubing
- AP brass chemical filer with stainless-steel check valve

PART NO.	DESCRIPTION	GPM
ROBOKIM "QC"	WITH PLASTIC KNOB	
8.904-209.0	Chemical Injector "0"	2.1-2.9
8.904-210.0	Chemical Injector "1"	3.0-4.0
8.904-211.0	Chemical Injector "2"	4.0-5.5
8.904-212.0	Chemical Injector "3"	5.5-10.8
ROBOKIM "QC"	WITH BRASS KNOB	
8.904-217.0	Chemical Injector "0"	2.1-2.9
8.904-218.0	Chemical Injector "1"	3.0-4.0
8.904-219.0	Chemical Injector "2"	4.0-5.5
8.904-220.0	Chemical Injector "3"	5.5-10.8



CHEMICAL INJECTORS - HI-LO

May be used on high or low side of pump. Adjustable flow orifices plus adjustable chemical valves. Standard features similar to ST-62.

■ Performance Range:

Low Side/Upstream:PSI: 10-120, GPM: .5-3.5 High Side/Downstream: PSI: 3500, GPM: 2.0-8.0 ■ Max Temperature: 180°F

- Machined-Brass Body
- 3/8" FPT Inlet, Outlet



PART NO.	MODEL NO.	GPM	PSI
8.710-486.0	Hi / Lo Injector with Meter Valve	2.0-8.0	3500
8.710-487.0	without Chemical Adjust	2.0-8.0	3500
8.700-290.0	Repair Kit		

CHEMICAL INJECTORS - 400 SERIES

The injector of choice.

- PSI: 3200
- Temperature: 200°F
- Forged-Brass Housing
- Teflon® Valve Seat
- 3/8" Inlet, Outlet (3 Configurations)
- Renewable Orifices and Check Valve
- Options Include: Quick-Coupled, Stainless-Steel Orifices, Acid-Resistant Check
- Weight: 5 oz.

ORIFICE SELECTION



ORIFICE DIA.	DESCRIPTION	GPM / FLOW RATE	PSI
1.6 MM	3/8" Inlet / Outlet	1.5-2.7	3200
1.8 MM	3/8" Inlet / Outlet	2.0-3.6	3200
2.1 MM	3/8" Inlet / Outlet	2.7-4.9	3200
2.3 MM	3/8" Inlet / Outlet	3.3-6.0	3200

ADJUSTABLE INJECTORS, PRECISE NEEDLE-METERING VALVE

ORIFICE SIZE	M X M PART NO.	M X F PART NO.	F X M PART NO.
BRASS BODY			
1.6	8.710-541.0	8.710-549.0	8.710-559.0
1.8	8.710-535.0	8.710-543.0	8.710-551.0
2.1	8.710-537.0	8.710-545.0	8.710-554.0
2.3	8.710-539.0	8.710-547.0	8.710-557.0
BRASS BODY / ST	TAINLESS-STEEL INSERT		
1.6			8.710-560.0
1.8	8.710-536.0	8.710-544.0	8.710-552.0
2.1	8.710-538.0	8.710-546.0	8.710-556.0
2.3	8.710-540.0	8.710-548.0	-
BRASS BODY / A	CID-RESISTANT		
1.6	8.904-230.0	-	-
1.8	8.904-224.0	8.904-232.0	-
2.1	8.904-226.0	8.904-234.0	8.904-242.0
2.3	8.904-228.0	8.904-236.0	
BRASS BODY / ST	AINLESS-STEEL INSERT / ACID-RESISTA	NT	
1.6		-	-
1.8	8.904-225.0	8.904-233.0	8.904-241.0
2.1	8.904-227.0	8.904-235.0	-
2.3	8.904-229.0		

PART NO. DESCRIPTION

REPAIR KITS INCLUDE CHECK BALL, SPRING, SEAT AND O-RING

8.900-769.0 Standard Kit **8.900-770.0** Acid Kit

CHEMICAL INJECTORS -STAINLESS-STEEL



- PSI: 5500
- Temperature: 190°F
- 3/8" MPT Inlet, Outlet
- 1/4" Hose Barb
- 1.8 mm Orifice
- Weight 8.0 oz.
- High Draw: 20%
- PART NO. MODEL NO. **GPM** PSI 9.112-213.0 Chemical Injector 2.0-3.0 5500

CHEMICAL INJECTORS - 505 SERIES STAINLESS-STEEL



All metal parts are stainless-steel



- PSI: 5650
- GPM: 8.0
- Temperature Max: 195°F
- 3/8" Inlet, Outlet
- Premier Type Injector
- Teflon® O-Rings

PART NO.	MODEL NO.	GPM	PSI	V
8.710-586.0	Stainless-steel Injector 1.8	2.0-2.6	5650	
8.710-587.0	Stainless-steel Injector 2.1	2.6-4.0	5650	
8.710-588.0	Stainless-steel Injector 2.3	4.0-5.3	5650	
8.704-027.0	Repair Kit			

CHEMICAL INJECTORS - ADJUSTABLE. WITH QUICK-CONNECT



- PSI: 3500
- Temperature Max: 200°F
- 3/8" M Plug Inlet 3/8" F Coupler Outlet
- 1/4" Hose Barb

PART NO.	MODEL NO.	GPM
8.710-502.0	Adjustable QC - 1.8 mm	2.0-3.0
8.710-503.0	Adjustable QC -2.1 mm	3.0-5.0
8.710-504.0	Adjustable QC - 2.3 mm	5.0-8.0
ACID INJECTORS		
8.904-221.0	Adjustable QC - 1.8 mm	2.0-3.0
8.904-222.0	Adjustable QC - 2.1 mm	3.0-5.0
8.904-223.0	Adjustable QC - 2.3 mm	5.0-8.0
8.701-187.0	Injector Repair Kit	
8.900-087.0	Injector Acid Kit	

CHEMICAL INJECTORS - BRASS

All metal parts are brass



- PSI: 4000
- Temperature Max: 190°F
- 3/8" MPT Inlet, Outlet
- Premier Type Injector
- EPDM O-Ring

PART NO.	MODEL NO.	GPM	PSI
8.710-505.0	Brass Injector 1.8	2.0-2.6	4000
8.710-506.0	Brass Injector 2.1	2.7-4.0	4000
8.710-507.0	Brass Injector 2.3	4.0-5.3	4000
8.704-028.0	Repair Kit		

DUAL INJECTORS - HIGH DRAW



Dual, adjustable downstream chemical injector



- PSI: 4000
- Temperature Max: 190°F
- 3/8" MPT Inlet, Outlet

PART NO.	MODEL NO.	GPM	PSI
9.117-527.0	Injector .083/2.1	3 - 5	4500

CHEMICAL INJECTORS / PRESSURE REDUCER - EXTACT-A-FLOW

"Low side" chemical injector that regulates inlet pressure to maintain consistent chemical ratio.



- GPM: Up to 6.0
- 1/2" FPT I/O Ports
- 1/4" Hose Barb Chemical Inlet
- +2% Injection Ratio Variation

PART NO.	DESCRIPTION
8.711-162.0	Weep Seat*
8.711-160.0	Non-Weep
8.711-161.0	With Switch**
8.904-389.0	Hose Barb with Viton Check

^{*}Weep Seat allows pump to self-prime

CHEMICAL INJECTORS - NON ADJUSTABLE

PART NO.	MODEL NO.
8.756-796.0	1.8
8.756-797.0	2.1
8.757-724.0	2.3

^{**}With burner control switch (9.802-362.0) automatically turns burner off when water flow stops



FLOAT VALVES - ADJUSTABLE, BRONZE





- Temperature Max: 180°F
- Cast-Bronze Body
- Adjustable Float Arm
- Live Rubber Stopper

PART NO.	THREAD	STEM	GPM AT 40 PSI	
8.710-045.0	1"	1/4"-20	47	
9.802-183.0	1"	1/2"-20	47	
8.707-305.0		3/8"		
REPAIR PARTS F	OR ADJUS	TABLE VA	LVES	
8.700-476.0	Short Ar	m*		

*Fits 3/8", 1/2" and 3/4" valve only Note: Float valve requires stem and float

FLOAT VALVES - PA BRASS ASSEMBLY

Used on Pressure Pro Equipment as well as other major equipment manufacturers.





Max GPM: 7.0Max PSI: 145Temperature: 140°F

■ Brass Body

■ Positional / Adjustable Arm

PART NO.	DESCRIPTION	INLET	TEMP
8.710-042.0	Float Valve	3/8" BSP-M	140°F
8.754-586.0	Float Valve	3/8" NPT-M	140°F
8.704-204.0	Repair Kit		

FLOAT VALVES - STEMS

9.802-157.0		8.710-047.0
PART NO.	LENGTH	THREAD
BRASS		
9.802-157.0	8"	1/4" - 20
8.710-051.0	10"	1/4" - 20
STAINLESS-STE	EL	
8.710-047.0	8"	1/4" - 20 x 5/16" - 18

Parts for other float valves also available

FLOAT VALVES - ST-8, BRASS ASSEMBLY



Complete assembly includes valve, stem and float.



1	PART NO.	DESCRIPTION	GPM	ТЕМР	
	8.710-031.0	ST-8	5.0	175°F	
	8.710-033.0*	MPT Adapter Kit for ST-8			

^{*}Double MPT nipple, sealing washer and lock nut

FLOAT VALVES - BALLS, COPPER & PLASTIC





0.740.053.0	0.002.004.0
8.710-053.0	9.802-061.0

PART NO.	LENGTH	THREAD
COPPER		
8.710-061.0	4" x 5"	1/4"-20
8.710-052.0	5"	1/4"-20
8.710-053.0	6"	1/4"-20
PLASTIC		
8.710-057.0	6"	1/4"-20
8.710-059.0	8"	1/4"-20
9.802-061.0	4" x 5"	1/4"-20

Parts for other float valves also available

FLOAT VALVES - BRASS FLOAT WITH BALL & STEM





- Inlet PSI Max: 142
- GPM: 7.1 at PSI: 28
- 1/2" MPT Inlet
- Temperature: 140°F
- Positive Soft Buna / Brass Shut-Off
- Adjustable Float Ball Settings
- Inlet Nut and Washer Seal Provided

PART NO.	DESCRIPTION	PSI MAX	TEMP
8.710-037.0	Valve Complete	142	140°F
8.704-092.0	Repair Kit		

FLOAT VALVES - DIAPHRAGM



- PSI: 142
- GPM: 7.86 at PSI: 28
- GPM: 6.68 at PSI: 14
- Temperature: 140°F
- 3/8" MPT Inlet
- Requires only 6.5" x 3"
 - inside tank
- All-Plastic Snap-On Float
- Positive Shutoff Diaphragm Style
- Inlet Screen, Tank Gasket and Nut Included

PART NO.	DESCRIPTION	PSI TEMP
8.710-030.0	Float Valve Complete	142 140°F

FLOAT VALVES - KERICK



FLOW RATE FOR 1/2" VALVE

- PSI: 20 at GPM: 7.7
- PSI: 30 at GPM: 9.1
- PSI: 40 at GPM: 10.5
- PSI: 50 at GPM: 11.4
- PSI: 60 at GPM: 12.5

FLOW RATE FOR 3/4" VALVE

- PSI: 30 at GPM: 13
- PSI: 60 at GPM: 16.5

PART NO.	DESCRIPTION	ORIFICE
8.749-328.0	1/2" Float Valve	.25"
8.749-329.0	3/4" Float Valve	.30"

FLOAT VALVES - VERTICAL



- GPM: 8.0 at PSI: 150
- Temperature: 140°F
- 1/2" MPT Inlet
- Inlet Nut and Washer Seal Provided

PART NO.	DESCRIPTION	TEMP
9.802-185.0	Vertical Float Tank	140°F

FLOAT VALVES - BRASS

- MTM / Veloci
- Includes Filter and Pipe

PART NO.	DESCRIPTION
8.754-085.0	Float Valve 3/4" M with Filter and Pipe



Retain prime on pumps with low-lift capability.



- PSI: 0-130
- Temperature: 90 & 150°F
- No External Moving Parts
- No Float Ball or Arm
- All Plastic, Nylon, Rubber and Stainless-Steel
- 1" Inlet Easy Installation
- Automatic Anti-Siphon
- Flow Capacity 80% of Supply: GPM:40 at PSI: 40

PART NO.	DESCRIPTION	PSI TEMP	
8.710-035.0	1" Hudson Float Valve, 90°	0-130 90°F	
8.710-036.0	1" Hudson Float Valve, 150°	0-130 150°F	

CHECK VALVES - SWING ACTION,

■ PSI: 150



- Brass Body, Swing (flapper) Action
- FPT Inlet, Outlet
- Gravity Seal, No Spring Pressure

PART NO.	DESCRIPTION	PSI
8.709-378.0	1/2", FPT Inlet / Outlet, Gravity Seal	150
8.709-379.0	3/4", FPT Inlet / Outlet, Gravity Seal	150
8.709-380.0	1", FPT Inlet / Outlet, Gravity Seal	150
8.709-381.0	1-1/4", FPT Inlet / Outlet, Gravity Seal	150



CHECK VALVES - STAINLESS-STEEL, HIGH PSI

Holds pump prime without overloading pump suction.



- PSI: 6000 6500
- Rated PSI: 5800
- Temperature: 195°F
- Female x Female
- Weight: 2.0 oz.

PART NO.	DESCRIPTION	FLOW RATE	PSI
8.709-361.0	1/4" F x F	6.1	6500
8.709-362.0	3/8" F x F	10.5	6500
8.709-364.0	1/2" F x F		6000

CHECK VALVES - 460 SERIES. HIGH PSI

Holds pump prime without overloading pump suction







8.709-356.0

8.709-357.0

8.709-358.0

- Max PSI: 2500-3000
- Buna Seals
- Stainless-Steel Check Ball & Spring
- Machined-Brass Body

PART NO.	DESCRIPTION	CRACKING PRESSURE
2500 PSI MIN	IATURE BALL CH	ECK
8.709-356.0	1/4", M x F	1 PSI
8.709-357.0	1/4", M x M	3 PSI
3000 PSI STAI	NLESS GUIDED B	ALL AND QUAD RING SEAT
8.709-358.0	1/4", F x F	1 PSI
8.709-359.0	3/8", F x F	3 PSI

CHECK VALVES - SPRING LOADED, HIGH PSI

Holds pump prime without overloading pump suction.



- PSI: 1200
- Max Temperature: 250°F
- Cracking Pressure PSI: 1
- Machined-Brass Body
- Stainless Steel Springs
- Poppet Seal

PART NO.	DESCRIPTION	MATERIAL
8.709-351.0	1/4", F x F	Machined Brass Body
8.709-352.0	3/8", F x F	Machined Brass Body
8.709-353.0	1/2", F x F	Machined Brass Body
8.709-354.0	3/4", M x M	Machined Brass Body

CHECK VALVES - SPRING LOADED, LOW PSI

Holds pump prime without overloading pump suction



- PSI: 150
- Max Temperature: 250°F
- Machine-Cast Brass Bodies
- FPT x FPT
- Mount Horizontal or Vertical

PART NO.	DESCRIPTION	PSI	TEMP	
8.709-384.0	1/2"	150	250°F	
8.709-385.0	3/4"	150	250°F	
8.709-386.0	1"	150	250°F	

CHECK VALVES / BACKFLOW PREVENTOR - T533 MODEL, VACUUM BREAKER

Protects water supply from harmful chemical backflow - will not allow "spike" pressure to push chemicals into supply line. Now required by many city and state regulations.



- Max PSI: 125
- Max Temperature: 180°F
- Machined-Brass Housing, Chrome Plated Finish
- Plastic Diaphragm Check
- 3/4" Female Garden Hose Inlet (with Lock Screw)
- 3/4" Male Garden Hose Outlet

PART NO.	DESCRIPTION	MATERIAL
8.705-039.0	Backflow Preventor	Machined Brass Housing

CHECK VALVES - PVC. LOW PSI

Holds pump prime without overloading pump suction.

- PSI: 125
- Cracking Pressure PSI: 1
- Temperature: 180°F
- Choice of Connects
- PVC Plastic Body
- Stainless-Steel Ball Check
- Designed for Harsh Chemical Applications

PART NO.	DESCRIPTION	PSI	TEMP
8.709-366.0	1/4" MPT x 1/4" Barb	125	180°F
8.709-367.0	1/4" Barb x 1/4" MPT	125	180°F
8.709-369.0	1/4" Barb x 1/4" Barb	125	180°F
8.709-370.0	3/8" Barb x 3/8" Barb	125	180°F
8.709-373.0	1/2" Barb x 1/2" Barb	125	180°F

^{*8.709-373.0} has Viton Seals

BALL VALVES - STAINLESS-STEEL, LOW PSI





- PSI: 2000 at Temperature: 180°F
- PSI: 1000 at Temperature: 300°F
- PSI: 300 at Temperature: 350°F
- Full-Flow Ports
- Investment Cast Process
- Two-Piece 316 Stainless Bodies
- Glass-Filled Telfon® Seals

PART NO.	DESCRIPTION		
8.709-265.0	1/4" F x F, Glass-filled Teflon® Seals		
8.709-266.0	3/8" F x F, Glass-filled Teflon® Seals		
8.709-268.0	1/2" F x F, Glass-filled Teflon® Seals		
8.709-269.0	3/4" F x F, Glass-filled Teflon® Seals		

BALL VALVES - FORGED-BRASS, LOW PSI





- PSI: 600
- Temperature: 180°F
- Forged-Brass Body
- Full-Flow Ports
- Telfon® PTFE Seals

SIZE	M X F PART NO.	F X F PART NO.	M X M PART NO.
1/4"	8.709-249.0	8.709-250.0	-
3/8"	8.709-252.0	8.709-253.0	8.709-254.0
1/2"	8.709-255.0	8.709-256.0	8.709-257.0
3/4"	8.709-258.0	8.709-259.0	8.709-260.0
1"	8.709-261.0	8.709-262.0	8.709-263.0

BALL VALVES - MINI, LOW PSI



- PSI: 600
- 180° Handle Movement
- Forged-Brass Body

SIZE	M X F PART NO.	F X F PART NO.	M X M PART NO.
1/8"	8.709-208.0	8.709-209.0	-
1/4"	8.709-211.0	8.709-212.0	8.709-213.0
3/8"	8.709-216.0	-	-



BALL VALVES - NICKEL-PLATED BRASS, LOW PSI





- Threaded FPT Connects
- Chrome-Plated Ball
- Full-Flow Bore
- Seats and Seals have Glass-Filled Telfon®
- Nickel Plated Brass Body

PART NO.	DESCRIPTION	PSI
8.709-242.0	1/4", Chrome-plated Ball, Full-flow Bore	710
8.709-243.0	3/8", Chrome-plated Ball, Full-flow Bore	710
8.709-244.0	1/2", Chrome-plated Ball, Full-flow Bore	710
8.709-245.0	3/4", Chrome-plated Ball, Full-flow Bore	570
8.709-246.0	1", Chrome-plated Ball, Full-flow Bore	570
8.709-247.0	1-1/4", Chrome-plated Ball, Full-flow Bore	430
8.709-248.0	1-1/2", Chrome-plated Ball, Full-flow Bore	430
8.709-264.0	2", Chrome-plated Ball, Full-flow Bore	360

BALL VALVES - RKH SERIES - STAINLESS-STEEL, HIGH PSI



- 316 Stainless-Steel Body, Ball and Stem
- Viton O-Rings
- Delrin Ball Seats
- Full Port

PART NO.	FPT	PSI	
8.709-277.0	3/8" x 3/8"	5880	
8.709-280.0	1/2" x 1/2"	5880	
8.709-283.0	3/4" x 3/4"	5154	
8.709-286.0	1" × 1"	5154	

BALL VALVES - SHUT-OFF, HIGH PSI



- Max PSI: 3000
- Max Temperature: 176°F
- Nickel Plated Brass Body

PART NO.	DESCRIPTION	PSI	
8.753-959.0	3/8" FPT x 3/8" FPT	3000	
9.113-462.0	3/8" FPT x FPT	5000	
9.115-186.0 NE	<mark>⊮</mark> -1/2" F X 1/2" F	5000	

BALL VALVES - BKH SERIES, HIGH PSI



- Rugged Carbon Steel Construction
- 2-Way
- NPT (F x F) Threads
- Blow-Out Proof Stems
- Delrin Ball Seats
- Buna O-Rings

PART NO.	FPT	PSI	1 1
8.709-274.0	1/4" x 1/4"	7350	
8.709-276.0	3/8" x 3/8"	7350	
8.709-279.0	1/2" x 1/2"	7350	
8.709-282.0	3/4" x 3/4"	5880	
8.700-270.0	Replacement Handle (fits all sizes above)		
8.700-271.0	Replacement Screw for Handle		

BALL VALVES - PVC, LOW PSI

Great for chemical on / off flow control.



- PSI: 125
- Temperature: 140°F
- Flag Handle
- PVC and Nitrile Material
- Chemical and Impact Resistant

PART NO.	DESCRIPTION	PSI
8.709-214.0	1/4" Panel Mtg, Barb x Barb	125
8.709-219.0	1/4" In-line, Barb x Barb	125
8.709-220.0	3/8" In-line, Barb x Barb	125

BALL VALVES - STAINLESS-STEEL, LOW PSI, ONE PIECE





- PSI: 800 at Temperature: 300°F
- PSI: 400 at Temperature: 350°F
- Standard Port
- 316 Stainless-Steel Body
- Suitable for Steam

PART NO.	FPT	MATERIAL
8.709-287.0	1/4" x 1/4"	316 Stainless-steel Body
8.709-288.0	3/8" x 3/8"	316 Stainless-steel Body
8.709-290.0	3/4" x 3/4"	316 Stainless-steel Body

BALL VALVES - 2940/3830 MINI SERIES, LOW PSI



- PSI: 147 Working Pressure
- Nickel Plated Brass
- Brass Housing-Hex Bar
- Compact Knob Operation
- Designed to fit tight quarters
- Telfon® Seals

PART NO.	DESCRIPTION	
8.709-270.0	Series 3830 - Nickel Plated Brass, 1/8" x 1/8" FPT	
8.709-271.0	Series 3830 - Nickel Plated Brass, 1/4" x 1/4" FPT	
8.709-272.0	Series 2940 - Brass, 3/8" x 3/8" FPT	
8.709-273.0	Series 2940 - Brass, 1/2" x 1/2" FPT	

BALL VALVES - MODEL 727, 3 WAY



- PSI Max: 500
- Temperature Max: 180°F
- Telfon® Seat & Stainless Handle Screw
- Buna Seals
- Brass

PART NO.	DESCRIPTION	PSI	TEMP
8.709-207.0	1/4" M x F x F	500	180°F

CHEMICAL METERING VALVES - FLOW SELECTOR, 3 & 4 WAY

3-way and 4-way lever control with brass body.



- 3-Way
- Plumb for 2 Inlets and 1 Outlet or 1 Inlet and 2 Outlets
- 4-Way
- Plumb for 3 Inlets and 1 Outlet or 1 Inlet and 3 Outlets
- Rated Temperature: 180°F

PART NO.	DESCRIPTION	ТЕМР	
8.710-108.0	1/4" FPT 3-Way	180°F	
8.710-110.0	3/8" FPT 3-Way	180°F	
8 710-113 N	1 / // " FDT //-\//>\/	180°E	

BALL VALVES - T-601 SERIES COMPACT PVC, LOW PSI



- PSI: 150 Working Pressure
- Temperature: 140°F
- FPT Thread Both Ends
- Easy-Turn Handle
- EPDM Seals White Body

PART NO.	FPT
8.709-233.0	1/4" x 1/4"
8.709-234.0	1/2" x 1/2"
8.709-235.0	3/4" x 3/4"
8.709-236.0	1" X 1"
8.709-237.0	1-1/4" × 1-1/4"
8.709-238.0	1-1/2" × 1-1/2"
8.709-239.0	2" x 2"

BALL VALVES - 454 SERIES, POLYPROPYLENE, LOW PSI

Full port reinforced polypropylene body for strength & chemical resistance.





8.709-222.0 8.709-228.0

- Max PSI: 240 Working Pressure
- Teflon Seats for smooth operation & proper sealing.
- Double EPDM O-Rings in Stem for "No Leak"
- Threaded Mounting Brass Inserts on 1-1/4" 2" Sizes
- 8mm Mounting Inserts

PART NO.	FPT
, ,	***
TWO-WAY BALL	VALVES
8.709-222.0	1/2" x 1/2"
8.709-223.0	3/4" x 3/4"
8.709-224.0	1" X 1"
8.709-225.0	1-1/2" x 1-1/2"
8.709-226.0	2" x 2"
THREE-WAY BAL	L VALVES
8.709-227.0	1/2" x 1/2" x 1/2"
8.709-228.0	3/4" x 3/4" x 3/4"
8.709-229.0	1" × 1" × 1
8.709-230.0	1-1/4" x 1-1/4" x 1-1/4"
8.709-231.0	1-1/2" x 1-1/2" x 1-1/2"
8.709-232.0	2" x 2" x 2"



CHEMICAL METERING VALVES - SERIES 28, FLOW CONTROL



- PSI: 150
- Rated Temperature: 175°F
- Forged-Brass, Nickel-Plated Body
- Panel Mtg in 17/32" Hole
- Compact Size
- Double-Stem Seal

PART NO.	DESCRIPTION	TEMP	PSI
8.710-775.0	1/4", FPT Inlet/Outlet	175°F	150
8.710-776.0	3/8", FPT Inlet/Outlet	175°F	150

CHEMICAL METERING VALVES - BRASS





- PSI: 400 450
- Rated Temperature: 100°F
- 1/4" Inlet, Outlet
- Easy-Grip, Fluted Plastic Handle with Pointer
- Brass Body, Viton gland seal eliminates air leaks
- Panel Mount 11/16" or 3/4" Hole
- Extremely Compact T-Style

PART NO.	DESCRIPTION	PSI	
8.710-773.0	"T" 1/4" F x F, Forged	440	
9.802-188.0	"L" 1/4" M x M	440	

CHEMICAL METERING VALVES - SERIES 28, FLOW CONTROL







9.802-532.0

limiting orifice

■ Forged-Brass Body

■ 9.802-187.0 has presettable

- 9.802-187.0
- PSI: 4000
- GPM: 6
- 1/4" Inlet, Outlet
- Adjusts from off to full flow

PART NO.	DESCRIPTION	PSI
8.710-771.0	Flow Control	4000
9.802-187.0	Flow Control with Botton Locking Adjustment	m 4000
9.802-532.0	Valve, Less Solenoid	4000

CHEMICAL METERING VALVES - FLOW CONTROL



The valve that "seals" (will not suck air).



- PSI: 3500
- Rated Temperature: 195°F
- 28" Vacuum No Leak
- Viton Gland Seal Isolates Metering Threads from Solution
- Stainless-Steel Needle, Brass Seat
- 1/4" FPT Ports
- Heavy-Duty Brass Bar Stock Body
- Panel Mounts 5/8" Hole
- Large Easy-Grip Four-Lobe Handwheel
- Aluminum or Poly Available

PART NO.	DESCRIPTION	PSI
8.904-362.0	Metering Valve, Aluminum Knob	3500
8.904-361.0	Metering Valve, Poly Knob	3500

CHEMICAL METERING VALVES - SUTTNER W

Chemical flow can be metered and shut off remotely from the injector. With two inlets, it also allows switching from one solution to another.



- Double-Metering Dial with Center OFF
- Panel Mount in Single 5/8" Hole
- Two Input Barbs for Different Chemicals to Single Outlet Barb

PART NO.	DESCRIPTION	PANEL MOUNTING
8.710-779.0	ST-66	Single 5/8" Hole

THERMAL RELIEF VALVE/PUMP PROTECTOR- COMPACT





■ With and W/out 90° Hose Barb

PART NO.	SIZE	90° BARB	"TRIP' TEMP
8.712-544.0	1/4" MPT	No	145°F
8.712-545.0	3/8" MPT	No	145°F
9.802-181.0	3/8 MPT	Yes	145°F
9.804-025.0	1/4" MPT	Yes	145°F
8.707-250.0	3/8 MPT	Yes	190°F
9.803-670.0	1/2" MPT	Yes	190°F
8.707-256.0	1/2" MPT	Yes	145°F

REGULATOR VALVE - STEAM

For "combo" hot pressure washer / steamer units. The single-turn on / off diverter valve bypasses pump flow to reduce water flow to the coil, creating steam in place of normal hot water.



- PSI: 4000
- Rated Temperature: 175°F Max Temperature: 300°F
- 1/4" MPT Inlet, Outlet
- Panel Mount in 11/16" or 3/4" Hole
- Machined-Brass Body
- Easy-Grip Plastic Knob

PART NO.	ORIFICE (MM)	PSI	
8.711-263.0	0.8	4000	
8.904-406.0	1.2	4000	
8.904-407.0	1.5	4000	
8.904-408.0	1.8	4000	
8.904-409.0	2.0	4000	

THERMAL RELIEF VALVE/ PUMP PROTECTOR

A must for any pump that might ever be left in bypass mode (unloading) for more than 15 seconds. Protects the pump from overheating caused by recirculating water.



- Installs in Bypass Line
- Automotive Style Wax Element
- Automatically Resets at Cool Down to 115°F+



- No Adjustment Required
- 1/8" FPT Side Discharge
- PSI: 125 Inlet Pressure
- GPM: 2.5

PART NO.	INLET	GPM	"TRIP' TEMP
8.904-565.0	3/8" MPT	2.5	140°F
8.904-566.0	1/2" MPT	2.5	140°F
8.723-943.0	1/2" MPT	2.5	165°F

RUPTURE DISKS



- Temperature: 225°F
- 3/8" Inlet x 1/2" MPT Outlet
- Prevents dangerous thermal expansion of water in the coil
- Ensures operator safety

PART NO.	DESCRIPTION	MAX PSI
9.802-192.0	S Assembly	7000
8.707-381.0	Assembly	8500

THERMAL RELIEF VALVE/PUMP **PROTECTOR - TRV**



- PSI: 145
- Opens Temperature: 135°F
- Low Profile
- Brass Body
- Plastic-Covered Barb

PART NO.	DESCRIPTION	PSI
8.712-547.0	3/8" Inlet, Low Profile, Brass Body	145
8.712-548.0	1/2" Inlet, Low Profile, Brass Body	145

PRESSURE RELIEF VALVES

Commonly referred to as a Pop-Off Valve.



- Temperature:160°F
- GPM: 10
- MPT Inlets x End Vent Outlets
- Machined Brass
- Automatically Resets
- Prevents pressure overloads, protecting people and equipment

PART NO.	DESCRIPTION	MAX PSI
8.722-192.0	1/4", Silver Spring	1200
8.722-193.0	1/4", Red Spring	2400
8.722-194.0	1/4", Orange Spring	3600
8.722-190.0	\$ 3/8", Orange Spring	3600
9.802-191.0	3/8", Blue Spring	5000

AIR VALVE - COIL BLOW OUT

Also good for water tank blowouts as well as blowing out irrigation lines.





- Threaded Connection
- 1/8" Model is Stainless-Steel Valve Cap Included
- 1/4" Brass Valve

PART NO.	DESCRIPTION
8.705-047.0	Stainless-steel, 1/8" MPT Connect
8.705-048.0	Lead Free Brass, 1/4" MPT Connect



FLOW METERS - VISI - FLOAT





- Installs in Bypass Line
- Automotive Style Wax Element
- Automatically Resets at Cool Down to 115°F+
- No Adjustment Required
- 1/8" FPT Side Discharge
- PSI: 125 Inlet Pressure
- GPM: 2.5
- 2" Scale

PART NO.	GPH	MATERIAL	METERING VALVE
8.710-097.0	.6-5	Brass	No
8.710-101.0	2-10	Brass	No
8.710-102.0	2-10	Brass	Yes
8.710-099.0	.6-5	Stainless-steel	No
8.710-100.0	.6-5	Stainless-steel	Yes
8.710-104.0	2-10	Stainless-steel	No
8.710-105.0	2-10	Stainless-steel	Yes

Note: All flow measurements must be on low-pressure side of pump

PRESSURE RELIEF VALVE - EASY-START, HIGH PSI





- Rated PSI: 4050 Permissable PSI: 4500
- Temperature: 176°F
- GPM: 8.0
- 3/8" MPT Inlet
- Hose Barb Outlet (8 mm)
- Machined-Brass Body
- Stainless-Steel Spring and Ball

PART NO.	DESCRIPTION	GPM	PSI
8.709-867.0	Easy-Start Valve	8.0	4500

PRESSURE GAUGES - PORT KIT



- PSI: 5000 Cold Water
- 1-3/4" Gauge
- 3/8" QC Socket
- 3/8" QC Plug

PART NO.	DESCRIPTION	QC SOCKET / PLUG
8.712-208.0	Pressure Gauge Kit	3/8" / 3/8"

PRESSURE RELIEF VALVE - EASY-START, LOW PSI







- Temperature: 195°F
- GPM: 8.0

- Machined-Brass Housing
- Stainless-Steel Internals

PART NO.	DESCRIPTION	INLET / OUTLET	PSI
9.804-065.0	Easy-Start Valve	1/4" MPT, 1/8" FPT	5000
9.802-190.0	Easy-Start Valve	3/8" MPT, 1/8" FPT	5000
8.709-865.0	Easy-Start Valve	3/8" MPT, 1/4" Barb	4100
8.709-866.0	Easy-Start Valve	3/8" MPT, 1/8" FPT	3500
9.802-137.0	Hose Barb (only) - 1/4" Barb x 1/8" MPT		

PRESSURE GAUGES - 100 SERIES PNEUMATIC



- Black Lacquered Steel Case
- Bronze Bourdon Tube
- Dry Gauge
- 1/4" NPT Brass Mounting Stem
- Accuracy + 3-2-3%

PART NO.	PRESSURE RANGE	MOUNTING STEM
2" BOTTOM MOU	INT	
8.710-307.0	0-60	1/4" NPT Brass
8.710-308.0	0-100	1/4" NPT Brass
8.710-309.0	0-200	1/4" NPT Brass
8.710-310.0	0-300	1/4" NPT Brass

PRESSURE GAUGE - FUEL / OIL



- PSI: 0-200
- Perfect for Testing Burner Pump Fuel Pressure
- Metal Housing
- 2" Bottom Mount, 1/4" NPSM

PART NO.	DESCRIPTION	PRESSURE RANGE
8.700-738.0	Fuel Oil Pressure Gauge	0-200 PSI

NOTE: NPSM - American National Straight Pipe Threads

PRESSURE GAUGES - ABS, CORROSION-RESISTANT



- 2-1/2", Bottom Mount
- Acid and Alkali Proof Plastic Case
- 1/4" NPT Brass Mounting Stem
- Accuracy, Dry: + 3-2-3%
- Accuracy, Filled: + 1.5%
- Bronze Bourdon Tube

PART NO.	PRESSURE RANGE	MOUNTING STEM
8.710-293.0	0-200 PSI	1/4" NPT Brass
8.710-294.0	0-300 PSI	1/4" NPT Brass
8.710-295.0	0-1000 PSI	1/4" NPT Brass
8.710-296.0	0-2000 PSI	1/4" NPT Brass
8.710-297.0	0-3000 PSI	1/4" NPT Brass
8.710-299.0	0-5000 PSI	1/4" NPT Brass
8.710-296.0 8.710-297.0	0-2000 PSI 0-3000 PSI	1/4" NPT Brass 1/4" NPT Brass

PRESSURE REGULATOR, WATER 2-WAY



- PSI: 10 125
- 3/8" Valve
- Lowers city water pressure for better machine performance

PART NO.	DESCRIPTION	PSI
8.707-248.0	Pressure Regulator	10-125

PRESSURE GAUGES - VACUUM - STAINLESS-STEEL



- Black Lacquered Steel Case
- Bronze Bourdon Tube
- Dry Gauge
- 1/4" NPT Brass Mounting Stem
- Accuracy + 3-2-3%

PART NO.	DESCRIPTION
2-1/2" BACK M	OUNT WITH BRONZE INTERNALS
8.710-246.0	30Hg - 0 Vacuum Gauge
MOUNTING HA	RDWARE FOR BACK MOUNT GAUGES
8.710-223.0	U-Bracket, Mounting
8.710-228.0	3-Hole Flange Mounting

PRESSURE GAUGES - STAINLESS-STEEL



- AISI 304 Stainless-Steel Case
- Bronze Bourdon Tube
- 99.5% Pure Glycerin Filled
- PSI and Bar Dual Scale
- 1/4" NPT Brass Mounting Stem
- Convex Magnifying Lens for Easy Readings
- Steel Needle and Peg
- Accuracy + 1.5%

PART NO.	PRESSURE RANGE	MOUNTING STEM
2-1/2" BOTTOM	MOUNT WITH BR	ONZE INTERNALS
8.710-270.0	0-100 PSI	1/4" NPT Brass
8.710-272.0	0-200 PSI	1/4" NPT Brass
8.710-273.0	0-300 PSI	1/4" NPT Brass
8.710-276.0	0-500 PSI	1/4" NPT Brass
8.710-278.0	0-1000 PSI	1/4" NPT Brass
8.710-280.0	0-2000 PSI	1/4" NPT Brass
8.710-281.0	0-3000 PSI	1/4" NPT Brass
8.710-283.0	0-4000 PSI	1/4" NPT Brass
9.804-017.0	0-5000 PSI	1/4" NPT Brass
8.710-286.0	0-6000 PSI	1/4" NPT Brass
9.804-001.0	0-10,000 PSI	1/4" NPT Brass
2-1/2" BACK MO	OUNT WITH BRON	ZE INTERNALS
8.710-250.0	0-100 PSI	1/4" NPT Brass
8.710-254.0	0-500 PSI	1/4" NPT Brass
8.710-256.0	0-1000 PSI	1/4" NPT Brass
8.710-257.0	0-2000 PSI	1/4" NPT Brass
8.710-258.0	0-3000 PSI	1/4" NPT Brass
8.710-259.0	0-4000 PSI	1/4" NPT Brass
8.712-149.0	0-5000 PSI	1/4" NPT Brass
8.712-150.0	0-6000 PSI	1/4" NPT Brass (Includes bracket)
8.710-262.0	0-6000 PSI	1/4" NPT Brass
9.804-013.0	0-10,000 PSI	1/4" NPT Brass
MOUNTING HAP	RDWARE FOR BAC	K MOUNT GAUGES
8.710-223.0	U-Bracket, Mounting	1/4" NPT Brass
8.710-228.0	3-Hole Flange, Mounting	1/4" NPT Brass



PRESSURE GAUGES / TEMPERATURE TEST SET



Convenient test set provides both pressure and temperature check with one easy quick coupled connection at outlet of unloader or coil.



- Test Set 5000 500°F Thermometer 5000 PSI Pressure Gauge for Systems up to 2000 PSI
- Test Set 10,000
 500°F Thermometer
 10,000 PSI Pressure Gauge for
 Systems up to 5000 PSI

PART NO.	DESCRIPTION	
8.904-559.0	Test Set 5000 (0-2500 PSI Systems)	
8.904-558.0	Test Set 10,000 (0-5000 PSI Systems)	

THROTTLE CONTROL - SPEEDMASTER



Stop overworking the engine and pump during bypass.

Decelerator reduces engine speed when pump head pressure drops below 215 PSI, reduces flow during bypass, slows recirculation heat build-up.



- PSI: 3500
- Temperature: 300°F
- A Major System Saver for Gas Engine Units
- Machined-Brass Body
- Stainless-Steel Gland Components
- 1/4" Male Connect
- Viton Seals
- 42" Lined and Covered Control Cable
- Engine Speeds Infinitely Adjustable for "Fine Tuned" System Performance

PART NO.	DESCRIPTION
8.903-840.0	Throttle Control

VOLTMETERS



- Designated for OEM or Replacement
- Accuracy to + 5%
- Metal Case
- Rugged and Weather-Resistant
- Bright Stainless Bezel
- Utilize as Constant Monitor or as Test Instruments
- Fits 2-1/16" Mounting Hole

PART NO.	DESCRIPTION
8.712-159.0	Voltmeter 120V

TACH/HR METER



PART NO.	DESCRIPTION
8.904-540.0	12VDC,SENDEC W/Magnet Tool

TEMPERATURE GAUGE



Dial thermometers.



- 3" Diameter Dial -Stainless-Steel Case
- Shatter-Resistant Polycarbonate Lens
- Stainless-Steel Stem (2.5")
- 1/2" MPT Connector
- Accuracy to within 3% of Dial Range (50-500=+ 6.8°F)

PART NO.	DESCRIPTION
8.712-488.0*	Temp Gauge +50° to 500°F

*"Thermwell" to be used with dial thermometers in systems over 300 PSI. For best results, fill Thermwell with liquid silicon or glycol to increase sensitivity and accuracy of readings.

TEMPERATURE GAUGE - THERMWELL

For use with above temperature gauge.



- PSI: 2000 Collapse Protection
- 1.75" Immersion Length
- Stainless-Steel, 3/4" MPT x 1/2" FPT

PART NO.	DESCRIPTION
8.712-489.0	Thermwell for 8.712-488.0



- Elapsed Time
- No Battery Required
- Digital Quartz Accuracy (+ .02%)
- Extremely Rugged and Tamperproof
- Sealed from Dirt and Moisture
- Requires 2" Panel Cutout

PART NO.	DESCRIPTION
8.749-183.0	EL 5-80V AC/DC 50/60 Hz
9.802-283.0	24-240V AC - Rectangle
8.904-540.0	Tach/Hour 12V DC with Magnet Tool

BRIGGS & STRATTON ENGINES - GASOLINE

Briggs & Stratton's top-of-the-line engines have proven performance in the pressure washer industry. They contain the power to complete any job faster and easier with less wear and tear on major engine components.





- Easy, Quick-Starting
- OilGaurd® Low-Oil Shutdown
- State-of-the-Art Carburetion System

■ Large Fuel Tank

PART NO.	HP	SHAFT DIA	START	CHARGE RATE	FUEL TANK	MODEL NO.
8.754-819.0	18	1"	Electric	20 Amp	N/A	Vanguard

Note: Mufflers for the above engine are sold separately. See Briggs & Stratton Engine Parts section below.

BRIGGS & STRATTON ENGINE PARTS

Genuine Brigss & Stratton replacement parts are available. Please provide engine model / type / code to ensure proper fit of replacement parts. All are authorized manufacturer replacement parts.






8.701-826.0

9

8.701-823.0



PART NO.	DESCRIPTION
8.701-826.0	Briggs 16/18 HP Vanguard, Oil Filter
8.701-820.0	Briggs 5 HP Industrial, Air Filter
8.701-823.0	Briggs 16/18 HP Vanguard, Air Filter
8.718-021.0	Sparkplug, Vanguard, RC12YC

HONDA ENGINE PARTS



Original Honda replacement parts from the factory. Filters are a great add-on to every service order. All are authorized manufacturer replacement parts.



8.701-764.0



8.701-830.0



8.701-782.0



8.701-783.0

PART NO.	DESCRIPTION
8.701-830.0	Honda 18/20 HP, Oil Filter
8.701-764.0	Honda GX160, Air Filter
8.701-780.0	Honda GX240/270, Air Filter
8.701-781.0	Honda GX340, Air Filter
8.701-782.0	Honda GX610/620, Air Filter (old style)
8.701-783.0	Honda GX610/620, Air Filter (new style)
8.718-117.0	Honda GX All, Sparkplug
8.750-737.0	Honda M20-1.50 X 3/8 FPT, Adapter

ENGINES - KOHLER LOMBARDINI - DIESEL

Kohler Lombardini water cooled diesel engines provide superior power and quiet operation.



■ Diesel Powered

■ Water Cooled

PART NO.	HP	SHAFT DIA	START	CHARGE RATE	FUEL TANK	MODEL NO.
8.753-906.0	26.8	1-1/2"	Electric	N/A	No	LDW1003, Water Cooled



ENGINE PARTS - KOHLER LOMBARDINI

Factory direct Kohler parts. All are authorized manufacturer replacement parts.





PART NO.	DESCRIPTION	ENGINE MODEL	
8.717-912.0	Oil Filter	LDW602/903/1003	
8.717-915.0	Air Filter	LDW602/903/10003	
8.717-909.0	Fuel Filter	LDW602/903/1003	

STARTER SOLENOID - 12V DC

Universal type used on many lawn and garden tractors and mowers.



- Double Terminal 5/16", 24 Studs
- Same as used on 16 HP B & S Vanguard Engines
- Rated for Intermittent Duty (i.e. for starting small gasoline engines)

VOLTAGE	REGIII	ATOR -	HEAVY-D	HTV 15V



■ Eliminates need for battery on 12 volt recoil hot water washers

PART NO.	DESCRIPTION	
8.701-691.0	12V DC Starter	

PART NO.	DESCRIPTION
9.802-531.0	Regulator, Voltage 15 Volts

KEYED IGNITION SWITCH - 12V DC



- Universal Style / 5 Pole
- Off / On Start (Spring Back to On)
- Panel Nut and Star-Lock Washer
- Two keys included
- Has two auxiliary circuits
- Universal used for small engine controls on many lawn and garden tractors, mowers

PART NO.	DESCRIPTION
8.701-689.0	Keyed Ignition Switch, 5 Pole
8.701-690.0	Keyed Ignition Switch, 6 Pole

BALDOR MOTORS - C-FACE OPEN DRIP PROOF (ODP)

Built to "industrial" specifications.



PART NO.	MOTOR HP	RPM	SHAFT DIA	BOLT CIRCLE	FRAME C-FACE	FULL LOAD AMPS	VOLTAGE	MODEL
SINGLE-PHASE M	IOTORS							
9.107-929.0	2.0	1725	5/8"		56C	16.4/8.2	115/230	EPCL1322M
8.709-754.0	3.0	3450	5/8"	5-7/8"	56C	13.7/12.5	208/230	35K316Y771A4
8.709-723.0	3.0	1725	5/8"	5-7/8"	184CZ	32/16	115/230	36G309-2761
8.709-727.0	4.0	1725	5/8"	5-7/8"	182CZ	17.5/16	208/230	36G551X401G1
8.709-728.0	4.0	3450	5/8"	5-7/8"	56C	38/21/19	115/208/230	35K316S276G1
8.709-730.0	5.0	1725	1-1/8"	7-1/4"	184TC	25/23	208/230	CL1410TM
8.709-731.0*	5.0	3450	5/8"	5-7/8"	56HCY	24/23	208/230	PCL1327M
8.709-733.0	6.0	1725	1-1/8"	7-1/4"	184TCZ	26	230	36G601X288G1
8.709-734.0	7.5	1725	1-1/8"	7-1/4"	215C	36/33	208/230	37N007X177G1

^{*} SPECIAL MOTOR/ODTF- OPEN DRIP PROOF TANDEM FAN

BALDOR MOTORS - OPEN DRIP PROOF (ODP)

Industrial-grade motors built specifically to meet or exceed the demands fo the pressure washer industry.



■ The Industry Standard









1 Phase, 56 Frame

1 Phase, 184T Frame

3 Phase, 184T Frame

1 Filase, 30 Fiaille		11	11030, 1041	rianic		J Filase,	1041 Flaine
PART NO.	MOTOR HP	VOLTAGE	RPM	SHAFT DIA	FRAME	FULL LOAD AMPS	MODEL
SINGLE-PHASE M	OTORS						
9.804-516.0	1.5	115V	1725	5/8"	56C	13.6	35R735R770G1
8.754-709.0	2.0	115V	1750	5/8"	56C	16.4	35E3197L171G1
8.754-710.0	2.0	115/230V	3470	5/8"	56C	15.6/7.8	35U075L138G1
9.107-929.0	2.0	115/230V	1725	5/8"	56C	16.4/8.2	EPCL1322M
8.715-158.0	2.3	115V	1750	5/8"	56C	18	35Q899R328G1
8.709-751.0	3.0	115/230V	1725	1-1/8"	184T	32/16	L1408TM
8.715-090.0	3.0	208/230V	1725	5/8"	56HC	12.5	35M895T356
8.715-144.0*	5.0	200V	3450	3/4"	56CZ	24.5	35V142R510G1
8.715-146.0	5.0	208/230V	3450	3/4"	56CZ		35L358S214G1
8.709-759.0*	5.0	208/230V	3450	5/8"	56/56H	23/24	PL1327M
8.709-757.0*	5.0	208/230V	1725	1-1/8"	184T	25/23	L1410TM
8.715-091.0	5.0	230V	1725	7/8"	184TCZ	23	36L306W903G1
8.715-142.0	5.0	230V	1725	1-1/8"	182TZ	23	36J800X811
9.802-337.0	6.2	200V	1725	1-1/8"	184TZ	30.7	36J468Y852
9.802-336.0**	6.2	230V	1725	1-1/8"	184TZ	26	36K907T466
8.715-102.0	7.5	230V	1725	1-3/8"	215TZ	31	37H404W885G1
8.715-163.0	8.2	208V	1740	1-3/8"	215T	36.5	37H847Y711G1
8.715-165.0	8.2	230V	1740	1-3/8"	215T	34.5	37H847Y712
8.715-168.0	8.2	230V	3450	1-1/8"	184T	32.8	36E002Y277G1
8.725-973.0	8.2	230V	1740	1-3/8"	215T	34.5	37L276Y712G1
THREE-PHASE MC	OTORS						
8.751-009.0**	5.0	575V	1750	1-1/8"	184T	5.3	EM3218T-5
8.751-004.0**	6.2	208-230/460	1750	1-1/8"	184T	17.6-17.4/8.7	36G548S590G1
8.751-014.0**	7.5	208-230/460	1770	1-3/8"	213T	20.4-19.4/9.7	EM3311T
8.750-999.0**	8.2	208-230/460	1770	1-3/8"	215T	22.2/11.1	37F614S938G1
8.751-005.0**	8.2	575V	3450	1-1/8"	184T	7.4	36G548S515G1

Note: Amp draw ratings require adequate wire size and full voltage to apply. Full load Amp ratings apply only when full rated. * SPECIAL MOTOR/ODTF- OPEN DRIP PROOF TANDEM FAN ** OPSB = Additional slotted bands to vent the heat.



MOTORS - TOTALLY ENCLOSED FAN COOLED (TEFC)



Featuring heavy-guage steel frames, ball bearings, welded base and "snap-action" starting for reliability. Built to industrial specifications.



PART NO.	MOTOR HP	RPM	SHAFT DIA	BOLT CIRCLE	FRAME / C-FACE	FULL LOAD AMPS	VOLTAGE	MODEL		
SINGLE-PHASE MOTORS										
8.709-767.0	1.5	1725	5/8"	5-7/8"	56C	12/6	115/230	PCL3514M		
8.723-881.0	2.0	1725	5/8"		56C	17.6/8.8	115/230	35W249T988G1		
8.709-774.0	2.0	3450	5/8"	5-7/8"	56C	17.6/8.8	115/230	PCL3515M		
8.709-779.0	3.0	3450	5/8"	5-7/8"	56C	13.7/12.5	208/230	PCL3519M		
8.709-784.0	5.0	1725	1-1/8"	7-1/4"	184TC	23	230	CL3612TM		
8.709-737.0	7.5	1725	1-1/8"	7-1/4"	215C	34.1/30.8	208/230	37H209T032		
8.709-793.0	10.0	1740	1-3/8"		215T	38	230	L3712T		
THREE-PHASE M	OTORS									
8.751-318.0	5.0	1750	1-1/8"	7-1/4"	184TC	13.9-13.4/6.7	208-230/460	CEM3615T		
8.751-016.0	10.0	1770	1-3/8"		215T	25.4-24/12	208-230/460	EM3714T		

MOTORS - A.O. SMITH - PRESSURE WASHER - OPEN DRIP PROOF (ODP)

Excellent power efficiency.



PART NO.	MOTOR HP	RPM	SHAFT DIA	BOLT CIRCLE	FRAME / C-FACE	FULL LOAD AMPS	VOLTAGE	MODEL
SINGLE-PHASE	MOTORS							
8.709-808.0	6.0	3600	7/8"	5-7/8"	56Y	22.0	208/230	B869

REFERENCE / CALCULATION GUIDE

Conversion Factors			Horsepov	wer (HP) Equations	QUESTIONS AND ANSWERS		
1 inch	_	25.4 mm	HP =	GPM X PSI	How fast do I turn my pu	mp to give me a desired GPM?	
1 cm	=	0.394 inch	1117 -	1460	Reauired RPM =	(Desired GPM x Rate RPM)	
1 gal H20		8.33 lbs.	DCI	HP X 1460	Required RPM =	Rated GPM	
1 oz.	_	23.35 gram	PSI =	GPM	How fast do I turn my pu	ump to give me a desired GPM?	
				HP X 1460		Motor Pulley Diameter x Motor RPM	
1 gal	=	3.79 liter	GPM =	PSI	Pump Pulley Diameter =	Pump RPM	
1 liter	=	0.2642 gal				p W	

MOTORS - WEG - PRESSURE WASHER

Built to industrial specifications.

■ Rolled Steel Platform





PART NO.	MOTOR HP	SHAFT DIA	FRAME	FULL LOAD AMPS	VOLTAGE	MODEL
				OF (ODP) - THREE-P		MODEL
8.756-425.0	5.0	1-1/8"	182/4T	14.0-12.7/6.33	190/380/208-230/460	005180T3E184T-S
8.755-598.0	5.0	1-1/8"	182/4T	14.6	200	005180T3P184T-S
8.755-604.0	7.5	1-3/8"	213/5T	20.5-18.5/9.25	190/380/208-230/460	007180T3E213T-S
8.755-606.0	7.5	1-3/8"	213/5T	21.0	200	007180T3P213T-S
8.755-599.0	10.0	1-3/8"	213/5T	28.5	200	010180T3P215T-S
8.755-605.0	10.0	1-3/8"	213/5T	27.4-24.8/12.4	190/380/208-230/460	010180T3E215T-S
8.755-600.0	15.0	1-5/8"	254/6T	42.2	200	015180T3P254T-S
8.755-601.0	20.0	1-5/8"	254/6T	56.8	200	020180T3P256T-S
8.756-431.0	20.0	1-5/8"	254/6T	55.3-50.0/25.0	208-230/460	020180T3E256T-S
					EFC) - SINGLE-PHASE MOT	
8.759-044.0	1.5	5/8"	56C		115/230	1750
8.759-045.0	2.0	5/8"	56C	16.2/8.12	115/230	1725
8.759-046.0	3.0	5/8"	56C		208/230	1725
8.759-047.0	5.0	1 1/8"	182/4T	22.7	200	1755
8.759-048.0	5.0	1 1/8"	182/4T	20.4	230	1755
8.759-049.0	5.0	3/4"	182/4TCZ		230	1755
8.759-053.0	6.2	1 1/8"	182/4TZ	27.7	200	1750
8.759-054.0	6.2	1 1/8"	182/4TZ	24.3	230	1750
8.759-057.0	7.5	1 1/8"	213/5TZ	33.1	200	1745
8.759-067.0	10.0	1 3/8"	213/5TZ		200	1750
8.759-069.0	10.0	1 3/8"	213/5TZ		230	1740
MOTORS- WEG-I	PRESSURE WA	ASHER- TOTA	LLY ENCLOS	ED FAN COOLED (T	EFC) - THREE-PHASE MOTO	ORS
8.759-050.0	5.0	1 1/8"	182/4T	14.9	200	1750
8.759-051.0	5.0	1 1/8"	182/4T	13.0/6.49	230/460	1750
8.759-052.0	5.0	1 1/8"	182/4T	5.19	575	1750
8.759-056.0	6.2	1 1/8"	182/4T		230/460	1740
8.759-059.0	7.5	1 3/8"	213/5T		200	1770
8.759-061.0	7.5	1 3/8"	213/5T		575	1770
8.759-064.0	8.2	1 3/8"	213/5T		200	1770
8.759-065.0	8.2	1 3/8"	213/5T		230/460	1770
8.759-066.0	8.2	1 3/8"	213/5T		575	1770
8.759-070.0	10.0	1 1/8"	213/5T	28.1	200	1760
8.759-071.0	10.0	1 1/8"	213/5T	24.4/12.2 A	230/460	1760
8.759-072.0	10.0	1 1/8"	213/5T	9.76	575	1760
8.759-073.0	15.0	1 3/8"	254/6T	41.9	200	1770
8.759-074.0	15.0	1 3/8"	254/6T	36.4/18.2 A	230/460	1770
8.759-075.0	15.0	1 3/8"	254/6T	14.6	575	1770
8.759-076.0	20.0	1 3/8"	254/6T	56.8	200	1765
8.759-077.0	20.0	1 3/8"	254/6T	49.4/24.7 A	230/460	1765
8.759-078.0	20.0	1 3/8"	254/6T	19.8	575	1765



SMALL ENGINE TEST EQUIPMENT



SPARK TESTER

- Connects between plug and plug wire
- Totally Contained Spark
- Engine will run with tester attached
- Neon test light verifies proper ignition
- Handy tool allow safe, easy visual inspection of ignition output



COMPRESSION TESTER

- Designed for small engines
- 2-1/2" dial reads up to 300 PSI
- 12" flexible hose to reach spark plug holes
- Adapters for 14 mm and 18 mm spark plug holes
- Built-in pressure holding / release valves

PART NO.	DESCRIPTION				
8.701-680.0	Spark Tester				
8.701-682.0	Compression Tester				

COUPLERS SECTIONS - BROWNING / LOVEJOY

Listed as individual coupler sections (half) to allow flexibility in design. For complete coupler select: Bore size for motor + Bore size for pump + Spider = Complete Coupler.

Please Note: Select halves from same series as listed in groups below. (e.g. All "090/095", "099/100")







PART NO.	DESCRIPTION	BORE
090/095 SERIES:	UP TO 3 HP ELECT	RIC OR 4 HP GAS
8.709-620.0	Coupler Half	24 mm
8.709-634.0	Coupler Half	3/4" (090)
8.709-639.0	Buna Spider for 0	90 (STD)
099/100 SERIES:	UP TO 5-7 1/2 HP	ELECTRIC OR 5-13 HP GAS
8.709-626.0	Coupler Half	3/4" (100)
8.709-625.0	Coupler Half	20 mm (100)
8.709-627.0	Coupler Half	24 mm (099)
8.709-628.0	Coupler Half	24 mm (100)
8.709-629.0	Coupler Half	1" (100)
8.709-632.0	Coupler Half	1-1/8" (100)
8.709-637.0	Coupler Half	1-3/8" (100)
8.709-633.0	Buna Spider for O	99/100 (STD)

PULLEY BUSHINGS

Split taper "H"



- Split Taper, Malleable Iron
- Keyed to Both Shaft and Hub
- Highest Torque Carrying Capacity

PART NO.	SIZE
MOTOR / ENGINE	BUSHINGS
9.802-397.0	H X 5/8"
9.803-897.0	H X 3/4"
8.715-633.0	H X 7/8"
9.802-399.0	H X 1"
9.802-400.0	H X 1-1/8"
9.802-401.0	H X 1-3/8"
8.715-638.0	H X 1-3/8" - 6B, Spline
PUMP BUSHINGS	
8.711-118.0	H X 20 mm
8.711-119.0	H X 22 mm
9.802-402.0	H X 24 mm
9.802-403.0	H X 25 mm
8.715-646.0	H X 30 mm
8.711-124.0	H X 32 mm
8.711-125.0	H X 35 mm

ENGINES, MOTORS & PULLEYS

PULLEYS

Fits Interpump, General and Admiral XLS, XDS Series pumps, plus XD3040, XD3047, XD3047, XD3055 and XD3065.







- Double Grove
- 24 mm Bore

■ 2 x A Groove

PART NO.	OD
8.711-115.0	4.0"
8.711-116.0	5.5"
8.711-117.0	6.3"

V-BELTS - SUPER "GRIPNOTCH"



- Full Line of Belts
- "V"-notched for longer life and better performance

PART NO.	SIZE	
8.715-669.0	AX26	
8.715-671.0	AX28	
8.715-672.0	AX29	
8.715-673.0	AX30	
9.804-026.0	AX31	
9.803-896.0	AX33	
9.802-407.0	AX34	
9.803-683.0	AX35	
9.802-408.0	AX36	
9.802-409.0	AX37	
9.802-410.0	AX38	
9.803-543.0	AX39	
9.804-005.0	AX40	
8.715-682.0	AX41	
9.802-411.0	AX42	
8.715-684.0	AX46	
9.802-412.0	S BX22	
9.802-413.0	BX32	
9.802-415.0	BX35	
9.802-416.0	S BX36	

PART NO.	SIZE	
8.715-698.0	BX37	
8.710-745.0	BX38	
9.802-418.0	BX39	
8.715-701.0	S BX40	
8.715-702.0	BX41	
9.802-419.0	BX42	
9.802-420.0	BX43	
9.802-421.0	BX44	
8.710-756.0	BX45	
8.715-706.0	BX46	
8.715-707.0	BX47	
8.715-708.0	BX48	
8.710-761.0	BX49	
8.715-709.0	BX50	
8.715-710.0	BX51	
8.715-712.0	BX54	
8.710-766.0	BX56	
8.715-711.0	BX52	
8.715-713.0	BX68	



PULLEYS- SHEAVES

High-quality, cast-iron pulleys, Cast design. All sizes availble.











2AK Pulley

BK Pulley

2BK Pulley


3TB Pulley

PART NO.	SIZE	OD
8.715-517.0	AK21*	2.10"
8.715-519.0	AK23*	2.30"
9.804-028.0	AK28*	2.80"
8.715-527.0	AK32H	3.25"
8.715-530.0	AK34H	3.45"
9.803-898.0	АКЗ9Н	3.75"
9.802-369.0	AK74H	7.25"
8.715-538.0	AK84H	8.25"
8.715-539.0	AK89H	8.75"
9.802-371.0	2AK32H	3.25"
9.804-047.0	2AK34H	3.45"
8.715-546.0	2AK44H	4.25"
8.715-547.0	2AK46H	4.60"
8.715-548.0	2AK49H	4.75"
8.715-549.0	2AK51H	4.95"
9.802-372.0	2AK54H	5.25"
8.715-555.0	2AK64H	6.25"
9.802-374.0	2AK74H	7.25"
9.802-375.0	2AK84H	8.25"
9.803-548.0	2AK94H	9.25"
8.715-560.0	вкзон	3.30"
9.802-377.0	ВКЗ2Н	3.35"
9.802-378.0	ВК34Н	3.55"
9.802-379.0	ВК36Н	3.75"
8.715-566.0	ВК40Н	3.95"
8.710-823.0	ВК47К	4.45"
8.710-831.0	BK52H	4.95"

PART NO.	SIZE	OD
8.710-837.0	ВК60Н	5.75"
8.715-568.0	BK65H	6.25"
8.715-570.0	ВК70Н	6.75"
8.715-571.0	BK75H	7.25"
9.802-380.0	ВК80Н	7.75"
8.715-573.0	BK85H	8.25"
8.715-574.0	ВК90Н	8.75"
8.715-576.0	2BK32H	3.35"
9.802-382.0	2BK34H	3.55"
9.802-383.0	2BK36H	3.76"
9.802-384.0	2BK40H	3.95"
9.802-385.0	2BK45H	4.25"
8.715-582.0	2BK47H	4.45"
8.715-583.0	2BK50H	4.75"
9.802-386.0	2BK52H	4.95"
8.715-5850	2BK55H	5.25"
9.803-299.0	2BK57H	5.45"
9.802-387.0	2BK60H	5.75"
9.804-060.0	2BK65H	6.25"
9.802-388.0	2BK67H	6.45"
8.715-591.0	2BK70H	6.75"
9.802-389.0	2BK80H	7.75"
8.715-593.0	2BK90H	8.75"
9.802-391.0	2BK100H	9.75"
9.802-392.0	3TB34	3.75"
9.802-394.0	3TB40	4.35"

BURNERS - BECKETT - 115V / 230V





- 6-1/4" Blower Fan, 115V and 230V
- 3,450 RPM Pump / Blower Motor
- Solid-State Ignition
- Beckett "CleanCut" Fuel Pump with Oil Valve
- Air Tube: 2-3/4"
- UL-Recognized

PART NO.	DESCRIPTON			
8.709-325.0	Beckett AFG 115			
8.709-326.0	Beckett AFG 230			

BURNER CHART - BECKETT



BURNER			MOTOR		BLOWER WHEEL		IGNITOR ASSEMBLY	
PART NO.	DESCRIPTON	BECKET NO.	PART NO.	BECKET NO.	PART NO.	BECKET NO.	PART NO.	BECKET NO.
8.709-326.0	AFG, 240V 3"	VMG202	8.750-518.0	22825U	9.802-649.0	2999U	8.751-780.0	5199701U
8.709-325.0	AFG, 120V AC	VMG902	9.802-642.0	21805U	9.802-649.0	2999U	9.802-647.0	51771U
8.709-327.0	ADC, 13.5V DC - without ICB*	VMG504	9.802-638.0	52145U	9.802-636.0	2999AU	8.751-784.0	5218301U
8.709-328.0	ADC, 13.5V DC - with ICB*	VMG505	9.802-638.0	52145U	9.802-636.0	2999AU	8.751-784.0	5218301U
8.717-071.0	SM, 120V	H01501	8.701-090.0	2364U	9.803-057.0	2383U	9.803-060.0	51824U
8.717-090.0	SM, 240V	H01301	8.701-093.0	21344U	9.803-057.0	2383U	8.751.781.0	5199702U

^{*}Ignition Control Board

BURNER			FUEL PUMP		SOLENOID WITH CORD SET		TUNE UP KIT	
PART NO.	DESCRIPTON	BECKET NO.	PART NO.	BECKET NO.	PART NO.	BECKET NO.	PART NO.	BECKET NO.
8.709-326.0	AFG, 240V AC	VMG202	9.802-644.0	2184403U	8.900-082.0	N/A	8.723-715.0	578730
8.709-325.0	AFG, 120V AC	VMG902	9.802-645.0	2184405U	8.900-081.0	N/A	8.723-715.0	578730
8.709-327.0	ADC, 13.5V DC - without ICB*	VMG504	9.802-562.0	2184402U	8.900-080.0	N/A	8.723-715.0	578730
8.709-328.0	ADC, 13.5V DC - with ICB*	VMG505	9.802-562.0	2184402U	8.900-080.0	N/A	8.723-715.0	578730
8.717-071.0	SM, 120V	H01501	9.802-645.0	2184405U	8.900-081.0	N/A	8.723-715.0	578730
8.717-090.0	SM, 240V	H01301	9.802-644.0	2184403U	8.900-082.0	N/A	8.723-715.0	578730

^{*}Ignition Control Board

BURNERS - BECKETT 14V DC



- 14V, Solid-State Ignition
- 1/6 HP
- 3,450 RPM



- Max Rate 2.5 GPH
- Beckett "CleanCut" Fuel Pump with Oil Valve

PART NO.	DESCRIPTION	OIL VALVE	ELECTRIC EYE	MOTOR RPM
8.709-327.0	Beckett, 13.5V, VMG504	Yes	-	3450
8.709-328.0	Beckett, 13.5V, VMG505	Yes	Yes	3450

Note: Proper operation requires an engine with 16+ Amp alternator and deep-cycle battery on nightly, overnight recharge





FLEX COUPLINGS - BECKETT





PART NO.	BECKETT NO.	DESCRIPTION
9.802-648.0	2454	A/AF/AFG/NX
9.803-058.0	2433	5/16" X 1/2" SR/SF/SM/CF
9.802-637.0	2140501U	12V DC ADC

BURNER PARTS - BECKETT - MISC REPAIR



PART NO.	BECKETT NO.	DESCRIPTION
9.802-651.0	31332	Mntg Flange Gasket, 323005
8.701-059.0	578726	Electrode Insitr Assy,- SDC
8.701-063.0	5432	Flange, Adj, with Gasket (All)
8.723-912.0	5850	Flange, Split, Adj, with Gasket
8.701-070.0	31653	Gasket, Universal Flange (Replaces 3616)
9.802-653.0	31802	Gasket, Mtg Flange, 4 slot Square (Replaces 3416)
8.701-085.0	5717 (51400)	Knurled Nut Kit ADC
8.701-134.0	51304	Gasket Kit, Xfmr Mntg -A/AF/AFG/NX
9.802-676.0	7006U	Cad Cell Eye with leads-A/AF/AFG/NX/SR/SF
8.701-137.0	7556A0000U (7556A)	Burner Control, 12V DC
8.701-133.0	3245	Spring, Xfmr Contact
8.701-074.0	5151501	Air Band, 8 Slot- A/AF/AFG

BURNER PARTS - BECKETT - ELECTRODE / INSULATOR ASSEMBLY





PART NO.	BECKETT NO.	DESCRIPTION
9.802-668.0	5780	Electrode Insulator Kit: AF/AFG/AR/SF/SR
8.717-978.0	578728	Electrode Insulator Assembly EA17305H-ADC
9.802-669.0	578711	Electrode Insulator Assembly EA13602J withContact
9.802-670.0	578727	Electrode Insulator Assembly EA15602J

BURNER CONTROLLER AND CONTRACTOR TOOL - GENISYS™



Advanced burner control, 120V AC primary safety control for residential and light commercial oil burners.



PART NO.	BECKETT NO.	DESCRIPTION
8.751-335.0	7505A	Genisys Controller
8.726-018.0	52082U	Genisys Contractor Tool

BURNERS - WAYNE



115V AND 220V WAYNE BURNER

- 75 to 3 GPH Firing Rates
- Solid-State Ignition (Low Amp)
- 3,450 RPM Pump / Blower Motor
- "A"-Type Suntec Fuel Pump

12V WAYNE BURNER CHART

- 12V Solid-State Ignitor
- 3,450 RPM Fuel Pump

- UL-Recognized
- High-volume 6-1/4" blower on 220V unit, 5-3/16" blower on 110V unit
- 3-3/4" air tube with adjustable flange for maximum versatility





PART NO.	DESCRIPTON	
8.709-317.0	115V AC Burner with Oil Valve - EHASR	
8.709-318.0	230V AC Burner with Oil Valve - EHASR	
8.709-319.0*	12V DC Burner with Oil Valve - MSRDC	

*Proper operation requires an engine with 16+ Amp alternator and deep-cycle battery on nightly, overnight recharge

BURNER CHART - WAYNE



PART NO.	DESCRIPTON	IGNITOR	TRANSFORMER	MOTOR
8.709-317.0	Wayne 115V	8.700-802.0 079111	8.700-804.0 079115	8.701-095.0 079612
8.709-318.0	Wayne 220V	N/A N/A	8.700-809.0 079123	8.701-094.0 079611
8.709-319.0	Wayne 12V	8.700-807.0 079120 Includes	N/A N/A	8.700-739.0-FASCO 079021 8.750-715.0-MET to FASCO

Note: 8.700-721.0 - Coupling for 8.700-740.0 FASCO motor used on MET to FASCO converted burner

8.700-720.0 - Adapter Bushing to allow MET blower wheel to work with FASCO motor

8.700-740.0 - Conversion Kit, use MET to FASCO conversion kit if 12V burner motor cannot be identified.

The kit contains the following parts: 8.700-739.0 Motor, 8.700-720.0 Adapter Bushing, 8.700-682.0 Adapter Plate, 8.700-721.0, Coupling, 8.700-691.0 Screws (2), 8.700-104.0 Nuts

PART NO.	DESCRIPTON	BLOWER WHEEL	FUEL PUMP	SOLENOID VALVE	ELECTRODE ASSEMBLY
8.709-317.0	Wayne 115V	8.700-730.0 079005	8.700-749.0 079030	8.700-779.0 079062	8.700-770.0 079052
8.709-318.0	Wayne 220V	8.700-731.0 079006	8.700-749.0 079030	8.700-780.0 079063	8.700-770.0 079052
8.709-319.0	Wayne 12V	8.700-727.0-FASCO 079003 2.44"W x 2.53" T 5/16" Shaft 8.700-728.0 (079003A) MET 3.44" W x 4.25" T 1/2" Shaft	8.700-749.0 079030	8.700-782.0 079064	8.700-774.0 079056 with 8.700-721.0 coupling for converting from MET to FASCO

Note: 8.700-721.0 - Coupling for 8.700-740.0 FASCO motor used on MET to FASCO converted burner

8.700-720.0 - Adapter Bushing to allow MET blower wheel to work with FASCO motor

8.700-740.0 - Conversion Kit, use MET to FASCO conversion kit if 12V burner motor cannot be identified.

The kit contains the following parts: 8.700-739.0 Motor, 8.700-720.0 Adapter Bushing, 8.700-682.0 Adapter Plate, 8.700-721.0, Coupling, 8.700-691.0 Screws (2), 8.700-104.0 Nuts



BLOWER WHEELS - WAYNE





PART NO.	WAYNE NO.	WIDTH X OD	SHAFT SIZE
8.700-730.0	20288-SER	3.44" X 5.25"	1/2"
8.700-731.0	21854-SER	4.00" X 6.25"	1/2"
8.700-726.0	20673-SER	3.12" x 4.25"	1/2"
8.700-727.0	101317-SER	2.44" X 4.53" (FASCO)	5/16"
8.700-728.0	21427-SER	3.44" X 4.25" (MET)	1/2"

BURNER REPAIR PARTS / COMMON - BECKETT & WAYNE



ì			
9			
_	ī	_	•

PART NO.	DESCRIPTION
8.701-054.0	Oil Line, 6.5", Copper
9.802-667.0	Oil Line, 8", Copper
8.701-053.0	Oil Line, 9.5", Copper
8.700-784.0	Brass 90° Elbow 1/8" Flare, 1/8" MPT
8.700-785.0	Brass 90° Elbow 3/16" Flare, 1/8" MPT
8.700-738.0	Oil Pressure Gauge 0-200 PSI
8.700-768.0	(28737-1) Nozzle Adapter
8.705-063.0	Straight Thru Double Nipple 1/8" x 1/8"
8.700-777.0	Coupler End (J Pump 7/16")

BURNER REPAIR PARTS - WAYNE





PART NO.	WAYNE NO.	DESCRIPTION
8.700-774.0	31156	Crown Burner Tune-up Kit
8.700-770.0	14733-001	Electrode Assembly (Pair)
8.700-743.0	12945	Buss Bar - G Shape
8.700-754.0	14344	Burner Gasket- 4" (E-Series)
8.700-692.0	12484	Universal Flange Gasket- 7 3/8" x 4 5/16"
8.700-735.0	20372	Burner Housing (E-Series)
8.700-736.0	2689-SER	Adj. Flange Kit with Gasket-Serv
8.700-776.0	13279	Shaft Coupler - 5/16"(Green) x 1/2" (Gray) - 4.33" long
8.700-733.0	13360	Transformer Clip Screw, 5/16"-15
8.700-734.0	13038	Transformer Hold Down Clip
8.700-729.0	2668-002	Outer Air Band (8 Hole)
8.700-732.0	2669-002	Inner Air Band (8 Hole)
8.700-714.0	31702-014	Gun Assy, F/307007
8.700-680.0	21913-SER	Nzl Adaper with Legs MSR / DC

BURNER MOTORS



48M 5.75" Diameter

PART NO.	CAPACITOR	RPM	HP	FLANGE	VOLTAGE	WAYNE / BECKETT
9.802-642.0	Υ	3450	1/7	48M	115V	20627 / 21805U
8.700-739.0		4500	1/5	48M	12V DC	21993-005 / N/A
9.802-638.0	Kit	3450	1/6	48M	13.5V	N/A / 52145U
8.701-090.0		3450	1/4	48N	115V	N/A / 2364U
8.701-091.0		3450	1/4	48N	12V	N/A / 52146U
8.701-093.0	Υ	3450	1/4	48N	115/240V	N/A / 21344
8.701-094.0		3450	1/5	48N	240V	21328 / 21173U
8.701-095.0		3450	1/5	48N	115V	20554 / 2900U
UNIVERSAL						
8.700-741.0		3450	1/7	48M	110-60 Hz	
8.700-744.0		3450	1/5	48N	110/240V	Canacitor Start

48N 7.25" Diameter

BURNER TUNE UP KIT - BECKETT

Fits all Beckett Burners with 3" or 3-5/8" air tube.





KIT CONTAINS:

- Four Becket Electrodes
- Two Couplings
- One Fuel Line
- T-Gauge

PART NO.	DESCRIPTION
8.723-715.0	Beckett Burner Tune-up Kit

BLOWER WHEELS - BECKETT





PART NO.	DESCRIPTION	SHAFT SIZE
9.803-057.0	6-1/4" D x 3-7/16" W	1/2", SR/SF/SM
9.802-649.0	4-1/4" D x 2-1/2" W	1/2", AFG/ADC
9.802-636.0	4-1/4" D x 2-7/16" W	1/2" & 5/16", AFG/ADC

FUEL CONDITIONER AND SOOT REMOVER

Red Devil eliminates soot build-up.



- Easy to Use just add to burner fuel
- Keeps burner at top efficiency
- 1 oz. Per 10 Gallons

PART NO.	DESCRIPTION
8.704-625.0	Pint (16 oz.)
8.704-626.0	Quart

FUEL PUMP - BECKETT CLEANCUT

Simple design provides faster cleaning, more reliable cut-offs, and cut-ons. Cleaner operation - less soot.

More reliable - fewer moving parts. Reduced motor load in start-up. Higher capacity - 4 GPH at 100 PSI.



- PSI: 100-200
- Factory Set PSI: 100
- Inlet Pressure PSI: 10
- Rated Speed: 3,600 RPM

PART NO.	DESCRIPTION
9.802-645.0	110V
9.802-644.0	220V (includes built-in solenoid cordset)
9.802-562.0	12V
9.802-646.0	Valve Stem Kit (21877U)

SOOT PUMP

Tool for measuring the soot number in the exhaust of HDS appliances.



PART NO.	DESCRIPTION
6.775-001.0	Soot pump



BURNER IGNITORS - BECKETT





- Solid-State Technology
- 14,000V Spark

■ Only .35 AMP @ 110V

■ 1.7 lbs.

PART NO.	BECKETT PART NO	NO MOUNTING	VOLT
9.802-647.0	51771U	AFG/Lo Amp	120V
9.803-060.0	51824U	SM/SF	120V
8.751-780.0	5250001U	AF/AFG/NX/CF375	240V
8.751-781.0*	5250002U	SM/SF/CF500/CF800	240V
8.751-784.0	5270001U		12V DC
8.751-785.0	517780	SDC w/Con BD	12V DC
8.751-788.0	5218309U	ADC/ SDC	12V DC
8.701-140.0	51779U	SDC w/o CB	12V DC

^{*}Complete with timer

FUEL PUMPS & REPLACEMENT PARTS - SUNTEC





■ Use with Single- or Dual-Line Systems

■ Pressure Adjustment Valve

PART NO.	SUNTEC NO.	GPH	RPM	ROTATION	
STANDARD PUM	IPS	1.00			
8.700-749.0	A2VA7116	3.0	3450	RH	
8.700-789.0	A2VD-7119	3.0	3450	LH	
8.700-756.0	A1YA7912	7.0	1725	RH	
8.700-757.0	A2YA7916	7.0	3450	RH	
8.700-748.0	A2RA7710	2.5		RH	
PUMPS WITH SO	DLENOID				
8.754-706.0	OL35, 120V	3.0			
8.700-758.0	A2VA3106-N221R/ 12-24V	4.0	3450	RH	
8.700-760.0	A2VA-3106-N721R / 230V	3.0	3450	RH	
PUMP REPLACEMENT PARTS					
8.700-764.0	3715732 (A2VA 7116)	Pump Fuel Screen			
8.717-878.0	3715744 (A2AVA 7916)	Screen with Gasket			
8.700-765.0	3779801 Gasket Cover	Gasket Cover			

BURNER TRANSFORMERS - ALLANSON





- 10,000V Spark
- 2.2 AMP @ 120V

FranceFormer
I I dilicci di ilici

■ 8.5 lbs.

PART NO.	ALLANSON NO.	WAYNE NO.	MOUNTING	VOLT	
8.700-804.0	2721-620	23101/E	Side / EH-EHA	120V	
8.700-806.0	2721-628G	23101/M	Back / M-MSR	120V	
8.700-809.0	2744-620	23103/E	Side / EH-EH	230V	
8.700-798.0	2729-619	23103/M	Back	220V	

BURNER IGNITOR / BASE PLATES - BECKETT






PART NO.	BECKETT NO.	DESCRIPTION	VOLT
8.701-116.0	51830U	A, Trans / Ign	Kit
8.701-117.0	51831U	S, Trans / Ign	Kit
8.701-118.0	51833U	E, Trans / Ign	Kit
8.701-119.0	51829U	M, Trans / Ign	Kit
8.751-780.0	5250001U	AF/AFG/NX/CF375	240V
9.803-060.0	51824U	A-SF-SR-SM	120V
8.751-781.0	5250002U	SM/SF/CF500/CF800	240V

BURNER IGNITORS - WAYNE



■ 14,000V Spark



■ 1.7 lbs.



DART NO	WAYNE NO	MOUNTING	WOLT
PART NO.	WAYNE NO.	MOUNTING	VOLT
8.700-810.0	23101-FH	Side, FH-FHA	120V
8.700-802.0	101295-SERE	Side, EH/EHA/EHASR	120V
8.700-803.0	101295-SERM	Back, M/MH/MSR	120V
8.700-801.0	31812-002	Back, M-MSR	220V
8.700-807.0	31812-003	Bottom, W/M	12V
8.700-820.0	31813-003	Side Mount (E)	12V

BURNER IGNITORS - ALLANSON



PART NO.	ALLANSON NO.	WAYNE NO.	MOUNTING	VOLT
8.700-800.0	2280-620S	31813-002	Side, E/EH/EHA/EHS	220V

FUEL SOLENOID VALVE - 12V DC KIP



- Brass Body
- 12V DC Coil
- 1/8" NC, FPT, I/O Ports
- Conduit Connector
- 5/64" Orifice = 6 Watt

PART NO.	DESCRIPTION
8.701-120.0	Fuel Solenoid Valve

FUEL SOLENOID VALVES / COILS -**SUNTEC**







- PSI: 300
- 1/8" FPT Inlet
- Unitized mounting on Suntec fuel pumps
- Uses Standard Suntec Coil

PART NO.	DESCRIPTION
8.700-779.0	110V Oil Valve, Non-Delay, R642NL
8.700-780.0	220V Oil Valve, Non-Delay, R753NL
8.700-782.0	12 Oil Valve, Non-Delay, R261NL
8.900-081.0	110V Coil with Cord Set
8.900-082.0	230V Coil with Cord Set
8.900-080.0	12/24 Coil with Cord Set
9.802-640.0	115V Coil without Cord Set
9.802-641.0	230V Coil without Cord Set
8.700-794.0	12/24V DC Coil without Cord Set
8.700-795.0	Cord Set Only
8.900-079.0	8mm Nut for Old Style Coil

GAS JETS



PART NO.	DRILL SIZE	ORIFICE SIZE	USE
GAS JETS FOR BU	JRNER RINGS	5	
8.717-377.0	#63	(.037)	LP
8.710-219.0	#66	(.033)	LP
9.802-684.0	#69	(.029)	LP
8.710-214.0	Blank (Must	t Be Drilled)	

GAS VALVES - HONEYWELL













9.803-615.0

9.803-616.0

8.718-048.0

9.803-612.0

8.905-681.0

8.930-332.0

9.803-613.0

9.803-610.0

PART NO.	DESCRIPTION
NATURAL GAS	- SMALL MILLIVOLT VALVE
9.803-617.0	NG Pilot for Piezo Ignitor
9.803-611.0	Thermopile/Powerpile with Spade Termimals, 47"
9.803-614.0	LP Conversation Kit (NG to LP)
8.718-116.0	NG Conversion Kit (LP to NG)
NATURAL GAS	- SMALL ELECTRONIC IGNITION VALVE
9.803-616.0	Natural Gas Electronic Ignition Valve, 24V, 3/4" NPT
9.803-618.0	LP Converson Kit (NG to LP)
8.718-112.0	NG Conversion Kit (LP to NG)

PART NO.	DESCRIPTION		
NATURAL GAS /	NATURAL GAS / LP - LARGE ELECTRONIC IGNITION VALVE		
8.718-050.0	NG Diaphragm Gas Valve, Single Stage Pressure Regulating, Slow Opening (No LP Conversion Kit)		
8.718-048.0	LP Diaphragm Gas Valve, Single Stage Pressure Regulating. Slow Opening. (No NG Conversion Kit)		
9.803-612.0	Pilot Gas Solenoid Valve, 24V, 1/4" Small Normally Closed		
ELECTRONIC IGNITION			
9.803-613.0	Electronic Ignition Controller Back 90 sec TFI		
9.803-610.0	Pilot, Electronic Ignition		
9.803-562.0	48" Ignition Cable		

60" Ignition Cable

69" Ignition Cable

GAS REGULATORS - NATURAL GAS

■ A.G.A. Design Certified

■ CGA Certified



PART NO.	SIZE	VOLTAGE	MODEL NO.	BRAND
9.803-616.0	3/4"	24V	VR8304M4002B	Honeywell
8.710-182.0	3/4"	120V	36C03A-410	White Rogers
8.718-099.0	3/4"	24V	SV9601M4167/B	Honeywell
8.710-174.0	1"	24V	700-059	Robert Shaw with Pilot
9.802-674.0	1"	24V	7000 DERHC, 5N2-501-531	Robert Shaw

GAS REGULATORS - LP GAS CONVERSION KITS

■ A.G.A. Design Certified

CGA Certified

PART NO.	MODEL NO.	DESCRIPTION
9.803-614.0	391937/U	Fits: V/VR800 Series, Standard & Delay Models
9.803-618.0	393691/U	Fits Honeywell: VR/SV Series
8.710-187.0	1751-013	Fits Robert Shaw: 7000, 7010, 7100, 7200 and 7222

GAS REGULATORS - LP



8.717-746.0



9.802-633.0

- High Quality Fischer Regulators
- High and Low Pressure

PART NO.	MODEL NO.	DESCRIPTION
8.717-752.0	LV404B96	LP,F.POL X 3/4" F.NPT, 525K BTU
8.717-746.0	R122HAAJ	1st Stage, High Pressure, 1,180,000 BTU
8.717-747.0	R622CFF	2nd Stage, Low Pressure- Reducing
8.717-749.0	R632CFF	Integral 2 Stage, 1/4" x 3/4" NPT
9.802-633.0		LP Assembly, Includes High / Low Pressure Assy

PROPANE GAS HOSE



PART NO.	DESCRIPTION
8.711-853.0	LP 1/4" x 10' POL x POL
8.711-856.0	LP 1/2" x 48", MNPT Both Ends
8.711-854.0	LP 1/4" x 18" MPOL Both Ends
8.711-864.0	LP 3/4" x 16" MNPT Both Ends

DRAFT DIVERTERS & RAIN CAPS



- Prevents backdrafts and keeps cold air out
- Fits on Standard Stove Pipe
- Hot Dipped Galvanized
- Prevents water from running down vent pipes

PART NO.	DESCRIPTION
8.717-764.0	8" Oil Fired, Barometric Dampener
8.717-728.0	8", Round Gas-Fired
9.801-040.0	10", Round Gas-Fired
8.717-730.0	12", Round Gas-Fired
RAIN CAPS	
9.105-845.0	8", Exhaust Stack, Cap
8.717-731.0	10", Exhaust Stack, Cap
8.717-732.0	12", Exhaust Stack, Cap

GAS VALVES - 1" BY ROBERT SHAW

Universal type for new equipment or replacement.



- Manual Gas Cock
- Auto-Pilot Safety Valve
- Wiring and Hardware Included
- Pilot Gas Filter
- 600,000 BTU LP Gas 720,000 BTU Natural Gas
- 1" Inlet / Outlet

*Kit is for 8.710-174.0 and includes: gas valve, flame sensor, electrode pilot relight and harness

PART NO.	DESCRIPTION
8.710-179.0	24V AC/NG, Standing Pilot
8.710-174.0	24V AC/NG, Electronic Ignition
8.710-181.0	700 MV, Natural Gas
8.710-163.0*	24V Retrofit Kit (NG) 720,000 BTU

LP Conversion Kit Below

GAS PILOTS



PART NO.	DESCRIPTION
8.718-100.0	LP Orifice HS, Q3480C 1437 (829858)
8.718-101.0	NG Orifice HS Q3480C 1205 (829977)
8.718-011.0	NG Pilot Burner & Ignition with Orifice (Q345A1073/B)
9.802-685.0	NG Pilot 77623, A3-S, 77623 2SH60
9.803-610.0	NG Electronic Ignition Pilot

GAS CONVERSION KITS - LP - ROBERT SHAW



■ Convert NG to LP

PART NO.	DESCRIPTION
8.710-187.0	1" LP Conversion Kit
8.710-164.0	LP Orifice .010

POWERED DAMPER



PART NO.	DESCRIPTION
8.749-806.0	Powered Damper, 10"
8.753-171.0	Powered Damper, 12"
8.755-253.0	Powered Damper, 8"
8.749-807.0	Wiring Harness for Powered Damper

FUEL NOZZLES - DELAVAN - 45° & 60°

Select proper size for maximum burner efficiency.



PART NO.	DESCRIPTION	GPH
45° W HOLLOW		
8.701-013.0	Delavan Fuel Nozzles	2.25
45° A HOLLOW		
8.701-001.0	Delavan Fuel Nozzles	1.25
8.701-002.0	Delavan Fuel Nozzles	1.35
8.701-004.0	Delavan Fuel Nozzles	1.75
8.701-005.0	Delavan Fuel Nozzles	2.00
8.701-014.0	Delavan Fuel Nozzles	2.25
45° B HOLLOW		
8.701-009.0	Delavan Fuel Nozzles	0.90
8.701-008.0	Delavan Fuel Nozzles	1.25
8.700-847.0	Delavan Fuel Nozzles	1.35
8.701-010.0	Delavan Fuel Nozzles	1.50
8.701-012.0	Delavan Fuel Nozzles	2.25
60° W		
8.740-139.0	Delavan Fuel Nozzles	1.25
8.701-007.0	Delavan Fuel Nozzles	1.35
8.701-015.0	Delavan Fuel Nozzles	1.50
8.701-016.0	Delavan Fuel Nozzles	1.65
8.701-017.0	Delavan Fuel Nozzles	1.75
8.701-018.0	Delavan Fuel Nozzles	2.00
8.701-019.0	Delavan Fuel Nozzles	2.25
60° AR		
8.717-286.0	Delavan Fuel Nozzles	1.20
8.717-287.0	Delavan Fuel Nozzles	1.50

PART NO.	DESCRIPTION	GPH
60° A HOLLOW		
8.700-850.0	Delavan Fuel Nozzles	0.50
8.700-851.0	Delavan Fuel Nozzles	0.60
8.700-852.0	Delavan Fuel Nozzles	0.65
8.700-853.0	Delavan Fuel Nozzles	0.85
8.700-854.0	Delavan Fuel Nozzles	0.90
8.700-855.0	Delavan Fuel Nozzles	1.00
8.700-856.0	Delavan Fuel Nozzles	1.10
8.700-857.0	Delavan Fuel Nozzles	1.20
8.700-858.0	Delavan Fuel Nozzles	1.25
8.700-859.0	Delavan Fuel Nozzles	1.35
8.717-328.0	Delavan Fuel Nozzles	1.50
8.700-861.0	Delavan Fuel Nozzles	1.65
8.700-862.0	Delavan Fuel Nozzles	1.75
8.700-863.0	Delavan Fuel Nozzles	2.00
8.700-864.0	Delavan Fuel Nozzles	2.25
8.700-865.0	Delavan Fuel Nozzles	2.50
8.700-866.0	Delavan Fuel Nozzles	2.75
8.700-867.0	Delavan Fuel Nozzles	3.25
60° B SOLID		
8.700-868.0	Delavan Fuel Nozzles	0.50
8.700-870.0	Delavan Fuel Nozzles	0.75
8.700-871.0	Delavan Fuel Nozzles	0.85
8.700-872.0	Delavan Fuel Nozzles	0.90
8.700-873.0	Delavan Fuel Nozzles	1.00
8.700-874.0	Delavan Fuel Nozzles	1.10
8.700-875.0	Delavan Fuel Nozzles	1.20
8.700-876.0	Delavan Fuel Nozzles	1.25
8.700-877.0	Delavan Fuel Nozzles	1.35
8.700-878.0	Delavan Fuel Nozzles	1.50
8.700-879.0	Delavan Fuel Nozzles	1.65
8.700-880.0	Delavan Fuel Nozzles	1.75
8.700-881.0	Delavan Fuel Nozzles	2.25
8.700-882.0	Delavan Fuel Nozzles	2.50
8.700-883.0	Delavan Fuel Nozzles	2.75
8.700-884.0	Delavan Fuel Nozzles	3.50
8.700-885.0	Delavan Fuel Nozzles	4.00
9.841-677.0	Delavan Fuel Nozzles	6.50
8.700-886.0	Delavan Fuel Nozzles	8.00

FUEL NOZZLES - DELAVAN - 70°

Select proper size for maximum burner efficiency.



PART NO.	DESCRIPTION	GPH
70° AR-D		
8.756-262.0	Delavan Fuel Nozzles	1.25
8.756-263.0	Delavan Fuel Nozzles	1.50
8.756-264.0	Delavan Fuel Nozzles	1.75
8.756-265.0	Delavan Fuel Nozzles	2.00
70° AR-DZ		
8.755-760.0	Delavan Fuel Nozzles	1.25
8.755-761.0	Delavan Fuel Nozzles	1.50
8.755-762.0	Delavan Fuel Nozzles	1.75
8.755-763.0	Delavan Fuel Nozzles	2.00
70° AZ		
8.755-845.0	Delavan Fuel Nozzles	1.75
70° WZ		
8.755-766.0	Delavan Fuel Nozzles	1.75
8.755-764.0	Delavan Fuel Nozzles	2.00
8.755-765.0	Delavan Fuel Nozzles	2.25

PART NO.	DESCRIPTION	GPH
70° A HOLLOW		
8.700-887.0	Delavan Fuel Nozzles	.50
8.700-888.0	Delavan Fuel Nozzles	.75
8.717-275.0	Delavan Fuel Nozzles	.85
9.105-583.0	Delavan Fuel Nozzles	1.10
8.717-277.0	Delavan Fuel Nozzles	1.20
8.723-910.0	Delavan Fuel Nozzles	1.35
8.717-278.0	Delavan Fuel Nozzles	1.50
8.700-892.0	Delavan Fuel Nozzles	1.75
9.106-987.0	Delavan Fuel Nozzles	2.00
8.717-280.0	Delavan Fuel Nozzles	2.25
8.700-893.0	Delavan Fuel Nozzles	2.50
8.700-894.0	Delavan Fuel Nozzles	3.00
8.700-895.0	Delavan Fuel Nozzles	3.25
70° B SOLID		
8.700-896.0	Delavan Fuel Nozzles	.75
8.700-897.0	Delavan Fuel Nozzles	1.00
8.700-899.0	Delavan Fuel Nozzles	1.25
8.700-900.0	Delavan Fuel Nozzles	1.35
8.700-902.0	Delavan Fuel Nozzles	1.65
8.700-903.0	Delavan Fuel Nozzles	1.75
8.700-904.0	Delavan Fuel Nozzles	2.00
8.700-905.0	Delavan Fuel Nozzles	2.25
8.700-907.0	Delavan Fuel Nozzles	3.50
8.700-908.0	Delavan Fuel Nozzles	4.00
8.700-909.0	Delavan Fuel Nozzles	5.00
8.700-910.0	Delavan Fuel Nozzles	8.00

FUEL NOZZLES - DELAVAN - 80°

Select proper size for maximum burner efficiency.

D4.DT 110			45 11
PART NO.	DESCRIPTION		GPH
80° W			
8.723-697.0	Delavan Fuel		.85
8.723-698.0	Delavan Fuel		.90
8.701-022.0	Delavan Fuel		1.00
8.723-699.0	Delavan Fuel		1.10
8.723-700.0	Delavan Fuel	Nozzles	1.20
8.701-027.0	Delavan Fuel	Nozzles	1.25
8.723-701.0	Delavan Fuel	Nozzles	1.35
8.701-021.0	Delavan Fuel	Nozzles	1.50
8.701-020.0	Delavan Fuel	Nozzles	1.65
8.701-023.0	Delavan Fuel	Nozzles	1.75
8.717-342.0	Delavan Fuel	Nozzles	2.00
8.701-025.0	Delavan Fuel	Nozzles	2.25
8.701-026.0	Delavan Fuel	Nozzles	2.50
8.701-028.0	Delavan Fuel	Nozzles	2.75
8.701-029.0	Delavan Fuel	Nozzles	3.00
8.701-030.0	Delavan Fuel	Nozzles	3.25
8.701-031.0	Delavan Fuel	Nozzles	3.50
8.701-036.0	Delavan Fuel	Nozzles	4.00
80° AZ			
8.754-928.0	Delavan Fuel	Nozzles	1.25
8.754-894.0	Delavan Fuel	Nozzles	1.35
8.755-197.0	Delavan Fuel	Nozzles	2.00
8.756-330.0	Delavan Fuel	Nozzles	2.25
80° BZ			
8.756-861.0	Delavan Fuel	Nozzles	1.00
8.756-718.0	Delavan Fuel	Nozzles	1.25
8.756-723.0	Delavan Fuel	Nozzles	1.50
8.756-699.0	Delavan Fuel	Nozzles	2.00
8.756-759.0	Delavan Fuel	Nozzles	2.25
8.756-900.0	Delavan Fuel	Nozzles	2.50
8.754-893.0	Delavan Fuel	Nozzles	3.00
8.755-048.0	Delavan Fuel	Nozzles	3.25
8.756-697.0	Delavan Fuel	Nozzles	4.00
80° A HOLLOW			
8.700-911.0	Delavan Fuel	Nozzles	.50
8.700-912.0	Delavan Fuel	Nozzles	.60
8.700-913.0	Delavan Fuel		.65
8.700-914.0	Delavan Fuel		.75
8.700-915.0	Delavan Fuel		.85
8.717-333.0	Delavan Fuel		.90
8.700-916.0	Delavan Fuel		1.00
8.700-917.0	Delavan Fuel		1.10
8.717-323.0	Delavan Fuel		1.20
8.700-919.0	Delavan Fuel		1.25
0.700-313.0	Delayali FUEI	INUZZIES	1.∠J

PART NO.	DESCRIPTION	GPH
80° A HOLLOW	(CONTINUED)	
9.802-584.0	Delavan Fuel Nozzles	1.35
8.700-921.0	Delavan Fuel Nozzles	1.50
8.700-922.0	Delavan Fuel Nozzles	1.65
8.717-329.0	Delavan Fuel Nozzles	1.75
8.700-924.0	Delavan Fuel Nozzles	2.00
8.717-347.0	Delavan Fuel Nozzles	2.25
8.700-926.0	Delavan Fuel Nozzles	2.50
8.700-927.0	Delavan Fuel Nozzles	2.75
8.700-928.0	Delavan Fuel Nozzles	3.00
8.700-929.0	Delavan Fuel Nozzles	3.50
8.700-930.0	Delavan Fuel Nozzles	4.00
8.717-331.0	Delavan Fuel Nozzles	4.50
80° B SOLID		
8.700-931.0	Delavan Fuel Nozzles	.50
8.700-932.0	Delavan Fuel Nozzles	.60
8.700-933.0	Delavan Fuel Nozzles	.65
8.700-934.0	Delavan Fuel Nozzles	.75
8.700-935.0	Delavan Fuel Nozzles	.85
8.700-936.0	Delavan Fuel Nozzles	.90
8.700-937.0	Delavan Fuel Nozzles	1.00
8.700-938.0	Delavan Fuel Nozzles	1.10
8.700-939.0	Delavan Fuel Nozzles	1.20
8.717-350.0	Delavan Fuel Nozzles	1.25
8.717-358.0	Delavan Fuel Nozzles	1.35
8.717-351.0	Delavan Fuel Nozzles	1.50
8.700-943.0	Delavan Fuel Nozzles	1.65
8.717-352.0	Delavan Fuel Nozzles	1.75
8.717-353.0	Delavan Fuel Nozzles	2.00
8.700-946.0	Delavan Fuel Nozzles	2.25
8.700-947.0	Delavan Fuel Nozzles	2.50
8.717-330.0	Delavan Fuel Nozzles	2.75
8.717-354.0	Delavan Fuel Nozzles	3.00
8.700-950.0	Delavan Fuel Nozzles	3.25
8.700-951.0	Delavan Fuel Nozzles	3.50
8.700-952.0	Delavan Fuel Nozzles	4.00
8.717-367.0	Delavan Fuel Nozzles	4.50
8.717-357.0	Delavan Fuel Nozzles	5.00
8.700-956.0	Delavan Fuel Nozzles	6.00
8.700-953.0	Delavan Fuel Nozzles	6.50
8.700-959.0	Delavan Fuel Nozzles	9.00



FUEL NOZZLES - DELAVAN - 90°

Select proper size for maximum burner efficiency.



PART NO.	DESCRIPTION	GPH
90° W		
8.701-006.0	Delavan Fuel Nozzles	1.00
8.701-038.0	Delavan Fuel Nozzles	1.50
8.701-039.0	Delavan Fuel Nozzles	1.65
8.701-040.0	Delavan Fuel Nozzles	1.75
8.701-032.0	Delavan Fuel Nozzles	2.00
8.701-034.0	Delavan Fuel Nozzles	2.25
8.701-035.0	Delavan Fuel Nozzles	2.75
90° AZ		
8.754-890.0	Delavan Fuel Nozzles	1.00
8.754-891.0	Delavan Fuel Nozzles	1.50
8.755-053.0	Delavan Fuel Nozzles	2.00
8.755-030.0	Delavan Fuel Nozzles	2.25
8.755-052.0	Delavan Fuel Nozzles	2.75
8.755-051.0	Delavan Fuel Nozzles	4.00
90° BZ		
8.754-895.0	Delavan Fuel Nozzles	1.25
8.756-179.0	Delavan Fuel Nozzles	1.35
8.754-916.0	Delavan Fuel Nozzles	1.50
8.754-888.0	Delavan Fuel Nozzles	2.00
8.754-889.0	Delavan Fuel Nozzles	2.25
8.754-986.0	Delavan Fuel Nozzles	2.75
90° A HOLLOW		
8.700-961.0	Delavan Fuel Nozzles	.65
8.700-962.0	Delavan Fuel Nozzles	.75
8.723-911.0	Delavan Fuel Nozzles	.85
8.700-963.0	Delavan Fuel Nozzles	.90
9.802-583.0	Delavan Fuel Nozzles	1.00
8.717-332.0	Delavan Fuel Nozzles	
8.700-966.0	Delavan Fuel Nozzles	1.25
8.700-967.0	Delavan Fuel Nozzles	1.35
9.802-585.0	Delavan Fuel Nozzles	1.50
8.700-969.0	Delavan Fuel Nozzles	1.65
8.700-970.0	Delavan Fuel Nozzles	1.75
8.700-971.0	Delavan Fuel Nozzles	2.00
8.700-972.0	Delavan Fuel Nozzles	2.25
8.700-973.0	Delavan Fuel Nozzles	2.50
8.700-974.0	Delavan Fuel Nozzles	2.75
8.700-975.0	Delavan Fuel Nozzles	3.00
8.717-336.0	Delavan Fuel Nozzles	3.25

PART NO.	DESCRIPTION	GPH
90° A HOLLOW	(CONTINUED)	
8.700-977.0	Delavan Fuel Nozzles	3.50
8.700-978.0	Delavan Fuel Nozzles	4.00
8.700-979.0	Delavan Fuel Nozzles	5.00
90° B SOLID		
8.700-981.0	Delavan Fuel Nozzles	.50
8.700-982.0	Delavan Fuel Nozzles	.75
8.700-983.0	Delavan Fuel Nozzles	.85
8.700-984.0	Delavan Fuel Nozzles	1.00
8.700-985.0	Delavan Fuel Nozzles	1.10
9.802-582.0	Delavan Fuel Nozzles	1.25
8.700-987.0	Delavan Fuel Nozzles	1.35
8.700-988.0	Delavan Fuel Nozzles	1.50
8.700-989.0	Delavan Fuel Nozzles	1.65
9.802-575.0	Delavan Fuel Nozzles	1.75
9.802-576.0	Delavan Fuel Nozzles	2.00
9.802-577.0	Delavan Fuel Nozzles	2.25
9.802-586.0	Delavan Fuel Nozzles	2.50
8.700-994.0	Delavan Fuel Nozzles	2.75
8.700-995.0	Delavan Fuel Nozzles	3.00
8.700-996.0	Delavan Fuel Nozzles	3.25
8.700-997.0	Delavan Fuel Nozzles	3.50
8.700-998.0	Delavan Fuel Nozzles	4.00
8.717-374.0	Delavan Fuel Nozzles	4.50

FUEL NOZZLES - CHECK VALVE - "SNAP"

Spring-loaded "snap" check valve replaces filter element on fuel nozzle. Valve opens when fuel pump pressure reaches 130 PSI and "snaps" shut when fuel pressure drops below 130 PSI. Stops "smokey" burners at start-up and eleminates "shutdown" after burn and reduces soot build-up in coil.

- Reduces nozzle fouling caused by residual fuel in orifice
- Easy field installation in standard fuel nozzles



PART NO.	DESCRIPTION	PSI	
8.900-083.0	Snap Fuel Valve	100	
8.700-845.0	Snap Check Valve, 5/PK	130	
8.700-844.0	Snap Check Valve, 5/PK	100	

GAS VALVES - LP OR NATURAL

Universal-type for building new systems or field replacement. 750 MV, 24V or 120V controls by White-Rogers.

White Rodgers

- 335,000 BTU Max
- 3/4" Inlet / Outlet
- All adjustments and wiring connections on top of valve
- Automatic Outlet Pressure Regulator
- A.G.A. Design Certified, C.G.A. Certified



PART NO.	DESCRIPTION
8.710-172.0	Universal, 24V, Includes LP Conv. Kit (1)
8.710-182.0	Universal 120V, Includes LP Conv. Kit (2)
8.710-183.0	Universal, Standing Pilot, 750 MV (1)
8.750-110.0	3/4" NG to LP Conversion Kit
8.750-109.0	3/4" LP to NG Conversion Kit
WHITE-RODGER	S REPAIR PARTS
8.710-184.0	24V Cycle Pilot Control (347425), 1/4" Spade Terminals, High Voltage

(1) Includes two 3/4" x 1/2" all-thread plated bushings and valve instructions. (2) Includes L.P. Kit, two 3/4" x 1/2" and one 1/2" x 3/8" all-thread plated bushings and all instructions.

GAS VALVE ACCESSORY COMPONENTS

Use with both 3/4" and 1" models on this page.



8.710-190.0

PART NO.	DESCRIPTION
8.710-190.0	600/750 MV Generator 36" Length
8.710-191.0	Pilot, Universal-Kit with Standard Flame
8.718-092.0	Thermocouple, Universal, 24" Length,Cap Tube
8.710-196.0	Thermocouple, Universal, 36" Length,Cap Tube
9.802-686.0	Thermonile VNG with Spade Terminals 47" Length

INSULATION AND RIGID DISC / DONUTS

Refractory-grade ceramic Kaowool formed; retains heat inside coil for better fuel efficiency and paint protection.



PART NO.	DESCRIPTION	THICKNESS	WIDTH	LENGTH
"RIGID FORMED	" DONUT AND DISC	CS		
8.704-807.0	Donut	.88"	18" 6"/4	4"
8.704-810.0	Donut	.88"	16" 6"/4	4"
8.717-474.0	Donut		24"	
8.704-808.0	Disc	1/2"	18"	
8.704-809.0	Disc	1/2"	16"	
8.717-475.0	Disc		24"	
INSULATION BL	.ANKET			
8.901-288.0	Coil Wrap	1"	24"	4'
8.901-289.0	Coil Wrap	1"	24"	5'
8.704-800.0	Coil Wrap	1"	24"	6'
8.704-802.0	Full Roll	1/2"	24"	37.5'
8.704-805.0	Full Roll	1"	24"	25'

FLOW SWITCHES - LEGACY MV60 **& AP500**



■ Temperature: 180°F ■ 3/8" FPT Inlet / Outlet

AMP: 3. 12-250V 2 Wire Reed Horizontal & Vertical Mount ■ 62" Cord Length

DESCRIPTION PART NO. **GPM** PSI 8.933-006.0 MV-60, Vertical or 5660 10.0 Horizontal Mount 8.712-244.0 AP-500, Vertical 4350 8.0 Mount Only 9.803-266.0 Reed Switch (AP) (2 wire)

FLOW SWITCHES - ST-5 & ST-6





■ Temperature: 180°F ■ Brass Body

PART NO.	DESCRIPTION
9.112-680.0	ST-5 Gray, Vertical/ Horizontal Mount, 75-5075 PSI Max, 1-7.8 GPM, 3/8" FPT Inlet/Outlet, 1 A-250 V (47" Wire Length)
8.757-669.0	ST-5 Black, Vertical Mount, 75- 4380 PSI Max, 1-8 GPM, 3/8" FPT Inlet/Outlet, Contact: 1A-250V (48" Wire Length)
8.757-668.0	ST-6 Vertical/Horizontal Mount, 75-5075 PSI Max, 1-8 GPM, 3/8 MPT Inlet/Outlet, 1 A-250 V (47" Wire Length)
8.757-670.0	Reed Switch for ST-5 and ST-6 New Style

FLOW SWITCHES - PHOENIX WITH PILOT



■ PSI: 18 - 4000

■ GPM: .75 -16.0

■ Temperature: 190°F

■ AMP: 3, 120V

■ 3/8" F Inlet / Outlet Ports

DESCRIPTION PART NO. 8.712-252.0 Switch with Pilot 8.712-253.0 Reed Switch

■ 96" Reed Cord

Mounting Hole

2.5 lbs.

Includes 8 mm Pilot

FLOW SWITCHES - LEGACY

Spring return float allows full mounting versatility.



■ PSI: 4050

Rated Pressure: 3650

GPM: 8.0

Temperature: 175°F

Vertical Mount

■ Forged Brass Body

■ 3/8" MPT Inlet / Outlet

■ 1 Amp Switch, 230V, 36" Cord

Solenoid Control

DESCRIPTION PART NO. 8.712-246.0 Flow Switch

FLOW SWITCHES - ST-7 WITH MICRO SWITCH



■ PSI: 5000

■ GPM: 12.0

Temperature: 176°F

3/8" FPT Inlet / Outlet

Micro Switch

■ 10.1 A- 250 V

PART NO. DESCRIPTION 8.755-296.0 ST-7 Horizontal or Vertical Mount (47" Wire Length)

FLOW SWITCHES - GP - TMT



■ PSI: 5000

GPM: 1.5 at PSI: 50

Minimal Pressure Drop up to 12 GPM Flow

Activates with 1.5 GPM Flow

■ Temperature: 40° - 180°F

■ AMP: 5, 250V

■ 3/8" F Inlet / Outlet Ports

■ 48" Electrical Lead Length

■ 1.0 lbs.

Can be mounted in any position

Micro-Switch technology eliminates reed switch

■ No Spring, uses Magnets for all Movements

PART NO. **DESCRIPTION** 8.712-258.0 Inline Flow Switch



FLOW SWITCHES - ST-505 STAINLESS-STEEL



- PSI: 75 8700
- GPM: 1.0 8.0
- Temperature: 176°F
- 3/8" FPT Inlet / Outlet
- Stainless-steel
- 3 A, Max/ 250 V Max
- Free floating brass magnet

PART NO.	DESCRIPTION
8.723-665.0	ST-505 Vertical Mount, 47" Lead

VAC SWITCHES - BURNER CONTROL

Normally open (NO) switch closes when pump vacuum begins drawing water and opens when vacuum is broken due to pump shutdown or empty water tank.



- Temperature Max: 140°F
- Heavy-duty, 16 Amp Contacts
- 1/4" FPT Connect

PART NO.	DESCRIPTION	
8.712-391.0	1.5" (HG) Vac Switch	
8.712-392.0	2.5" (HG) Vac Switch	
8.712-393.0	4.5" (HG) Vac Switch	

PRESSURE SWITCHES - LEGACY



Operation without opening switch case: Blue = Common

CONNECT: Red / Blue = N/C, Blue / Brown = N/O



- PSI: 3600
- Temperature: 200°F
- AMP: 15, 115V or 230V AC
- Stainless-Steel Plunger
- 1/4" and 3/8" MPT Nipple
- 3 Wire, Internally Wired for either N/O or N/C
- 42" Wire Length

PART NO.	DESCRIPTION
8.712-261.0	Pressure Switch 1/4" MPT (Switches @ 360 PSI)
8.712-262.0	Pressure Switch 1/4" MPT (Switches @ 580 PSI)
8.751-272.0	Pressure Switch 3/8" MPT (Switches @ 580 PSI)

PRESSURE SWITCHES - COMPACT & PS-6 SS

3- & 5-Amp rating provides the switching power to control fuel solenoids just like the large switches.



- Temperature: 194°F
- 1/4" Brass MPT Connect
- 3 Wire Cable for use in either NC or NO application: Blue = Common Brown = No Red = NC

PART NO.	DESCRIPTION
8.712-260.0	Compact Switch- 54" 2 Wire Lead, Normally Open, 5 A- 250 V, 725- 3000 Max PSI
8.712-270.0	PS-6 Switch- 16 A- 250 V, 47" 3 Wire Lead, 4060 PSI MAX, 435 Switching Pressure, SS Plunger

PRESSURE SWITCHES - PR16 - BLACK





- Rated PSI: 3625 Max PSI: 4060

INLET

3/8" MPT

- Switching Pressure PSI: 580
- Temperature: 195°F
- AMP: 16, 250V

PART NO.

9.802-458.0

8.716-125.0

- Brass Stem and Stainless-Steel Nipple
- 8 oz.
- Normally Open

65" Wire

WIRE LENGTH 1/4" MPT 45" Wire

PRESSURE SWITCHES - PA - PR1 - RED



- Rated PSI: 8700 Max PSI: 9570
- Switching Pressure PSI: 640
- Temperature: 195°F
- AMP: 15, 250V
- All Stainless-Steel Construction
- 3/8" Male Inlet
- 10 oz.
- 44" Wire Length

PART NO.	DESCRIPTION
8.712-267.0	PR1 - Red Pressure Switch
8.704-572.0	Heavy-duty Micro Switch

SWITCHES - TOGGLE - PUSH BUTTON



- 7/16" Mounting Bushing
- 1/2" Diameter Mounting Hole Required
- Mounting Hardware Included
- Non-Illuminated

PART NO.	DESCRIPTION	HP*	CONNECTS		
8.712-319.0*	SPST, 20A/125V -10A/250V AC	1.0	M/Spade		
8.712-320.0	DPST, 20A/125V -10A/250V AC		M/Spade		
8.709-705.0*	DPST, 20A/125V -10A/250V AC	1.5	Screw		
8.709-704.0*	DPST, 20A/250V	2.0	Screw		
8.709-054.0*	SPDT, 20A/125V -10A/250V AC	3/4	M/Spade		
8.709-065.0*	DPDT, 20A/125V -10A/250V AC	3/4	M/Spade		
8.716-078.0	SPST, 20A/125V -10A/250V AC	1.5			
8.709-706.0	Y500 - Switch Gu	ard			
8.716-081.0	Waterproof Switc	h Prot	tector		
PUSH BUTTON SV	WITCHES				
8.709-053.0	SPST, 3A/250V-6A/125V Screw AC, Miniature- Push Button On/Off				
8.709-064.0		SPST, 15A/125V AC, Sc Push Button On/Off			

^{*}Motor Rated

SWITCHES - TOGGLE - MOTOR CONTROL



- 20/30 A, 250/600 V DPST
- Rated For: 2, 3, 5 & 7.5 HP, Single Phase
- With or Without Box

PART NO.	DESCRIPTION
8.709-696.0	Switch Only
8.903-802.0	Switch & Rain Tight Box with Cover
8.709-708.0	Switch with NEMA 1 Enclosure: Not Rain Tight (Baldor Replacement)

SWITCHES - THERMAL - HI-LIMIT - SNAP



8.712-306.0

- PSI: 4000
- AMP: 15 at 110V, AMP: 10 at 220V
- 1/4" Male Spade Lug Terminals
- Normally Closed
- UL / CSA Rated, Bimetal Switch Componenets
- Heavy-Duty Brass Housing -7000 PSI Collapse Rating
- Normally used with other adjustable or fixed range thermostat which regulates water temperature
- Does not turn back on until water has cooled 50° - 70°F
- Operates as a safety device to shut off burner to prevent machine (water) overheating flashing to steam

PART NO.	PROBE MPT	TEMP
8.712-301.0	3/8" x /1/2"	120°F
8.712-206.0	3/8"	140°F
8.753-450.0	3/8"	160°F
8.712-306.0	3/8" x 1/2"	180°F
8.712-311.0	3/8" x 1/2"	230°F
8.712-179.0	1/2"	180°F
8.712-308.0	1/2"	210°F
8.712-298.0	1/2"	230°F
8.712-316.0	1/2"	330°F
8.705-351.0	1/2" FPT x FPT	PVC Coupler

SWITCHES - THERMAL - HI-LIMIT - SNAP WITH LEADS



- AMP: 15 at 110V, AMP: 10 at 220V
- 1/4" Male Spade Lug Terminals
- 1/2" MPT external thread connects for attaching conduit or PVC wire connectors
- UL / CSA Rated, Bimetal Switch Componenets
- Does not turn back on until water has cooled 50° - 70°F
- Heavy-Duty Brass Housing -7000 PSI Collapse Rating
- Normally used with other adjustable or fixed range thermostat which regulates water temperature
- Operates as safety device to shut off burner to prevent machine (water) overheating flashing to steam

PART NO.	PROBE MPT	WIRE LEAD	TEMP
8.712-185.0	1/2"	42"	225°F
8.712-205.0	1/2"	42"	340°F
8.751-363.0	1/2"	36" SJO 3 Wire	180°F
8.712-187.0	1/2"	42"	275°F



CONTACTORS - DP - CUTLER-HAMMER

Cutler-Hammer



- Cutler-Hammer Quality
- Type C25 definite purpose contactors feature a compact, efficient design with low-VA coil
- Din Rail Mounting

PART NO.	COIL VOLTAGE	FL AMPS	MOTOR HP @ 115V 1PH	MOTOR HP @ 230V 1PH	MOTOR HP @ 230V 3PH	MOTOR HP @ 460V 3PH	MOTOR HP @ 575V 3PH
8.724-267.0	24V	15	.75	2	3	5	5
8.724-264.0	115V	15	.75	2	3	5	5
8.724-265.0	230V	15	.75	2	3	5	5
8.724-269.0	24V	25	2	3	7.5	10	10
8.724-268.0	115V	25	2	3	7.5	10	10
8.724-270.0	230V	25	2	3	7.5	10	10
8.724-271.0	460V	25	2	3	7.5	10	10
8.724-275.0	24V	30	2	5	10	15	15
8.724-272.0	115V	30	2	5	10	15	15
8.724-273.0	230V	30	2	5	10	15	15
8.724-280.0	24V	40	3	7.5	10	20	20
8.724-276.0	115V	40	3	7.5	10	20	20
8.724-277.0	230V	40	3	7.5	10	20	20
8.724-278.0	460V	40	3	7.5	10	20	20
8.724-283.0	24V	50	3	10	15	30	30
8.724-281.0	115V	50	3	10	15	30	30
8.724-282.0	230V	50	3	10	15	30	30
8.724-286.0	24V	60	5	10	20	40	40
8.724-284.0	115V	60	5	10	20	40	40
8.724-285.0	230V	60	5	10	20	40	40
8.735-015.0*	115V	65	5	15	25	50	60

^{*}includes aux contact block

SWITCHES / CONTACT BLOCKS - PUSH BUTTON - CUTLER-HAMMER

- Cutler-Hammer Quality
- Heavy-Duty
- Water Tight / Oil Tight









Cutler-Hammer

8.751-916.0

8.751-915.0

8.751-910.0

8.751-912.0

PART NO.	MODEL NO.	DESCRIPTION
9.803-666.0	CH C320KGS3	Aux Contact-N/O, N/C, 10A, Standard, Side Mounting
8.751-912.0	M22-K01	Contact Block-SPST-NC, 6A, 120V, Screw Terminal
8.751-913.0	M22-K10	Contact Block-SPST-NO for Non-Illum., Push Button, 6A, 500V, Screw Terminal
8.751-916.0	M22S-D-G	Switch, Green Push Button-SPST-NO, 22mm,Momentary, Flush Button, 6A, 500V, Screw Clamp Term.
8.751-915.0	M22S-DH-R	Switch, Red Push Button- SPST-NO/NC, 22mm, Momentary, Extended Button, 6A, 500V
8.751-910.0	M22S-WKV	Selector Switch Actuator- 22mm, 2 Position, Maintained, Non-Illum, Panel Mount

OVERLOAD RELAYS FOR CONTACTORS

Cutler-Hammer



- Direct Heated Bimetal Elements
- Adjustable Trip Current
- Manual / Automatic Reset

PART NO.	AMP RANGE	MODEL #
8.724-300.0	1.6 - 2.4	XTOB2P4CC1DP
8.724-301.0	2.4 - 4.0	XTOB004CC1DP
8.724-302.0	4.0 - 6.0	XTOB006CC1DP
8.724-303.0	6.0 -10.0	XTOB010CC1DP
8.724-312.0	10.0 - 16.0	XTOB016CC1DP
8.724-304.0	16.0 - 24.0	XTOB024CC1DP
8.724-305.0	24.0 -32.0	XTOB032CC1DP
8.724-306.0	24.0 - 40.0	XTOBO40DC1DP
8.724-307.0	40.0 - 57.0	XTOB057DC1DP

RELAY SWITCH



PART NO.	DESCRIPTION
8.716-087.0	DPST-NO, 24V, Screw Terminal, Omron 2000 Series

POWER CORD - MOLDED

■ Water Tight

Factory Finished Look

PART NO.	DESCRIPTION
8.752-150.0	6' 14/3 with Plug

RELAYS













9.802-468.0 8.716-230.0 9.802-467.0 9.802-470.0 8.716-264.0 8.716-257.0

PART NO.	DESCRIPTION
9.802-468.0	Compact Relay with Light & Button- 10A, 120V, 4170 Ohms with indicator, DPDT, Socketable Mount RH2B UI AC120
9.802-467.0	Relay Socket/Base- 8 Pin, 2 Pole, 10A / 300V, DIN Rail Mount, M3.5 Screw, RH2B Series
8.716-230.0	Relay- 10A/24V AC, Midget, 153 Ohms, DPDT, Socketable Mount, RH2B
8.716-264.0	Power Relay-120V, Tab Mount, 30A SPST-NO-DM, 1/4" Terminals for SKHT-1X
8.716-257.0	Power Relay- 40A / 120V AC, SPDT, PCB/Chassis Mount
9.802-470.0	Mini Iso Relay- 40A / 12V, SPDT, for 12V DC Units, 13HP & Below
9.802-471.0	Mini Relay- 40A / 24V DC, SPDT, for 12V DC Units over 13HP

CAM SWITCHES - ROTARY - SALZER

- Single or Three Phase
- 2 Position or 3 Position

Heavy-Duty



PART NO.	DESCRIPTION
9.802-450.0	2-Position 35A-115V/600V, 1-3 Phase
9.802-449.0	3-Position 115V / 230V, 1PH, 20 Amp
8.716-027.0	3-Position 230V / 460V, 3PH
8.716-030.0	Rotary Switch



MOTOR CONTACTORS - COILS & THERMAL OVERLOADS

For pressure washer and car wash applications.

- 24V AC Control
- 10 240V, 30 240V or 480V Contractor
- Componentized for Flexibility
- Thermal overloads adjustable within range shown
- Electrical Life: 1,000,000 + Cycles
- Mechanical Life: 20,000,000 + Clycles
- Contacts: 90% Silver, 10% Cad-Oxide







Contactor

Coil

Thermal Overload

TYPE	24V COIL PART NO.	120V COIL PART NO.	230V COIL PART NO.	FL AMP	220V 10 H	P 220V 30 H	P 440V 30 HP
CONTAC	CTORS UL RATING						
Α	8.708-753.0	8.902-527.0	8.902-532.0	22	2	3	5
В	8.708-754.0		8.902-533.0	24	2	5	7.5
С			8.902-534.0	32	3	5	10
D	8.902-524.0		-	40	5	7.5	15
E	8.902-526.0		8.902-536.0	52	7.5	10	20

PART NO.	VOLTAGE	FITS CONTACTOR
COILS ONLY		
8.708-765.0	480v	A,B,C,D

PART NO.	ТҮРЕ	AMP RANGE	FITS CONTACTOR
THERMAL OVER	RLOADS		
8.708-749.0	Manual	9.0 - 15	A,B,C,D
8.708-760.0	Manual	17 - 26	A,B,C,D
8.708-742.0	Manual	20 - 33	C,D
8.708-744.0	Manual	28 -42	C,D
8.708-750.0	Auto	9.0 - 15	A,B,C,D
8.708-743.0	Auto	20 - 33	C,D
8.708-747.0	Auto	35 - 50	E,F

Used to Mount Overload to Motor Starter Contactors

PART NO.		FITS CONTACTOR	
RELAY CONNEC	TOR KIT		
8.708-768.0	Relay Connector Kit 260265-268	A,B,C,D	

TRANSFORMERS - STEP-DOWN

■ Industrial Duty



8.716-899.0

■ High-Quality Cutler-Hammer



9.802-553.0

 Drops primary voltage to selected secondary voltage



8.716-904.0

PART NO.	PRIMARY V	SECONDARY V	SIZE
9.802-553.0	120V/240V	24V	.050KvA
8.716-904.0	120V/240V	24V	.100KvA
8.716-883.0	208V/230V/460V	24V/115V	.050KvA
9.804-556.0	208V/277V	120V	.050KvA
8.716-882.0	208V/277V	120V	.075KvA
9.802-550.0	240V/480V	120V/240V	.500KvA
9.802-552.0	240V/480V	120V	.075KvA
9.802-551.0	240V/480V	120V	.050KvA
9.803-668.0	550V/575V/600V	115V	.050KVA

MOTOR STARTER WITH SEALED BOX - MANUAL

- AMP: 25 with Adjustable Overload
- Adjustment Range AMPS: 20-25
- Sealed Box: 3-1/4" W x 3-1/2" D x 6-1/2" H
- 110-500V IEC-Rated

- Two-Cord Grip Fit 1/2" Threaded Knockouts
- Protective Cover Over Buttons
- Single and 3-Phase Wiring Instructions



PART NO.	DESCRIPTION	
8.709-709.0	Motor Starte	



JUNCTION BOXES













9.802-474.0





8.716-271.0



9.802-475.0



8.716-280.0, 8.716-281.0, 8.716-272.0

9.802-477.0

8.716-320.0

8.716-321.0

8.716-322.0

22.0 8.716-326.0

DESCRIPTION
VNG Remote, Plastic
Fiberglass, NEMA1 for PE Units
12" x 10" x 5.25" for Solid Sep
8" x 8" x 4", Box, Plastic with Lid for SEA 3-1100
10" x 8" x 6", Box, Plastic with Lid for SEA
Box, Plastic without Lid E9081
Lid, Plastic for 9.802-477.0
18" x 16" x 9.25", Plastic for CLP, WB
14" x 16" x 6.75", Plastic for HBG, AMC
Cover, Duplex Receptacle for Alpha
2" x 4", 3-Hole, 1/2" WB, for CLP
2" x 4", Extension for 8.716-321.0, 8.716-323.0, 8.716-324.0
2" x 4", 5-Hole, 1/2" for CLP
2" x 4", 4-Hole, 1/2" for CLP
4" x 4", 5-Hole, 1/2" for WB
4" x 4" SK, Cover Plate for WB for 6-00041
2" x 4", Cover Plate for 8.716-321.0
2" x 4", Junction 3-Hole, 3/4"
2" x 4", 3-Hole, 1" for ENG

SWITCH BOX - RAINTITE

- UL 728A
- Box: 2-3/4" x 5-1/2" x 2"
- Three 1/2" Tapped Holes

- Box includes two plugs, ground screw and mounting lugs
- Cover Includes Gasket



PART NO.	DESCRIPTION
8.709-702.0	RainTite Switch Box

TIMER

■ Preset and Adjustable Available

■ 24-240V

■ Heavy-Duty



PART NO.	DESCRIPTION
9.802-472.0	Solid State, 5-60 Min, 15 Sec with Lockout for Auto Start

CIRCUIT BREAKERS

■ Provides protection against excessive Amp draw



PART NO.	DESCRIPTION
9.802-485.0	25 Amp (All 12V Systems)

FUSES

■ Full range of fuses

Protect your equipment









PART NO.	CODE	MAX V	AMPS
9.802-463.0	FNM1/2	250V	0.5
9.802-464.0	FNM8/10	250V	0.8
8.716-173.0	FNM1	250V	1.0
9.803-977.0	FNM2-1/2	250V	2.5
8.716-187.0	FNM3	250V	3.0
9.803-664.0	FNM5	250V	5.0
8.716-194.0	FNM7	250V	7.0
9.802-460.0	FNM8	250V	8.0
8.716-165.0	FNM10	250V	10.0
8.716-191.0	FNQ3/10	500V	0.3
8.716-192.0	FNQ6/10	500V	0.6
9.802-465.0	FNQ-R-3	600V	3.0
8.716-169.0	KTK-R1/4	600V	0.25
9.802-462.0	KTK-R1/2	480V	0.5
8.933-007.0	KTK-R1	240V	1.0
8.716-177.0	KTK-R1-1/2	600V	1.5
9.803-663.0	KTK-R2	120V	2.0
8.716-179.0	KTK-R2-1/2	600V	2.5
8.716-180.0	KTK-R4	600V	4.0
9.804-050.0	KTK-R5	600V	5.0
8.716-183.0	KTK-R30	600V	30.0
8.716-170.0	MDL1/2	120V	0.5
8.716-172.0	MDL1	250V	1.0
8.716-174.0	MDL2-1/2	24V	2.5
8.716-188.0	MDL5	250V	5.0
8.716-161.0	MDL7-1/2	250V	7.5



CAM SWITCHES - 3-POSITION - MACHINE CONTROL

- Heavy-Duty Rotary Cam Switches
- Legend plate reads off / pump / burner
- Quick make / break action reduces arcing

- Wiring Boot Included (Except 410242-3)
- Legend Plate, 2/1/2" Square
- 4-Screw Mounting



PART NO.	MODEL	AMP RATING	VOLTAGE	PHASE
8.712-219.0*	S220-1686	20	110V	1
8.712-224.0*	S220-1687	20	220V	1
8.712-225.0*	S220-1688	20	220V	3
8.712-227.0*	S225-1686	30	110V	1
8.712-228.0*	S225-1687	30	220V	1
8.712-229.0*	S225-1688	30	220V	3
8.712-234.0	S432-4095	40	240V	1
8.712-235.0	S432-1402	40	480V	3
SINGLE-HOLE MO	OUNTING - REQUIRES	1 22MM (7/8" DIA) HOLE	
8.712-218.0	220-1789	20	110V	1
REPLACEMENT	KNOB - FITS THOSE PA	ART NUMBERS AB	OVE MARKED WIT	H AN ASTERISK ()
8.700-258.0	Replacement Knob			

CAM SWITCHES WITH & WITHOUT BOX

Cam action fast "make-break" to reduce arcing.

- 40 60 Amp disconnect rating
- Four 1/2" Knock-Outs
- Versatile Mounting

Motor Ratings:7.5 HP at 240V, Single Phase5.0 HP at 240V, 3 Phase30.0 HP at 480V, 3 Phase



PART NO.	DESCRIPTION
8.712-217.0	40 Amp Switch with Large Box 4-1/2" W x 7" H x 3-3/4" D
8.712-211.0	60A/600V, 4P, Salzer Switch Only, No Knob
Note: Switch does not have thermal overload protection	

CAM SWITCHES - 3-POSITION -SALZAR "BIG BOOT"

Large rectangular boot for easier wiring.



■ Mounting configuration and electrical ratings same as "S" switches

PART NO.	MODEL	AMP RATING	VOLTAGE	PHASE
8.712-238.0	T225-1686	30	110V	10
8.712-241.0	T225-1688	30	240V	3Ø
SINGLE-HOLE MOUNTING - REQUIRES ONE 22 MM (7/8" DIA) HOLE				
8.712-223.0	220-1843	20	220V	10

CAM SWITCHES - 3-POSITION - "ELEKTRA" UNIVERSAL

UL/CSA-rated machine control cam switches.

- Position "off" "pump burner"
- Quick make / break action reduces arcing
- 2 or 4 Screw Mount (2-1/2" Square Legend Plate)
- Matches Salzer / Kraus, Naimer / Bremas & Klockner, Moeller Mounts





- "Boot" has plenty of wiring room
- "Tite Boot" excellent dust and moisure seal
- Screw-to-screw, terminal-to-terminal replacement for Salzer "S" and "J" type switches above
- Contacts UL / CSA Rated: 24 Amp vs 20 Amp, 35 Amp vs 30 Amp, 50 Amp vs 40 Amp



8.712-240.

PART NO.	AMP RATING	WIRING POLES	VOLTAGE	PHASE	HP RATING
8.712-236.0	25	1	120V	1	1.5
8.712-237.0	25	2	120V / 240V	1	1.5 / 2.0
8.712-240.0	35	2	120V / 240V	1	2.0 / 3.0
8.712-242.0	50	2	120V / 240V	1	3.0 / 7.5

Note: None of the Elektra switches are for use on 3-phase motors without adding fuses or thermal overload

CAM SWITCHES - ON / OFF WITH BOX - "ELEKTRA"

UL/CSA-rated 25 and 35 Amp. Compact 3-1/4" square x 3-3/4" deep enclosure "versatile mount."



8.712-236.0

PART NO.	AMP RATING	WIRING POLES	VOLTAGE	PHASE	HP RATING
8.712-214.0	25	2	120V / 240V	1	1.5 / 2.0
8.712-216.0	35	2	120V / 240V	1	2.0 / 3.0

Note: None of the Elektra switches are for use on 3-phase motors without adding fuses or thermal overload

ROCKER SWITCHES

2500 Watt, 120V, 21.6 Amp at 3,600 RPM

- On / Off, 2 & 3 Position
- Lighted Available

9.802-453.0



8.716-051.0

■ 125V / 250V / 24V



9.802-451.0



9.802-452.0

PART NO.	DESCRIPTION	AMP	VOLTAGE
9.802-453.0	Curvette, SPST, 2-Pos, Carling	16 / 10	120V / 250V
8.716-051.0	Curvette, DPST, 2-Pos, Carling	20 / 15	125V / 250V
9.802-451.0	Carling, Green Light, 2-Pos	15 / 10	125V / 250V
9.802-452.0	Green Lamp, Red Actuator, 3-Pos	15 / 10	125V / 250V
8.716-037.0	Rocker Switch	15 / 10	125V / 250V / 24V



GENERATOR - WINCO- AC- TB2400

2400 Watt, 120 VT, 3600 RPM, 20 Amps.



- 13.3" L x 7.6" W x 8.1" H
- 33 lbs.
- Starts and Runs 1/2 HP Motor



- 7/8" diameter shaft
- Conforms to UL1004-1, UL1004-4 and CSA 22.2
 No. 100-24

PART NO.	DESCRIPTION	
8.757-639.0	TB2400 Generator	

THERMOSTAT - PROBE STYLE

With panel-mount controls



- PSI: 4000
- Temperature change response within + 12°F
- Accuracy + 2.5%
- 120VAC-20A
- 240VAC-20A
- 120/240VAC-1/4HP

DESCRIPTION

86-302 Deg

86-195 Deg

86-250 Deg

- Large, Easy-Read Dial
- 3-1/2" SS
 Capillary Copper Immersion bulb with 60" capillary tube. UL/CSA

 Approved
- Seal, nut and 1/2" transition coupling included

GENERATOR - VOLTMASTER

2500 Watt, 120V, 21.6 Amp at 3,600 RPM



- 36.5 lbs.
- Brushless Design
- Circuit breaker protection (standard)
- 7/8" Shaft, Two Sealed (Ball) Bearings
- Shaft rotates either direction
- Industrial-Type Watertight Enclosure (11-5/8" x 7-1/2" Diameter)
- All Copper Windings, High Surge Capacity

PART NO.	DESCRIPTION	
8.709-810.0	2500 Watt Generator	

CAM SWITCHES - 2-POSITION



- Legend Plate: On / Off
- Tear-Drop-Shaped Knob
- Face Plate 2-1/2" Square
- Motor Ratings: 410202 - 1-1/2 HP / 110V 410204 - 6 HP / 240V

PART NO.	DESCRIPTION
8.712-213.0	25 Amp / 110V
8.712-215.0	30 Amp / 220V

THERMOSTAT - ADJUSTABLE - FLOW-THRU





Tension Adjusting Screw

■ Ceramic Insulation

Stainless-Steel Case

■ Silver Contacts

8.700-501.0

Stop Collar

8.904-555.0 PSI: 3000

PART NO.

8.758-149.0

8.758-180.0

8.758-181.0

- Adjustable Temperature: 85° - 195°F
- AMP: 10, 110V
- AMP: 5, 220V
- 1/2" Inlet, 3/8" Outlet
- Fenwall Inside

PART NO.	DESCRIPTION
8.904-555.0	Thermostat
8.700-501.0	Switch Only

INDICATOR LIGHTS



9.802-456.0

8.716-408.0

- Easy Mounts to Control Panel
- Available in 12V, 24V and 125V
- Great for remote applications

PART NO.	VOLTAGE	COLOR	
8.716-095.0	125V	Red	
9.802-455.0	125V	Green	
8.716-408.0	125V	Amber	
9.803-651.0	28V	Red	
9.803-652.0	28V	Green	
8.716-097.0	12V	Red	
9.802-456.0	12V	Green	

BREAKER SWITCHES



PART NO.	DESCRIPTION	PHASE	
8.716-067.0	7.5 HP, 230V, 1400	1PH	
8.716-068.0	7.5 HP, 230V, 1400	3PH	
8.716-069.0	7.5 HP, 460V, 1400	3PH	
8.716-073.0	10A / 460V, 900	3PH	
8.716-074.0	12A / 480V	3PH	
8.716-076.0	20A / 277V, 900	3PH	
8.716-070.0	25A / 250V, 2255	3PH	
8.716-077.0	30A / 277V, 900	1PH	
8.716-066.0	40A / 230V, 1070	1PH	

WIRE LOOMS - USED FOR WIRING HARNESSES



- Protects wires from abrasion and crushing
- Controls bundles of wires and allows for multiple exits at wiring points
- "Factory-perfect" look for all machines

PART NO.	DESCRIPTION
8.709-679.0	1/4" ID 100' Roll
8.709-680.0	3/8" ID 100' Roll
8.709-681.0	1/2" ID 100' Roll
8.709-682.0	5/8" ID 100' Roll

GFCI MODULE

Not recommended for field service.



- 240V, 60 Hz
- 240V shop attachable module; attach your power cord length as required
- Use with 16-12 gauge SJ, SJO or SJT, 3-wire cords

PART NO.	DESCRIPTION	PHASE
8.709-858.0	GFCI Module	1PH

TAPE - VINYL ELECTRICAL



- Premium Grade, 7 mil
- UL-Approved

PART NO.	DESCRIPTION
8.704-706.0	Roll 3/4" x 60'

CONNECTOR CLAMPS - ROMEX (METAL)



PART NO.	DESCRIPTION
8.709-663.0	1/2" Strt. Connector
8.709-664.0	3/4" Strt. Connector
8.709-660.0	1/2" Lock Nut Only
8.709-661.0	3/4" Lock Nut Only

CORD CAPS & PLUGS







8.709-656.0



8.709-659.0

8.709-653.0

8.709-655.0

- Industrial-Quality
- Dead front cord caps nylon body straight plugs and "auto-clamp" for cord

8.709-659.0 angle plug has vinyl body and both 30A and 50A neutral leg

PART NO.	DESCRIPTION	MATERIAL
8.709-653.0	15A / 125V	Black Nylon
8.709-655.0	20A / 125V	Black Nylon
8.709-656.0	20A / 220V	Black Nylon



CONNECTOR / STRAIN RELIEFS - LIQUID TIGHT - FOR CABLE, WIRE & TUBING

Keep water-tight NEMA-4 and 4x enclosures water-tight with these unique fittings.

DOME NUT WITH INSIDE TAPER

 As the dome nut is tightened, the seal ring grips, holding the cable wire or tubing positively in place.

LEAD-SCREW THREAD

The dome nut can be firmly tightened due to the high strength lead-screw thread.

CLAMPING SPLINES

 Various sizes and odd-shaped cables, wires and tubing can be accommodated due to overlapping diagonally split clamping splines



PART NO.	TYPE	THREAD	CORD SIZE	CORD OD	LENGTH
9.802-514.0	Dome	1/2" NPT	14/3-12/3	.230"470"	1.8"
8.709-688.0	Dome	3/4" NPT	14/3-12/3	.350"630"	2.0"
8.709-690.0	Flex	1/2" NPT	14/3-12/3	.230"470"	4.3"
8.709-692.0	Flex	3/4" NPT	12/3-10/4	.51"71"	5.2"



PART NO.	THREAD			100	
PLASTIC JAM NU	JTS				
9.802-526.0	3/4" NPT				

GFCI - WITH AND WITHOUT PLUGS & CORDS

GFCIs protect people and equipment by interrrupting potentially lethal ground circuits exceeding 6mA. The dangers of electrical shocks have been long known - GFCIs are the only real way to be safe. Most city and county codes now require GFCI protection on power cleaning equipment.

- UL-Listed
- Three Wire Circuits
- Transient Voltage Protection
- 4-6mA Ground Fault Protection
- Grounded Neutral Protection

- Mechanical Trip Indicator
- Compact Size
- Rugged Construction
- Radio Frequency Interference Suppression



Integrated GFI & Plug



PART NO.	VOLTAGE	АМР	LENGTH	INTEGRATED
GFCI CORD WITHOU	T PLUG			
8.709-842.0	120V	20A	12'	N/A
8.709-860.0	240V	30A	6'	N/A
8.709-861.0	240V	30A	12'	N/A
8.709-862.0	240V	30A	35'	N/A
9.802-434.0	240V	40A	36'	N/A
GFCI CORD WITH PL	.UG			
9.802-432.0*	120V	15A	36'	Combo
9.802-431.0*	120V	20A	36'	Combo
9.802-433.0	240V	20A	36'	Separated
8.709-853.0	240V	30A	6'	Separated
8.709-854.0	240V	30A	12'	Separated
8.709-855.0	240V	30A	35'	Separated
9.802-430.0	240V	30A	36'	Separated
GFCI PLUG WITHOU	T CORD			
8.709-847.0	120V	15A	N/A	N/A
8.709-846.0	120V	20A	N/A	N/A

Note: User-attached plug also includes the sealant necessary to attach the power cord per UL specification * Integrated GFI & Plug

MOLDED PLASTIC FLOAT TANKS



- Molded Polypropylene
- 7 Liter Size: 13" x 5" x 6"
- 1 Gallon Size: 10" x 5" x 8"
- No Holes for Max Flexibility
- 1-Gallon Tank has Tight Fitting Lid (included)
- 7-Liter Snap-on Tank Lid (sold separately)

PART NO.	DESCRIPTION
8.710-026.0	7-Liter Tank Only
8.710-027.0	7-Liter Tank Lid
8.710-028.0	1-Gallon Tank with Lid

STAINLESS-STEEL FLOAT TANK



- Fully Welded and Water Tight
- 2.8 Gallon Capacity
- 12" x 9" x 6"
- 16 Gauge #303 Stainless-Steel
- 1/2" Full Coupling, Stainless-Steel Inlet / Outlet
- Convenient Mounting Tabs

PART NO.	DESCRIPTION	
8.710-029.0	Stainless-Steel Float Tank	
8.710-034.0	Stainless-Steel Lid	

FRAMES, DIRECT DRIVE



- Heavy-duty Aluminium, More Corrosion-resistant than Steel
- 10" Flat-free Tire for Better Reliability
- Integrated Nozzle Holders

PART NO.	DESCRIPTION
8.924-399.0	Aluminium Frame, DD CW
8.924-400.0	Aluminium Frame, 270 and 390 AL DD CW

REPLACEMENT FUEL CAP

■ Fits 9 Gallon Diesel Fuel Tank (8.710-142.0)

■ Fits Fuel Tanks (8.751-294.0, 8.751-296.0, 8.751-293.0)

PART NO.	DESCRIPTION	
8.751-449.0	Replacement Fuel Cap for Fuel Tanks	

FUEL TANK, 9-GALLON DIESEL



- Strap or Bolt Mount (4 / 5/ 16" Inserts in Bottom)
- Metal Inset 3/8" Inlet / Return Lines
- Black, Crosslinked PE
- Vented Fuel Cap
- Filler Neck Doesn't Extend Beyond Tank Wall
- Compact Size: 19-3/4"L x 12"W x 10-1/2"H

PART NO.	DESCRIPTION	
8.710-142.0	9-Gallon Fuel Tank - Plastic	
Note: Includes Fue	el Cap	

FUEL TANKS



8.751-293.0

- EPA / CARB-Compliant
- Seamless One-piece Construction of Marine Grade, UV-protected Polyethylene
- 90° Fuel Withdrawal Fitting



8.751-294.0

- Two-stage Click when Closed Fuel Cap
- Built-in Reserve (when gauge reads "empty", tilt to access additional fuel)
- Easy-to-read Sight Gauge

PART NO.	SIZE	DIMENSIONS (LxWxH)
8.751-294.0	6-gal	21.18" x 13.5" x 10"
8.751-296.0	12-gal	20.375" x 13.75" x 14.75"
8.751-293.0	12-gal	24.25" x 18" x 11"



RUBBER PARTS







9.802-066.0



8.706-557.0





9.802-067.0

9.802-069.0

PART NO.	DESCRIPTION
9.802-064.0	Grommet, Nozzle Holder
8.706-557.0	Bellows, Leg Boot
9.802-067.0	Bumper Pad, Engine
9.802-069.0	Handle Grip
8.706-745.0	Plug, Hole Plastic
9.803-046.0	Mount, Rubber Vibration
8.706-553.0	Mount, Rubber Vibration 60 Duro
8.706-524.0	Mount, Rubber Vibration 1-3/8" Dia x 3/4"
9.802-066.0	Pad, Soft Rubber

FUEL CAPS



- For Gas or Diesel Fuel Tanks
- Fits Standard 2-1/4" Fuel Necks

PART NO.	DESCRIPTION	
8.701-700.0	Fuel Cap with Gauge 10"	

BATTERY BOXES WITH COVER, MARINE STYLE

Protect batteries on presssure washers, boats or other industrial equipment.



- Attractive Molded Polypropylene
- Complete with hold-down cleats and strap for cover
- Small: 8-1/2"L x 6"W x 8-1/2"H
- Large: 11-1/4"L x 7-3/4"W x 10-3/4"H

PART NO.	DESCRIPTION	
8.706-652.0	Small Box	
8.706-600.0	Large Box	

FLAT-FREE TIRES

Flat-free tires provide the bounce and load handling characteristics similar to an air filled tire - with the benefit of never going flat. Flat-free tires are lighweight, non-marking and come mounted on a heavy-duty steel rim with shielded ball bearings. Not for highway use.



- Heavy-Duty Steel Rim
- Non-Marking
- 4" Steel Rim: Max Load 300 lbs.
- 12" Steel Rim: Max Load 375 lbs.
- Accepts .63" Shaft

PART NO.		DESCRIPTION
8.711-898.0	S	Wheel and Tire Assembly, 4" Steel Rim
8.758-460.0		Wheel and PU Tire Assembly, 12" Steel Rim

PLASTIC DIP TUBE ASSEMBLY



Rubber bushing seal (order separately) ■ New Style Plastic Dip Tubes

PART NO.	DESCRIPTION
8.706-495.0	Plastic Dip Tube Assembly, 12" Long
8.706-496.0	Plastic Dip Tube Assembly, 17.75" Long
9.802-053.0	Rubber Bushing, Fuel Line

COMPLETE WHEELS







8.711-901.0

8.754-186.0

8.712-762.0

■ High-Quality Pneumatic ■ Fits 5/8" Shaft and Semi Pneumatic

PART NO.	DESCRIPTON	
8.754-186.0	10" Steel Rim with Tube 5/8" Shaft	
8.712-762.0	10" White Steel Rim, 3/4" Hub Tubeless	
8.711-921.0	6" Tube Only	
8.712-767.0	10" Tube Only	
9.802-274.0	10" x 2-3/4" Hard Rubber Wheel	
8.711-908.0	3" Gray Caster Wheel	
INTERCHANGEA	BLE BEARINGS	
8.700-484.0	5/8" Bore Bearing	
8.700-486.0	3/4" Bore Bearing	
HUB CAPS AND COLLARS		
8.700-184.0	5/8" Hub Cap	
9.802-782.0	5/8" Bore Shaft Collar	







8.700-486.0

8.700-485.0

MISCELLANEOUS PARTS







8.719-064.0

9.802-066.0

8.932-992.0

PART NO.	DESCRIPTON
8.719-064.0	Chassis Knob 5/16" Thread, Black
9.802-066.0	Soft Rubber Foot Pad
8.932-992.0	Vibration Isolator 3/8"

PUMP - AIR-OPERATED -FLOJET



- Twin Diaphragm, Self-priming
- Dry Air (or CO2) PSI: 20-120 Automatic, On-Demand
- GPM: 7.0
- Max Liquid Temperature: 120°F
- Santoprene Elestomers
- Self-Priming up to 15 Feet
- Air (Gas) In & Out, 1/4" Barb

FLOJET



Start & Stop

Barb Fuild In/Out

- Flow Control via Air (Gas) Pressure
- Common Use: Chemical transfer and dispensing parts, washers and car wash systems

PART NO.	DESCRIPTON
8.702-321.0	3/8" Pump, Santoprene
8.702-322.0	3/8" Pump, Viton
8.702-323.0	1/2" Pump, Santoprene
8.702-324.0	1/2" Pump, Viton

PUMPS - AIR-DRIVEN - FLOJET FLOJET

Twin diaphragm, self-priming.



- Dry Air (or CO2) PSI: 20-80
- GPM: 1.9
- Max Liquid Temperature: 120°F
- Use Santoprene for Soaps, Use Viton for Butyls
- Chemical In & Out, 3/8" Barb
- Air (Gas) In & Out, 1/4" Barb
- Automatic, On-demand Start & Stop
- Santoprene/Viton Elestomers: Control Flow and Pressure with Air Pressure

PART NO.	DESCRIPTON	
8.702-320.0	Pump, Santoprene	
8.702-319.0	Pump, Viton	
8.700-388.0	Valve Kit. Santoprene	

AIR-FILTER / REGULATORS




8.712-585.0



■ PSI: 125 ■ 1/4" Ports

- Pressure-Relieving
- Removes air line inpurities to 5 microns



	_	Mai to, a
8.712-586.0		pres diag

PART NO.	DESCRIPTON	
8.712-585.0	Regulator Only	
8.712-586.0	Filter / Regulator	
8.712-587.0	Gauge, 0-1 60, 1/8"	

BRUSHES - FOAM & ACCESSORIES



FOAM BRUSH

■ 3" x 10" super soft flagged bristle fountain brush. Choose from black, red or blue.



FOAM BRUSH LANCE

■ 40" long with 30" insulated grip, 3/8" FPT inlet, 1/2" MPT outlet (matches brush inlet). Colors: red, blue or black.

BRUSH HOSES

■ Clear, spiral wire braid, 1/2" ID with 3/8" MPT, zinc-plated steel fittings both ends.

PART NO.	DESCRIPTON
8.710-115.0	Foam Brush Head, Black
8.710-117.0	Foam Brush Head, Red
8.710-116.0	Foam Brush Head, Blue
8.710-119.0	Foam Hose, 15'
8.710-121.0	Lance 40", Red
8.710-122.0	Lance 40", Black
8.710-123.0	Lance 40", Blue

CAR WASH BOOMS, "REFLEX"

The performance leader!



- PSI: 3000
- 5' 6" Car Wash Model
- 8' Truck Wash Model



- Stainless-Steel Boom Arm
- 3/8" FPT Inlet / Oulet Hose (Included)

PART NO.	DESCRIPTON	
BOOMS		
8.903-620.0	180° Wall Mount 5' 6" Boom	
8.903-621.0	360° Ceiling Mount 5' 6" Boom	
8.903-624.0	180° Wall Mount 10' Boom	
8.903-625.0	360° Ceiling Mount 10' Boom	
8.903-626.0	180° Wall Mount 8' Boom	
8.903-627.0	360° Ceiling Mount 8' Boom	
PARTS / ACCESSORIES		
8.903-622.0	5.5' Rod / Hose, Assy Only	
8.903-623.0	8' Rod / Hose, Assy Only	
8.903-628.0	10' Rod / Hose, Assy Only	
8.903-630.0	Ceiling Mount, Base Only	
8.903-632.0	Wall Mount, Base Only	
8.700-265.0	Set Screw for Angle Block	
8.905-605.0	90° End Coupler C/W Boom	
8.905-604.0	8' Coupler Stainless-steel C/W Boom	
8.712-450.0	Swivel - Brass 3/8"	
8.700-263.0	Swivel Repair Kit (Pre-1998)	
8.700-287.0	Swivel Repair Kit (1998-Present)	

WASH BAY ACCESSORIES - STAINLESS-STEEL

Foam brush broom holder, wand holders, mat clamps.





PART NO.	DESCRIPTON
8.708-880.0	Standard Foam Brush Holder
8.708-881.0	Rigid Wall Mount Wand Holder
8.708-882.0	Flex Bottom Mount Wand Holder
8.708-883.0	Mat Clamp

LOCKS FOR METER BOXES



PART NO.	DESCRIPTON
8.708-730.0	Tubular Cam Lock

SWITCH - ROTARY - 8-POSITION

Metal car wash switch.



- Double Stack 8-Position
- Metal
- Much more durable than cheaper plastic switches
- Direct replacement for Electroswitch 31302A-S and NU32LA
- Make before break functions

PART NO.	DESCRIPTON
8.708-729.0	8-Position Rotary Switch

TRANSFORMERS





PART NO.	DESCRIPTON
8.708-780.0	115-24V AC: 600 MIL/AMP
8.708-781.0	115/208/230-24V AC: 100V A Fused
8.708-783.0	120/208/240-24V AC: 50V A
8.708-784.0	120/208/240-24V A Not Fused

FUSES



PART NO.	DESCRIPTON
8.708-786.0	Transformer Fuse 5 AMP



SWIVELS - MEDIUM-PRESSURE - CAR WASH



- PSI: 1000
- 7/16" Flow-Thru Opening
- All-Brass Body
- Bronze-Thrust Bearing
- Buna Seals (Non-Repairable)
- 1/2" FPT x 1/2" MPT

PART NO.	DESCRIPTON
8.705-057.0	Swivel

SWIVELS - LOW-PRESSURE - CAR WASH



- Swivel Action PSI: 300
- Brass MPT
- Zinc-Chromate Steel FPT

PART NO.	DESCRIPTON	
8.705-056.0	3/8" FPT x 3/8" MPT	
8.705-055.0	1/2" FPT x 1/2" MPT	

LANCES - FLEX



- PSI: 2500
- Temperature: 200°F
- Flexes 180° and returns
- Prevents bent lances and broken hoses
- Industrial-grade polyurethane flex section
- Perfect for self-serve car wash bays
- 1/4" galvanized pipe end sections

PART NO.	LENGTI	H DESCRIPTON	
8.710-600.0	18"	1/4"MPT x 1/8"FPT, Black	
8.710-603.0	21"	1/4"MPT x 1/8"FPT, Red	
8.710-604.0	24"	1/4"MPT x 1/8"FPT, Red	
8 710-598 0	18"	1//"MPT v 1//"MPT Red	

VACUUM ACCESSORIES

May slip directly on to hose. Use with swivel cuffs for better results.



Vacuum Claw Nozzle

PART NO.	COLOR
1-1/2"	
8.708-892.0	Yellow
8.708-891.0	Black
8.708-890.0	Gray
2"	
8.708-894.0	Yellow





Adapter

PART NO.	DESCRIPTION
8.708-900.0	2" Hose x 1-1/2" Wand
8.708-904.0	2" Hose x 2" Wand



Cuffs, Hose to Tank

PART NO.	DESCRIPTION
8.708-903.0	1-1/2" x 1-1/2"
8.708-904.0	2" x 2"
8.708-905.0	1-1/2" x 1-1/2" Swivel

Vacuum Hose

PART NO.	DESCRIPTION
8.697-112.0	50' Blue Vac hose 1-1/2" Swivel
8.697-117.0	50' Blue Vac hose, 2" Swivel

TRIGGER GUN - RB65 WASH GUN



Low-pressure spray gun with straight jet and adjustable cone from the trigger with adjustable screws to alter cone angle wideness from 0° to 60° .



- PSI: 350
- GPM: 16.0
- Temperature: 195°F
- Completely Sealed
- Ergonomic
- Adjustable Jet Cone
- Trigger Protection
- Brass Body

PART NO.	DESCRIPTON
8.710-449.0	PA RB65 with Swivel
8.710-448.0	PA RB65 No Swivel
9.114-478.0	PA RB65 Stainless Steel w/ Swivel (RED)
8.751-896.0	RB 65 Trigger Gun Seal Kit- KIT 2

VACUUM MOTORS - A+ / AP









8.625-841.0

8.620-204.0

8.625-842.0

PART NO.	DESCRIPTON				
TWO FAN STAG	ES, BYPASS MOTORS				
8.625-841.0	5.7" Diameter, 120V Double Ball Bearing, Peripheral Discharge				
8.620-204.0	Vault System Vac Motor: 120V Double Ball Bearings, Tangent Discharge				
THREE FAN STAGES, BYPASS MOTORS					
0.635.043.0	F 71 Di 120// D				

8.625-842.0 5.7" Diameter, 120V Double Ball

Bearings, Tangent Discharge

VACUUM MOTORS - AMETEK-LAMB







8.685-502.0

8.685-442.0

8.685-458.0

PART NO.	DESCRIPTON
TWO FAN STAGE	S, BYPASS MOTORS
8.685-502.0	5.7" Diameter, 120V Double Ball Bearing, Peripheral Discharge
8.685-442.0	Vault System Vac Motor: 120V Double Ball Bearings, Tangent Discharge
THREE FAN STA	GES, BYPASS MOTORS
8.685-458.0	5.7" Diameter, 120V Double Ball

Bearings, Tangent Discharge

HOSES - CONNECTOR / CAR WASH BAY, 12'-25'

All car wash bay hoses come with solid male pipe on both ends.



PART NO.	LENGTH	PSI
3/8" BLACK - 1 V	VIRE	
8.918-333.0	12'	4000
8.918-334.0	13'	4000
8.918-338.0	15'	4000
8.918-340.0	16'	4000
8.918-342.0	17'	4000
8.918-344.0	18'	4000
8.918-348.0	20'	4000
3/8" BLUE - 1 W	IRE	
8.918-360.0	12'	3000
8.918-366.0	15'	3000
8.919-124.0	16'	3000
8.918-369.0	17'	3000
8.918-371.0	18'	3000
8.918-373.0	19'	3000
8.918-375.0	20'	3000
8.918-385.0	25'	3000
1/4"BLUE - 1 WI	RE	
8.918-389.0	13'	3000
8.918-391.0	14'	3000
8.918-393.0	15'	3000
8.918-395.0	16'	3000
8.918-397.0	17'	3000
8.918-399.0	18'	3000
8.918-401.0	19'	3000
8.918-403.0	20'	3000
8.918-409.0	23'	3000
8.918-411.0	24'	3000
8.918-413.0	25'	3000



SOLENOID VALVES - CFA - SS & BRASS



Air

■ Professional Car Washes

■ Light Oil

■ Chemicals

- Low Pressure Steam
- Other Industrial Applications

WATER SOLENOID VALVES 2-WAY. NORMALLY CLOSED.



The S211 Series Standard Water Valves have reliable piloted diaphragm construction with proven performance over decades of use. Featuring stainless-steel seats, the S211 Series typically requires 4 or 5 PSI pressure differential to open. The S201 Series Zero Differential Valves are constructed with the

same materials, but are capable of operating with the same amount of pressure on both sides of the valve. Both valve types are often utilized in the car wash industry.

CHEMICAL SOLENOID VALVES, 2-WAY, NORMALLY CLOSED.



For decades, car wash industry professionals have chosen the rugged S301 and S311 Series Valves because of their compact size and long life. Available in 1/8", 1/4" and 3/8" NPT designs, these valves are used in air, water and chemical applications.

HIGH-PRESSURE SOLENOID VALVES 2-WAY, NORMALLY CLOSED.



The S401 High-Pressure Valves are compact, dependable and specifically designed by ITT to meet car wash applications up to 1400 PSI. Best Buy.

SOLENOID VALVES FOR CAR WASH ANTI-FREEZE APPLICATIONS, **NORMALLY OPEN**

These valves provide long life and reliable performance in the "make" or break" anti-freeze systems of car washes. The S202 and S212 Series Diaphragm Valves feature non-wicking, fabric-reinforced diaphragms, which eliminates premature diaphragm failures, as well as stainless-steel upper seats, which prevents seat deterioration often associated with brass-seated valves. The S202 Series Diaphragm Valve incorporates the zero-operating pressure design discussed above; the S212 Series is a piloted diaphragm, and the S402 Series is piloted piston valve.

SOLENOID VALVES - CFA - SS & BRASS SEALS

B = Buna

V = Viton



SS = Stainless-Steel

BODY

MODE

N/O = Normally Open

N/C = Normally Closed

TYPE

DA = Direct Acting

PP = Piloted Piston

PD = Piloted Diaphragm

PART NO.	GC PART NO.	PORT F-NPT / BODY	ORIFICE	OPER PSI	SEALS	MODE	TYPE / AC VOLTS	DEMA EQUIV
8.708-806.0	S201-CG4	3/8" / BR	.312"	150	В	N/C	PD / 110	A413P-110
8.708-807.0	S201-DG4	1/2" / BR	.438"	150	В	N/C	PD / 24	A414P-24
8.708-808.0	S201-DG4	1/2" / BR	.438"	150	В	N/C	PD / 110	A414P-110
8.708-821.0	S211-CG4	3/8" / BR	.625"	150	В	N/C	PD / 110	473P-110
8.708-822.0	S211-DG4	1/2" / BR	.625"	150	В	N/C	PD / 24	474P-24
8.708-823.0	S211-DG4	1/2" / BR	.625"	150	В	N/C	PD / 110	474P-110
8.708-824.0	S211-EG5	3/4" / BR	.750"	150	В	N/C	PD / 24	476P-24
8.708-825.0	S211-EG5	3/4" / BR	.750"	150	В	N/C	PD / 110	476P-110
8.708-826.0	S211-FG9	1" / BR	1.00"	150	В	N/C	PD / 24	-
8.708-827.0	S211-FG9	1" / BR	1.00"	150	В	N/C	PD / 110	-
8.708-829.0	S301-BD7	1/4" / BR	.109"	150	В	N/C	DA / 24	401P-24
8.708-830.0	S301-BD7	1/4" / BR	.109"	150	В	N/C	DA / 110	401P-110
8.708-831.0	S301-BD7	1/4" / SS	.125"	150	V	N/C	DA / 24	424-2-24
8.708-832.0	S301-BD7	1/4" / SS	.125"	150	V	N/C	DA / 110	424-2-110
8.708-833.0	S401-Z	3/8" / SS	.350"	1200	V	N/C	PP / 24	453P-24
8.708-834.0	S401-Z	3/8" / SS	.350"	1200	V	N/C	PP / 110	453P-110
8.708-835.0	S401-Z	1/2" / SS	.500"	1200	V	N/C	PP / 24	454P-24
8.708-836.0	S401-Z	1/2" / SS	.500"	1200	V	N/C	PP / 110	454P-110

REPLACEMENT / REPAIR KITS FOR SOLENOID VALVES

8.708-837.0 24V AC Coil

8.700-217.0 Repair Kit - S301, 1/4" Valves (Viton)

SOLENOID VALVES - KIP - SS & BRASS

MODE

■ Reliable over years of use

■ Millions of cycles life not unusual

■ All with FPT Ports



8.708-846.0





TYPE

N/O = Normally Open **N/A** = Not Adjustable

N/C = Normally Closed **C/A** = Chemical Adjustment

PART NO.	MODE	FPT	VOLTAGE	TYPE	ORIFICE ID
STAINLESS-STEEL					
8.708-846.0**	N/C	1/4"	24V AC	N/A	.062
8.708-849.0	N/C	1/8"	24V AC	N/A	.062
8.708-851.0	N/C	1/4"	24V AC	C/A	
8.708-852.0*	N/C	1/4"	24V AC	C/A	
8.708-855.0	N/C	1/4"	120V AC	N/A	.093
8.708-856.0	N/C	1/4"	24V AC	N/A	.093
8.708-857.0*	N/C	1/4"	120V AC	N/A	.093
8.708-858.0*	N/C	1/4"	24V AC	N/A	.093
BRASS SOLENOID	VALVES - KIP				
8.708-863.0*	N/C	1/8"	240V AC	N/A	.062
8.708-864.0*	N/C	1/8"	120V AC	N/A	.062
PARTS					
8.708-859.0	Coil Only		120V	Wire Leads	
8.708-860.0	Coil Only		24V	Wire Leads	
*Conduit Body Style v	with Wire Leads	** Wire Leads			

SOLENOID VALVES WITH BUILT-IN STRAINERS

For pressure lines and pressure systems only.

BRASS VALVES - DIAPHRAGM STYLE

- Normally close valve operation
- Proven design features for reliable performance on all applications
- Operates in any position, but Rated to 200°F fluid and do NOT mount valve with coil under valve
 - 120°F ambient

CELCON PLASTIC VALVES - SUPER FOR STRONG CHEMICALS

■ PSI: 125

- 1/4" & 3/8" FPT, 1/4" Orifice
- Temperature: 180°F
- Diaphragm style with

Y-screen (S.S.)

■ Molded coil CSA-approved ■ Compact design - 1/4" spade

connects

■ Normally closed operation





PART NO.	DEMA NO.	FPT	ORIFICE	PSI	VOLTAGE		
BRASS VALVES - DIAPHRAGM STYLE							
8.711-249.0	442P	1/4"	.25	125	24V AC		
8.711-250.0	442P	1/4"	.25	125	110V AC		
8.711-252.0	443P	3/8"	.25	125	24V AC		
CELCON PLASTIC	VALVES						
8.708-869.0	P442	1/4"	.25	125	24V AC		
8.708-870.0	P442	1/4"	.25	125	110V AC		
8.708-872.0	P443	3/8"	.25	125	24V AC		



PROPORTIONER FLOAT VALVE SYSTEMS - AQUA MASTER™ MODEL 440


Liquid level proportioning controls - automatically maintain drum level and chemical concentration. The Aqua Master automatically maintains a desired level of proportioned mixture in a drum, tank or other type reservoir.



Magnetically activated "snap acting" float valves provide full water flow to activate the chemical proportioners. There are two basic sizes to give a choice of water flows as shown in the table below. Chemical feed rate is adjusted by metering screw or threaded metering tips. The compact 440 float valve is made of Celcon® plastic and is easily accessible for field maintenance.

Liquid-level proportioning controls are available in two flow capacities, 4.0 and 22.0 GPM at 50 PSI. Either size can be used with or without a proportioner. The proportioner allows chemical to be inducted while the valve is open.

All models, except as noted, are equipped with siphon breakers to prevent backflow into the fresh water line. The proportioner discharge is provided with means for attaching a hose or piece for under water feeding to minimize sudsing.

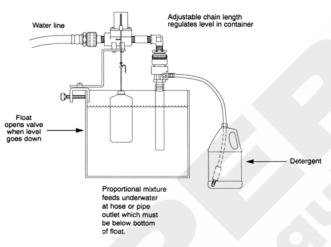

MODEL	DESCRIPTION	CAPACITY
440-23BT	Proportioning Valve, 4 GPM Flow at 50 PSI, Medium Capacity	12*
440-23T	Proportioning Valve, 4 GPM Flow at 50 PSI, High Capacity	35*
440-24	Proportioning Valve,4 GPM Flow at 50 PSI, Highest Capacity	70*
437-21	Proportioning Valve, 22 GPM Flow at 50 PSI, Medium Capacity	10*

*Oz. / Gal of 1 CPS Fuild (ie, Viscosity of Water)

PART NO.	DESCRIPTION
8.710-525.0	440-23BT
8.710-524.0	440-23T
8.710-526.0	440-24
8.710-534.0	Optional Tips

VALVE - 3-WAY - ERIE MOTORTROL®



- Three-way valve to switch hot and cold inlets to single outlet
- 1/2" MPT (all three)
- 24V AC

PART NO.	DESCRIPTION
8.708-879.0	Motortrol Valve

PROPORTIONERS & ACCESSORIES - DEMA

Designed to blend liquid chemical concentrates with water (flowing at normal city water pressure) to create an accurate mix of diluted chemcials. Complete with metering orifice set and/or metering adjustment valve.

1 CPS = Viscosity of Water 75 CPS = Viscosity of SAE 10 Oil

220 CPS = Viscosity of SAE 30 Oil CAPACITY MODEL NO. DESCRIPTION

	1 CPS	75 CPS	220 CPS
162	24	14	6
163H*	64	30	14

*High-concentration chemical blender

Max Blend Rate = Oz Chem Per Gal Water

PART NO.	DESCRIPTION
8.710-530.0	#162 Drum Mount with Proportioner
8.710-529.0	#163H High Concentrate Proportioner Low Side
8.700-226.0	Polyproylene Foot Valve
8.710-534.0	Optional Tips

HYPRO ROLLER PUMPS

Ideal for farm sprayers, pest control and chemical application usage.



- Maximum Fluid Temperature: 140°F
- Self-Priming Operation: Roller Pumps Should Not be Run Dry
- Adaptable to PTOs or Gas Engines

- Standard Super Rollers Provide the Chemical Resistance of Nylon and Long Life of Polypropylene
- Rotation is Determined by Looking at Shaft End of Pump



PART NO.	MODEL NO.	HOUSING	ROTATION	SHAFT DIA	NO. OF ROLLERS	SEALS
8.702-281.0	4101C	Cast-Iron	CW	5/8"	4	Viton
8.702-261.0	6500C	Cast-Iron	CCW	5/8"	6	Viton
8.702-263.0	6500C-R	Cast-Iron	CW	5/8"	6	Viton
8.702-282.0	7560C	Cast-Iron	CCW	15/16"	8	Viton
8.702-283.0	7560C-R	Cast-Iron	CW	15/16"	8	Viton

PERFORMANCE TABLES

→ HYPRO

SERIES 4001

■ PSI Max: 150

■ GPM Max: 9.0

■ RPM Max: 1,800

PRESSURE IN PSI	GPM @ 1,100 RPM	HP	GPM @ 1,400 RPM	HP	GPM @ 1,800 RPM	HP
50	4.4	.24	5.9	.32	8.0	.46
100	3.8	.41	5.3	.56	7.3	.78
125	3.5	.50	5.0	.68	7.0	.95
150	3.3	.62	4.8	.78	6.7	1.10

SERIES 6500

■ PSI Max: 300

■ GPM Max: 21.8

■ RPM Max: 1,200

PRESSURE IN PSI	GPM @ 540 RPM	HP	GPM @ 1,000 RPM	HP	GPM @ 1,200 RPM	НР
50	8.0	.38	16.5	.71	20.1	.90
100	7.2	.68	15.4	1.26	19.1	1.51
125	5.6	1.29	14.0	2.34	17.3	2.84
150	4.3	1.91	12.7	3.47	15.7	4.17

SERIES 4101

■ PSI Max: 150

■ GPM Max: 7.0

■ RPM Max: 2,600

PRESSURE IN PSI	GPM @ 1,800 RPM	HP	GPM @ 2,200 RPM	HP	GPM @ 2,600 RPM	HP
50	4.5	.34	5.60	.40	6.6	.46
100	3.9	.56	5.0	.68	6.0	.76
125	3.7	.68	.82	.82	5.7	.92
150	3.4	.78	4.40	.96	5.4	1.08

SERIES 7560

316

■ PSI Max: 300

■ GPM Max: 22.5

■ RPM Max: 1,000

PRESSURE IN PSI	GPM @ 540 RPM	HP	GPM @ 800 RPM	HP	GPM @ 1,000 RPM	HP
50	11.1	.74	17.5	1.26	22.0	1.78
100	10.3	1.25	16.9	1.95	21.3	2.53
125	8.6	2.26	15.5	3.40	20.0	4.20
150	7.1	3.30	18.9	5.30	18.0	6.10



FLOJET DIAPHRAGM PUMP

FLOJET

Built-in pressure switch automatically starts and stops pump instantaneously.



- Can run dry without damage
- Excellent Self-Priming Capability

■ Low-Current Draw

PART NO.	FLOJET MODEL NO.	VOLTAGE	GPM	MAX PSI	PORTS	DIAPHRAGM*	VALVES*	
8.702-328.0	4300-142A	12V DC	3.50	40	1/2" Barb	S	E	
8.702-312.0	2100-032	115V	1.85	50	3/8" FPT	S	S	
8.702-337.0	2100-022A	115V	1.85	50	3/8" FPT	V	V	
8.702-331.0	4300-042	115V	3.50	45	1/2" Barb	S	E	
8.702-329.0	4300-043A	115V	4.70	35	1/2" Barb	S	E	

^{*}V = Viton E = EPDM S = Santoprene

Note: These units are designed to withstand many harsh chemicals. However, because compounds and concentrations of materials pumped through these units are beyond the manufacturer's control, the manufacturer DOES NOT PROVIDE A WARRANTY on the wet-end of the pump.

DIAPHRAGM PUMP UNITS



1.0 - 3.8 GPM integrated pump motor units. Powered by 12V DC or 115V AC power. Pumps are standard with Santoprene® diaphragms and Viton valves for excellent service with a wide variety of sprayable products.

NOTE: Flow is reduced as pressure is increased (i.e. 100580 pumps 1.12 GPM at 60 PSI) automatic demand control on/off.



- Chemical-Resistant Materials
- Can run dry without damage
- Self-Priming

- Low-Amp Draw
- Automatic demand pressure switch or interanl bypass

PART NO.	SHURFLO MODEL NO.	POWER	VOLTAGE	GPM	MAX PSI	PORTS	DIAPHRAGM*	VALVES*
8.702-294.0	8000-541-236	Demand	12V DC	1.0	60	3/8" FPT	S	V
8.702-304.0	8000-343-236	Demand	12V DC	1.2	60	3/8" FPT	V	V
8.702-300.0	8000-543-236	Demand	12V DC	1.4	60	3/8" FPT	S	V
8.702-296.0	8000-543-238	Demand	12V DC	1.6	100	3/8" FPT	S	V
8.702-335.0	8030-813-239	Demand	12V DC	1.5	150	3/8" FPT	S	V
8.702-302.0	8002-793-238	Demand	12V DC	1.7	100	3/8" FPT	S	E
8.702-311.0	8000-532-256	Demand	115V	1.4	60	3/8" FPT	S	V
8.702-307.0	8000-033-236	Demand	115V	1.0	60	3/8" FPT	V	V
8.702-306.0	8000-533-236	Demand	115V	0.98	60	3/8" FPT	S	V
8.702-334.0	8000-812-288	Bypass	115V	1.4	100	3/8" FPT	S	V
8.702-308.0	8000-813-238	Demand	115V	1.6	100	3/8" FPT	S	V
8.702-338.0	8000-713-238	Demand	115V	1.6	100	3/8" FPT	S	E
2088 PREMIUM	SERIES - SELF-PRIMES	UP TO 12 F1	r BUILT-IN	васк сн	ECK			
8.702-305.0	2088-343-135	Demand	12V DC	3.0	45	1/2" - 14M	S	V
8.702-303.0	2088-313-145	Demand	12V DC	3.6	45	1/2" - 14M	S	V
8.702-301.0	2088-712-244	Demand	12V DC	3.8	40	1/2" - 14M	S	E
8.702-310.0	2088-394-154	Demand	115V	3.2	40	1/2" - 14M	S	V
4111 - DOUBLE	HEAD							
8.702-339.0	4111-035	Demand	12V	7.0	45	1/2" - 14M	S	V
166 - AIR DRIVE								
8.702-317.0	166-200-56	Demand	AIR	1.25	65	3/8" Barb	Е	E

*V = Viton E = EPDM S = Santoprene

Note: These units are designed to withstand many harsh chemicals. However, because compounds and concentrations of materials pumped through these units are beyond the manufacturer's control, the manufacturer DOES NOT PROVIDE A WARRANTY on the wet-end of the pump.

AQUATEC 550 SERIES DIAPHRAGM PUMP

These pumps can either be controlled by a pressure switch ("demand" mode) or an external power control device. When required, an integrated bypass can be incorporated to help regulate pressure levels.





- Powerful flow rates up to
 5.5 GPM / 21 LPM at pressures up to 80 PSI / 5.5 Bar
- Patented 5-Chamber diaphragm and piston design
- Quiet nosie levels and with minimal pulsations

PART NO.	AQUATEC MODEL NO.	VOLTAGE	MAX FLOW	MAX PSI	PORTS	DIAPHRAGM*	VALVES*
8.750-812.0	25513-1E11-M638	12V DC	5.3	60	1/2" NPT	S	E
*V = Viton E = EF	PDM S = Santoprene						

TWIN-DIAPHRAGM SPOT SPRAY PUMP





- PSI: 35 (#8 Tip)
- GPM: 1.0 (Open)
- 3/8" Hose Barb Inlet / Outlet
- Self-Priming to 2.5 Feet
- Operating Temperature: 40° 110°F
- Liquid Temperature Max: 110°F
- 5 Amp Fuse
- Dry Weight: 1.3 lbs.
- Chemical-Resistant Valves and Diaphragm

- Compact automatic on-demand operation
- Sealed pressure switch automatically stops pump when discharge valve opens and closes
- Self-priming so pump can be located above supply tank
- Can run dry for extended periods without damage
- Built-In Thermal Protection on 12V DC Motor
- Low-Amp Draw (2.5 at 25 PSI, 4.0 at 35 PSI)

PART NO.	DESCRIPTION	OPEN
8.702-326.0	Spot Spray Pump, Max 35 PSI, 12V DC	1.0

INDUSTRIAL CHEMICAL SPRAYER

Excellent pre-prep chemical applicator. Trigger control, demand flow, wall-mount cabinet, enclosed pump unit pulls chemical from a bulk tank and delivers it through 100' lightweight hose for low-pressure stream / cone or mist application. Operator simply squeezes trigger for instant application.



- Diaphragm Pump Units
- PSI: 60
- Choice of 12V DC or 110V DC
- 100-Foot Hose
- Adjustable nozzle for cone mist to straight stream
- Durable Santoprene and Viton-Wetted Parts

PART NO.	DESCRIPTION	MOTOR	PSI	GPM
WALL MOUNT / 0	ABINET SPRAY	/ER		
8.906-090.0	Chemical Applicator	115V AC	60	1.15
8.906-089.0	Chemical Applicator	12V DC	60	1.25

Note: These units are designed to withstand many harsh chemicals. However, because compounds and concentrations of materials pumped through these units are beyond the manufacturer's control, the manufacturer DOES NOT PROVIDE A WARRANTY on the wet-end of the pump.

SPRAYMAX TRIGGER GUN

For pest control applications.



- PSI: 1000
- Temperature: 200°F
- Compare to JD-9, Mag-1, Robco and Ges
- Adjusts from fine mist to straight stream
- Drip-Free Shutoff
- Crafted for all-day comfortable use
- Larger trigger for 4-fingered grip

PART NO.	DESCRIPTION
8.708-995.0	With 1/2" Inlet
8.709-028.0	Repair Kit



M23 TRIGGER VALVES

Versatile hand-held trigger valves for chemical or water-flow control.



■ PSI: 700

- 1/2" FPT Inlet/Outlet
- GPM: 18.5
- Lock-On Trigger Loop

PART NO.	DESCRIPTION				
ALUMINUM BODY - SS / BR VALVE					
8.708-982.0	Trigger Valve - Viton				
PLASTIC BODY - SS / BR VALVE					
8.708-983.0	Trigger Valve - Viton				
8.708-984.0	Trigger Valve - Buna				

TRIGGER-CONTROL SPRAY LANCES

Excellent for low-pressure chemical applications up to 150 PSI. Available in either plastic- or brass-lance tube. Works well with neutral, alkaline or mild acid solutions.



- Steel Trigger and Service Wrench
- Plastic Valve Body
- Brass-Needle Plunger
- Filter Screen in Nozzle Housing
- Cone Nozzle Adjusts 0-80°
- 24" Lance Brass or Plastic
- Standard 11/16" outlet thread for standard lowpressure nozzle
- Accepts the adjustable cone nozzles or standard tip-jet nozzles (11/16 nozzle thread)

PART NO.	DESCRIPTION			
TRIGGER LANCE	NCE			
8.902-777.0	Brass withou	t Nozzle		
8.902-778.0	Plastic withou	ut Nozzle		
8.708-977.0	Plastic with Red Nozzle			
8.925-822.0	Brass with Red Nozzle			
8.700-493.0	Needle Valve and Seal Kit			
PART NO.	DESCRIPTION	80° STRAIGHT	CONE	
ADJUSTABLE NOZZLE - GPM @ 40 PSI / ADJUST 0-80°				
8.708-980.0	#2 Red .545 .204			

TURBINE SERIES GUNS

Forged-brass housings, stainless-steel lances, mist cone to straight stream adjustment, on/off control, lock-on trigger, 1/2" BSP inlet Viton seals, up to 850 PSI at 140°F.



- PSI: 850
- 1/2" BSP Male Inlet
- Weight: 4 lbs.
- Standard 15 x 1 LRT(4.5 mm)
- 62 ft Reach, Straight Stream at 850 PSI, 31.5 ft -Reach, Full Cone at 850 PSI

PART NO.	DESCRIPTION	GPM	BARREL
8.708-990.0	Long Range Turbine	30	21
8.708-989.0	Turbine	25	17

GUN ASSEMBLY - 910 SPOT SPRAY

High-pressure trigger gun adapted to spot spray application.



- Durable and comfortable
- 1/4" Hose Barb Inlet
- 12" Plated Steel Lance
- #2 Blue Adjustable Nozzle

PART NO.	DESCRIPTION
8.904-088.0	910 Spot Spray Gun Assembly

BRASS PRESSURE REGULATOR



- Durable and Strong
- 3/4" FPT Outlet
- Temperature: 120°F
- Weight: 10.3 oz.
- Sprayers pumping up to 15 GPM
- Adjustable Pressure Ranges
- Stainless-Steel Spring
- Tee-Handle Adjustment Screw
- 3/4" MPT Inlet
- Knurled locknut for ease of locking in adjustment

PART NO.	DESCRIPTION	PSI
8.712-557.0	3/4" FPT Outlet x 3/4"	0-300

HEAVY-DUTY SWIVELS

Live swivels help prevent twisted and tangled hose.





- PSI: 600
- Brass Body, Stainless-Steel Bolt

- Viton Seals
- 1/2" MPT inlet and 1/2" outlet

PART NO.	DESCRIPTION	PSI
8.708-996.0	Swivel 1/2" M x F	600
8.708-997.0	Swivel 3/4" M X F	600

8.708-996.0

TRIGGER-JET SPRAY LANCES - TEEJET

Low-pressure chemical application lance will tolerate mild acid solutions.



■ PSI: 150

- Diaphragm Shut-Off Valve
- Hand-Grip Trigger Control
- Plastic lance tube resistant to acids and agricultural chemicals
- Excellent for mild acids or alkali chemicals
- Polypropylene Body EPDM Seals STD
- 11/16" Nozzle Connect Outlet

PART NO.	DESCRIPTION			
TRIGGER LANCE (TIP NOT INCLUDED)				
8.709-182.0	24", 1/4" FPT Inlet, Viton			
8.709-184.0	709-184.0 24", 3/8" HB Inlet, Viton			
TRIGGER VALVE	ONLY			
8.709-185.0	3/8" HB Inlet, 11/16" Outlet, Viton			
8.709-186.0	1/4" HB Inlet, 11/16" Outlet, Viton			
8.709-187.0	1/4" FPT Inlet, 11/16" Outlet, Viton			
PARTS AND ACC	ESSORIES - TRIGGER JET LANCE			
8.709-188.0 Adapter, 11/16" x 11/16" PP				
8.709-189.0 24" Lance Tube Only				
8.709-190.0 24" Lance Tube with Seals and Fittings				
TRIGGER JET NOZZLES - POLYPROPYLENE, ADJUST FROM 00 TO 600				
8.709-192.0	Yellow Core (x 3), .23 GPM / 60 PSI			
8.709-193.0 Green Core (x 5), .37 GPM / 60 PSI				
8.709-194.0	Red Core (x 6), .45 GPM / 60 PSI			
8.709-195.0	Gray Core (x 8), .57 GPM / 60 PSI			
8.709-196.0 Brown Core (x 12), .84 GPM / 60 PSI				
8.709-197.0	Orange Core (x 18), 1.2 GPM / 60 PSI			

LONG RANGE TIP

Best used with long-range turbine gun.



- PSI: 850
- GPM: 24.4
- 15 x 1 Long-Range Tip
- Brass Body
- 77 ft Max Throw Range

PART NO.	ORIFICE DIA (MM)	DEGREES
8.708-998.0	3.5	45°
8.708-999.0	4.0	45°
8.709-000.0	4.5	50°
8.709-003.0	6.0	65°
8.709-004.0	7.0	75°

LOW-FLOW BRASS PRESSURE REGULATOR



- 1/2" MPT Inlet
- 1/2" Outlet
- Temperature: 120°F
- Weight: 10.3 oz.
- For Sprayers Pumping Up to 5 GPM
- Durable and Strong Brass Construction
- Stainless-Steel Spring
- Positive Viton Seal to Prevent Leakage
- Knurled Locknut for Easy Adjustment

PART NO.	DESCRIPTION
8.712-553.0	200-650 PSI
8.712-554.0	0-300 PSI



NYLON PRESSURE REGULATOR

Maximum corrosion resistance.



- Male Inlet / Female Outlet
- Temperature: 120°F
- Weight: 4 oz.
- Up to 15.0 GPM
- Stainless-Steel Spring

- Positive Viton Seal to Prevent Leakage and Provide Best Chemical Resistance
- Knurled Locknut for Easy Adjustment
- Tee-Handle Adjustment Screw
- Choice of 1/2" or 3/4" Inlet / Outlet

PART NO.	INLET	OUTLET	ADJUSTABLE PRESSURE RANGE
8.712-555.0	1/2"	3/4"	0-250 PSI
8.712-552.0	3/4"	3/4"	0-250 PSI
8.712-556.0	3/4"	3/4"	0-400 PSI

BULKHEAD FITTINGS



- Black Polypropylene
- Double-Threaded with **EPDM Gasket**
- Opening Same Size as Outside Diameter

PART NO.	FPT	HOLE DIA	
8.705-336.0	1/2"	1-5/8"	
8.705-338.0	3/4"	1-5/8"	
8.705-144.0	3/4"	1-3/4"	
8.705-145.0	1"	1-3/4"	
8.705-339.0	1"	2-1/2"	
8.705-341.0	1-1/4"	2-1/2"	
8.705-342.0	1-1/2"	2-1/2"	
8.705-146.0	1-1/2"	3"	
8.705-147.0	2"	3"	
8.705-343.0	2"	3-1/8"	
GASKET FOR ABOVE			
8 705-337 0	Fits 1/2" 3/4"		

BULKHEAD / TANK FITTINGS - BRASS



- Use to drain or remove liquids from tanks, drums, etc.
- Heavy-Duty Brass
- Includes nut and aluminum grip water

PART NO.	OVERALL LENGTH	MOUNTING HOLE DIAMETER
8.705-139.0	1/8" x 1.5"	5/8"
8.705-140.0	1/4" x .94"	3/4"
8.705-141.0	1/4" x 1.5"	3/4"
9.802-149.0	3/8" x 1.3"	1"
9.802-150.0	1/2" x 1.5"	1-1/8"

Note: Installation requires access to inside of tank

DIAPHRAGM CHECK VALVES - NYLON

For drip-free spraying.



- PSI: 125
- Operating Pressure PSI: 10
- GPM: 2.0
- Nylon Body, Polypropylene End Cap - EPDM - Diaphragm
- 1/4" MPT Inlet, 11/16" 16 Male Outlet Nozzle Thread
- Spring-backed diaphragm for positive actions


PART NO.	DESCRIPTION
8.709-377.0	Diaphragm Check Valves

- DO NOT USE... Polypropylene DO NOT USE... Nylon for: for: gasoline, nitric acid, trichlorethylene, toluene, aromatic hydrocarbons or kerosene. Polypropylene "P" - black / glass reinforced
 - hydrochloric acid, chlorine, fluorine, nitric, xylene or phosphoric or sulfuric acids. Nylon 6/6 "N" white / natural color.

PLASTIC FITTINGS

For cater and chemical supply lines. Ideal for use with most alkaline-based detergents, most agricultural chemicals, ethanol, and most ammonium and sodium-based compounds.

■ PSI: 150



■ Temperature Max: 90°F at 150 PSI







8.705-265.0

8.705-317.0

8.705-335.0

PART NO.	DESCRIPTION	BARB X MPT	
HOSE BARBS - BARB X MPT			
8.705-262.0	Poly	1/4" × 1/4"	
8.705-264.0	Poly	1/4" x 3/8"	
8.705-263.0	Poly	3/8" x 1/4"	
8.705-265.0	Poly	3/8" x 3/8"	
8.705-268.0	Poly	1/2" x 3/8"	
8.705-270.0	Poly	5/8" x 1/2"	
8.705-278.0	Nylon	3/8" x 1/4"	
8.705-281.0	Nylon	3/8" x 3/8"	
8.705-284.0	Nylon	3/8" x 1/2"	
8.705-282.0	Nylon	1/2" x 3/8"	
8.705-285.0	Nylon	1/2" x 1/2"	
8.705-288.0	Nylon	1/2" x 3/4"	
8.705-286.0	Nylon	5/8" x 1/2"	
8.705-289.0	Nylon	5/8" x 3/4"	
8.705-287.0	Nylon	3/4" x 1/2"	
8.705-290.0	Nylon	3/4" x 3/4"	
8.705-291.0	Nylon	1" x 3/4"	
90° BARB X MPT	ELBOWS		
8.705-293.0	Poly	1/4" x 1/4"	
8.705-296.0	Poly	1/4" x 3/8"	
8.705-294.0	Poly	3/8" x 1/4"	
8.705-298.0	Poly	3/8" x 3/8"	
8.705-301.0	Poly	3/8" x 1/2"	
8.705-295.0	Poly	1/2" x 1/4"	
8.705-299.0	Poly	1/2" x 3/8"	

PART NO.	DESCRIPTION	BARB X MPT	
90° BARB X MPT ELBOWS			
8.705-303.0	Poly	1/2" x 1/2"	
8.705-304.0	Poly	5/8" x 1/2"	
8.705-308.0	Poly	5/8" x 3/4"	
8.705-305.0	Poly	3/4" x 1/2"	
8.705-310.0	Poly	3/4" x 3/4"	
8.705-300.0	Nylon	3/8" x 1/2"	
8.705-306.0	Nylon	1/2" x 3/4"	
8.705-309.0	Nylon	3/4" x 3/4"	
HEX NIPPLE - M	PT X MPT		
8.705-316.0	Poly	1/4" x 1/4"	
8.705-317.0	Poly	3/8" x 3/8"	
8.705-323.0	Poly	1/2" x 3/8"	
8.705-319.0	Poly	1/2" x 1/2"	
8.705-326.0	Poly	3/4" x 1/2"	
8.705-321.0	Poly	3/4" x 3/4"	
8.705-324.0	Nylon	1/2" x 1/4"	
8.705-318.0	Nylon	1/2" x 1/2"	
8.705-320.0	Nylon	3/4" x 3/4"	
ELBOWS - BARB	X BARB		
8.705-335.0	Poly	3/8" x 3/8"	
TEES BARB X BA	RB X BARB		
8.705-327.0	Nylon	1/4" B x B x B	
8.705-328.0	Nylon	3/8" B x B x B	
"PUSH-ON" HOSE BARBS - NORMALLY DOES NOT REQUIRE CLAMPS			
8.705-346.0	Nylon	1/4" B x 1/4" FPT	



HIGH-VOLUME LOW-PRESSURE SOFT WASH KIT*

Kit includes:





- Comet P40 pump Low speed, 11GPM@290 psi, with a day work duty cycle (8 hours). Made from Stainless steel, head plates of Aluminum to avoid misalignment and chemical resistant polypropylene for all wet parts
- Honda GX200 Suitable for a wide range of heavy duty applications with a high power-to-displacement ratio,
- easy starting decompression system, high quality materials, low fuel/oil consumption and reduced vibration and noise levels
- Aluminum chassis Corrosion resistance, with skid feet for trailer mounting including vibration isolators
- Extra bracket For pump mounting

PART NO.	MODEL NO.		
9.808-395.0	Soft Wash Kit		
REPLACEMENT PARTS/ACCESSORY			
8.765-877.0	Diaphragm pump P40		
9.118-125.0	Diaphragm pump P36		
8.765-878.0	Diaphragm pump AR750		

*Picture shown assembled, but note components arrive individually; assembly required.

EVERFLO SERIES - DIAPHRAGM PUMPS



PART NO.	MODEL NO.
9.118-120.0	Pump, 5.5 GPM, 12V
9.118-121.0	Pump, 7.0 GPM, 12V
9.118-122.0	Bleach Pump, 5.5 GPM, 12V
9.118-123.0	Replacement Pump Head Kit, 5.5 GPM

LONG DISTANCE NOZZLE



- PSI Max: 5000
- Temperature: 250°F
- Inlet 1/4" NPT-M
- 10 GPM

- Cleans surfaces from longer distances
- Robust stainless steel construction

PART NO.	DESCRIPTION
9.116-521.0	Nozzle, Long Distance #2.0
9.116-522.0	Nozzle, Long Distance #2.5
9.116-523.0	Nozzle, Long Distance #3.0
9.116-524.0	Nozzle, Long Distance #3.5
9.116-525.0	Nozzle, Long Distance #4.0
9.116-526.0	Nozzle, Long Distance #4.5
9.116-527.0	Nozzle, Long Distance #5.0
9.116-528.0	Nozzle, Long Distance #5.5

PART NO.	DESCRIPTION
9.116-529.0	Nozzle, Long Distance #6.0
9.116-530.0	Nozzle, Long Distance #6.5
9.116-531.0	Nozzle, Long Distance #7.0
9.116-532.0	Nozzle, Long Distance #7.5
9.116-533.0	Nozzle, Long Distance #8.0
9.116-534.0	Nozzle, Long Distance #8.5
9.116-535.0	Nozzle, Long Distance #9.0
9.116-536.0	Nozzle, Long Distance #10.0

SPRAY GUN RB65



PART NO. DESCRIPTION

8.710-449.0 16GPM/350PSI 195DEG W/SW

A+ JROD (QC) MULTI-NOZZLE HOLDER

■ Stainless Steel



PART NO.	DESCRIPTION	
9.115-330.0	2-Way	
9.115-396.0	4-Way	

HIGH PSI BALL VALVES



■ Max PSI: 5000

■ Max Temperature: 176°F

■ Nickel Plated Brass Body

PART NO.	DESCRIPTION	
9.113-462.0	3/8" FPTxFPT	
9.115-186.0	1/2" FPTxFPT	

Ball Valves - 2940/3830 Mini Series, Low PSI......262 A Ball Valves - BKH Series, High PSI261 2nd Story Nozzle Kit, 2 PK......197 Ball Valves - Forged-brass, Low PSI......260 15" 2 in 1 Surface / Undercarriage Cleaner......141 Ball Valves - Mini, Low PSI......260 21" Undercarriage Cleaner Kit......142 Ball Valves - Model 727, 3 Way......262 44" Zinc Plated Wand......161 Ball Valves - Nickel-plated Brass, Low PSI......261 A+ 24" VEnturi Pump Surface Cleaner......138 Ball Valves - PVC, Low PSI......261 Ball Valves - RKH Series - Stainless-steel, High PSI.261 A+ relaxed Trigger Gun......155 Ball Valves - Shut-off, High PSI......261 Ball Valves - Stainless-steel, Low PSI......260 Accumulator - Pulse Dampener238 Ball Valves - Stainless-steel, Low PSI, One Piece......261 Adapters - Brass180 Ball Valves - T-601 Series Compact PVC, Low PSI 262 Adapters - High PSI - Steel......185 Barbs - Push-N-Lock......182 Admiral Pump Repair Kits220 Battery Boxes with Cover, Marine Style307 AG Hose - Complete Assembly......171 BD 38/12 C Bp......59 AG Hose - Orange PVC-Ribbed - Bulk......171 Air-filter / Regulators309 BD 50/55 W BP Classic......61 Air Valve - Coil Blow Out264 BD 70/75 W Bp CLASSIC......62 Anti-seize Compound239 BD 80/100 W Bp CLASSIC64 AP1000 Open Gun......159 BDS 51/175 C.......78 AP Dump Gun......159 AP Uninsulated Lances......162 Big Stainless-steel Lances & Side Handles162 Aquatec 550 Series Diaphragm Pump318 Blower Wheels - Beckett......280 AR Direct Drive Pumps232 Blower Wheels - Wayne279 AR Pump Kits......234 BR 35/12 C Bp......58 AR Pump Repair Kit Selection Chart.....233 BR 75/75 W Bp Classic......63 AR Triplex Ceramic Plunger Pumps......231 BR 85/100 W Bp Classic65 Axial Pumps Repair Kits.....127 Bracket Holder145 Axial Pumps, Repair Kits and Tools......125 Brass Pressure Regulator......319 Axial Pumps, Repair Kits and Tools (continued).......126 Axial Pumps, Repair Kits and Tools (continued).......127 Breaker Switches......304 Briggs & Stratton Engine Parts......268 В Briggs & Stratton Engines - Gasoline......268 B 80 W Bp......66 Brushes - Foam & Accessories309 B 150 R Bp......69 Bulkhead Fittings......321 B 150 R BP Accessories......70 Bulkhead / Tank Fittings - Brass......321 Baldor Motors - C-Face Open Drip Proof (ODP)269 Burner Chart - Beckett276 Baldor Motors - Open Drip Proof (ODP).....270

Burner Chart - Wayne278

Ball Valves - 454 Series, Polypropylene, Low PSI 262

Burner Controller and Contractor Tool - Genisys™	·277	Chemical Injectors - 400 Series	255
Burner Ignitor / Base Plates - Beckett	282	Chemical Injectors - 505 Series Stainless-steel	256
Burner Ignitors - Allanson	282	Chemical Injectors - Adjustable, with	
Burner Ignitors - Beckett	281	Quick-connect	
Burner Ignitors - Wayne	282	Chemical Injectors - Amerimax Series	253
Burner Motors	280	Chemical Injectors - Amerimax Series - Quick-coupled Assemblies	253
Burner Parts - Beckett - Electrode / Insulator Assembly	277	Chemical Injectors - Brass	
Burner Parts - Beckett - Misc Repair		Chemical Injectors - Fixed	253
Burner Repair Parts / Common - Beckett & Wayn		Chemical Injectors - Hi-Lo	255
Burner Repair Parts - Wayne		Chemical Injectors - Non Adjustable	256
Burners - Beckett 14V DC		Chemical Injectors / Pressure Reducer - Extact-A-Flow	256
Burners - Beckett - 115V / 230V	276	Chemical Injectors - Robokim	
Burners - Wayne	278	Chemical Injectors - Robokim Quick-Coupled	254
Burner Transformers - Allanson	281	Assemblies	254
Burner Tune Up Kit - Beckett	280	Chemical Injectors - ST-60 Series	253
Bushings - Brass	180	Chemical Injectors - ST-62 Variable	254
BV/Vac Pac™ HEPA Series	57	Chemical Injectors - ST-64, Up Stream	254
		Chemical Injectors - Stainless-steel	253
C		Chemical Injectors - Stainless-steel	256
Cam Switches - 2-Position	303	Chemical Metering Valves - Brass	263
Cam Switches - 3-Position - "Elektra" Universal		Chemical Metering Valves - Dual - ST-66 Model	263
Cam Switches - 3-position - Machine Control		Chemical Metering Valves - Flow Control	263
Cam Switches - 3-Position -SALZAR "BIG BOOT"		Chemical Metering Valves - Flow Selector, 3 & 4 Way	262
Cam Switches - On / Off with Box - "Elektra"	302	Chemical Metering Valves - Series 28, Flow Contr	
Cam Switches - Rotary - Salzer	296	Chemical Metering Valves - Series 28, Flow Contr	
Cam Switches with & without Box	301	Chemical Metering Valves - ST-61	
Car Wash Booms, "Reflex"		Circuit Breakers	
CAT Triplex Pumps		Cleaning Heads & Brushes	
Ceramic Plungers	230	Cleaning Heads & Brushes	
Ceramic Unitized Ball Valve	156	Cleaning Heads & Brushes	
Check Valves - 460 Series, High PSI	259	CleanWave	
Check Valves / Backflow Preventor - T533 Model, Vacuum Breaker	259	Coils	
Check Valves - PVC, Low PSI	259	Coils	135
Check Valves - Spring Loaded, High PSI		Comet Pumps and Pump Kits	236
Check Valves - Spring Loaded, Low PSI		Comet Pumps & Pump Kits- MC25-GR	226
Check Valves - Stainless-steel, High PSI	259	(with Gear Reducer)	
Check Valves - Swing Action, Low PSI	258	Complete Wheels	3U8

Connector Clamps - Romex (Metal)	304	E	
Connector Hose	174		
Connector Hose - 2' - 10'	173	Easy!Force Trigger Gun and Easy!Lock Accessory System	95
Connector / Strain Reliefs - Liquid Tight - For Cable, Wire & Tubing	305	Easy!Force Trigger Gun and Easy!Lock Accessory System	
Contactors - DP - Cutler-Hammer	295	EB 30/1	
Cord Caps & Plugs	304	Economy Trigger Gun	
Couplers - Lance & Nozzle Couplers	206	Elbows - 45°	
Couplers Sections - Browning / Lovejoy	273	Elbows - 90° - Brass	
Couplings and Adapters	106	Elbows - 90° - Galvanized	
Couplings - Field Attachable	172	Elbows - High PSI - Steel	
Couplings - Galvanized	187	Elbows - Street - 90° - Galvanized	
Couplings - Hex - Heavy Wall Steel	185	Elbows - Street-Brass	
Couplings - Hex - High PSI - Steel	185	Elbows - Street - High PSI - Steel	
Crimp Fittings	172	Engine Parts - Kohler Lombardini	
Crosses - 4 Connects - High PSI - Steel	186	Engines - Kohler Lombardini - Diesel	
Crosses - FPT - Brass Extruded	182		
Curb Cleaner		E	
CVS 65/1 Bp	54	File walkes Tale service Monde	1.00
		Fiberglass Telescoping Wands	
D		Filters - Blue TopFilters - Chemical - Brass	
Diaphragm Check Valves - Nylon	321	Filters - Chemical - Brass / Plastic	
Diaphragm Pump Units	317	Filters - Chemical Lines with Filter	
Disinfectant - Vital Oxide	148	Filters - Chemical - "The Big One"	
Draft Diverters & Rain Caps	285	Filters - Clear Bowl	
Drain Cocks	183	Filters - Fuel	
Drum Pumps - Red Head	144	Filters - Fuel - Clear Bowl	
Drum / Tank Pump - Crank Style	144	Filters - Fuel Element - General	
Dual Injectors - High Draw	256	Filters - Fuel / Water Separator - Legacy	
Dual Lances	160	Filters - Fuel / Water Separator - Racor	
Dual Lances	160	Filters - Funnel - Racor	
Duct Cleaner	142	Filters - High-volume	
Duct Cleaner	142	Filters - In-line - All Metal	
DUMP GUN- SJ3000	159	Filters - In-line - Can-type	
		Filters - In-line - Clearview	
		Filters - In-line - Green-cap	
		Filters - In-line - Heavy-duty	
		Filters - In-line - Nozzle - High-pressure	

Flanges - Interpump / General Pump240

240	Foam Systems and Cleaning Agent Injectors	121
307	Foam Systems and Cleaning Agent Injectors	
240		
240		
277		
163		
173		
257	Fuel Caps	307
257	Fuel Conditioner and Soot Remover	280
258	Fuel Nozzles - Check Valve - "Snap"	290
257	Fuel Nozzles - Delavan - 45° & 60°	286
258	Fuel Nozzles - Delavan - 70°	287
	Fuel Nozzles - Delavan - 80°	288
258		
257	Fuel Pump - Beckett Cleancut	280
257	Fuel Pumps & Replacement Parts - Suntec	281
257	Fuel Solenoid Valve - 12V DC Kip	282
258	Fuel Solenoid Valves / Coils - Suntec	283
	Fuel Tank, 9-gallon Diesel	306
265	Fuel Tanks	306
	Fuses	310
	G	
	Galvanized Pipe Fittings	187
	•	
146		
147		
145		
210		
147		
	307240240277163257257258258258257258257257257265292	Continued)

Geared Reduction Units - Interpump / General Pur 240	np	HDS upright class	
Gear Reduction	239	HDS VHP	
Generator - Voltmaster		HD Wall Mounted	
Generator - WINCO- AC- TB2400		Heavy-duty Swivels	
GFCI Module		Hex Couplings - Brass	
GFCI - with and without Plugs & Cords		Hex Couplings - Reducing - Brass	
_		Hex Nipples - Double - Brass	
Giant Trigger Guns		Hex Pipe Plugs - High PSI - Steel	186
Gloves - Industrial Duty		Hex Reducing Nipples - Brass	180
GP Locking Trigger Gun		High-pressure Hoses	99
GP Pump Packing / Extraction Kit - Complete		High-pressure Hoses	100
Gray HOSE fittings		Hobby Gun, Lance and Hose	164
Gun Assembly - 910 Spot Spray		Hobby Hose	170
Gun, Dual Lance Combo		Honda Engine Parts	268
Gutter Cleaner Attachment	163	Hose - 1-Wire	165
		Hose - 2-Wire	165
Hand Cleaner - Victor Waterless Command-O with		Hose - A+ 1- & 2-Wire with Coupling and Plug, Non-marking	168
Pumice		Hose - A+ 1-Wire Gray Smooth Cover,	
Handles - Fiberglass "Super Handles"	145	Non-Marking	168
HD 7.9/72-4 Cage Ec		Hose - A+ / Tuff-flex - 1-Wire Smooth Cover	169
HD Cabinet - Belt Drive		Hose - A+ / Tuff-flex - 2-Wire Smooth Cover	169
HD Cart		Hose Barbs - Brass	183
HD Compact Class		Hose Barbs - Brass Check Barbs	183
HD Gas Mini Skids		Hose Barbs - Orificed	183
HD Mid Class		Hose Barbs - Swivel - Low Pressure	183
HD Mid Class Cage		Hose Bend Restrictors	170
HD PB Cart		Hose Clamps	185
HD PB / PeB / D Cage		Hose - Gray Non-Marking 1 & 2-Wire -	
HD Roll Cage		With & Without Couplers	
HDS Cabinet		Hose - Legacy 1- & 2-Wire, Non-marking	168
HDS Compact Class		Hose - Legacy 1- & 2-Wire, With Couplers or M22 ENDS	166
HD Series Electric		Hose - Legacy 1-Wire Smooth Cover,	100
HD Series Gas		Non-marking	167
HD Series Gas Skid		Hose - Legacy High-pressure	165
HD Special Class		Hose Reels and Brackets	103
HDS P / PE Cage		Hose Reels - AP	
HDS Special Class		Hose Reels - Coxreels	152
		Hose Reels - General Pump A-frame Hose Reels	
HD Super Class	ZO	·	

Hose Reels - General Pump Swivels	153	1	
Hose Reels - Legacy Pivot & Fixed Base	150	<u>- </u>	
Hose Reels - Legacy Stackable	149	Jalapao Series	
Hose Reels - Legacy Swivels	150	Jarvis Series	
Hose Reel Swivels	104	Jetter Pulse Valves	
Hoses - Connector / Car Wash Bay, 12'-25'	312	JRod Multi-Nozzle Holder	
Hose - Whitewater® Combination Steam Hose	170	JRod Multi-Nozzle Holder	
Hypro Roller Pumps	316	Junction Boxes	299
		K	
Indicator Lights	303	Kärcher Detergents	
Industrial Chemical Sprayer	318	Kärcher R1 and R2 Hose	
Insulation and Rigid Disc / Donuts	291	Kärcher Tools	
Interpump / General Pump - Car Wash		Kärcher Tools	133
Solid-shaft Pump	226	Kärcher Triplex Pump Repair Kits	
Interpump / General Pump - EZ Series	227	Kärcher Triplex Pumps	128
Hollow-shaft		Kärcher Triplex Pumps	
Interpump / General Pump - Hollow-shaft		KEW Style QC's	178
Interpump / General Pump Kit Selection Chart		Keyed Ignition Switch - 12V DC	269
Interpump / General Pump Kits - Genuine	229	KM 70/20 C	45
Interpump / General Pump Kits - Genuine (continued)	230	KM 70/30 C Bp Adv	46
Interpump / General Pump - Large Frame	230	KM 75/40 W Bp	47
Solid-shaft Pump	226	KM 85/50 R Bp	48
Interpump / General Pump - Series "44" (EZ Serie Solid-shaft Pump		KM 90/60 R Bp Adv	49
Interpump / General Pump - Solid-shaft Pumps	225	L	
Interpump / General Pump - TSF Solid-shaft Pump	226	Lance Handles / Accessories	163
Interpump / General Pump -		Lances - Flex	311
TX Series Hollow-shaft	227	Legacy "Best" Spray Gun	155
Interpump / General Pump - TX Solid-shaft Pump	o226	Legacy HD Pump	211
Interpump / General Pump - V-packing Insertion Tool Kit	238	Legacy HD Pump - FOG NEMA Series	214
Interpump Packing / Extraction Tool		Legacy HD Pump - GF & GFP Series	214
Solar 400/800 Solar Panel Cleaner		Legacy HD Pump - GM Series	212
Solar 400/800 Solar Panel Cleaner		Legacy HD Pump - GP & GPP Series	214
issue. Too, ood sold it drief cledifer		Legacy HD Pump - GS Series	214
		Legacy HD Pump - GT Series	212
		Legacy HD Pump - GX Series	211
		Legacy HD Pump - Ready to Go Series	212
		Legacy HD Pump Repair - Ceramic Plunger Kits	224

Legacy HD Pump Repair - Complete Kits	224	Miscellaneous Hoses	102
Legacy HD Pump Repair Kit Selection Chart	221	Miscellaneous Parts	308
Legacy HD Pump Repair Kit Selection Chart	222	Mississippi Recovery	42
(continued)	222	ML320	158
Legacy HD Pump Repair Kit Selection Chart (continued)	223	Mobile Hot Water Generator	40
Legacy HD Pump Repair - Plunger Oil Seal Kits	225	Mojave Series	
Legacy HD Pump Repair - Seal Kits	223	Molded Plastic Float Tanks	
Legacy HD Pump Repair - Valve Kits	224	Motor Contactors - Coils & Thermal Overloads	297
Legacy Industrial Gun and Lance Combo	164	Motors - A.O. Smith - Pressure Washer - Open Drip Proof (ODP)	271
Legacy "Industrial" Spray Gun	155	Motor Starter with Sealed Box - Manual	
Legacy Oval Molded Grip Lances	161	Motors - Totally Enclosed Fan Cooled (TEFC)	
Legacy Pump	217	Motors - WEG - Pressure Washer	
Legacy Pump - GBP & GB Series	212	MV925 Gun	
Legacy Pump - HFR Series	213	MV925 Gun and Lance Combo	
Legacy Pump - HHP Series	213	MV925 Gun, Lance and Hose Combo	
Legacy Pump - KKV Series	215	MV 925 Open Gun	
Legacy Pump - NLT Series	213	MV925 Trigger Gun	
Legacy Pump - NMT Series	213	MV Lance Handle	
Legacy Pump Repair Kits	219		
Legacy Pump Repair Tool Kit	218	N 😌	
Legacy Pump - TMH Series	217		
Legacy Pump - TML Series	215	Nipples - Brass - Open & Close	
Legacy Pump - TTV Series	215	Nipples - Hex - High PSI - Steel	
Legacy Pump - WJG Series	216	Nipples -JIC - Brass	
Legacy Pump - WJH-F & WJH Series	216	Nipples - JIC X-Pipe	
Legacy Pump - WMG 1 Series	217	Nipples - Pipe - MPT - High PSI - Zinc	
Legacy Pump - WMG Series	216	Nozzle Fan Selection	
Legacy Square Molded Grip Lances	161	Nozzle Filters - 1/4" High-pressure	
Legacy Vented Lances	162	Nozzle Holder	
Lightweight Gray HOSE	167	Nozzle Holder - Double	
Locknut Fittings - Hex-Head Plugs	184	Nozzle Holder Grommet	
Locks for Meter Boxes	310	Nozzle Holder / Head - ST-56 Rollover	
Long Range Tip	320	Nozzle Holder - Pivot	
Low-flow Brass Pressure Regulator	320	Nozzle Holder - Rollover - Twist Type	
		Nozzle Holder - ST-51N Adjustable	
M		Nozzle Holder - ST-330 - Swiveling	
M23 Trigger Valves	310	Nozzle Protector / Coupler	
M407 Trigger Gun		Nozzle Protector - Slip-on	
1V1707 11166C1 0011	100	Nozzle Protector - ST-10	203

Nozzles - 1/4" Veejet - Broad Spray Stainless-ste	eel 200	NT 48/1	55
Nozzles - 1/4" Veejet - Low-pressure - Brass	201	NT 68/1	56
Nozzles - 3650 & 5100 PSI Turbo	205	Nylon Pressure Regulator	321
Nozzles - A+ / AP Revolution Turbo	203		
Nozzles - A+ Multi-fan	207	0	
Nozzles - Adjustable	209	O-Ring REplacements	178
Nozzles and Power Nozzles	111	O-Rings	
Nozzles - Duo-reg	207	Other Accessories	
Nozzle Sets - GP - QC 4 & 5 Packs - Color-coded	196	Other Accessories	
Nozzle Sets - Legacy - QC 4 & 5 Packs - Color-coded	195	Overload Relays for ConTACTors	
Nozzles - Gum RemovAl	209	n	
Nozzles - HL250 Vari Hi-low Angle	208	P	10
Nozzle Size Selection Chart	194	PA Linear Gun	158
Nozzles - Legacy - QC - 1/4" Color-coded	195	PA Trigger Gun	157
Nozzles - Legacy Revolution Turbo	202	Performance Tables	316
Nozzles - Long distance	210	Pipe Cleaning	118
Nozzles - MEG - 1/4" Male Threads	198	Piston Pumps - Hypro	237
Nozzles - MEG - 1/4" - M-Style	197	Plastic Dip Tube Assembly	307
Nozzles - MEG - 1/8" - "Washjet"	199	Plastic Fittings	322
Nozzles - MV Rotojet 3700 & 5800 Turbo	204	Plugs - Allen Head	184
Nozzles - QC - 1/4" - Q-Style	196	Plugs - Hex Head	184
Nozzles - QC "Wash Jet"	200	Power Cord - Molded	296
Nozzles - Rotojet 2500	206	Powered Damper	285
Nozzles - Soap	202	Pressure Gauge - Fuel / Oil	265
Nozzles - Soap Nozzles	197	Pressure Gauges - 100 Series Pneumatic	265
Nozzles - ST-357 & ST-457 Turbo	205	Pressure Gauges - ABS, Corrosion-resistant	266
Nozzles - Steam	209	Pressure Gauges - Port Kit	265
Nozzles - Steam	209	Pressure Gauges - Stainless-steel	266
Nozzles - Turbo - A+ Nozzle Kit	203	Pressure Gauges / Temperature Test Set	267
Nozzles - Turbo - IDK & DK Series - Dirt Killer	206	Pressure Gauges - Vacuum - Stainless-steel	266
Nozzles - Turbo MV Rotating Soft / Hard	206	Pressure Loop - 2-Wire	169
Nozzle System - Tip Jet	201	Pressure Regulator, Water 2-Way	266
Nozzle System - Tip Jet Adapter Caps	202	Pressure Relief Valve - Easy-start, High PSI	265
Nozzle System - Tip Jet Nozzle Bodies	201	Pressure Relief Valve - Easy-start, Low PSI	265
Nozzle System - Tip Jet Retainer	202	Pressure Relief Valves	264
Nozzle System - Tip Jet Retainer Caps	202	Pressure Relief Valves - SR/S3	251
Nozzle System - Tip Jet Strainers	202	Pressure Relief Valves - Timax	251
Nozzles - ZRMax & ZRotomax Rotating	206	Pressure Relief Valves - VS 200 / 180 High PSI	252

Pressure Relief Valves - vs 220	252	Q.C. Sockets & Plugs - M22 - Twist Seal	177
Pressure Relief Valves - vs 350, High PSI	252	Q.C. Sockets & Plugs - Snaptite Series	176
Pressure Relief Valves - VS 500, High PSI	252	Q.C. Sockets & Plugs - ST Series	176
Pressure Switches - Compact & PS-6 SS	293	Quick Change Pumps	129
Pressure Switches - Legacy	293		
Pressure Switches - PA - PR1 - Red	293	R	
Pressure Switches - PR16 - Black	293	Rain Suit, 2 Piece	
Pro HD 400 ED	21	Ranger	
Propane Gas Hose	284	Reducing Bushing - High PSI - Steel	
Proportioner Float Valve Systems - Aqua Maste Model 440		Reference / Calculation Guide	271
Proportioners & Accessories - DEMA	315	Regulating Relief Valve	
PTO Geared Multiplier	240	Regulator Valve - Steam	
Pulley Bushings	273	Relays	
Pulleys	274	Relay Switch	
PULLEYS- SHEAVES	275	Replacement Fuel Cap	
Pulse Hose		Replacement Orlfices	207
Pump - Air-operated - Flojet		Rocker Switches	302
Pump Lube	239	Rotary Nozzles	115
Pump Oil	239	Rotary Nozzles	116
Pump Packing Extractor Hammer & Sockets	238	Rubber Parts	307
Pump Packing & Seal Kits - Generic - A+	237	Rupture Disks	264
Pump Parts and Tools	237		
Pump Rails - Legacy & Legacy HD	217	S	
Pumps - Air-driven - Flojet	309	Sandblasters - Industrial	143
Pump Technical Information	241	Sandblast Head - Professional	143
Pumptech Pump		Sandblast Hose	143
Pump Tools - Extractor Pliers & Dental Pick Puzzi™ 8/1 C		Sandblast Kit - Tungsten Carbide Nozzle Head - Industrial	142
1 0221 0/ 1 C	J1	Sandblast Nozzle Tips	143
Q		Sand Nozzle	143
<u> </u>		Scalemaster	149
Q.C. Sockets & Plugs - A+ Brass		Sechura - LP	12
Q.C. Sockets & Plugs - Double Shut-off	178	Sechura - NG	11
Q.C. Sockets & Plugs - Extended Twist Seal	177	Sechura Series	10
Q.C. Sockets & Plugs - Foster		Sewer Hose	174
Q.C. Sockets & Plugs - Legacy - Brass & Steel	175	Sewer / Tube Cleaning Nozzles	193
Q.C. Sockets & Plugs - Legacy - Stainless-steel	175	Sewer / Tube Cleaning Nozzles - ST-49 & "Mini".	
Q.C. Sockets & Plugs- M22 - Quick Disconnect	177	SG 4/4	74
Q.C. Sockets & Plugs - M22 - Twist Seal	177	SG Bp Gum Remover	76
			333

SGV 6/5	75	Surface Cleaners - GP - Flat 12", 18" & 20"	139
Sludge pump kit	144	Surface Cleaners - Vac Recovery	138
Sludge Sucker - ST-36 Pit Boss	144	Surface Cleaners - Whisper Wash Flat	140
Small Engine Test Equipment	273	Surface Cleaners with Suction	120
Solenoid Valves - CFA - SS & Brass	313	Suttner Dual Lances	161
Solenoid Valves - CFA - SS & Brass	313	Suttner Lances	162
Solenoid Valves - Kip - SS & Brass	314	Suttner Push and Pull Lance	162
Solenoid Valves with Built-in Strainers	314	Suttner Trigger Gun	158
Soot Pump	280	Switch Box - Raintite	299
Sprayers - B&G Poly-molded	147	Switches / Contact Blocks - Push Button -	
Sprayers - Chapin Air-Powered	147	Cutler-Hammer	
Spray-Flex™ Flex Wand	163	Switches - Thermal - Hi-limit - Snap	
Spray Lances	109	Switches - Thermal - Hi-limit - Snap with Leads	
Spray Lances	110	Switches - Toggle - Motor Control	
Spraymax Trigger Gun	318	Switches - Toggle - Push Button	
SS Nozzle Filter	207	Switch - Rotary - 8-position	
ST-810 Suttner Trigger Gun	156	Swivels - 90°	
ST-1500h Open Gun		Swivels - A+ Long Body Style	
ST-1500 Suttner Trigger Gun	157	Swivels - Ball Bearing	179
ST-2000 Suttner Trigger Gun	156	Swivels - Gun - Mosmatic	179
ST-2305 Suttner Trigger Gun		Swivels - JIC	181
ST-2305 Suttner Trigger Gun		Swivels - Low-pressure - Car Wash	311
ST-2315 Suttner Trigger Gun		Swivels - Medium-pressure - Car Wash	311
ST-2605 Suttner Trigger Gun		Swivels - Right Angle	178
ST-2700 Suttner Trigger Gun		Swivels - Stainless-steel	179
ST-2720 Suttner Trigger Gun		Swivels - Stainless-steel Ball Bearing	179
Stainless-steel Float Tank		Swivels - Stainless-steel, High-pressure	179
stainless steel Lance	161	Swivels - Stainless-steel, High-pressure and	470
Starter Solenoid - 12V DC	269	Economy Brass	179
Stationary Hot Water Generator Series	41	T	
Steam Jet Nozzles	117	<u> </u>	
Steam Lance	144	Tach/HR meter	267
Strainers / Tank Screen	190	Tape - Teflon® Thread Sealing	148
Strainers - Y Trap	189	Tape - Vinyl Electrical	304
Surface Cleaner Nozzle Recommendation	140	Tees - 3 Connects - High PSI - Forged	186
Surface Cleaners	119	Tees - Banded - 3 Connects - Galvanized	187
Surface Cleaners - 15" detergent dosing	139	Tees - Branch-Brass	182
		Tees - FPT - Forged-Brass	182
Surface Cleaners - Economy - 8" & 15"	139	Tees - Street-Brass	182
22.4		Tees - Street Tee - High PSI - Steel	186

Temperature Gauge	267	Unloader Valves - APMPressure Actuated Series	250
Temperature Gauge - Thermwell	267	Unloader Valves - APR Series	244
Teton Series	32	Unloader Valves - AR Bolt-on	250
Thermal Relief Valve/ Pump Protector	264	Unloader Valves - Control Set "W" Series	247
Thermal Relief Valve/ Pump Protector- Compact	263	Unloader Valves - Flow-actuated	251
Thermal Relief Valve/ Pump Protector - TRV	264	Unloader Valves - Gymatic -	
Thermostat - Adjustable - Flow-thru	303	3/B & VR35 3/B Series	
Thermostat - Probe Style	303	Unloader Valves - HM Model	
Thread Lock Products	148	Unloader Valves - Hypro-style	
Throttle Control - Speedmaster	267	Unloader Valves - Kits for K / ZK Series	
Timer	300	Unloader Valves - K / ZK Series	
Transformers	310	Unloader Valves - MG4000 Series	
Transformers - Step-down	298	Unloader Valves - Mounting Block	
Trigger-control Spray Lances	319	Unloader Valves - Pulsar RV Series	245
Trigger Gun - RB65 Wash Gun	311	Unloader Valves - pulsar RZ - Flow sensitive	
Trigger Guns	107	Unloader Valves - ST-230	249
Trigger-jet Spray Lances - Teejet	320	Unloader Valves - ST-261 Series	
Triple Nozzles	113	Unloader Valves - ST-280	249
Triple Nozzles	114	Unloader Valves - UU1 Universal	243
Triplex Pump Repair Kit Selection Chart		Unloader Valves - VB3	244
TRK-3500		Unloader Valves - VB7 Series	245
TRK-6000	18	Unloader Valves - VB8 Series	246
Tubing - Clear PVC	172	Unloader Valves - VB9 / VB10 Trapped	247
Tubing - Clear Reinforced PVC	172	Pressure Series	
Tubing - Heavy-duty Vinyl	172	Unloader Valves - VB75 / VB135 Series	
Tule Series HDS 3.5/40 Ge MT	16	Unloader Valves - VB80 / 400 Stainless-steel	
Turbine Series Guns		Unloader Valves - VB85 / 280 Series	
Turbo Nozzle - ST-559	203	Unloader Valves - VB130/135 Series	
Twin-diaphragm Spot Spray Pump		Unloader Valves - VB200 High-volume Series	
		Unloader Valves - VB350 / VB7 Series	
U		Unloader Valves - VBT Series	
	4.40	Unloader Valves - VR53	
Underbody Wand Assembly - Self Serve		Unloader Valves - VR54/56	
Undercarriage Cleaner		Unloader Valves - VR56/VBA35 Series	
Undercarriage Cleaner		Unloader Valves - VRT3 Series	
Undercarriage Cleaner & Roof Surface Cleaner		Unloader Valves - VRT100 High-Volume Series	
Unloader Valve - Flow Sensitive	247	Unloader Valves - YU High Volume	248
Unloader Valves - 22900A Pressure Actuated Series	250		

V

Vac Switches - Burner Control	293
Vacuum Accessories	311
Vacuum Motors - A+ / AP	312
Vacuum Motors - Ametek-Lamb	312
Valve - 3-Way - Erie Motortrol®	315
V-belts - Super "Gripnotch"	274
Voltage Regulator - Heavy-duty 15V	269
Voltmeters	267
VP Dual Lance	160
W	
Wash Bay Accessories - Stainless-steel	310
Wash Brushes	105
Water Broom 16"	141
Wayne Burner Replacement Parts & Cross Reference Chart	137
Wayne Burners for Kärcher Pressure Washers.	136
Wet Blasting Attachments	121
Wire Looms - Used for Wiring Harnesses	304
X-Y	Ø
X-Jet Long Range Nozzle	209
Yamada Pumps	242
Yamada Pumps Diaphragm Kits	242

Please contact us for more information:

Kärcher U.S.A.

6398 N. Kärcher Way Aurora, CO 80019 U.S.A.

Tel. 888-805-9852











