


CUSTOM SPECTRA LIGHTING.com

T8 Intergrated Led Tube

- UL Certificate No.: E471267
- 50,000 Hours Life Time

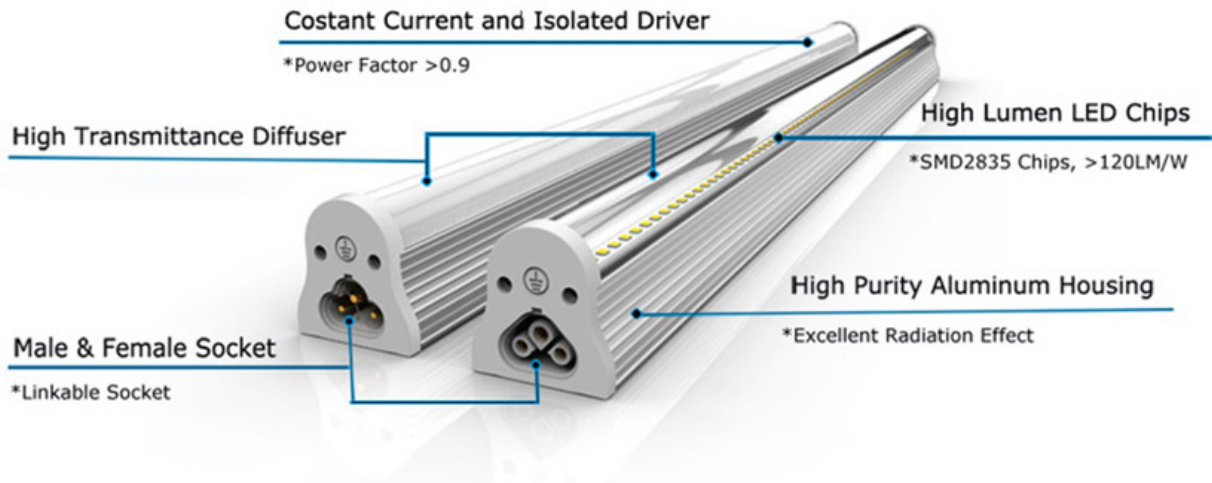

Features

- Patent Male-female linkable design
Seamless & No Dark in-line connection
- UL ETL TUV SAA approved, DLC Listed
- 0.8mm aluminum for excellent heat dissipation

Technical Specifications

- Input Voltage: Isolated Driver
AC100-277V 50/60Hz or AC100-240V 50/60Hz
- Total harmonic distortion: THD<19
- Power Factor: PF>0.95
- Efficiency: 110-130LM/W
- Color Index: Ra>82
- IP Rating: IP40
- Switching Time: 100,000
- Operation Temperature: -20°C ~ +50°C / -4°F ~ +122°F




Available in a 3000K 4000K 5000K 5700K 6000K 6500K color temperature and your choice of a clear or milky diffusion lens


CUSTOM
SPECTRA
LIGHTING.com

CUSTOM SPECTRA LIGHTING.com

Item No.	Length	Power	Luminous flux(LM)	CRI	Package
CSLLY-T8DL600-9W-XXXX	2ft/600mm	9W	900-1,170lm	>82	725*240*205mm;20pcs/ctn
CSLLY-T8DL900-13W-XXXX	3ft/900mm	13W	1,430-1,690lm	>82	1035*240*205mm;20pcs/ctn
CSLLY-T8DL1200-22W-XXXX	4ft/1200mm	22W	2,420-2,340lm	>82	1335*240*205mm;20pcs/ctn
CSLLY-T8DL1500-25W-XXXX	5ft/1500mm	25W	2,640-2,860lm	>82	1640*240*205mm;16pcs/ctn
CSLLY-T8DL1800-30W-XXXX	6ft/1800mm	30W	3,300-3,900lm	>82	1900*240*205mm;20pcs/ctn
CSLLY-T8DL2400-44W-XXXX	8ft/2400mm	44W	4,840-5,730lm	>82	2520*165*165mm;9pcs/ctn

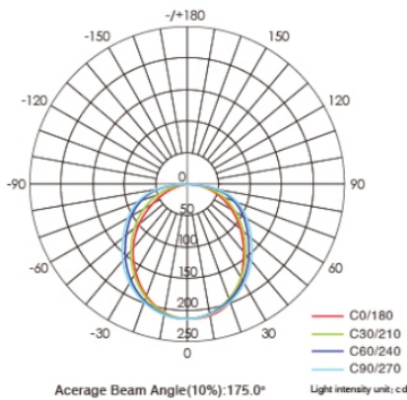

Size:(mm)

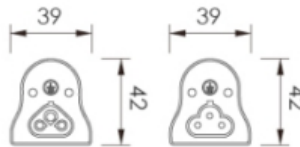

600/900/1200/1500/1800/2400



Available in multiple lengths, choice of color temperatures and cord connections, the Double T5 Integrated Tube LED luminaire is a great and flexible choice. Each unit comes with a pigtail, butt connector for a seamless light source when mounted end to end, mounting clips and a connector cable. Optional cable lengths and 120 VAC plug cords are available. You can also add a corner mount for a Custom look. DLC listed means this fixture is available for Utility Rebates!

Contact us at:

www.CustomSpectraLighting.com
 e office@CustomSpectraLighting.com
 p (317) 922-8775
 f (317) 877-1774

CUSTOM
SPECTRA
LIGHTING.com