



Inspired by a firm belief that we could create a unique sonic identity that focused on musical realism and sound integrity, we set out to redefine the reproduction of sound.



CONTENTS

Hi-Fi SPEAKERS

KORE.....	4
EPIKORE.....	8
EPICON.....	12
RUBIKORE.....	16
MENUET, MENUET SE.....	20
OPTICON MK2.....	24
FAZON.....	28
OBERON.....	30
KUPID.....	34
ALTECO.....	38

WIRELESS Hi-Fi

RUBICON C.....	40
KATCH G2.....	42

HEADPHONES

iO-6, iO-8, iO-12.....	44
------------------------	----

CUSTOM INSTALL

PHANTOM S.....	50
PHANTOM M.....	52
PHANTOM H.....	54
PHANTOM M-80 A.....	58
PHANTOM K.....	60
GARDIAN OW-6.....	62
PHANTOM E, E-WR.....	64
CI AMP-2500 DSP, CI AMP-4750 DSP.....	68
IW-SUB S-100.....	70

SUBWOOFERS

V-16 F.....	72
P-10 DSS, M-10 D, K-14 F, E-12 F, E-9 F, C-8 D.....	74

SOUND HUB

BLUOS NPM 2i, HDMI MODULE, DALI WSR.....	80
--	----

ACCESSORIES

.....	82
-------	----

DALI KORE

The DALI KORE is the ultimate expression of our admiration of music. It's a visual and sonic masterpiece with groundbreaking technologies that break with tradition and push the boundaries of loudspeaker design.

The DALI KORE delivers effortless sound with unlimited dynamic response. From the pluck of a string to the epic crescendo of a symphonic orchestra, the DALI KORE recreates every moment with unmatched fidelity.

SPECIFICATION

Frequency range ±3dB	26 - 34,000 Hz
Sensitivity (2.83V/1m)	88 dB
Nominal impedance	4.0 Ω
Recommended amplification power	50 - 1,000 watts
Bass drivers	2 x 11 1/2 inch Balanced Drive SMC
Midrange driver	7 inch Balanced Drive SMC
Hybrid high frequency driver	35 mm soft textile dome
Hybrid super high frequency driver	10 x 55 mm ribbon
Dimensions (H x W x D)	167.5 x 44.8 x 59.3 cm
Weight	148 kg

HI-FI SPEAKERS



HI-FI SPEAKERS



AMMARA EBONY
(Gold Metal)*



AMMARA EBONY
(Black Metal)

NEW



HIGH GLOSS WHITE

NEW



HIGH GLOSS VELVET RED

NEW

HI-FI SPEAKERS



HIGH GLOSS BLACK

NEW



HIGH GLOSS STEEL GREY

NEW



HIGH GLOSS RACING GREEN

NEW



HIGH GLOSS NAVY BLUE

NEW

HI-FI SPEAKERS

DALI EPIKORE

The EPIKORE series is the natural evolution of our acclaimed DALI EPICON series. Benefitting from four decades of loudspeaker research and development, EPIKORE inherits several new technologies from our DALI KORE flagship speaker, which together, set ground-breaking standards for low distortion loudspeaker design. It combines ultimate audio realism and luxurious craftsmanship to create an exceptional visual and musical experience.



HI-FI SPEAKERS

SPECIFICATION	EPIKORE 3	EPIKORE 7
Frequency range ±3dB	42 - 34,000 Hz	35 - 34,000 Hz
Sensitivity (2.83V/1m)	85 dB	88 dB
Nominal impedance	6.0 Ω	6.0 Ω
Recommended amplification power	40 - 250 watts	40 - 400 watts
Maximum SPL [dB]	108 dB	110 dB
High frequency driver(s)	10 × 55 mm planar magnetostatic tweeter 1 x 35 mm soft dome	10 × 55 mm planar magnetostatic tweeter 1 x 35 mm soft dome
High frequency diaphragm	Planar magnetostatic Soft woven fabric	Planar magnetostatic Soft woven fabric
Low/Mid frequency driver(s)	1 x 7 inch	2 x 7 inch
Dimensions (HxWxD)	470 x 250 x 420 mm 18.5 x 9.8 x 16.5 inches	1120 x 380 x 420 mm 44.1 x 15.0 x 16.5 inches
Weight	15.9 kg	32.5 kg

EPIKORE 9	EPIKORE 11	EPIKORE STAND
29 - 34,000 Hz	29 - 34,000 Hz	Speaker stand for EPIKORE 3.
88 dB	89 dB	
4.0 Ω	4.0 Ω	
40 - 500 watts	40 - 1,000 watts	
112 dB	116 dB	
10 × 55 mm planar magnetostatic tweeter 1 x 35 mm soft dome	10 × 55 mm planar magnetostatic tweeter 1 x 35 mm soft dome	
Planar magnetostatic Soft woven fabric	Planar magnetostatic Soft woven fabric	
2 x 8 inch 1 x 6½ inch	4 x 8 inch 1 x 6½ inch	
1310 x 422 x 554 mm 51.6 x 16.6 x 21.8 inches	1602 x 422 x 554 mm 63 x 16.6 x 21.8 inches	
57.1 kg	75.6 kg	

HI-FI SPEAKERS



HI-FI SPEAKERS



HIGH GLOSS BLACK



HIGH GLOSS MAROON



HIGH GLOSS WALNUT



HIGH GLOSS WHITE
(Late 2025, select markets only)

HI-FI SPEAKERS

DALI EPICON

Dramatically rich and detailed sound that will captivate your senses. The DALI EPICON series is a masterpiece of true musical indulgence that is as captivating to the eye as the sound is to the ear.



HI-FI SPEAKERS

SPECIFICATION	EPICON 2	EPICON 6
Frequency range ±3dB	47 - 30,000 Hz	35 - 30,000 Hz
Sensitivity (2.83V/1m)	87 dB	88 dB
Nominal impedance	4,0 Ω	5,0 Ω
Recommended amplification power	30-200 Watt	50 - 300 Watt
Maximum SPL [dB]	108 dB	110 dB
High frequency driver(s)	1 x 29 mm dome	1 x 29 mm dome + 55 x 10 mm ribbon
Mediums	-	-
Mids - Basses	1 x 16.5 cm with SMC	2 x 16.5 cm with SMC
Dimensions (HxWxD)	38.6 x 21.4 x 36.6 cm	102.9 x 23.2 x 44.1 cm
Weight	10.3 kg	30 kg



SPECIFICATION	EPICON 8	EPICON VOKAL	EPICON STAND
Frequency range ±3dB	35 - 30,000 Hz	48 - 30,000 Hz	Speaker stand for EPICON 2 or EPICON VOKAL.
Sensitivity (2.83V/1m)	89 dB	87.5 d	
Nominal impedance	4,0 Ω	8,0 Ω	
Recommended amplification power	50-500 Watt	50 - 300 Watt	
Maximum SPL [dB]	112 dB	111 dB	
High frequency driver(s)	1 x 29 mm dome + 55 x 10 mm ribbon	1 x 29 mm dome + 55 x 10 mm ribbon	
Mediums	1 x 16.5 cm	-	
Mids - Basses	2 x 20.3 cm with SMC	2 x 16.5 cm with SMC	
Dimensions (HxWxD)	122.5 x 26.4 x 48.5 cm	24.5 x 81.6 x 34.9 cm	
Weight	47.5 kg	18.4 kg	

HI-FI SPEAKERS



HI-FI SPEAKERS



SATIN BLACK



SATIN WHITE



HIGH GLOSS
LACQUER BLACK



HIGH GLOSS LACQUER
RUBY MACASSAR

HI-FI SPEAKERS

DALI RUBIKORE

The DALI RUBIKORE series is a versatile loudspeaker range that covers roles from ambitious High-End stereo to high performance home theatre and even background sound. With immense versatility of use through floor stand, stand mount, wall mount and home cinema applications, the RUBIKORE series covers every need in the home listening environment.



HI-FI SPEAKERS

SPECIFICATION	RUBIKORE 2	RUBIKORE 6
Frequency range ±3dB	50 - 26,000 Hz	38 - 34,000 Hz
Sensitivity (2.83V/1m)	87 dB	88.5 dB
Nominal impedance	4 ohm	4 ohm
Recommended amplification power	40 - 150 Watt	40 - 200 Watt
Maximum SPL [dB]	107 dB	110dB
High frequency driver(s)	1 x 29 mm low loss soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome
Mediums	Soft woven fabric	Planar magnetostatic Soft woven fabric
Mids - Basses	1 x 6½ inch Clarity Cone™ paper and wood fibre	2 x 6½ inch Clarity Cone™ paper and wood fibre
Dimensions (HxWxD)	350 x 195 x 335 mm 13.9 x 7.7 x 13.3 inches	990 x 200 x 380 mm 39.1 x 7.9 x 15.0 inches
Weight	9.5 kg 20.9 lb	23 kg 50.7 lb

SPECIFICATION	RUBIKORE 8	RUBIKORE ON-WALL	RUBIKORE CINEMA
Frequency range ±3dB	38 - 34,000 Hz	59 - 34,000 Hz	49 - 34,000 Hz
Sensitivity (2.83V/1m)	90.5 dB	88.5 dB	89 dB
Nominal impedance	4 ohm	4 ohm	4 ohm
Recommended amplification power	40 - 250 Watt	20 - 150 Watt	40 - 200 Watt
Maximum SPL [dB]	112 dB	108 dB	111 dB
High frequency driver(s)	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm soft dome
Mediums	Planar magnetostatic Soft woven fabric	Planar magnetostatic Soft woven fabric	Planar magnetostatic Soft woven fabric
Mids - Basses	3 x 6½ inch Clarity Cone™ paper and wood fibre	1 x 6½ inch Clarity Cone™ paper and wood fibre	2 x 6½ inch Clarity Cone™ paper and wood fibre
Dimensions (HxWxD)	1100 x 220 x 444 mm 43.5 x 8.7 x 17.6 inches	465 x 278 x 142 mm 18.4 x 11.0 x 5.6inches	197 x 581 x 400 mm 7.7 x 22.8 x 15.7 inches
Weight	30 kg 66.1 lb	8.5 kg 18.7 lb	16 kg 35.2 lb

HI-FI SPEAKERS



HI-FI SPEAKERS



HIGH GLOSS BLACK



HIGH GLOSS WHITE



NATURAL WALNUT



HIGH GLOSS MAROON
(Available for RUBIKORE 2,6, 8 only)

HI-FI SPEAKERS

DALI MENUET

DALI MENUET is a small, yet powerful loudspeaker. It reveals great musicality that sets new standards for sound and performance from a compact speaker. Experience clean, undistorted bass, open and dynamic midrange and crisp highs with lots of detail. The clean design of the DALI MENUET integrates into any room around the house and matches perfectly with our acclaimed RUBICON series as part of an exceptional home cinema system.

SPECIFICATION

Frequency range ±3dB	59 - 25,000 Hz
Sensitivity (2.83V/1m)	86 dB
Nominal impedance	4.0 Ω
Recommended amplification power	20 - 100 watts
Low frequency/Midrange driver	4½ inch wood fibre
High frequency driver (s)	1 x 28 mm soft dome
Mediums	1 x 11.4 cm
Dimensions (HxWxD)	250 x 150 x 230 mm
Weight	4.1 kg

HI-FI SPEAKERS



LACQUER BLACK




LACQUER WHITE



VANEER WALNUT



VANEER ROSSO

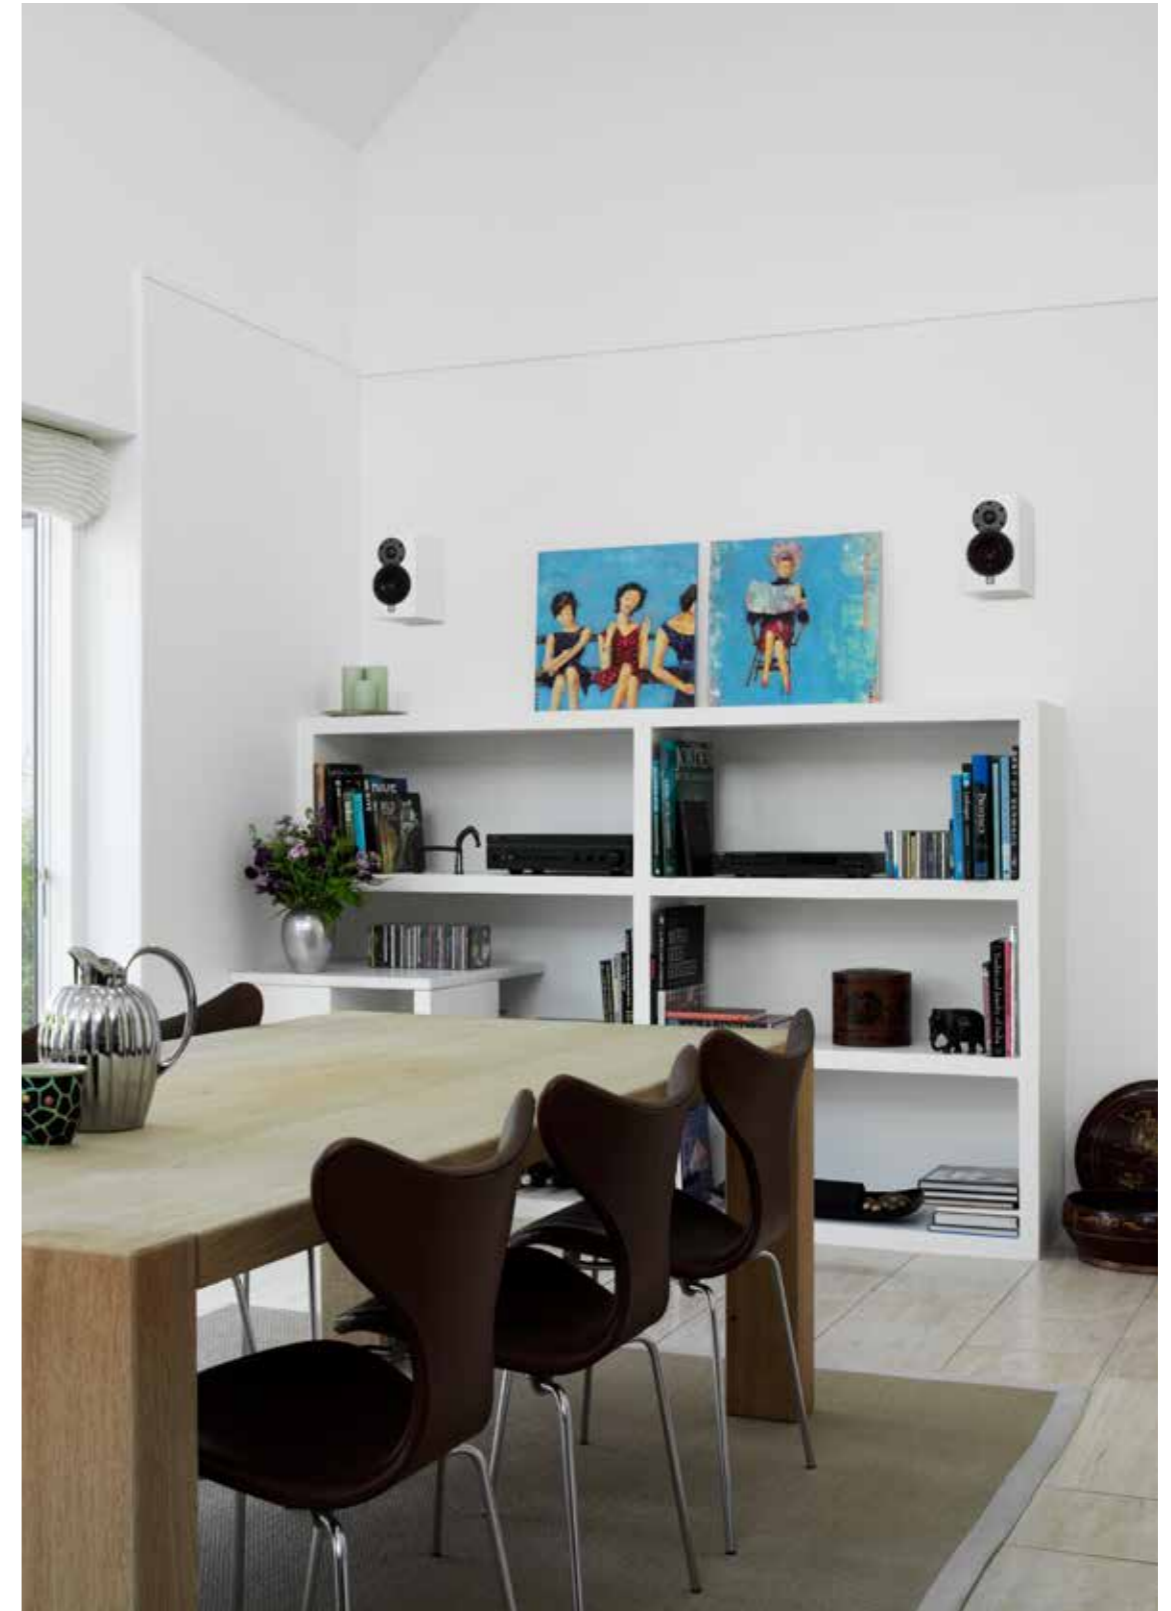

HI-FI SPEAKERS



DALI MENUET SE

The special edition MENUET SE is a tribute to high-performance, compact stereo speakers. Built on the legacy of the popular MENTOR MENUET and MENUET, the MENUET SE adds a unique look and significantly improved components, giving this special sibling a unique personality all its own. Listen to these amazing loudspeakers and you'll hear clean, undistorted bass, open and dynamic midrange and crisp highs with lots of detail.

SPECIFICATION

Frequency range ±3dB	59 - 25,000 Hz
Sensitivity (2.83V/1m)	86 dB
Nominal impedance	4.0 Ω
Recommended amplification power	20 - 100 watts
Low frequency/Midrange driver	4½ inch wood fibre
High frequency driver (s)	1 x 28 mm soft dome
Mediums	1 x 11.4 cm
Dimensions (HxWxD)	250 x 150 x 230 mm
Weight	4.1 kg

- Burl walnut cabinetry, unique for each pair
- Mundorf™ audiophile capacitors
- Internal copper/silver wiring
- Optimized woofer
- Terminal blocks used on the EPICON range



HIGH GLOSS WILD WALNUT

DALI OPTICON MK2

Exceptional midrange clarity and sparkling high-frequency response. The OPTICON MK2 series, with our hybrid tweeter and SMC-based drivers, brings excellent midrange clarity and sparkling high frequencies to any music or movie-watching experience.

*OPTICON 8 MK2 only available in Satin Black and Tobacco Oak.



HI-FI SPEAKERS

SPECIFICATION	OPTICON 1 MK2	OPTICON 2 MK2	OPTICON 6 MK2
Frequency range ±3dB	62 - 26,500 Hz	59 - 25,000 Hz	49 - 30,000 Hz
Sensitivity (2.83V/1m)	86 dB	86.5	88 dB
Nominal impedance	4.0 Ω	4.0 Ω	4.0 Ω
Recommended amplification power	25 - 100 Watt	30 - 150 Watt	25 - 200 Watt
Maximum SPL [dB]	105 dB	107 dB	110 dB
High frequency driver(s)	1 x 29 mm soft dome	1 x 29 mm soft dome	1 x 29 mm soft dome, 1 x 17 x 45 mm ribbon
Low frequency / mid-range driver(s)	1 x 4¾ inch with SMC	1 x 6½ inch with SMC	2 x 6½ inch with SMC
Dimensions (HxWxD)	261 x 152 x 231 mm	351 x 195 x 297 mm	1001 x 195 x 330 mm
Weight	4.5 kg	7.7 kg	19.3 kg



OPTICON 8 MK2	OPTICON LCR MK2	OPTICON VOKAL MK2	E-600 STAND
38 - 30,000 Hz	70 - 30,000 Hz	47 - 30,000 Hz	Speaker stand for OPTICON 1 MK2, OPTICON 2 MK2.
88.5 dB	89 dB	88 dB	
4.0 Ω	4.0 Ω	4.0 Ω	
40 - 300 Watt	30 - 150 Watt	30 - 150 Watt	
112 dB	109 dB	109 dB	
1 x 29 mm soft dome, 1 x 17 x 45 mm ribbon	1 x 29 mm soft dome, 1 x 17 x 45 mm ribbon	1 x 29 mm soft dome, 1 x 17 x 45 mm ribbon	
2 x 8 inch / 1 x 6½ inch with SMC	1 x 6½ inch with SMC	1 x 6½ inch with SMC	
1141 x 241 x 450 mm	482 x 285 x 128 mm	201 x 435 x 312 mm	
34 kg	8 kg	9.2 kg	

HI-FI SPEAKERS



SATIN BLACK



SATIN WHITE



SATIN TOBACCO OAK



OPTICON 8 MK2
(Tobacco Oak Vinyl)

DALI FAZON

The stylish and elegant DALI FAZON series is designed to integrate elegantly into any room - combining advanced driver and material technologies developed for our top-end speakers.



SPECIFICATION	FAZON SAT	FAZON MIKRO VOKAL	FAZON MIKRO
Frequency range ±3dB	86 - 25,000 Hz	95 - 25,000 Hz	95 - 25,000 Hz
Sensitivity (2.83V/1m)	86 dB	84 dB	84 dB
Nominal impedance	6.0 Ω	6.0 Ω	6.0 Ω
Recommended amplification power	20-120 Watt	30-120 Watt	30-120 Watt
Maximum SPL [dB]	104 dB	101 dB	101 dB
Crossover frequency	Hz	Hz	Hz
High frequency driver	1 x 28 mm dome	1 x 20 mm dome	1 x 20 mm dome
Low frequency / mid-range driver(s)	1 x 11.4 cm	1 x 10.2 cm	1 x 10.2 cm
Dimensions (HxWxD)	25.5 x 13.8 x 8.7 cm	11.3 x 19.6 x 9.6 cm	19.6 x 11.3 x 9.6 cm
Weight	2.4 kg	1.5 kg	1.5 kg



IRON BLACK



CHALK WHITE

HI-FI SPEAKERS



FAZON MIKRO

HI-FI SPEAKERS

DALI OBERON

Redefining what's possible in audio quality and design within its price class. DALI OBERON is our first entry-level loudspeaker to incorporate our patented SMC technology for an outstanding, ultra low distortion performance.

*OBERON 9 only available in Black Ash (Vinyl) and Dark Walnut (Vinyl).



SPECIFICATION	OBERON 1	OBERON 3	OBERON 5	OBERON 7
Frequency range ±3dB	51 - 26,000 Hz	47 - 26,000 Hz	39 - 26,000 Hz	36 - 26,000 Hz
Sensitivity (2.83V/1m)	86 dB	87 dB	88 dB	88.5 dB
Nominal impedance	6,0 Ω	6,0 Ω	6,0 Ω	6,0 Ω
Recommended amplification power	25 - 100 Watt	25 - 150 Watt	30 - 150 Watt	30 - 180 Watt
Maximum SPL [dB]	106 dB	108 dB	108 dB	110 dB
High frequency driver(s)	1 x 29 mm dome	1 x 29 mm dome	1 x 29 mm dome	1 x 29 mm dome
Low frequency / mid-range driver(s)	1 x 13 cm with SMC	1 x 17 cm with SMC	2 x 13 cm with SMC	2 x 17 cm with SMC
Dimensions (HxWxD)	162 x 274 x 234 mm	200 x 350 x 315 mm	162 x 830 x 283 mm	200 x 1015 x 340 mm
Weight	4.2 kg	6.3 kg	10.8 kg	14.8 kg



OBERON 9	OBERON ON-WALL	OBERON VOKAL	OBERON GRAND VOKAL	E-600 STAND
35 - 26,000 Hz	55 - 26,000 Hz	47 - 26,000 Hz	45 - 26,000 Hz	Speaker stand for OBERON 1, 3.
90.5 dB	86.5 dB	89.5 dB	91 dB	
4.0 Ω	6,0 Ω	6,0 Ω	4.0 Ω	
50 - 400 Watt	5 -100 Watt	25 - 150 Watt	25 - 200 Watt	
113 dB	107 dB	109 dB	111 dB	
1 x 29 mm dome	1 x 29 mm dome	1 x 29 mm dome	1 x 29 mm dome	
2 x 23 cm + 1 x 18 cm	1 x 13 cm with SMC	2 x 13 cm with SMC	2 x 17.7 cm with SMC	
1172 x 260 x 406 mm	385 x 245 x 120 mm	441 x 161 x 295 mm	201 x 700 x 310 mm	
37.1 kg	4.9 kg	7.45 kg	12.85 kg	

HI-FI SPEAKERS

HI-FI SPEAKERS



VINYL BLACK ASH



VINYL WHITE



VINYL LIGHT OAK



VINYL DARK WALNUT



OBERON ON-WALL

OBERON 9

OBERON GRAND VOKAL

DALI KUPID NEW

Sleek and compact, DALI KUPID is built for you who love great sound but want something that fits effortlessly into any space on a modest budget. Whether it's your main system or a second setup in the garage or vacation home, KUPID delivers full and refined sound. Designed to fit in. Built to stand out.

SPECIFICATION

Frequency range ±3dB	63 – 25,000 Hz
Sensitivity (2.83V/1m)	83 dB
Nominal impedance	4.0 Ω
Recommended amplification power	40 - 120 Watt
Maximum SPL [dB]	103 dB
Crossover frequency	2,100 Hz
High frequency driver	1 x 26 mm soft dome
Low frequency / mid-range driver(s)	1 x 4½ inch
Dimensions (HxWxD)	245 x 150 x 198 mm
Weight incl. grille	2.9 kg

HI-FI SPEAKERS



GOLDEN YELLOW

NEW



CARAMEL WHITE

NEW



DARK WALNUT

NEW



CHILLY BLUE

NEW



BLACK ASH

NEW

HI-FI SPEAKERS




DALI ALTECO

A height speaker and traditional stereo speaker in one stylish cabinet. The up and down-firing ALTECO C-1 adds height information to a home cinema setup for amazing movie-watching immersion. It's also a discreet alternative to traditional bookshelf speaker design.

SPECIFICATION

Frequency range ±3dB	74 – 26,000 Hz
Sensitivity (2.83V/1m)	83 dB
Nominal impedance	6.0 Ω
Recommended amplification power	40 - 100 Watt
Maximum SPL [dB]	103 dB
Crossover frequency	2,100 Hz
High frequency driver	1 x 21 mm dome
Low frequency / mid-range driver(s)	1 x 11.4 cm
Dimensions (HxWxD)	19 x 16 x 25.5 cm
Weight	2.8 kg

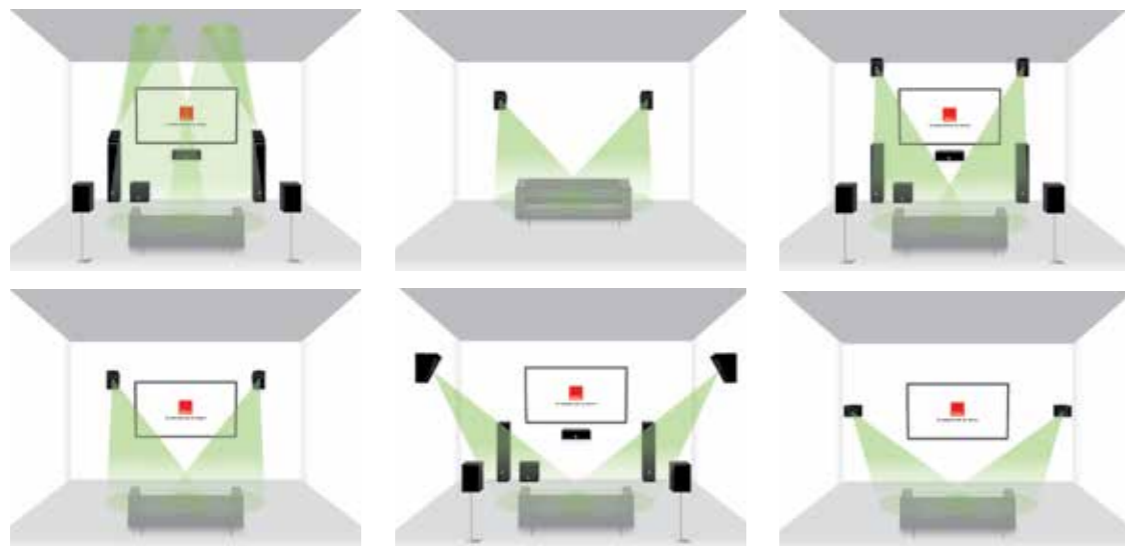


BLACK



WHITE



WALNUT

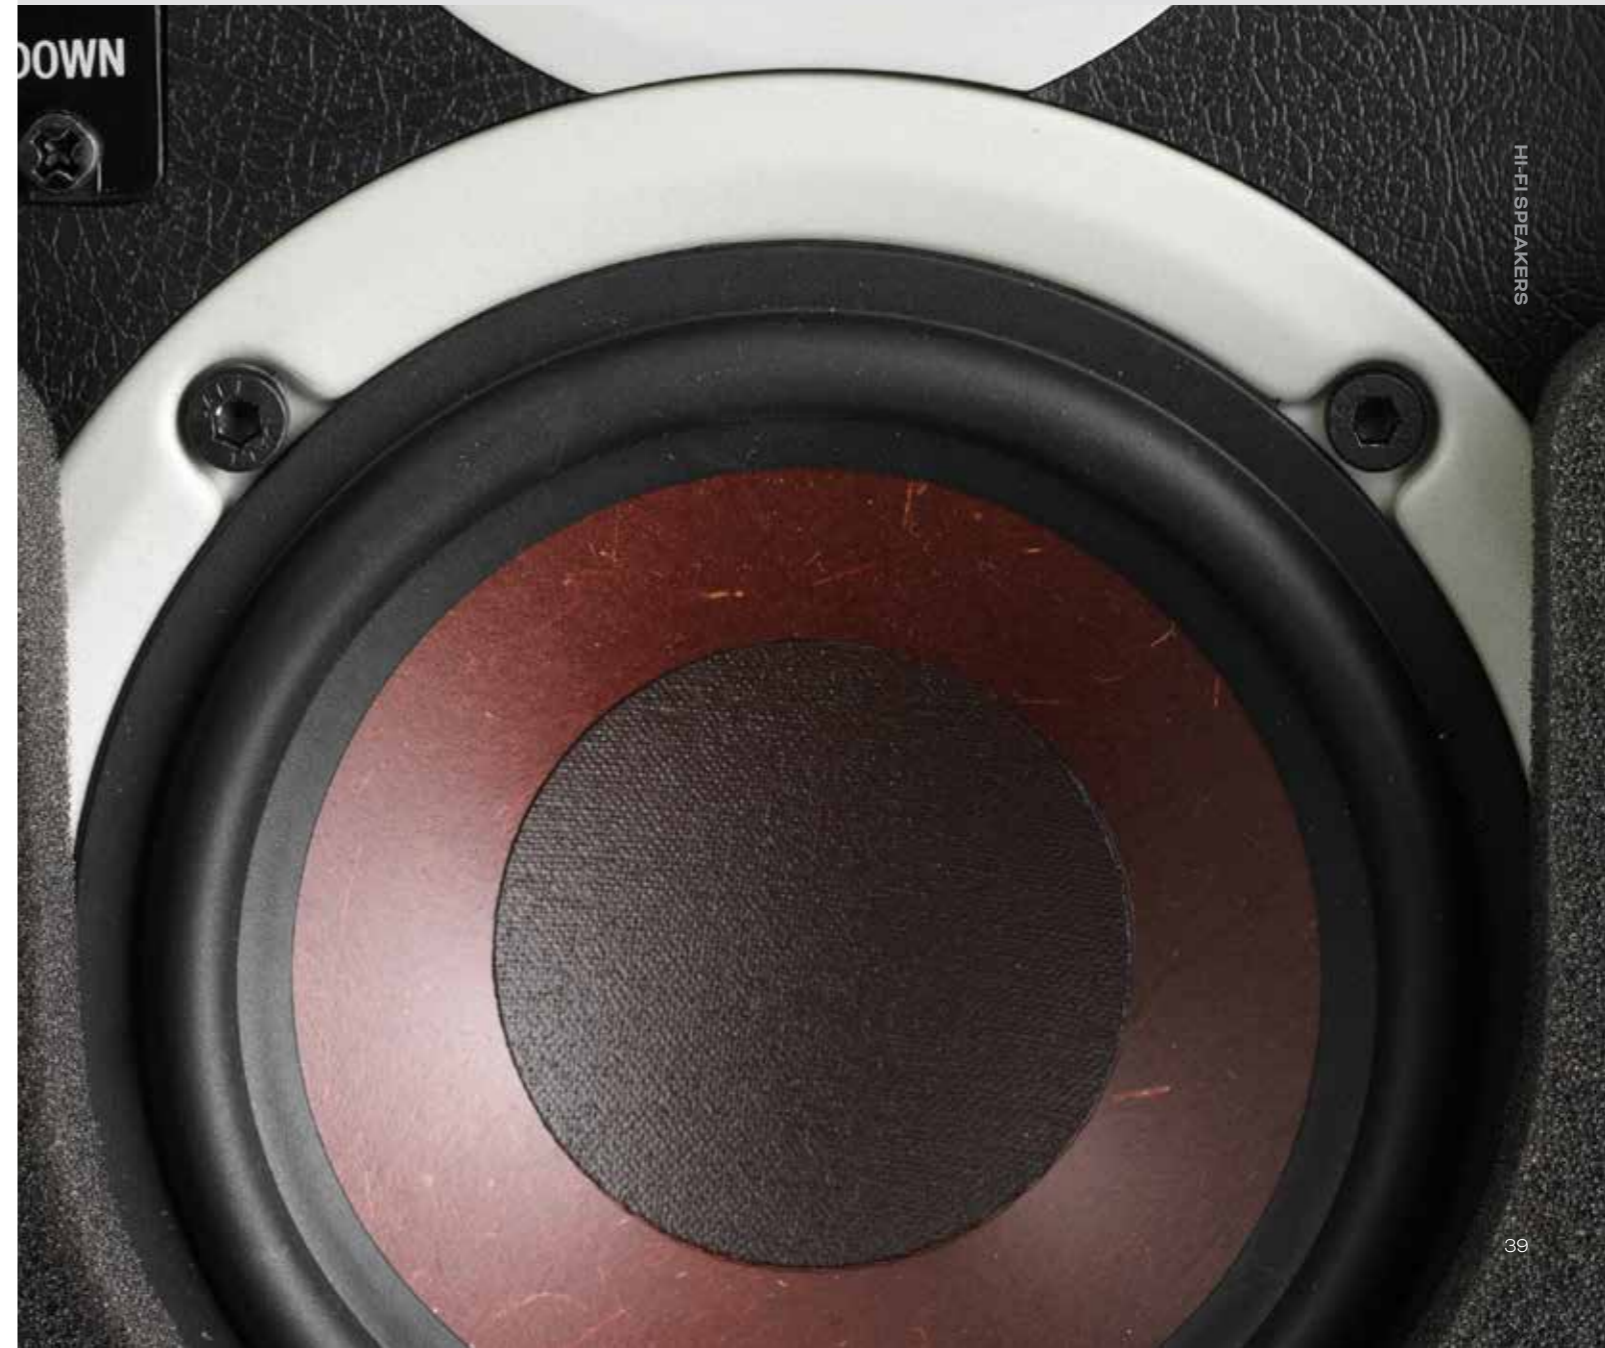

DALI RUBICON C

Best-in-class wireless active speaker system with large sound performance. Combining the performance of passive speakers with the convenience of wireless technology, the active RUBICON C series delivers the outstanding sound of our RUBICON speakers... without the wires. Part of the DALI EQUI ecosystem of wireless active speakers and preamplifiers.



SPECIFICATION	RUBICON 2 C	RUBICON 6 C	M-601 STAND
Frequency range ±3dB	46 - 26,000 Hz	37 - 30,000 Hz	Speaker stand for RUBICON 2 C.
Amplifier output	250 Watt / speaker	250 Watt / speaker	
Wireless input	5.2 / 5.8 GHz 24 bit / 96 kHz	5.2 / 5.8 GHz 24 bit / 96 kHz	
Connection input	ADC-In (RCA)	ADC-In (RCA)	
Maximum SPL	108 dB	110 dB	
High frequency driver	1 x 29 mm dome	1 x 29 mm dome + 45 x 17 mm ribbon	
Low frequency / mid-range driver(s)	1 x 16.5 cm	2 x 16.5 cm	
Dimensions (HxWxD)	353 x 195 x 335 mm	990 x 200x 380 mm	
Weight	8.4 kg	20.8 kg	

Complete your RUBICON C set by pairing with DALI Sound Hub.



WIRELESS HI-FI



LACQUER BLACK



LACQUER WHITE



LACQUER WALNUT



WIRELESS HI-FI

DALI KATCH G2

Setting new standards in elegance, style and quality for portable audio. DALI KATCH combines advanced technology and a stylish and elegant look to deliver room-filling home cinema sound and hours of on-the-go audio.

SPECIFICATION

Frequency range (+/-3 dB)	49 Hz - 23,000 Hz
Maximum SPL	95 dB
Crossover frequency	2,300 Hz
High frequency driver	2 x 21 mm soft textile dome
Low Frequency Driver	2 x 3.5" Aluminium cone with cloth cap
Low Frequency Passive Driver	2 x 73 x 52 mm steel cone
Power output [watt]	2 x 25 Watt
Connectivity	<ul style="list-style-type: none"> · mini jack 3.5 mm · charge USB (5V/1A) · entrée USB-A · Bluetooth 5.0 aptX, aptX HD, AAC
Functions	<ul style="list-style-type: none"> · Dual Sound Mode (Clear/Warm) · Stereo Pair Mode · Standby (Auto Power Off) · Power On/Off · NFC Pairing · Source Select · Volume
Battery playback time	Up to 30 hours (Li-Ion 3300 mAh)
Battery Charge Time	≈ 2 hour
Dimensions (HxWxD)	138 x 268.5 x 47 mm
Weight	1.1 kg

WIRELESS HI-FI



IRON BLACK



CARAMEL WHITE



CHILLY BLUE



WIRELESS HI-FI

DALI iO

Hi-Fi Bluetooth® headphones with industry-leading battery life. The DALI iO wireless Hi-Fi headphone series combines advanced technology, high-quality components, class-leading battery life and exceptional materials for hours of authentic DALI sound on the go.

SPECIFICATION	iO-6	iO-8	iO-12
Frequency range (+/-3dB)	10 Hz - 20 kHz	10 Hz - 43 kHz	10 Hz - 48 kHz
Maximum SPL	100 dB	100 dB	100 dB
Headphone principle	Closed back circumaural (over ear)	Closed back circumaural (over ear)	Closed back circumaural (over ear)
Full range driver	50mm free edge paper fibre cone	50mm free edge paper fibre cone	50 mm with SMC based magnet system
Connection input(s)	<ul style="list-style-type: none"> · Bluetooth® 5.0 · USB-C · 3.5mm mini jack stereo 	<ul style="list-style-type: none"> · Bluetooth® 5.2 · USB-C · 3.5mm mini jack stereo 	<ul style="list-style-type: none"> · Bluetooth® 5.2 · USB-C · 3.5mm mini jack stereo
Wireless inputs	<ul style="list-style-type: none"> · Bluetooth® 5.0 · AAC · aptX™ / aptX™ HD 	<ul style="list-style-type: none"> · Hi-Res Audio · Bluetooth® 5.2 · AAC · aptX™ / aptX™ HD / aptX™ Adaptive 	<ul style="list-style-type: none"> · Hi-Res Audio · Bluetooth® 5.2 · AAC · aptX™ / aptX™ HD / aptX™ Adaptive
Noise reduction	3 levels	3 levels	3 levels
Hands-free calls and voice assist	CVC (Clear Voice Communication)	Updated CVC (Clear Voice Communication)	CVC (Clear Voice Communication)
Battery life	Up to 30Hr	Up to 35Hr	Up to 35Hr
Impedance	25 Ω	25 Ω	25 Ω
Accessories included	<ul style="list-style-type: none"> · 1.2 m USB-C cable (charging + USB audio) · 1.2m stereo mini-jack cable · airplane adapter · travel case 	<ul style="list-style-type: none"> · 1.2 m USB-C cable (charging + USB audio) · 1.2m stereo mini-jack cable · travel case 	<ul style="list-style-type: none"> · USB-C cable · 1.2m stereo mini-jack cable · 3m stereo mini-jack cable · stereo mini-jack adapter, 3.5mm to 6.35mm jack · airplane adapter · luxury travel pouch
Weight	325 g	325 g	370 g



IO-6 IRON BLACK



IO-8 IRON BLACK



IO-8 CARAMEL WHITE



IO-12 DARK CHOCOLATE




IO-12 MOCHA GREY

NEW

HEADPHONES

HEADPHONES

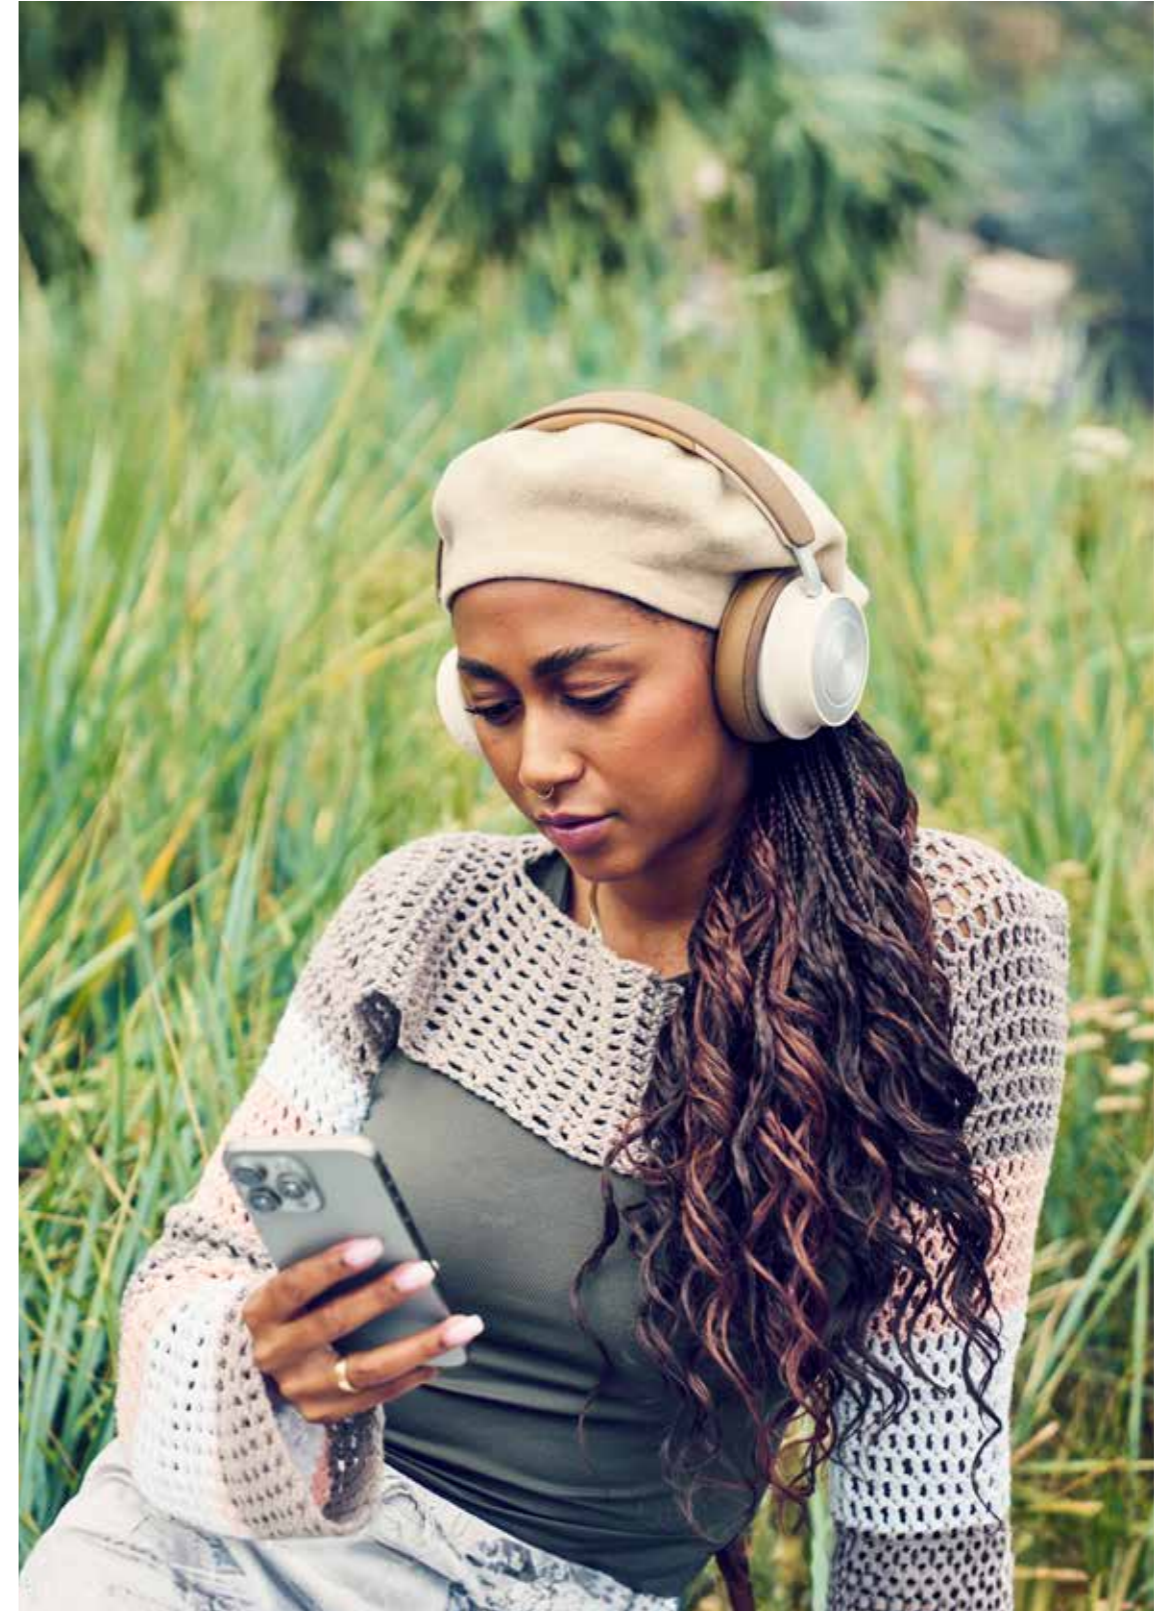

CUSTOM INSTALL

CUSTOM INSTALL



DALI PHANTOM S

Discreet in-wall speaker series with no-compromise audio performance. Featuring the same technology as our cabinet speakers, DALI PHANTOM custom install speakers are the perfect choice when you're looking for seamless room integration and the performance of a traditional Hi-Fi installation.



SPECIFICATION	S-80	S-180	S-280
Frequency range +/-3dB	59 - 25,000 Hz	49 - 25,000 Hz	48 - 25,000 Hz
Sensitivity (2.83V/1m)	88 dB	89 dB	89 dB
Nominal impedance	6.0 Ω	6.0 Ω	8.0 Ω
Recommended amplification power	40 - 200 Watt	40 - 200 Watt	40 - 400 Watt
Maximum SPL	108 dB	109 dB	112 dB
High frequency driver	1 x 28 mm soft dome + 1 x 17 x 45 mm ribbon	1 x 28 mm soft dome + 1 x 17 x 45 mm ribbon	1 x 28 mm soft dome + 1 x 17 x 45 mm ribbon
Low frequency driver	8" Wood Fibre Cone	8" Wood Fibre Cone	2 x 8" Wood Fibre Cone
Enclosure type	Closed Box	Passive Radiator Box 10" Slave	Passive Radiator Box 2 x 10" Slave
Dimensions (HxWxD)	647 x 403 x 110 mm	898 x 453 x 110 mm	1527 x 527 x 110 mm
Cut-out dimensions (HxWxD)	615 x 370 x 103 mm	865 x 420 x 103 mm	1495 x 495 x 103 mm
Weight	13.5 kg	18.5 kg	35.0 kg

· Speakers delivered with a primed white magnetic grille.



Frame OW (On Wall)



CUSTOM INSTALL

CUSTOM INSTALL

DALI PHANTOM M

Discreet in-wall speaker series with no-compromise audio performance. Featuring the same technology as our cabinet speakers, DALI PHANTOM custom install speakers are the perfect choice when you're looking for seamless room integration and the performance of a traditional Hi-Fi installation.



SPECIFICATION	M-250	M-375	M-675
Frequency range +/-3dB	58 - 24,000 Hz	57 - 25,000 Hz	49 - 25,000 Hz
Sensitivity (2.83V/1m)	89 dB	89 dB	90 dB
Nominal impedance	6.0 Ω	6.0 Ω	4.0 Ω
Recommended amplification power	30 - 180 Watt	30 - 180 Watt	40 - 300 Watt
Maximum SPL	107 dB	107 dB	110 dB
High frequency driver	1 x 28 mm soft dome	1 x 28 mm soft dome, 1 x 17 x 45 mm ribbon	1 x 28 mm soft dome, 1 x 17 x 45 mm ribbon
Low frequency driver	2 x 5 inch	1 x 7 inch	2 x 7 inch
Enclosure Type	Bass reflex enclosure, 2 x ports	Tuned mass enclosure, 2 x 7 inch passive radiators	Tuned mass enclosure, 4 x 7 inch passive radiators
Dimensions (HxWxD)	775 x 250 x 100 mm	775 x 250 x 100 mm	1320 x 250 x 100 mm
Cut-out dimensions (HxWxD)	751 x 226 x 100 mm	750 x 226 x 100 mm	1290 x 226 x 100 mm
Weight	8.45 kg	8.70 kg	17.7 kg

· Speakers delivered with a primed white magnetic grille.



Frame OW (On Wall)

CUSTOM INSTALL

CUSTOM INSTALL



PHANTOM M-250

DALI PHANTOM H

Discreet in-wall speaker series with no-compromise audio performance. Featuring the same technology as our cabinet speakers, DALI PHANTOM custom install speakers are the perfect choice when you're looking for seamless room integration and the performance of a traditional Hi-Fi installation.



SPECIFICATION	H-50	H-60
Frequency range ±3dB	52 - 25,000 Hz	51 - 25,000 Hz
Sensitivity (2.83V/1m)	88 dB	89 dB
Nominal impedance	6.0 Ω	6.0 Ω
Recommended amplification power	30 - 120 Watt	30 - 150 Watt
Maximum SPL	105 dB	107 dB
Crossover frequency	2,45 kHz	1,9 kHz
High frequency driver(s)	1 x 28 mm soft dome	1 x 28 mm soft dome
Low frequency / mid-range driver(s)	1 x 13.3 cm	1 x 16.5 cm
Dimensions (HxWxD)	27.5 x 27.5 x 10 cm	30 x 30 x 10 cm
Cut-out dimensions (HxWxD)	23.9 x 23.9 x 9.6 cm	26.4 x 26.4 x 9.6 cm
Weight	2.20 kg	2.60 kg

· Speakers delivered with their white magnetic grilles.

CUSTOM INSTALL



H-80	H-120	H-60 R	H-80 R
46- 25,000 Hz	32 - 25,000 Hz	51 - 25,000 Hz	46- 25,000 Hz
90 dB	90 dB	89 dB	90 dB
6.0 Ω	4.0 Ω	6.0 Ω	6.0 Ω
30 - 200 Watt	50 - 400 Watt	30 - 150 Watt	30 - 200 Watt
109 dB	112 dB	107 dB	109 dB
2,35 kHz	850 / 4,000 Hz	1,9 kHz	2.35 kHz
1 x 28 mm soft dome	1 x 28 mm soft dome	1 x 28 mm dome	1 x 28 mm dome
1 x 20.3 cm	1 x 13.3 + 1 x 30.5 cm	1 x 16.5 cm	1 x 20.3 cm
33.5 x 33.5 x 11.1 cm	48.7 x 48.7 x 16.1 cm	414 x 244 x 95 mm	452 x 284 x 95 mm
29.9 x 29.9 x 10.6 cm	45.2 x 45.2 x 15.7 cm	390 x 220 mm	427 x 260 mm
3.30 kg	9.0 kg	3.10 kg	3.70 kg

· Speakers delivered with their white magnetic grilles.

CUSTOM INSTALL

CUSTOM INSTALL

CUSTOM INSTALL



DALI PHANTOM M-80 A NEW

With a powerful 7 inch bass/midrange driver angled at 25° and an adjustable tweeter, the PHANTOM M-80 A (angled) lets you direct the sound in a specific direction for the best possible audio setup.

SPECIFICATION

Frequency range ±3dB	48 - 27,000 Hz ±3 dB
Sensitivity (2.83V/1m)	86.5 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm
Maximum SPL [dB]	106 dB
Crossover frequency	2,500 Hz
Recommended amplification power	50 - 250 Watt
High frequency driver	1 x 28 mm soft dome
Low frequency / mid-range driver(s)	1 x 7 inch
Outer dimensions incl. grille (HxWxD)	Ø 289 x 138.5 mm Ø 11.38 x 5.46 inches
Weight	2.8 kg / 6.16 lb

CUSTOM INSTALL



CUSTOM INSTALL

DALI PHANTOM K

Discreet in-wall/ceiling speaker series with no-compromise audio performance. Featuring the same technology as our cabinet speakers, DALI PHANTOM custom install speakers are the perfect choice when you're looking for seamless room integration and the performance of a traditional Hi-Fi installation.



SPECIFICATION	K-60 LP (Low Profile)	K-60	K-80
Frequency range +/-3dB	49 - 20.000 Hz	58 - 25.000 Hz	52 - 25.000 Hz
Sensitivity (2.83V/1m)	82 dB	87 dB	88 dB
Nominal impedance (ohm)	8 Ω	6 Ω	8 Ω
Recommended amplification power	40 - 150 Watt	40 - 150 Watt	50 - 200 Watt
Maximum SPL	98 dB	104 dB	105 dB
Crossover frequency	2,0 kHz	3,6 kHz	3,3 kHz
High frequency driver	1 x 25 mm soft dome	1 x 28 mm soft dome	1 x 28 mm soft dome
Low Frequency Driver	1 x 15.2 cm	1 x 13.3 cm	1 x 16.5 cm
Dimensions (HxWxD)	Ø 242 x 41 mm	Ø 230 x 100 mm	Ø 258 x 100 mm
Cut-out dimensions (HxW)	223 x 37 mm	197 x 96 mm	225 x 96 mm
Weight	1.1 kg	1.58 kg	1.92 kg
Grille	-	Black grille as option	Black grille as option

· Speakers delivered with their white magnetic grilles.

CUSTOM INSTALL



PHANTOM K-80

CUSTOM INSTALL

DALI GARDIAN OW 6 NEW

The GARDIAN OW 6 outdoor loudspeaker enables DALI sound quality to leave the listening room and venture outdoors. Its IP67 certification provides effective immunity to dust and water ingress to enable installation even in exposed locations throughout all seasons and weather conditions.

SPECIFICATION

Frequency range +/-3dB	47 - 25,000 Hz +/- 3dB
Sensitivity (2.83V/1m)	84 dB @ 1 m for 2.83 V
Nominal impedance (ohm)	6 Ohm
Maximum SPL	103 dB
Crossover frequency	2,700 Hz
Recommended amplification power	50 - 200 Watt
High frequency driver(s)	1 x 25 mm soft dome (Co-axially mounted)
Low/Mid frequency driver(s)	1 x 5 inch
IP rating	IP 67
Outer dimensions incl. grille (HxWxD)	200 x 372 x 206 mm 7.87 x 14.65 x 8.11 inches
Weight incl. grille	4.08 kg / 9 lbs
Grille	Deliver with white or black grille

CUSTOM INSTALL



BLACK



WHITE



CUSTOM INSTALL

DALI PHANTOM E

Discreet ceiling speaker series with no-compromise audio performance. Featuring the same technology as our cabinet speakers, DALI PHANTOM custom install speakers are the perfect choice when you're looking for seamless room integration and the performance of a traditional Hi-Fi installation.



SPECIFICATION	E-50	E-60	E-60 S (Stereo)
Frequency range +/-3dB	58 - 25,000 Hz	52 - 25,000 Hz	57 - 25,000 Hz
Sensitivity (2.83V/1m)	87 dB	88 dB	90 dB
Nominal impedance (ohm)	8 Ω	8 Ω	2 x 8 Ω
Recommended amplification power	40 - 120 Watt	30 - 120 Watt	2 x 20 - 80 Watt
Maximum SPL	104 dB	105 dB	105 dB
Crossover frequency	3,6 kHz	3,3 kHz	3,3 kHz
High frequency driver	1 x 28 mm soft dome	1 x 28 mm soft dome	1 x 28 mm soft dome
IP rating	NA	NA	NA
Low frequency driver	1 x 13.3 cm	1 x 16.5 cm	1 x 16.5 cm
Dimensions (HxWxD)	Ø 230 x 100 mm	Ø 258 x 100 mm	Ø 258 x 100 mm
Cut-out dimensions (HxW)	197 x 96 mm	225 x 96 mm	225 x 96 mm
Weight	1.58 kg	1.92 kg	1.92 kg
Grille	Square grille option	Square grille option, Black grille option	-

· Speakers delivered with their white magnetic grilles

DALI PHANTOM E WEATHER RESISTANT

With its engineered, weather-resistant features, the E-60 WR and E-80 WR in-ceiling loudspeaker is suitable for covered outdoor and high-humidity locations. With a working range of -20 to +60°C and IP65 rating, it's ready to take on the elements. So whether you want background music for the laundry room, bathroom or spa, or immersive multi-channel sound on the terrace, the E-80 WR delivers.



E-80	E-60 WR (Weather Resistant)	E-80 WR (Weather Resistant)
49 - 25,000 Hz	52 - 25,000 Hz	49 - 25,000 Hz
89.5 dB	88 dB	89.5 dB
6 Ω	8 Ω	6 Ω
30 - 150 Watt	30 - 120 Watt	30 - 150 Watt
107 dB	105 dB	107 dB
3,2 kHz	3,3 kHz	3,2 kHz
1 x 28 mm soft dome	1 x 25 mm dome	1 x 25 mm soft dome
NA	1 x 6½ inch	1 x 8 inch
1 x 20.3 cm	IP 65	IP 65
Ø 294 x 113 mm	Ø 258 x 104 mm	Ø 295 x 116 mm
261 x 110 mm	225 mm 8.86 inches	261 mm 10.28 inches
2.36 kg	2 kg	2.50 kg
Square grille option, Black grille option	Deliver with white grille	Deliver with white grille

CUSTOM INSTALL

CUSTOM INSTALL

PHANTOM E-80 WR

CUSTOM INSTALL

CUSTOM INSTALL



DALI PHANTOM CI AMPLIFIER

The multi-purpose amplifier features built-in Digital Signal Processing. Model-specific presets are continuously provided for the best sound experience from any DALI CI audio installation. Aimed primarily at high-performance home cinema installations and in-wall subwoofers, the multi-purpose amplifier can also power in-wall and in-ceiling speakers in a multi-room installation.



SPECIFICATION

CI AMP-2500 DSP

CI AMP-4750 DSP NEW

Frequency range +/-3dB	12 Hz - 20 kHz (+/- 0.5 dB, 8 Ω load, 3 dB below rated power)	12 Hz - 20 kHz (+/- 1 dB, 8 Ω load, 3 dB below rated power)
Connection input(s)	4x Analog unbalanced, RCA 4x Analog balanced, Euroblock connector	4x Analog unbalanced, RCA 4x Analog balanced, Euroblock connector
Output channels	1x S/PDIF digital out, RCA 2 x Lo-Z speaker (4 - 16 ohm) 1 x Hi-Z speaker (70V / 100V) 1x S/PDIF digital out, RCA	1x S/PDIF digital out, RCA 4 x Lo-Z loudspeaker (4 - 16 ohm) 2 x Hi-Z loudspeaker (70V / 100V) 1 x S/PDIF digital out, RCA
Output power @ 4 ohm	2 x 500 W (SE), 1 x 1000 W (BTL)	4x 750 W (SE) 2x 1500 W (BTL)
Output power @ 8 ohm	2 x 250 W (SE), 1 x 1000 W (BTL)	4 x 400 W (SE) 2 x 1500 W (BTL)
Output power @ 70V	1 x 1000 W (BTL)	2 x 1200 W (BTL)
Output power @ 100V	1 x 1000 W (BTL)	2 x 1500 W (BTL)
Total system power	1000 W	3000 W
Power consumption	350 W	1100 W
Output voltage	45 Vrms (SE) - 90 Vrms (BTL) 70/100V (Hi-Z)	SE: 85Vp / 170Vpp (unloaded) BTL: 170Vp / 340Vpp (unloaded) 70/100V (Hi-Z)
Output circuitry	UMAC™ Class D - full bandwidth PWM modulator with ultra-low distortion	
Signal to noise-ratio	>108 dB (A-weighted, 20 Hz - 20 kHz, 8 Ω load)	>106 dB (A-weighted, 20 Hz - 20 kHz, 8 Ω load)
Weight	5.9 kg / 13 lb	7.22 kg / 15.91 lb

*SE - conventional, single ended output mode, **BTL - bridge-tied load output mode

All technical specifications are subject to change without notice.



CUSTOM INSTALL

CUSTOM INSTALL

DALI PHANTOM IW-SUB S-100

The PHANTOM IW SUB S-100 is a 10-inch in-wall, on-wall or floor-mounted subwoofer with an ultra-shallow profile for simple, discreet installation and ultimate versatility. The rigid construction, high power handling and high volume levels bring an exceptional musical and cinematic performance to any Hi-Fi stereo or multichannel home theatre setup.

SPECIFICATION

Frequency range (+/-3 dB)	26-250 Hz
Sensitivity	84 dB
Nominal impedance	6 ohm
Maximum SPL	110 dB
Recommended amplifier power	200 – 500 Watt RMS
Recommended amplifier	DALI PHANTOM AMP-2500 DSP
Installation location	In-wall / On-wall / Floor
Low frequency driver	1 x 10 inch long throw, low profile
Outer dimensions incl. grille (HxWxD)	657 x 412 x 107 mm
Cut-out dimensions (HxW)	615 x 370 mm
Weight	17.25 kg

CUSTOM INSTALL



CUSTOM INSTALL

DALI SUBWOOFER V-16 F NEW

A subwoofer is the perfect tool for enhancing the low end response of an existing speaker setup. If you can't get enough bass adding a Subwoofer to your setup will bring that heartboom into your living room.

SPECIFICATION

Frequency range (in room)	19-200 Hz ±3dB (Line input) 19-500 Hz ±3dB (LFE input)
Input impedance	9 kohm
Maximum SPL	122 dB @ 1m
Crossover LP frequencies	40-200 Hz
Low frequency driver	1x16-inch long-throw
Low frequency diaphragm	Anodised aluminium with CSS technology
Connection input(s)	2 x RCA unbalanced (Stereo, mono or LFE) 2 x XLR balanced (Stereo, mono or LFE)
Connection output(s)	1 x XLR balanced (Follower out)
Continuous amplifier output power	1500 W RMS
Max. amplifier output power	2500 W Peak
Dimensions (HxWxD)	570.5 x 520 x 560 mm 22.46 x 20.47 x 22.04 inches
Weight	55 kg / 121.25 lb

SUBWOOFER



SUBWOOFER

DALI SUBWOOFER

A subwoofer is the perfect tool for enhancing the low end response of an existing speaker setup. If you can't get enough bass adding a Subwoofer to your setup will bring that heartboom into your living room.



SPECIFICATION

	SUB C-8 D	SUB E-9 F
Frequency range ±3dB	33 - 200 Hz	37 - 200 Hz
Maximum SPL [dB]	109 dB	111 dB
Continuous IEC power output (RMS)	150 Watt Class D	170 Watt Class D
Max. amplifier power output (RMS)	220 Watt	220 Watt
Low frequency Driver(s)	1 x 20.3 cm	1 x 22.9 cm
Dimensions (HxWxD)	335 x 295 x 310 mm	307 x 287 x 310 mm
Weight	10.4 kg	11 kg
Grille	Deliver without grille	Grille option: € 50
	 White, Black (Vinyl)	 White, Black (Satin)

SUB E-12 F

SUB K-14 F

SUB P-10 DSS

28 - 190 Hz	29 - 160 Hz	24 - 250 Hz
112 dB	115 dB	112 dB
170 Watt Class D	450 Watt	300 Watt
220 Watt	500 Watt	500 Watt
1 x 30.5 cm	1 x 35.6 cm	3 x 25.4 cm / 10" (1 active / 2 passive)
370 x 340 x 380 mm	430 x 395 x 425 mm	370 x 340 x 340 mm
14.7 kg	26.4 kg	19.5 kg
Deliver with grille	Deliver without grille	Deliver without grille
 White, Black (Satin)	 White, Black (Vinyl)	 White, Black (High Gloss Lacquer)

SUBWOOFER

SUBWOOFER

If you already have an active subwoofer you love...

the DALI WSR (Wireless Subwoofer Receiver) is just the ticket to integrate it into an EQUI wireless surround system: Simply connect the sub output jack to the subwoofer input and power the WSR from a USB-C power supply.

Your subwoofer is now officially part of your active wireless surround system!



SUBWOOFER



RUBIKORE
CINEMA



RUBIKORE
CINEMA



RUBIKORE
CINEMA

SUB K-14 F



SUBWOOFER

DALI SOUND HUB


The DALI SOUND HUB is the brains behind DALI EQUI, our exciting range of wireless active speakers and Sound Hubs. Streaming high resolution audio to CALLISTO C, RUBICON C and OBERON C speakers, while switching between sources automatically, the SOUND HUB brings true no-compromise convenience to music and movie lovers who demand more.

SPECIFICATION

Wireless output	5.2 / 5.8 GHz 24 bit / 96 kHz (uncompressed)
Connection input	· Bluetooth® Qualcomm® aptX™ HD audio · BluOS®
Connection output	· 2 x TosLink · 1 x Coax · RCA in/out · 1 x SUB out · 1 x 3.5 mm mini-jack · Bluetooth remote control
Dimensions (HxWxD)	76 x 300 x 213 mm
Weight	1.6 kg

SOUND HUB

SOUND HUB

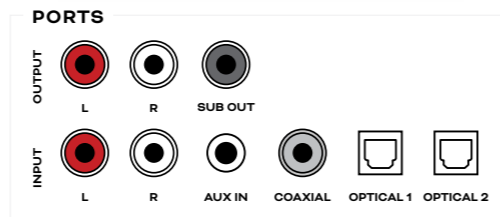

BLUOS NPM-2i

The BluOS NPM-2i module for the SOUND HUB allows you to stream music from a multitude of AirPlay 2 sources. BluOS is an advanced network streaming technology that allows you to easily access your favorite streaming services, Internet radio, or LAN-connected storage and to create a wireless multiroom system.



HDMI MODULE

Now you can create a complete wireless surround system with DALI active wireless speakers. Add the HDMI extender to your SOUND HUB for connectivity HDMI ARC and eARC, which lets you stream surround sound wirelessly from your TV. Dolby and DTS formats are supported, in configurations up to 7.1 channels.



DALI WSR

Truly immersive surround sound is best done with a subwoofer. If you already have an active subwoofer you love, the DALI WSR (Wireless Subwoofer Receiver) is just the ticket to integrate it into an EQUI wireless surround system: Simply connect the sub output jack to the subwoofer input and power the WSR from a USB-C power supply.

Your subwoofer is now officially part of your active wireless surround system!



SOUND HUB

SOUND HUB





E-601 Stand


Cable passage · points
Black or White (glass base)



M-601 Stand

Cable passage · points
Black or White (glass base)

This information has been presented to you by your authorized DALI dealer

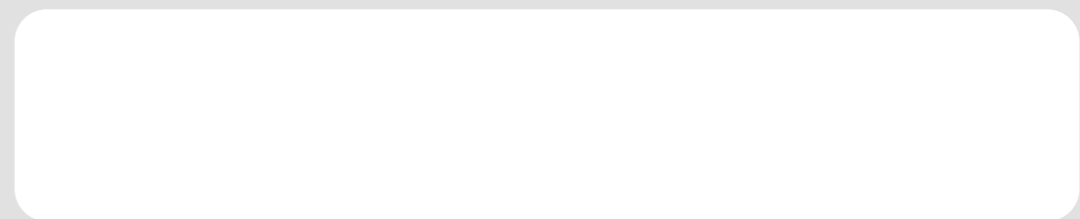

MSRP = Manufacturer's Suggested Retail Price

The indicative price is a simple recommended retail price left to the discretion of the professional reseller.

All suggested prices are recommended retail prices per piece, inclusive of VAT.

DALI reserves the right to change these terms and conditions at any time without prior notice.

Email: info@dali.dk | Website: dali-speakers.com
Dali Alle 1, 9610 Nørager, Denmark. | Tel: +45 9672 1155
Facebook: [@DALI.speakers](https://www.facebook.com/DALI.speakers) | Instagram: [@dalispeakers](https://www.instagram.com/dalispeakers)



