

PRODUCT CATALOGUE







PRODUCT CATALOGUE

01	COMPANY PROFILE PAGE 2		
02	INDUCTION HEATING PAGE 3		
03	INFRARED HEATING PAGE 4		
04	DISPLAY AND FUNCTIONS PAGE 5		
05	OPTIONAL FEATURES PAGE 7		
06	HIGH TECH PAGE 8-9 81F0-000	11	INDUCTION PAGE 15-23
07	NEW DESIGN PAGE 10-11 9140-201-A01 9141-201-B01	12	INFRARED PAGE 24-31
80	HIGH QUALITY PAGE 12	13	HYBRID PAGE 33-38
09	COST-EFFECTIVE PAGE 13	14	ISO9001: 2025 PAGE 40
10	PRICE COMPETITIVE PAGE 14	15	SERVICE PAGE 41

ABOUT US

COMPANY PROFILE

1993

2007 Establishment

Shenzhen H-one

H-one builted in 1993 which named Jingi at first,

it focused on Mold and structure design.

Our current boss Mr.Ben Guo took over the company and renamed "H-one" in 2007.

Mr.Ben Guo specilizes in electronic design so the company turned to new step: finished product design, manufacture and sale.

Core values

Talk Straight

Get Alianed

COMPANY PROFILE



We know Heat and control it to what you want

We are committed to empowering our customers with a competitive edge-not just through exceptional pricing, but through superior quality and outstanding performance.

We understand the science of heat and master its control, delivering precise results exactly as you desire.

Our goal is to offer more than just convenience; we aim to bring the true joy of cooking, enhanced by the innovation and precision that technology provides.

The Plant Area

Covering Country

Export Experience



SYSTEM: INDUCTION HEATING

H-one induction heating technology development

What is core for an Induction Cooker?

Not Production ability, Not Supply Chain, It's control system.

Normally, we already know there is 3 main control systems for Induction cooker: single ending drive system, half bridge drive system, full bridge drive system. The single ending drive system is wide used in most induction cooker now, they called "Basic Models". If you need higher power output, the half bridge system may be your first choice. About full bridge system it is very similar as half bridge system, most time it was applied in industrial field.

1st Generation



2nd Generation



3rd Generation



4th Generation





H-ONE STARTED INDUCTION HEATING RESEARCHING FROM 2007. AFTER PLENTY EXPERIENCE AND COST, HALF BRIDGE DRIVE SYSTEM IS IN OUR HAND

H-ONE INDUCTION CONTROL SYSTEM MODEL







HALF BRIDGE ONE BURNER MAIN BOARD

HALF BRIDGE TWO BURNER MAIN BOARD

HALF BRIDGE 3/4 BURNER MAIN BOARD









BASIC ONE BURNER MAIN BOARD

BASIC TWO BURNER MAIN BOARD

SINGLE SWITCH ONE BURNER MODULE

H-ONE INDUCTION COOKER PLASTIC BOTTOM CASE







TWO BURNER PLASTIC BOTTOM CASE Solid structure / Lightweight material / Same quality

FOUR BURNER PLASTIC BOTTOM CASE SINGLE POLARITY INDEPENDENT MOVEMENT

SYSTEM: INFRARED HEATING

■ CERAMIC HOB CONTROL SYSTEM INTRODUCE

Infrared Heating is used in Ceramic hob or called Hi-Light Cooker products.

It looks like Induction cookers when it doesn't work but the inside is different a lot for ceramic hob heats from electrical hotplate which generate heat from electrical resistance.so a good ceramic hob must have superior heat isolation. To fully use our electronic design advantage and be different from traditional prod- ucts, we choose thermocouple to detect temperature and relay for switch to control the temperature this design can control temperature more precise more flex and cost lower. Additional our sensor touch display board, the electronic control totally instead of mechanical control.

FOUR BASIC FEATURES OF H-ONE'S INFRARED PRODUCTS.

- 01 - SUPERIOR



HEAT ISOLATION

- 02 - MAINBOARD

- 03- ELECTRONIC



CONTROLINSTEAD OF MECHANICAL CONTROL



STANDARD CONTROL

-SENSOR TOUCH CONTROL-INSTEAD OF KNOB CONTROL









■ BEING COMPATIBLE CREATES MORE POSSIBILITIES



Single ring -INNER RING-



Double rings -OUTER RING-



Triple rings -COMPLETE RING-



Other shape -DIFFERENT SHAPES-

Ceramic hob can fit to different pots and pans, high power heating speed adopts infrared heating principle.

CREATES MORE POSSIBILITIES:













CONTROL: DISPLAY AND FUNCTIONS



- FREE TO SET THE OUT PUT POWER QUICKLY -

No matter you want to 0-9 levels,0-20 levels or 0-100 levels,the slider always respond immediately in right positions.



- HIDDEN TOUCH, INVISIBLE DESIGN -

The button with light, when you turn off, the display zone is invisible, new generation display control.



- SMART COOKING -

If you like cooking,the smart cooking display can help you to make many unique recipes and you can control by your phone, more convenient!



- WIFI CONTROL -


Download Tuya App, Connect the device with your samrt phone, check the cooking precess at your phone.

ONE-TOUCH FUNCTIONS

ONE-TOUCH FUNCTIONS IS MORE PRECISE IN TEMPERATURE

HERE WE OFFER 10 ONE-TOUCH FUNCTIONS MORE NEW FUNCTIONS WILL LAUNCH ONCE READY.

DEFROST: Ouickly deice the food which is taken out of fridge




WARMER: If you are busy and forget to Eat,it will not forget to keep food warm



PAN FRYING: Less oil, right temperature, suitable for most food like fish, chicken And steak.







SLOW COOK: Slow cook+pan frying, a perfect steak





NEW DISPLAY

DESIGNS FOR REFERENCE







Hidden touch control with slider, for 2 burners

Touch control with slider, for 1 burners Rectangular LED lamp

Hidden touch control with slider, for 2 burners



Touch control with slider, for 3 burners Dot LED lamp



Sensor Touch Control with Slider, for 5 burners, Hybrid (Induction +Infrared System), Flex zone



Touch control with slider, for 3 burners No LED lights

Sensor Touch Control with Slider, for 3 burners Gradual LED lamp



Touch control, for 3 burners



Knob Control, for 2 burners



Touch control, for 5 burners



SURFACE: OPTIONAL FEATURES









SCHOTT

NEG

EUROKERA

KANGER

■ The beveled edge makes built-in products fit better on cabinet easy to clean










■ The wrapping edge can protect the glass and extend the product's lifetime










- We built the r&d team and focused on heating technology researching for home appliances. Hair straightener is the first hot sale product, then H-one sets it's core goal: induction heating innovation. We study, we collect, we listen and dedicated to half-bridge technology developing. Thanks to this insistence, we built our own induction heating system and send our h-one inside products to all over the world.
- When one project comes to an end,the products launch in market,another new project will start.Now H-one have 5 main product series: induction cooker(induction heating),ceramic hob(infrared heating),sous vide(PTC heating),hair straightener(M-CH/PTC heating) and a new filed curtain motor(motor drive).
- As a ODM supplier,to keep our products always be competitive and functional,H-one never stop researching and work closely with our business partners,try to better understand the special and useful requirements in the market.
- Welcome all of you to H-one and share your ideas, we can make your designs come true.

HIGH TECH

- FLEX ZONE & IH















BUILT-IN Double Burner Induction

- · Slide Cooking Function
- · Front touch control operation :
- Touchscreen control operation
- · System:half bridge induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 10 kw full zone (single zone 3 kw)
- · Individual residual heat indicators: all-area
- Cut-out size: W 890 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



TFT DISPLAY

MODEL

81F0-000

PRODUCT SIZE 910 × 520 × 55 mm











NEW DESIGN

- IH -
- DOWNDRAFT -



BUILT-IN

- PRODUCT INFORMATION

· Slide Cooking Function

Four Burner Induction

· Front touch control operation :

· Touchscreen control operation

· System:half bridge induction

· 9 level power for each burner,

· boost for max power in 5 minutes

Cut-out size: W 760 * D 495 mm

· Functions as below control part :

· Automatic safety switch off

· Automatic pan detective

Dry burning protective

· Over flow water protective

· Individual residual heat indicators: 2

7.2 kw speed zone (diameter 2*160mm+2*180)

MODEL

9140-201-A01

PRODUCT SIZE

830 × 515 × 188 mm











BUILT-IN Four Burner Induction

· Slide Cooking Function

- PRODUCT INFORMATION

- Front touch control operation :
- Touchscreen control operation
- · System:half bridge induction
- · 9 level power for each burner,
- boost for max power in 5 minutes
- 7.2 kw speed zone (diameter 210*180mm) ×4
- Individual residual heat indicators: 4
- Cut-out size: W 730 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL

9141-201-B01

PRODUCT SIZE

760 × 520 × 188 mm
















HIGH QUALITY

- HAIF BRIDGE IH

MODEL:8144-201-B01



COST-EFFECTIVE - SINGLE ENDING PLUS IH







PRICE COMPETITIVE

- SINGLE ENDING IH

MODEL:8146-201-E01







BUILT-IN / COUNTERTOP Double Burner Induction

Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:half bridge induction
- · 9 level power for each burner,
- boost for max power in 5 minutes
- 2.3 kw speed zone (diameter 210mm)
- · Individual residual heat indicators: 1
- Cut-out size: W 280 * D 360 mm
- · Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL

8113-259-001

PRODUCT SIZE 310 × 385 × 188 mm



COLOR

Black Glass

White Glass



Capture your ideas :







BUILT-IN Double Burner Induction

· Slide Cooking Function

— PRODUCT INFORMATION 🤝

- · Front touch control operation :
- Sensor control operation
- · System:single switch induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 4.0 kw speed zone (diameter 190mm) x 2
- · Individual residual heat indicators: 2
- Cut-out size: W 285 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL

812C-201-D01

PRODUCT SIZE 315 × 520 × 55 mm






Capture your ideas :











MODEL

8124-2T0-B01

PRODUCT SIZE 730 × 430 × 55 mm









BUILT-IN Double Burner Induction

· Slide Cooking Function

— PRODUCT INFORMATION 🤝

- · Front touch control operation :
- Touchscreen control operation
- System:half bridge induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 4.0 kw speed zone (diameter 210mm) x 2
- · Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :







MODEL

8124-2A2-B00

PRODUCT SIZE 730 × 430 × 55 mm









BUILT-IN Double Burner Induction

Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- Hidden control operation
- System:half bridge induction
- 9 level power for each burner,
- · boost for max power in 5 minutes
- 3.0 kw speed zone (diameter 210mm) x 2
- Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :









INDUCTION

MODEL

8124-208-A01

PRODUCT SIZE 730 × 430 × 55 mm





Capture your ideas :





BUILT-IN Double Burner Induction

· Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:single switch induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 2.5 kw speed zone (diameter 210mm) x 2
- · Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- · Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :





INDUCTION

MODEL

812D-202-D01

PRODUCT SIZE 730 × 430 × 55 mm







BUILT-IN Double Burner Induction

· Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- System:single switch induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 4.0 kw speed zone (diameter 190mm) x 2
- · Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :







Black Glass

White Glass



MODEL

8125-201-B01

PRODUCT SIZE 730 × 430 × 55 mm





Capture your ideas :





BUILT-IN Double Burner Induction

Slide Cooking Function

— PRODUCT INFORMATION

- Front touch control operation:
- Two separate control operation
- System:half bridge induction
- 9 level power for each burner,
- boost for max power in 5 minutes
- 2.5 kw speed zone (diameter 210mm) x 2
- Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- · Functions as below control part :







MODEL

8126-202-B01

PRODUCT SIZE 730 × 430 × 55 mm









BUILT-IN Double Burner Induction

· Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- Sensor control operation
- System:half bridge induction
- 9 level power for each burner,
- boost for max power in 5 minutes
- · 2.5 kw speed zone (diameter 210mm) x 2
- Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :









INDUCTION

MODEL

8134-201-B00

PRODUCT SIZE 780 × 450 × 55 mm





Capture your ideas :





BUILT-IN Double Burner Induction

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:half bridge induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 3.7 kw speed zone (diameter 2*210mm+160)
- · Individual residual heat indicators: 3
- · Cut-out size: W 770 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :







BUILT-IN Three Burner Induction

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:single switch induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 7.0 kw speed zone (diameter 2*190mm+280)
- · Individual residual heat indicators: 3
- · Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL


8137-201-D01

PRODUCT SIZE 590 × 520 × 55 mm













BUILT-IN Three Burner Induction

Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:single switch induction
- · 9 level power for each burner,
- boost for max power in 5 minutes
- · 7.4 kw speed zone (diameter 2*210*180mm+280)
- Individual residual heat indicators: 3
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL

8133-203-B01

PRODUCT SIZE 590 × 520 × 55 mm















BUILT-INFour Burner Induction

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- System:half bridge induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 7.4 kw speed zone (diameter 180mm)× 4
- · Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



NDUCTION

MODEL

8142-255-B01

PRODUCT SIZE 590 × 520 × 55 mm













BUILT-IN Four Burner Induction

Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- System:single switch induction
- · 9 level power for each burner,
- boost for max power in 5 minutes
- · 8.0 kw speed zone (diameter 190mm)× 4
- · Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL

8143-201-D01

PRODUCT SIZE 590 × 520 × 55 mm



COLOR

Black Glass

White Glass













BUILT-IN/ COUNTERTOP Four Burner Induction

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- System:single switch induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 5.8 kw speed zone (diameter 190mm)× 4
- · Individual residual heat indicators: 4
- Cut-out size: W 578 * D 505 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL


8146-201-E01

PRODUCT SIZE 590 × 520 × 70 mm













BUILT-IN Four Burner Induction

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:half bridge induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 7.6 kw speed zone (diameter 180mm+210) × 2
- · Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL

8144-201-B01

PRODUCT SIZE 590 × 520 × 55 mm






Capture your ideas :







COLOR

Black Glass

White Glass





BUILT-IN Four Burner Induction

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:half bridge induction
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 7.4 kw speed zone (diameter 2*160mm+180+210)
- · Individual residual heat indicators: 4
- · Cut-out size: W 720 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INDUCTION

MODEL

8141-201-B01

PRODUCT SIZE 760 × 520 × 55 mm











INDUCTION

MODEL

8150-201-B01

PRODUCT SIZE 910 × 520 × 55 mm





Capture your ideas :





BUILT-IN Five Burner Induction

· Slide Cooking Function

- Front touch control operation :
- · Sensor control operation
- System:half bridge induction
- 9 level power for each burner.
- boost for max power in 5 minutes
- 10 kw speed zone (diameter 2*160mm+2*180+210)
- Individual residual heat indicators: 5
- Cut-out size: W 880 * D 495 mm
- · Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- · Functions as below control part :





HIDE BUTTONS INDUCTION COOKTOP

Invisible Touch Panel Sensitive:Functional:Colorful

Thanks to pan detection technology, it'll only warm up when it senses a pot has been placed on top, so it's super-safe and energy efficient.

MODEL:8124-2A2-B00





BUILT-IN Double Burner Infrared

Knob Cooking Function

- PRODUCT INFORMATION

- Front touch control operation:
- Separate control for each part
- System:infrared heating
- 9 level power for each burner,
- boost for max power in 5 minutes
- 3.0 kw speed zone (diameter 200mm+165)
- Individual residual heat indicators: 2
- Cut-out size: W 270 * D 495 mm
- Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL

8329-201-001

PRODUCT SIZE 290 × 520 × 55 mm













BUILT-IN Double Burner Infrared

Slide Cooking Function

- PRODUCT INFORMATION -

- · Front touch control operation :
- · Sensor control operation
- · System:infrared heating
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 3.0 kw speed zone (diameter 200mm+165)
- Individual residual heat indicators: 2
- Cut-out size: W 270 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL


8329-202-001

PRODUCT SIZE 290 × 520 × 55 mm













BUILT-IN Double Burner Infrared

· Slide Cooking Function


PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:infrared heating
- 9 level power for each burner,
- boost for max power in 5 minutes
- · 3.0 kw speed zone (diameter 200mm+165)
- Individual residual heat indicators: 2
- Cut-out size: W 275 * D 495 mm
- · Automatic safety switch off
- Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL 8324-202-001 PRODUCT SIZE 290 × 520 × 55 mm





White Glass



BUILT-IN Double Burner Infrared

· Slide Cooking Function

PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- System:infrared heating
- 9 level power for each burner.
- · boost for max power in 5 minutes
- · 3.0 kw speed zone (diameter 200mm+165)
- · Individual residual heat indicators: 2
- · Cut-out size: W 275 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INFRARED

MODEL


8324-202-001

PRODUCT SIZE 290 × 520 × 55 mm











MODEL

8325-201-002

PRODUCT SIZE 730 × 430 × 55 mm





@ Capture your ideas :







MODEL

8333-202-001

PRODUCT SIZE 590 × 520 × 55 mm









BUILT-IN Double Burner Infrared

Slide Cooking Function

- PRODUCT INFORMATION

- Front touch control operation:
- Separate control for each part
- System:infrared heating
- 9 level power for each burner,
- boost for max power in 5 minutes
- 4.4 kw speed zone (diameter 230mm) x 2
- Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- · Functions as below control part :






BUILT-IN Three Burner Infrared

· Slide Cooking Function

— PRODUCT INFORMATION 🤝

- · Front touch control operation :
- Sensor control operation
- System:infrared heating
- · 9 level power for each burner,
- boost for max power in 5 minutes
- 6.2 kw speed zone (diameter 200mm+165+200/300)
- · Individual residual heat indicators: 3
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :





COLOR

Black Glass

White Glass



BUILT-IN Three Burner Infrared

Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:infrared heating
- · 9 level power for each burner,
- boost for max power in 5 minutes
- · 6.5 kw speed zone
- · (diameter 200mm+165+165/235/320)
- · Individual residual heat indicators: 3
- Cut-out size: W 570 * D 495 mm
- Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INFRARED

MODEL

8334-257-001

PRODUCT SIZE 590 × 520 × 55 mm















BUILT-IN Four Burner Infrared

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:infrared heating
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 6.5 kw speed zone
- (diameter 200mm+165+165/235/320)
- · Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



INFRARED

MODEL

8342-201-003

PRODUCT SIZE 590 × 520 × 55 mm













BUILT-IN Four Burner Infrared

Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- Sensor control operation
- System:infrared heating
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 6.2 kw speed zone
- · (diameter 2*165mm+2*200)
- · Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL

8344-203-001

PRODUCT SIZE 590 × 520 × 55 mm















BUILT-IN Four Burner Infrared

Knob Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- Separate control for each part
- · System:infrared heating
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 3.0 kw speed zone
- (diameter 2*165mm+2*200)
- · Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL

8349-201-001

PRODUCT SIZE 590 × 520 × 55 mm







Capture your ideas :



Black Glass White Glass



MODEL

834D-201-001

PRODUCT SIZE 760 × 520 × 55 mm











COLOR

Black Glass

White Glass



MODEL

834E-201-001

PRODUCT SIZE 760 × 520 × 55 mm









BUILT-IN Four Burner Infrared

Slide Cooking Function

— PRODUCT INFORMATION

- Front touch control operation:
- Sensor control operation
- System:infrared heating
- 9 level power for each burner,
- boost for max power in 5 minutes
- 7.2 kw speed zone
- (diameter 2*165mm+200+180/250)
- Individual residual heat indicators: 4
- Cut-out size: W 730 * D 495 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- · Functions as below control part :





BUILT-IN Four Burner Infrared

· Knob Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Separate control for each part
- · System:infrared heating
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 7.2 kw speed zone
- · (diameter 2*165mm+200+180/250)
- · Individual residual heat indicators: 4
- Cut-out size: W 730 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :



Capture your ideas :



Black Glass

White Glass



INFRARED

MODEL

834F-201-001

PRODUCT SIZE 760 × 520 × 55 mm





Capture your ideas :





BUILT-IN Four Burner Infrared

- · Slide Cooking Function
- · Front touch control operation :
- · Sensor control operation
- System:infrared heating
- · 9 level power for each burner,
- boost for max power in 5 minutes
- 7.4 kw speed zone
- · (diameter 2*165mm+165/0val165*270+180/250)
- · Individual residual heat indicators: 4
- Cut-out size: W 730 * D 495 mm
- Automatic safety switch off
- · Automatic pan detective
- Day hyperian and addition
- Dry burning protective
- Over flow water protective
- · Functions as below control part :







INFRARFD

MODEL

834G-201-001

PRODUCT SIZE 760 × 520 × 55 mm







BUILT-IN Four Burner Infrared

- Knob Cooking Function
- · Front touch control operation :
- · Separate control for each part
- · System:infrared heating
- · 9 level power for each burner,
- boost for max power in 5 minutes
- 7.4 kw speed zone
- (diameter 2*165mm+165/0val165*270+180/250)
- · Individual residual heat indicators: 4
- Cut-out size: W 730 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :









INFRARED

MODEL

8350-201-001

PRODUCT SIZE 910 × 520 × 55 mm





Capture your ideas :





BUILT-IN Five Burner Infrared

· Slide Cooking Function

- PRODUCT INFORMATION

- · Front touch control operation :
- · Sensor control operation
- · System:infrared heating
- · 9 level power for each burner,
- boost for max power in 5 minutes
- · 8.4 kw speed zone
- · (diameter 2*165mm+165/0val165*270+145/230+200)
- · Individual residual heat indicators: 5
- Cut-out size: W 880 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- Over flow water protective
- Functions as below control part :







NFRARED

MODEL

8351-201-001

PRODUCT SIZE 910 × 520 × 55 mm










BUILT-IN Five Burner Infrared

· Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation:
- · Sensor control operation
- · System:infrared heating
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- · 8.4 kw speed zone
- (diameter 2*165mm+165/0val165*270+300+200)
- · Individual residual heat indicators: 5
- · Cut-out size: W 880 * D 495 mm
- · Automatic safety switch off
- Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :











BUILT-IN Double Burner Hybrid

Slide Cooking Function

- PRODUCT INFORMATION

- Front touch control operation:
- Sensor control operation
- System:single switch induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- 3.2 kw speed zone
- (diameter 190mm induction+165mm infrared)
- Individual residual heat indicators: 2
- Cut-out size: W 270 * D 495 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- · Functions as below control part :



MODEL

822P-201-D01

PRODUCT SIZE 290 × 520 × 55 mm



COLOR

Black Glass

White Glass



Capture your ideas :







BUILT-IN Double Burner Hybrid

Knob Cooking Function

- PRODUCT INFORMATION

- Front touch control operation :
- Sensor control operation
- System:single switch induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- 3.0 kw speed zone
- (diameter 190mm induction+165mm infrared)
- Individual residual heat indicators: 2
- Cut-out size: W 270 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL

822P-202-D01


PRODUCT SIZE 290 × 520 × 55 mm















MODEL

8225-201-B01

PRODUCT SIZE 730 × 430 × 55 mm









Capture your ideas :

BUILT-IN Double Burner Hybrid

Slide Cooking Function

- PRODUCT INFORMATION

- Front touch control operation:
- Sensor control operation
- System:half bridge induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- 5.2 kw speed zone
- (diameter 210mm induction+230mm infrared)
- Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- · Functions as below control part :







MODEL

8226-203-A01

PRODUCT SIZE 730 × 430 × 55 mm









· Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- Separate control for each part
- System:single switch induction + infrared
- · 9 level power for each burner.
- boost for max power in 5 minutes
- 4.7 kw speed zone
- (diameter 210mm induction+230mm infrared)
- Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- Over flow water protective
- · Functions as below control part :











MODEL

8228-202-D01

PRODUCT SIZE 730 × 430 × 55 mm













MODEL

8230-256-B01

PRODUCT SIZE 590 × 520 × 55 mm









BUILT-IN Double Burner Hybrid

Slide Cooking Function

— PRODUCT INFORMATION

- Front touch control operation:
- Separate control for each part
- System:single switch induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- 4.2 kw speed zone
- (diameter 190mm induction+230mm infrared)
- Individual residual heat indicators: 2
- Cut-out size: W 680 * D 380 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- Functions as below control part:





COLOR

Black Glass

White Glass

Three Burner Hybrid — PRODUCT INFORMATION

BUILT-IN

- · Slide Cooking Function
- · Front touch control operation :
- Sensor control operation
- System:half bridge induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- 5.9 kw speed zone
- (diameter 180mm+160 induction+230mm infrared)
- · Individual residual heat indicators: 3
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- Functions as below control part:







Black Glass

White Glass



BUILT-IN Three Burner Hybrid

· Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- Sensor control operation
- System:half bridge induction + infrared
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 6.2 kw speed zone
- (diameter 210 induction+200mm&165mm infrared)
- · Individual residual heat indicators: 3
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- · Functions as below control part :



MODEL

8235-201-B01

PRODUCT SIZE 590 × 520 × 55 mm



COLOR

Black Glass

White Glass



Capture your ideas :







MODEL

8237-201-B01

PRODUCT SIZE 780 × 450 × 55 mm









· Slide Cooking Function

— PRODUCT INFORMATION 🤝

- · Front touch control operation :
- Sensor control operation
- · System:half bridge induction + infrared
- · 9 level power for each burner,
- · boost for max power in 5 minutes
- 5.9 kw speed zone
- (diameter 180mm+160 induction+230mm infrared)
- · Individual residual heat indicators: 3
- Cut-out size: W 770 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- · Dry burning protective
- · Over flow water protective
- · Functions as below control part :









BUILT-IN Four Burner Hybrid

Slide Cooking Function

— PRODUCT INFORMATION

- Front touch control operation:
- Sensor control operation
- System:half bridge induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- 2.5 kw speed zone
- (diameter180mm*2 induction+200mm&165mm infrared)
- Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- Functions as below control part:



MODEL

8240-256-B01

PRODUCT SIZE 590 × 520 × 55 mm















BUILT-IN Four Burner Hybrid

· Slide Cooking Function

— PRODUCT INFORMATION

- · Front touch control operation :
- Sensor control operation
- System:single switch induction + infrared
- 9 level power for each burner,
- · boost for max power in 5 minutes
- 7.0 kw speed zone (diameter 2*190mm induction
- +165mm & 210mm infrared)
- Individual residual heat indicators: 4
- Cut-out size: W 570 * D 495 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- Functions as below control part:



MODEL

8241-201-D01

PRODUCT SIZE 590 × 520 × 55 mm















MODEL

8242-201-D01

PRODUCT SIZE 760 × 520 × 55 mm





Capture your ideas :



BUILT-IN Four Burner Hybrid

Knob Cooking Function

— PRODUCT INFORMATION

- Front touch control operation:
- Separate control for each part
- System:single switch induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- 7.8 kw speed zone (diameter 2*190mm induction
- +165mm & 250mm infrared)
- Individual residual heat indicators: 4
- Cut-out size: W 730 * D 495 mm
- Automatic safety switch off
- Automatic pan detective
- Dry burning protective
- Over flow water protective
- Functions as below control part:







MODEL

8250-201-B01

PRODUCT SIZE 910 × 450 × 55 mm









BUILT-IN Five Burner Hybrid

Slide Cooking Function

— PRODUCT INFORMATION 🗫

- Front touch control operation:
- Sensor control operation
- System:half bridge induction + infrared
- 9 level power for each burner,
- boost for max power in 5 minutes
- bridge-in for left induction part,
- 3000w boost for middle induction
- Individual residual heat indicators: 5
- Cut-out size: W 880 * D 380 mm
- · Automatic safety switch off
- · Automatic pan detective
- Dry burning protective
- · Over flow water protective
- Functions as below control part:



Capture your ideas :



White Glass





QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certification No: 117 25 QU 0137-05 R2M

Shenzhen H-ONE Electrical Appliances Co., Ltd.

This is to certify that: Zhongshan Guineng Electrical Appliances Co., Ltd.

Unified social credit code: 91440300279406613D/91442000MA56YYP76N

Phor J-1, Building A, 71-4 Kinton Band, Varian Community, Paying Novel, Basin Batch, Steadow Roginsterred Address: Flow J, Balling A, Yangawa High-ark Basin Indigent Equipment Measurement project, No. J Zhile Robert Stead

2nd Place, Suiteling A. No. 73-5, Xindon Avenue, Xindon Community, Payong Street, San 'on District,

Business Address: 5th Phot, Subling 3, Thougan High-to-b Starts Intelligent Equipment Monthstoring Project, No. 3

No Place, Building J., Zhongson High-teck Bashi Intelligent Equipment Months around Propert, No. Intelligent Branch Road, Buelle Town, Zhongsban City, Georgelong Province

The established MS conforms to: GB/T19001-2016/ISO9001:2015

Scope of approval:

Execute and development, production and expect of dave conting markines, hade straightness, industries coders, and electric portery stores; production and sales of electrical control closel bounds.

med by:

 Grighted Opcies
 27 May 2029 to 26 May 2027

 Previous Opcies
 27 May 2022 to 26 May 2025

 Second Recentification And to Bate
 13 May 2025 to 36 May 2025

 Recent Recentification Opcies
 27 May 2025 to 26 May 2025

Shanghai Ingeer Certification Assessment Co.,Ltd.
Continues and Assessment Co.,Edd.

Tel: 600-633-6051; +66-031-50314760
Welt: www.kzoloccom
Add Roan Et I Huding Manion, 2008 West Zhongshon Rd.,
Sulns Detret, Shanghai, China, 20025



Bate of Current Cortification



20 May 2025

The conversity of the contilicate bestrops to Managhan Inguer Contribution Assessment Cla., Ltd. The information & voluntion of the contribution on the behavior of the contribution can be handled on the Claff, existent Works(CRA_QNCCA) and ICAS residents, or the contribution on the contribution of the con

ASSESSMENT SERVICES

CERTIFICATION

NGEER

CAS TOTAL TO

质量管理体系认证证书

认证编号: 117 25 QU 0137-05 R2M

深圳市海一电器有限公司 中山市规能电器科技有限公司

统一社会信用代码: 91440300279406613D/91442000MA56YYP76N

2-massis, 深圳市宝安区福水街道新田社区新田大道71-1号A核1-2层

广东省中山市板美镇智科路3号中南高科板美智能装备制造项目3株5层

4X#### 探刺市宝安区模水街道新田社区新田大道71-1号A格2层

广东省中山市板美镇智能科路3号中南高科板美智能装备制造项目3栋5层

422E08

建立的管理体系符合: GB/T 19001-2016 /ISO 9001:2015 质量管理体系 要求

快煮机、直发器、电磁炉、电陶炉的研发、生产和外销; 电器控制电路板的 认证范围: 生产结果



松大山田東中和田: 2013年05月27日至2027年05月24日 上一田町東市和田: 2012年05月27日至2025年05月24日 第二大学学年6日間: 2015年05月13日至2025年05月24日 第二大学学年6日間: 2015年05月27日至2028年05月24日

2025 W 05 JR 20 ER



RIE www.kasiso.com Mtt: 1:90:9E.EP-0;RIB21689 MR B BIOTR 200215






本证金的的会交流上海流程的以上有限公司,证书的意义是合作可可能以其他在方形在(www.cocia.gov.co)上指挥,也可能过过来 对他公司为他从成就是具即的由一根的意识的问题,不过不可能实现的知识的。然而可以就是他们的一种有效。这样可能以可能 我们可以且这些事实的他的会就是一个时间来的,这种理解,这种理解,是可以让我们来说,那么

SERVICE: CUSTOMIZATION STEPS

Tell us your requirements, we offer you exact one you want!

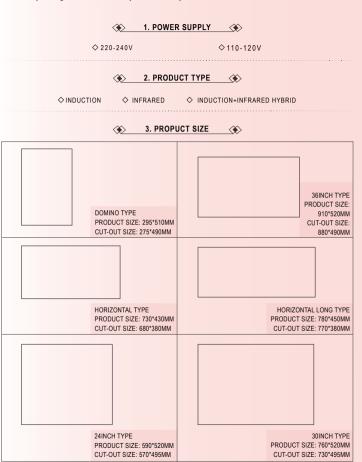







Floor 1-2,Building A,#71-1 Xintian Road,Xintian Community,Fuyong Street,Baoan District,Shenzhen,China Web:https://szh-one.com/

Tel:+86 0755-29411703 Email:inquiry@szh-one.com