

viscoSTAR

Solid state polycondensation plant for **iV increase and decontamination** of polyester pellets and/or flakes to be used after a pelletizing extruder, stand alone, or in front of a production extruder.

BENEFITS

- Fast iV increase
- Consistent and adjustable iV
- Decontamination time
- Continuous output
- Superior color values
- AA values




viscotec
foodgrade without compromise

Model		75	120	150	180	250	350
Max. output with pellets ¹	[kg/h]*	800	1200	1800	2000	2500	3500
Max. output with flakes ²	[kg/h]*	800	1200	1800	2000	-	-
Equipment height	[m]	10	11.6	13.1	14.6	13.6	16.1
Net volume of reactor	[m ³]	7.0	10.7	14.2	17.2	24.2	34.2
Energy consumption	[kWh/kg]*	0.06–0.15					
iV increase pellets/flakes	[dl/g/h]*	0.01–0.04					
Food grade according to		EFSA, FDA, brand owner approvals					

1) 6 h residence time 2) 3 h residence time

* Above table represents general technical data and average values, which depend on chemical composition, contamination, pelletizing, etc. of the pellets/flakes.
Guaranteed values only after trial with customer material. The calculated electrical power rate refers only to the reactor and periphery of the reactor and depends on the output rate. We reserve the right of technical modifications.

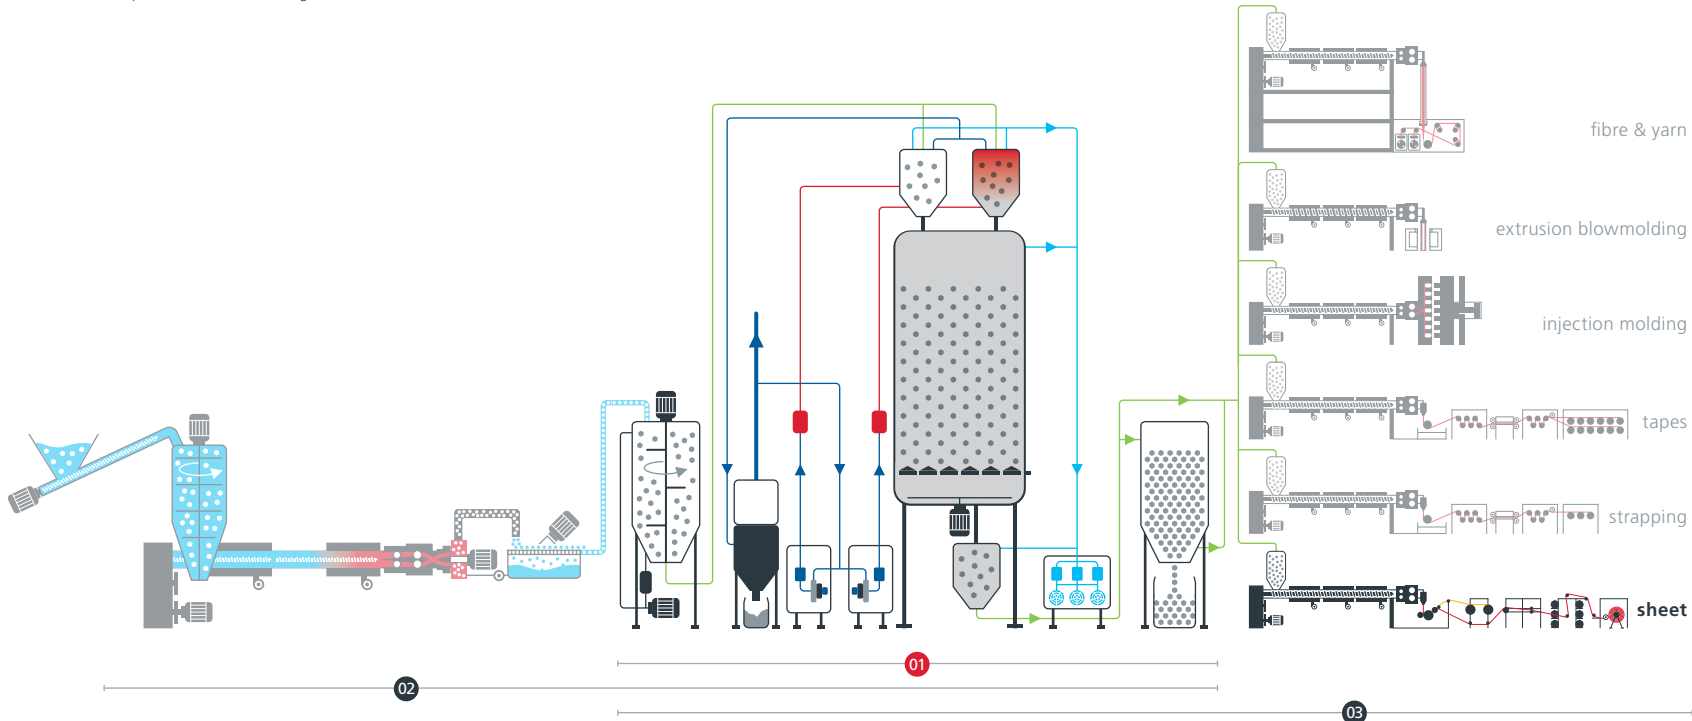

Starlinger & Co. Gesellschaft m.b.H.
A member of Starlinger Group

Austria
4113 St. Martin im Mühlkreis
Adsdorf 38
N 48° 25' 60" | E 14° 2' 33"

T: +43 7232 38170
E: viscotec.sales@starlinger.com
www.viscotec.at
www.starlinger.com



- 01 stand alone
- 02 in combination with recycling extruder
- 03 in front of production extruder