

TERRAVISTA GİYOTİN CAM SİSTEM

Mevcut profiller ile silinebilir ve standart giyotin tasarlanabilir.

Elektronik kontrol switch ile açılır kanat açık iken motor devreye girmez .

Kullanım alanları; konut, villa, teras ve restoranlar.

Mevcut profilleri ile ikili üçlü silinebilir veya standart giyotin yapılabilir giyotin sistemimiz terste toplanabilir .

Yüksek yoğunluklu fırça fitil ve contalar kullanılmaktadır. yağışlı havalarda tam koruma sağlar.

Hareketli ekipmanları zincir - kayış ve milli yapılabilir .

Kanat profillerinde yalıtım ve izolasyon için çift conta ile desteklenmektedir.

Güvenlik nedeniyle sadece küpeşte pozisyonunda temizlenebilmektedir.

Hareketli üst küpeşte profili sayesinde el sıkışması önlenmektedir.

Giyotin üretimini desteklemek için sistemde kertme ve kırk beş kesim yoktur.

Vasistas çelik güçlendirilmiştir ve lama ile desteklenmektedir.

Uzaktan kumanda ile düşeyde açılıp kapanabilen.

Balkon korkuluğu olarak da kullanılabilen sistemlerdir.

Kullanım alanları; konut, villa, teras ve restoranlar.

Küpeşte pozisyonunda temizlenebilmektedir.

Hareketli üst küpeşte profili sayesinde el sıkışması önlenmektedir

Yüksek yoğunluklu fırça fitil ve contalar kullanılmaktadır.

Yağışlı havalarda tam koruma sağlar.





TERRAVISTA GUILLOTINE GLASS SYSTEM

Can be opened and closed vertically with remote control.

Systems used as balcony railing.

Usage areas; houses, villas, terraces and restaurants.

It can be cleaned in the railing position.

Hand drawing is prevented thanks to the movable upper railing profile

High density brush wicks and seals are used.

Provides full protection in rainy weather.

Existing profiles can be deleted and standard guillotine can be designed.

It is opened with an electronic control switch, the motor does not start when the wing is open.

Usage areas; residences, villas, terraces and restaurants.

With existing profiles, double or triple can be deleted or a standard guillotine can be made,

our guillotine system can be collected in reverse.

High density brush wick and seals are used.

Provides full protection in rainy weather.

Moving equipment can be made with chains, belts and shafts.

The wing profiles are supported by double seals for insulation and isolation.

For safety reasons, it can only be cleaned in the handrail position.

Hand jamming is prevented thanks to the movable upper handrail profile.

There is no notching and forty-five cuts in the system to support guillotine production.


The transom is reinforced with steel and supported by a sheet metal.

terrace
ALÜMINYUM MİMARİ SİSTEMLER

info@terracealuminum.com

SİSTEM

TEKNİK DETAYLARI



4154 ALT KASA
 $1,310 \text{ Kg}/\text{m}=9.170\text{Kg}$



4153 HAREKETLİ KÜPEŞTE
 $0.640\text{Kg}/\text{m}=4.480\text{Kg}$




4152 MOTOR İÇ DİŞ KAPAK
 $0,950 \text{ Kg}/\text{m}=6.650\text{Kg}$




4151 motor alt-üst kapak
 $0.840\text{Kg}/\text{m}=5.880\text{Kg}$




4150yan kasa kapama çitası
 $0,240\text{Kg}/\text{m}=1.680\text{Kg}$

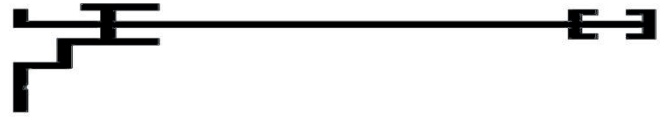

4149yan kasa ara çitası
 $0.480\text{Kg}/\text{m}=3,360\text{Kg}$

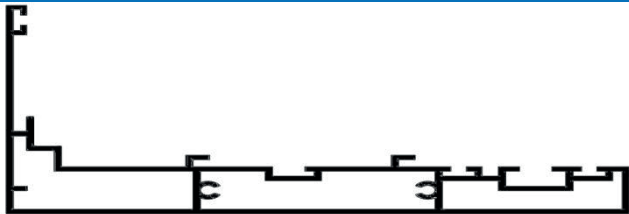


4147 yan kasa
 $2,100\text{Kg}/\text{m}=14,700\text{Kg}$

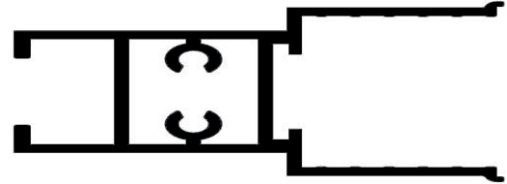


4156 yankasa bazası
 $0,690\text{Kg}/\text{m}=4,830 \text{ Kg}$


SYSTEM TECHNICAL DETAILS




4157 sabit küpeşte bazası
 $0,880K\check{g}/m=6,160K\check{g}$




4158 alt üst baza
 $0,710K\check{g}/m=4,970$



4159 çekirme kenet bazası
 $0,966K\check{g}/m=6,762K\check{g}$

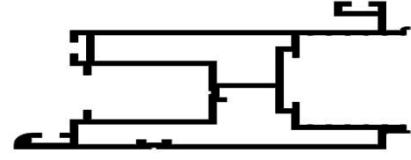

4067 kilit bazası
 $0,930K\check{g}/m=6,510K\check{g}$



4066 yan kasa iç kapak
 $1,200K\check{g}/m=8,400$