


PUFF HEAT TRANSFER VINYL



STRUCTURE

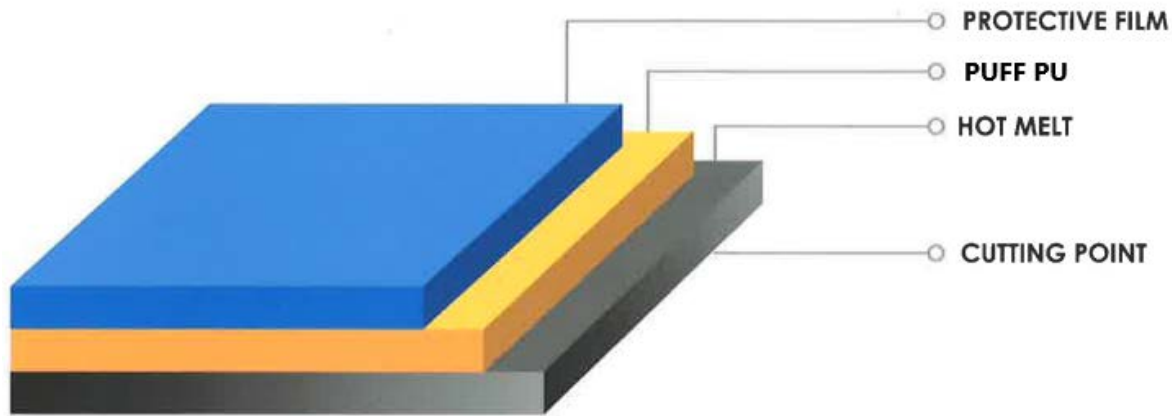

RECOMMENDED FABRICS

100% COTTON, 100% POLYESTER, POLY / COTTON BLENDS, ACRYLICS

SETTING & HOW TO USE

For best result, need to make adjustment on finding optimal level of pressure & temperature



CUT

MIRROR IMAGE



BLADE

45 DEGREE



TEMPERATURE

160°C(320°F)

SILVER/GOLD/ROSEGOLD
140°C(284°F)~150°C(302°F)



TIME

10-20 SECONDS



PRESSURE

HIGH



PEEL

HOT PEEL




WASH

WAIT AT LEAST 24 HOURS
BEFORE FIRST WASH
DO NOT HAND WASH
MACHINE WASH WITH COLD



DETERGENT

MILD DETERGENT



THICKNESS

165 MICRONS
(WITHOUT PROTECTIVE
FILM)

SILVER/GOLD/ROSEGOLD
160 MICRONS
(WITHOUT PROTECTIVE
FILM)



HGWORLD



worldpaperweb@gmail.com



WORLDPAPEWEB



HGWORLD.US



<https://www.world-paper.com>



561-200-76-16