
Yan's International Inc.


ASSEMBLING INSTRUCTION
SUKI SINGLE / DOUBLE

Website : www.miwafuton.com

1

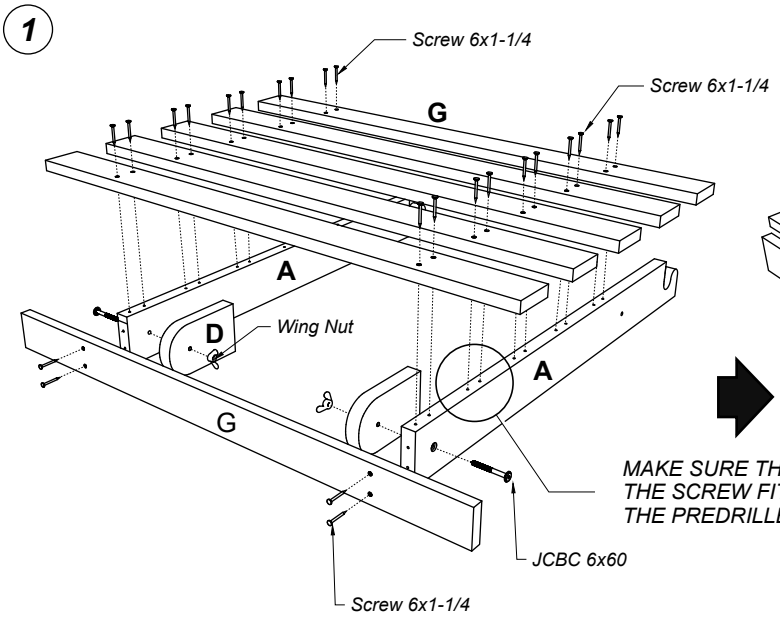


MAKE SURE THE TIP OF THE SCREW FITS INTO THE PREDRILLED HOLES

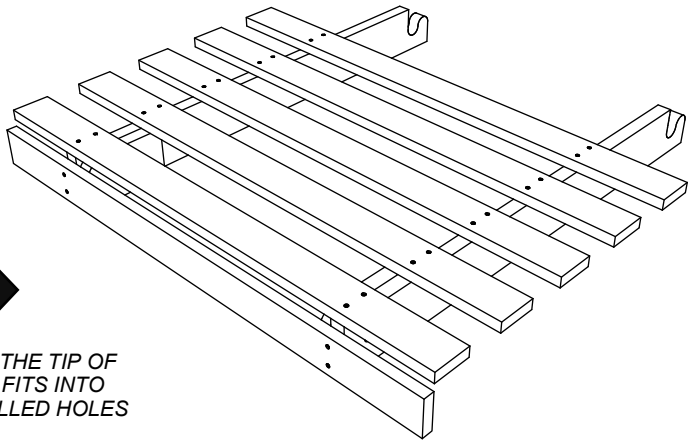


SEAT DECK

2

NOTE :
The slats will need to be aligned on top of component A/B/C on either side, with the predrilled holes directly on each respective rails, then screw on individually

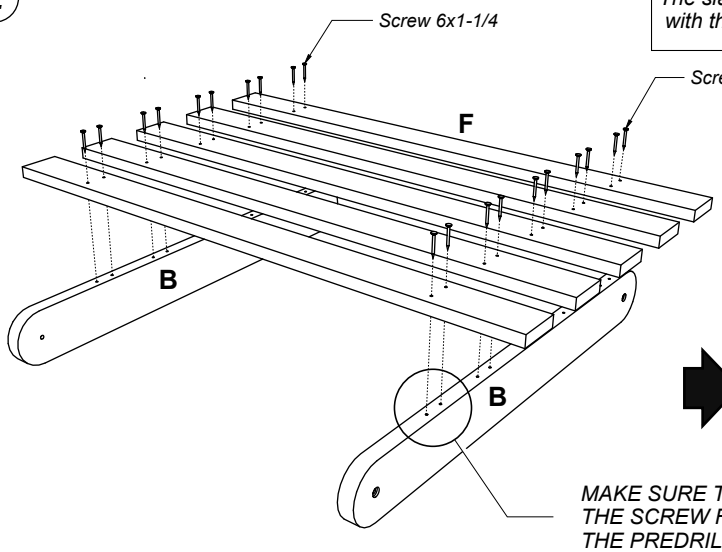


MAKE SURE THE TIP OF THE SCREW FITS INTO THE PREDRILLED HOLES

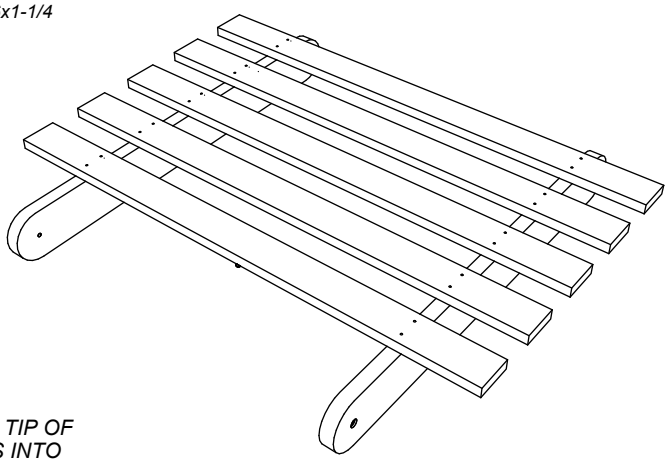


MIDDLE DECK

3

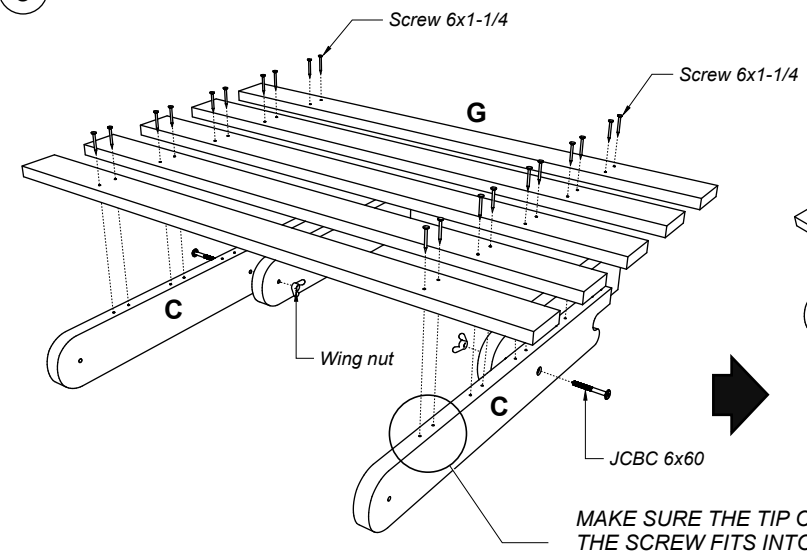


MAKE SURE THE TIP OF THE SCREW FITS INTO THE PREDRILLED HOLES

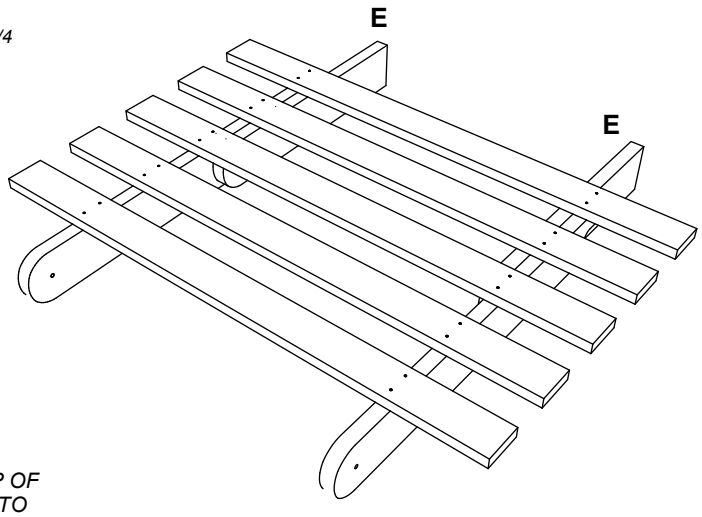


BACK DECK


4 Turn the frame upside down. Align and connect the Seat Deck, Middle Deck and Back Deck, then install Part H.

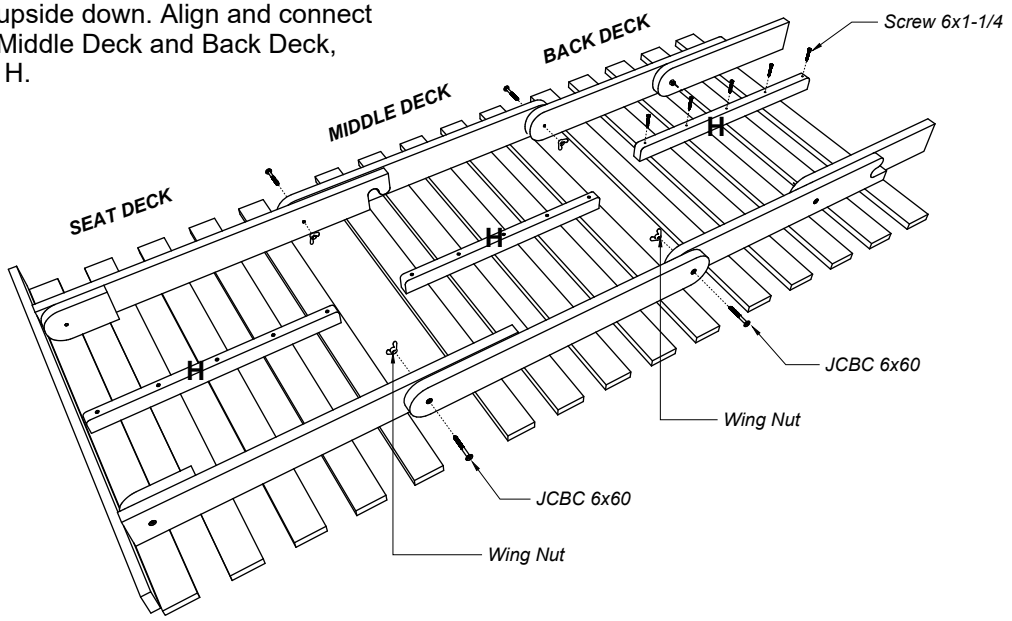


5 Assembly is complete.
Enjoy your Suki !

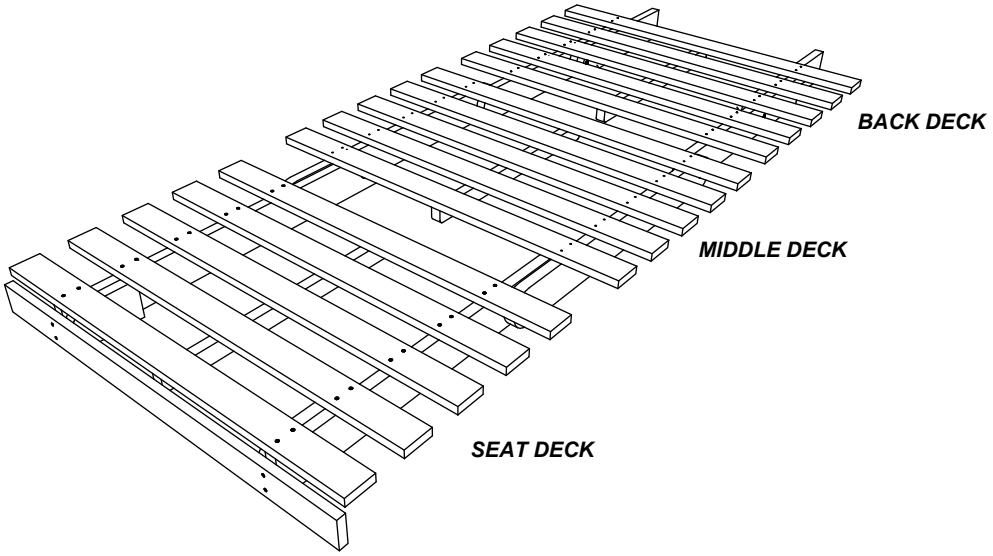


POSITION



BED POSITION

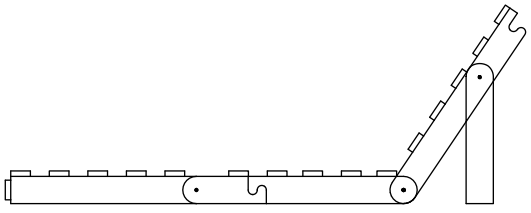


LOUNGER POSITION




CHAIR POSITION


SUKI SINGLE, DOUBLE PART COMPONENT

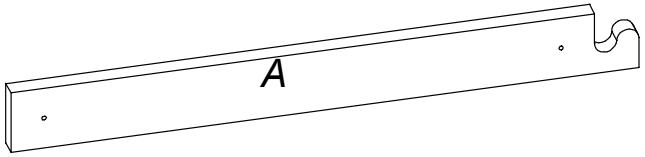1. 


2X R / L

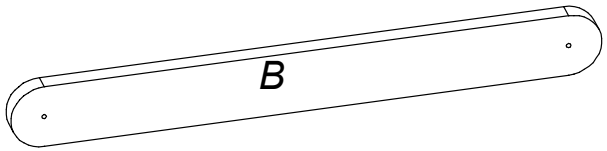2. 

2X

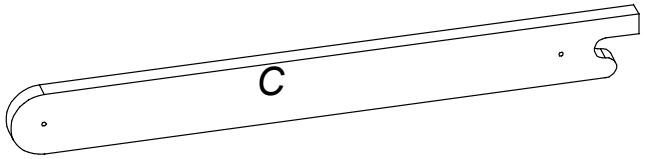3. 


2X R / L

4. 


2X

5. 


2X

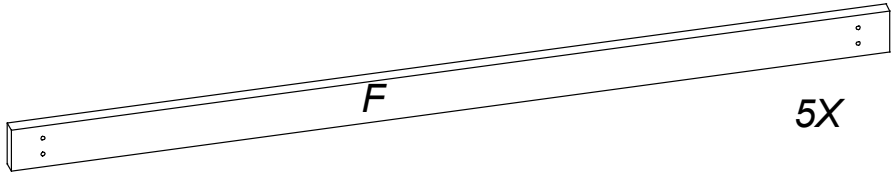6. 

5X

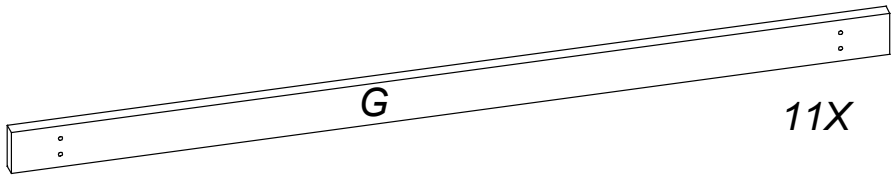7. 

11X


8. 

3X


SUKI SINGLE, DOUBLE, QUEEN HARDWARE



1. JCBC 6 x 60 = 8



2. WING NUTS M 6 = 8




3. SCREW 6 x 1 1/4 = 80



4. L Key 6x70 = 1


SUKI SINGLE, DOUBLE, QUEEN OPERATION INSTRUCTION

From Bed Position to Lounger Position

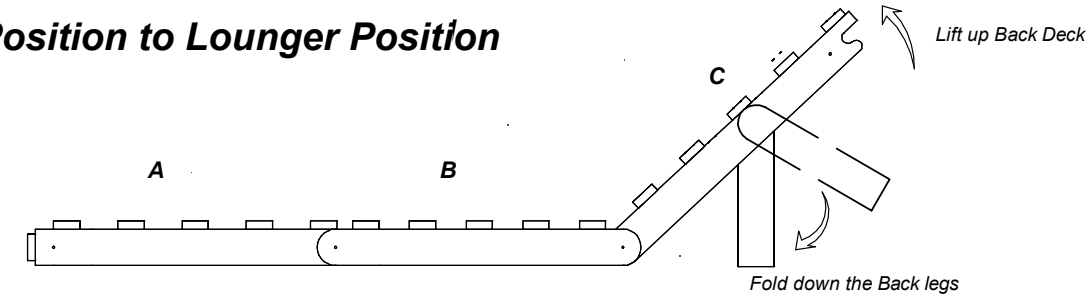


From Lounger Position to Chair Position

1

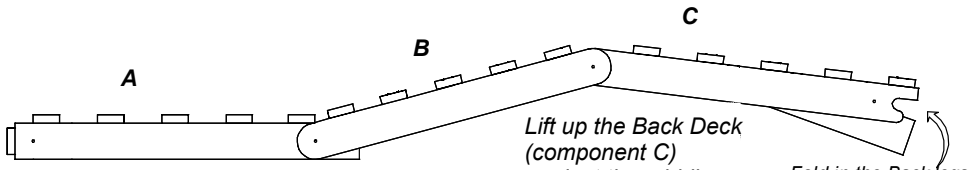


2

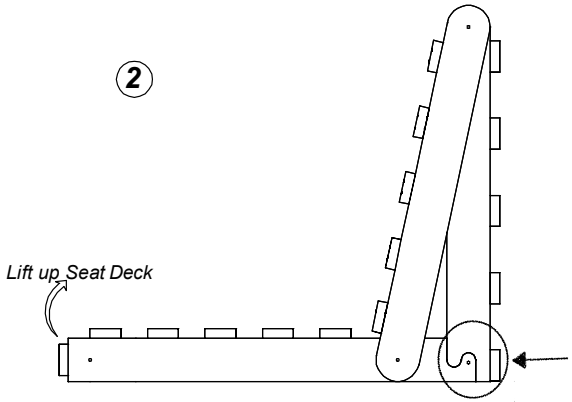

Please make sure the Back Deck and Seat Deck are firmly attached together, It's important for stability and safety.

3

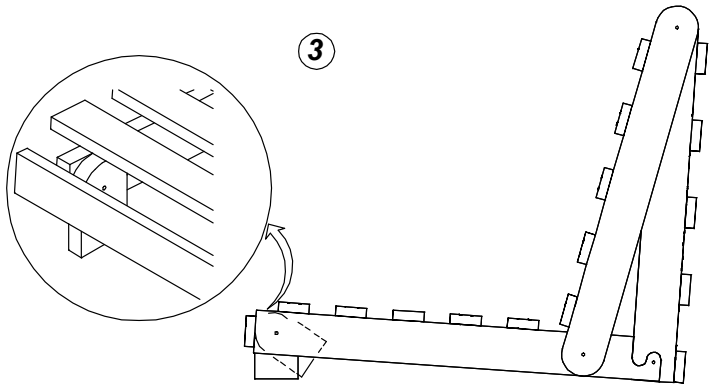

Fold the Front Legs out