




Automation for telescopic sliding doors for leaf weights up to 2x120Kg and 4x80Kg. Ideal for obtaining maximum useful passage in a limited space, the control unit with programming display allows local automatic adjustment of all the main functions and remote management via U-Link interconnectivity protocol

DIMENSION (MM)

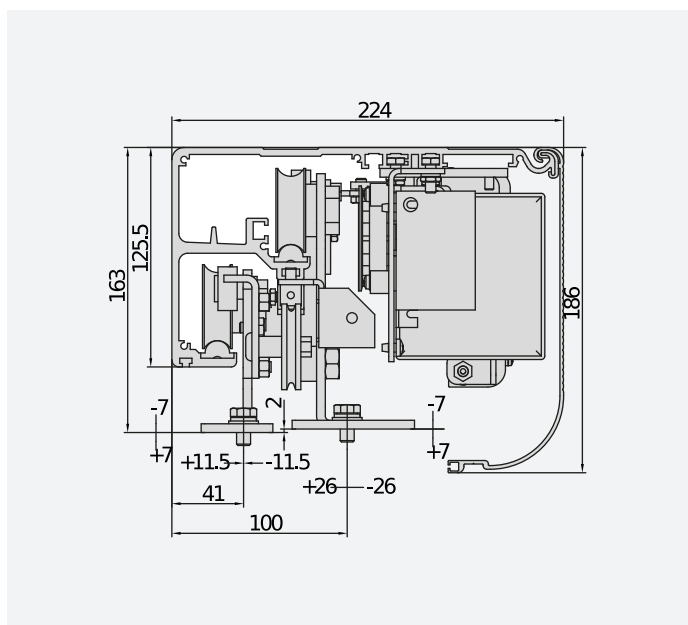

Technical features

	VISTA TL2-2	VISTA TL4-4
Control unit	ARIA EVO	
Supply voltage AC	24 V	24 V
Nominal power consumption	230 W	230 W
Leaf type	Sliding	Sliding
Number of doors	2	4
Door weight	2x120 kg	4x80 kg
Manual cycle	Reversible	Reversible
Type of limit switch	Encoder + mechanical stop for opening	Encoder + mechanical stop for opening
Clear opening	800 ÷ 3300 mm	1600 ÷ 4400 mm
Opening speed	up to 100	up to 200
Closing speed	up to 100	up to 200
Locking	Mechanical	Mechanical
Release	Release Lever	Release Lever
Impact reaction	Electronic torque limiter	Electronic torque limiter
Use cycle	Continuous	Continuous
Protection rating	IPX0÷IPX14	IPX14
Environmental conditions	-20 ÷ 55 °C	

[illegible]



		Description	
P960607 00002	VISTA TL4-440	Operator for telescopic sliding pedestrian doors with 4 leaves and max. weight 4x80 kg. useful passage 4000 mm and transom width 6200 mm. Maximum useful passage.	U-Link
P960608 00002	VISTA TL4-442	Operator for telescopic sliding pedestrian doors with 4 leaves and max. weight 4x80 kg. useful passage 4200 mm and transom width 6500 mm. Maximum useful passage.	U-Link
P960609 00002	VISTA TL4-444	Operator for telescopic sliding pedestrian doors with 4 leaves and max. weight 4x80 kg. useful passage 4400 mm and transom width 6800 mm. Maximum useful passage.	U-Link

ARIA EVO: Control unit for pedestrian doors.**ARIA EVO - Built-In**

- Control unit for pedestrian doors
- Application: control unit for pedestrian doors
- Board power supply: 230V single-phase
- Operator power supply: 24V
- Main features: programming with display, incorporated dual channel receiver, anti-crushing, slowdown during opening and closing
- Main functions: automatic re-closing, alarms management, anti-break-in logics

VISTA TL

	D113722 - VISTA SEL		P111158 - PGI
	Function selector for pedestrian door series VISTA SL, SL C, TL.		Bottom door guide for automatic doors with aluminium frame.
	P111618 00001 - PRV BR.48 		P111618 00002 - PRV BR.49
	Finishing brush 20 mm, length 2.5 m.		Finishing brush 27 mm, length 2.5 m.
	P111688 - PPA TL FX 		P111689 - PPA TL GD
	Vista TL glass leaf fixing clamp.		Floor guides for Vista TL glass leaves.
	P121016 - RB		P111156 - PPR
	4-channel wall-mounted radio control with rolling code.		Door guide slide for automatic doors with aluminium frame.

VISTA TL

	P111661 - SPRV TL T new Profile closing brackets, 5pcs.		P111660 - PRV TL T new Vista tl anodised closing profile, length 6.8 m.
	N733565 - SLV SBV TL2 SBV TL side fixing brackets.		N733408 - ERV Solenoid lock assembly for VISTA SL/SL C, (use with BBV recommended) ERV.
	P111503 - BBV SLC TL Battery powered anti-panic device for VISTA SL C, TL.		P111678 - SPAC new Pair of locks (2) for glass leaf.
	P111664 00002 - PPA TL 3200 O new Clamps for glass leaf, 3200 mm, anodised.		P111664 00001 - PPA TL 3200 N new Clamps for glass leaf, 3200 mm, natural.
	P111663 00002 - PPA TL 1600 O Clamps for glass leaf, 1600 mm, anodised.		P111663 00001 - PPA TL 1600 N new Clamps for glass leaf, 1600 mm, natural.
	P111640 00001 - SBV TL new Vista TL support beam, length 6.82 m.		N733564 - SLV SBV TL1 SBV TL ceiling fixing brackets.
	P111653 - VIO-DT2 new Safety and bi-directional activation sensor, dual technology, monitored.		P111654 - VIO-DT1 new Safety and mono-directional activation sensor, dual technology, monitored.



VISTA TL

	 P111655 - IXIO-DT1		 P111656 - VIO-ST
	Safety and mono-directional activation sensor, dual technology, monitored, programmable c.telecom.		Infrared safety sensor, monitored.
	 P111662 - VIO-M		 P111676 - MAGIC SWITCH
	Compact mono-directional activation sensor.		Activation touch button.
	 P111677 - PUSH PLATE		
	Activation button.		

