



SALES@SP1FITTINGS.COM


SP1FITTINGS.COM

SDR17 IPS ELECTROFUSION COUPLERS

FUSION RANGE: SDR17 TO SDR21

Gas: 100 PSI, Water: 160 PSI @ 23° Celcius (73.4° F)

10"-16" One Fusion Zone, 18"-36" Two Fusion Zones

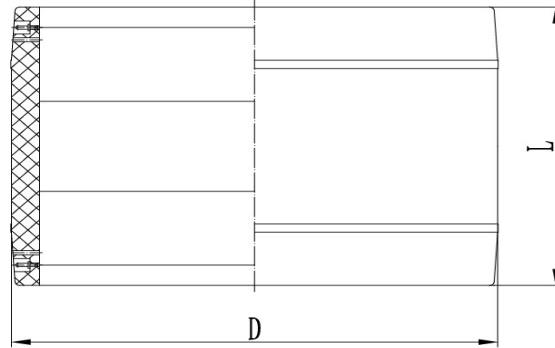

Size (IN)	D (IN)	L (IN)	Fusion Zones	Weight (KG)	Part Number
10"	12.40"	8.66"	1	4.62	EFC10017
12"	14.71"	9.45"	1	8.86	EFC12017
14"	16.15"	10.0"	1	9.56	EFC14017
16"	18.46"	11.61"	1	12.6	EFC160117
18"	20.77"	12.598"	2	17.33	EFC18017
20"	23.08"	14.17"	2	24.85	EFC20017
22"	25.38"	15.158"	2	37.18	EFC22017
24"	27.69"	15.354"	2	42.09	EFC24017
26"	30.00"	16.54"	2	54.53	EFC26017
28"	32.31"	17.323"	2	67	EFC28017
30"	34.62"	17.716"	2	71	EFC30017
32"	36.92"	18.50"	2	85.66	EFC32017
34"	39.23"	19.685"	2	97	EFC34017
36"	41.54"	19.685"	2	108.32	EFC36017

- Molded to meet or exceed PE100, PE3608, PE4710 Resin Specification.
- ASTM F714, F1055, D2513, D3035, D3350, AWWA C906.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C906
- Also available in DIPS & metric sizing.*

