




SALES@SP1FITTINGS.COM

SP1FITTINGS.COM

MOLDED CONCENTRIC REDUCERS

SDR9 - 250PSI/SDR11 - 200PSI/SDR17 - 125PSI ASTM/IPS

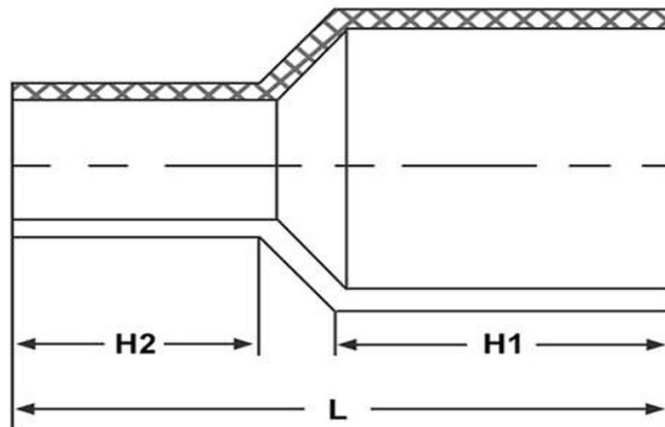

Size (IN)	L	H1	H2	Weight (KG) SDR9/SDR11/SDR17	Part Number
2" X 1"	6.299"	2.835"	2.638"	0.17/0.13/NA	MR0301**
3" X 2"	6.889"	3.15"	2.835"	0.43/0.33/0.23	MR0302**
4" X 2"	7.283"	3.307"	2.835"	0.67/0.46/0.28	MR0402**
4" X 3"	7.283"	3.307"	3.15"	0.79/0.54/0.25	MR0403**
6" X 2"	9.252"	4.252"	2.835"	1.79/1.28/1.02	MR0602**
6" X 3"	9.252"	4.252"	3.15"	1.88/1.41/1.15	MR0603**
6" X 4"	9.252"	4.252"	3.307"	2.03/1.52/2.05	MR0604**
8" X 4"	11.811"	6.024"	3.307"	4.68/3.28/2.69	MR0804**
8" X 6"	11.811"	6.024"	4.252"	5.26/3.51/3.04	MR0806**

(Insert SDR for **)

- Molded to meet or exceed PE100, PE3608, PE4710 Resin Specification.
- AWWA C906-15 and ASTM-D2513&D-3261 Requirements.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C906
- May also be available in DIPS & metric sizing.

