




SALES@SP1FITTINGS.COM

SP1FITTINGS.COM

MOLDED 45 DEGREE ELBOW

SDR9 - 250PSI/SDR11 - 200PSI/SDR17 - 125PSI ASTM/IPS

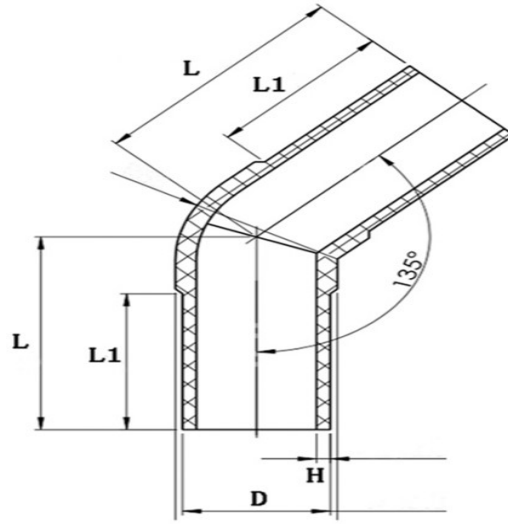

Size (IN)	D	L	L1	H SDR9	H SDR11	H SDR17	Weight (KG) SDR9/SDR11/SDR17	Part Number
1"	1.315"	3.54"	2.638"	.146"	.120"	-	0.10/0.08/NA	ME45010**
1-1/4"	1.90"	3.74"	2.64"	.211"	.173"	-	0.295/0.24/NA	ME45012**
1-1/2"	1.90"	3.74"	2.64"	.211"	.173"	-	0.295/0.24/NA	ME45015**
2"	2.375"	4.45"	2.83"	.264"	.216"	.140"	0.39/0.30/0.25	ME45020**
3"	3.5"	4.92"	3.15"	.389"	.318"	.206"	0.98/0.75/0.55	ME45030**
4"	4.5"	5.39"	3.31"	.500"	.409"	.265"	1.96/1.40/1.15	ME45040**
6"	6.625"	6.85"	4.25"	.736"	.602"	.390"	4.06/2.90/2.05	ME45060**
8"	8.625"	8.86"	5.95"	.958"	.784"	.507"	10.64/6.82/4.88	ME45080**
10"	10.75"	8.62"	5.35"	-	.977"	.632"	NA/7.35/6.90	ME45100**
12"	12.75"	9.61"	5.71"	-	1.159"	.750"	NA/11.34/10.98	ME45120**
14"	14"	9.69"	5.79"	-	1.273"	.824"	NA/14.00/13.40	ME45140**
16"	16"	9.96"	5.12"	-	1.455"	.941"	NA/19.32/18.95	ME45160**
18"	18"	10.39"	5.12"	-	1.636"	1.059"	NA/25.41/24.86	ME45180**
20"	20"	10.39"	5.12"	-	1.636"	1.059"	NA/33.81/33.01	ME45200**

(Insert SDR for **)

- Molded to meet or exceed PE100, PE3608, PE4710 Resin Specification.
- AWWA C906-15 and ASTM-D2513&D-3261 Requirements.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C906
- May also be available in DIPS & metric sizing.*

