




SALES@SP1FITTINGS.COM

SP1FITTINGS.COM

MOLDED REDUCING TEE

SDR9 - 250PSI/SDR11 - 200PSI/SDR17 - 125PSI ASTM/IPS

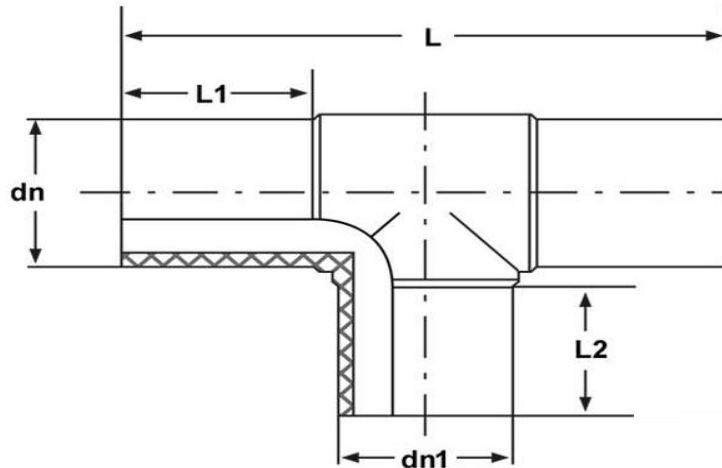

Size (IN)	SDR	DN	DN1	L	L1	L2	Weight (KG)	Part Number
3 X 2"	9	3.50"	2.375"	12.20"	3.15"	2.835"	1.3	MRT030209
4 X 2"	9	4.50"	2.375"	13.70"	3.31"	2.835"	2.44	MRT040209
6 X 4"	9	6.625"	4.50"	17.95"	4.25"	3.31"	7	MRT060409
*8 X 4"	9	8.625"	4.50"	22.874"	6.00"	3.31"	13.44	MRT080409
3 X 2"	11	3.50"	2.375"	12.20"	3.15"	2.835"	1.15	MRT030211
4 X 2"	11	4.50"	2.375"	13.70"	3.31"	2.835"	2.18	MRT040211
6 X 4"	11	6.625"	4.50"	17.95"	4.25"	3.31"	5.88	MRT060411
*8 X 4"	11	8.625"	4.50"	22.874"	6.00"	3.31"	11.9	MRT080411
3 X 2"	17	3.50"	2.375"	12.20"	3.15"	2.835"	0.8	MRT030217
4 X 2"	17	4.50"	2.375"	13.70"	3.31"	2.835"	1.44	MRT040217
6 X 4"	17	6.625"	4.50"	17.95"	4.25"	3.31"	4.1	MRT060417
*8 X 4"	17	8.625"	4.50"	22.874"	6.00"	3.31"	9.6	MRT080417

*Made with a molded tee and reducer at this time.

- Molded to meet or exceed PE100, PE3608, PE4710 Resin Specification.
- AWWA C906-15 and ASTM-D2513&D-3261 Requirements.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C906
- May also be available in DIPS & metric sizing.*

