




SALES@SP1FITTINGS.COM

SP1FITTINGS.COM

MOLDED IPS TEE

SDR9 - 250PSI/SDR11 - 200PSI/SDR17 - 125PSI ASTM/IPS

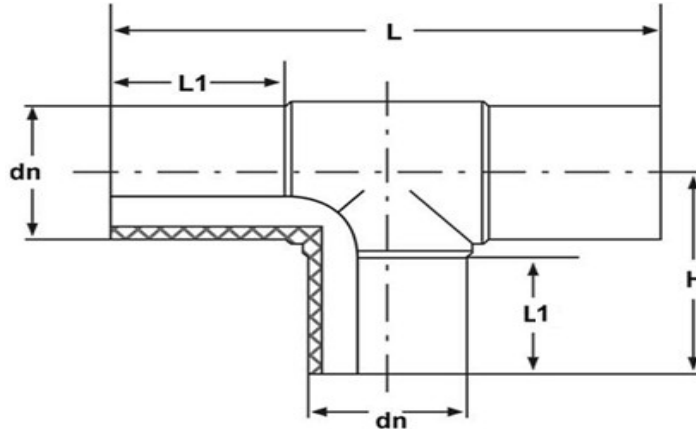

Size (IN)	DN	L	L1	H	Weight (KG) SDR9/SDR11/SDR17	Part Number
1"	1.315"	7.717"	2.638"	3.858"	0.16/0.10/NA	MT01**
1-1/4"	1.90"	8.28"	2.66"	4.035"	0.295/0.17/NA	MT012**
1-1/2"	1.90"	9.44"	2.74"	4.157"	0.295/0.22/NA	MT015**
2"	2.375"	10.236"	2.83"	5.12"	0.47/0.42/0.38	MT02**
3"	3.5"	12.20"	3.15"	6.10"	1.20/1.00/0.89	MT03**
4"	4.5"	13.70"	3.31"	6.85"	2.05/1.78/1.65	MT04**
6"	6.625"	17.95"	4.25"	8.976"	5.85/4.83/3.98	MT06**
8"	8.625"	22.874"	5.95"	11.457"	11.60/10.50/9.65	MT08**
10"	10.75"	25.98"	5.35"	12.165"	NA/18.90/13.86	MT10**
12"	12.75"	22.74"	5.71"	13.86"	NA/28.56/21.21	MT12**
14"	14"	25.394"	5.79"	15.12"	NA/33.25/24.65	MT14**
16"	16"	33.71"	5.12"	14.49"	NA/48.62/35.18	MT16**
18"	18"	32.677"	5.12"	15.433"	NA/64.68/47.46	MT18**
20"	20"	33.66"	5.12"	16.85"	NA/84.00/61.11	MT20**

(Insert SDR for **)

- Molded to meet or exceed PE100, PE3608, PE4710 Resin Specification.
- AWWA C906-15 and ASTM-D2513&D-3261 Requirements.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C906
- May also be available in DIPS & metric sizing.*

