




SALES@SP1FITTINGS.COM

SP1FITTINGS.COM

MOLDED FLANGE ADAPTERS

SDR7 - 335PSI/SDR9 - 250PSI

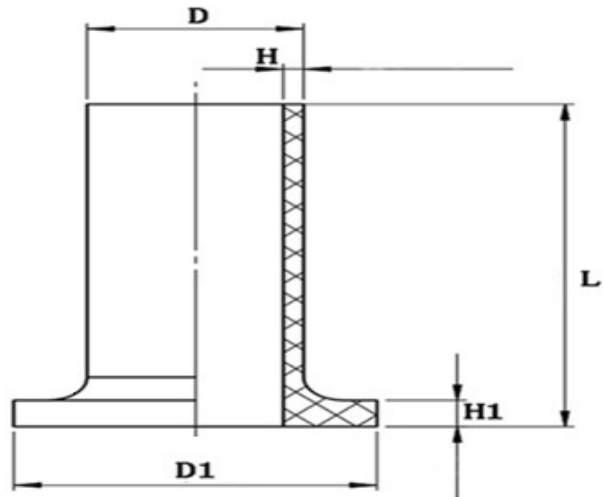

Size (IN)	D	D1	L	H1	H SDR7	H SDR9	Weight (KG) SDR7/SDR9	Part Number
2"	2.375"	3.937"	5.71"	.55"	.325"	.264"	0.295/0.24	MFA02**
3"	3.5"	5"	6"	.67"	.479"	.389"	0.59/0.47	MFA03**
4"	4.5"	6"	6.81"	.79"	.616"	.5"	1.02/0.86	MFA04**
6"	6.625"	8.50"	8"	.80"	.908"	.736"	2.70/2.08	MFA06**
8"	8.625"	10.63"	9"	1.02"	1.182"	.958"	4.99/3.92	MFA08**
10"	10.75"	12.75"	10"	1.54"	1.473"	1.194"	7.555/6.00	MFA010**
12"	12.75"	14.96"	10.75"	1.88"	1.747"	1.417"	13.73/11.35	MFA012**
14"	14"	17.50"	12"	2.00"	1.918"	1.556"	17.12/13.88	MFA014**
16"	16"	20"	12"	2.28"	2.192"	1.778"	22.74/18.66	MFA016**
18"	18"	21.12"	12"	2.50"	2.466"	2.000"	26.72/22.22	MFA018**
20"	20"	23.50"	12"	2.90"	2.740"	2.222"	36.98/28.18	MFA020**
24"	24"	28"	14"	3.39"	3.288"	2.667"	58.93/40.81	MFA024**
28"	28"	32.30"	14"	3.84"	3.84"	3.111"	92.50/68.60	MFA028**
30"	30"	34.30"	14"	4.19"	EMAIL	3.333"	NA/80.81	MFA030**
32"	32"	36.75"	14.50"	4.40"	EMAIL	3.556"	NA/98.21	MFA032**
36"	36"	40.909"	13.78"	4.421"	EMAIL	4.48"	NA/111.70	MFA036**

(Insert SDR for **)

- Molded to meet or exceed PE100, PE3608, PE4710 Resin Specification.
- AWWA C906-15 and ASTM-D2513&D-3261 Requirements.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C906
- May also be available in DIPS & metric sizing.*

