




The Portafill MS-3 is a high yield but ultra-portable screening plant. International shipping is a breeze as this powerful machine can hydraulically compact to fit inside a single shipping container or be transported by road to end users.

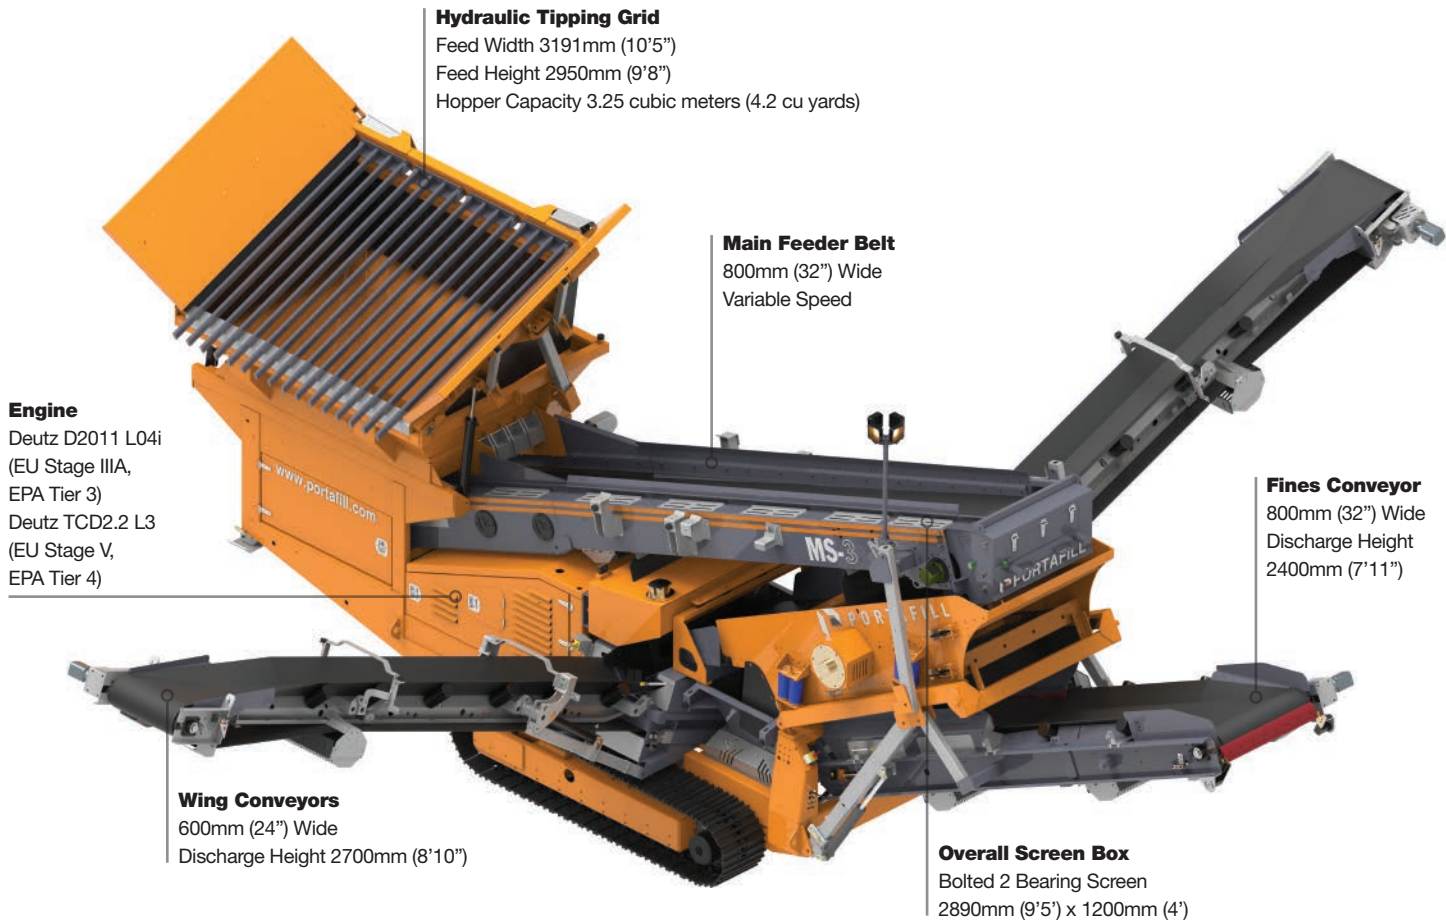

Hydraulic Tipping Grid
 Feed Width 3191mm (10'5")
 Feed Height 2950mm (9'8")
 Hopper Capacity 3.25 cubic meters (4.2 cu yards)

Main Feeder Belt
 800mm (32") Wide
 Variable Speed

Engine
 Deutz D2011 L04i
 (EU Stage IIIA,
 EPA Tier 3)
 Deutz TCD2.2 L3
 (EU Stage V,
 EPA Tier 4)

Fines Conveyor
 800mm (32") Wide
 Discharge Height
 2400mm (7'11")

Wing Conveyors
 600mm (24") Wide
 Discharge Height 2700mm (8'10")

Overall Screen Box
 Bolted 2 Bearing Screen
 2890mm (9'5") x 1200mm (4')

Features

- Triple conveyor system for multiple products
- Aggressive screening action for high yield production
- Track mounted for ultra-portability around site
- Loading with excavator or loader
- Machine compacts incredibly well to aid efficient and easy transport

Transport		Working	
Width	2.3m (7'6")	Width	11m (35'12")
Length	8.7m (28'7")	Length	9.9m (32'8")
Height	2.5m (8'5")	Height	3.5m (11'8")
Weight	11,500kgs		
	25,350lbs		

Portafill International Ltd, Dungannon Business Park,
 Killyliss Road, Dungannon, Co Tyrone, BT70 1RP
 T: 44 (0)28 8772 3505 | reception@portafill.com | www.portafill.com

PORTAFILL MS-3

All dimensions and weights are approximate. Subject to change without notice.