


EWS LubCos H₂O

Continuous Oil Condition Monitoring



LubCos

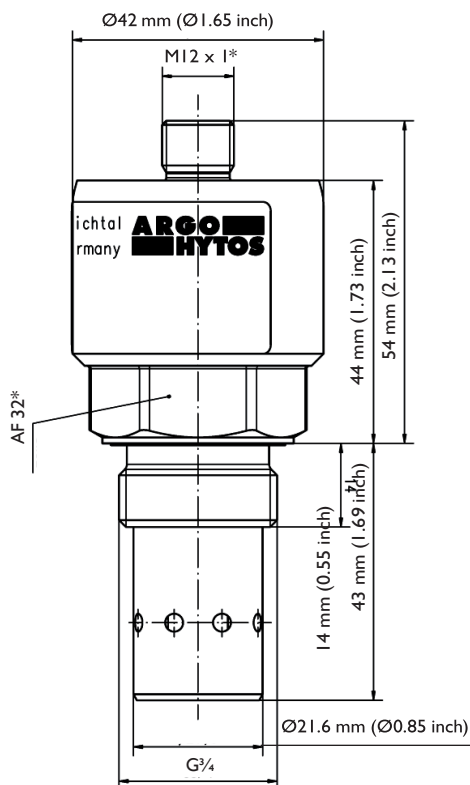

* mm

Description

Application area

Water is not desired in hydraulic fluids and lubricants. High concentration of water can cause severe disturbance in operation and damage.

Performance features

The LubCos H₂O measures the relative humidity of the oil and thus directly displays the saturation degree in the water:

- › 0%: Absolutely dry oil.
- › 100%: The oil is completely saturated with water. Additional water will not be dissolved anymore and will present itself as free water.

In contrast to the humidity analysis from laboratories, where the absolute water content is defined in ppm (parts per million), the saturation limit of the oil can be determined by relative humidity measurement. The advantage of the relative humidity over the absolute water content is, that it is not necessary to know the oil or its saturation limit in order to determine if there is free or dissolved water.

Example:

- › Mineral oils (e.g. HLP) have a comparatively low water absorption capacity. 500 ppm may signify that the oil is over-saturated and that free water exists.
- › Ester oils (e.g. HEES) have a relatively high water capacity. 500 ppm may show that the oil is just saturated by 15%.

Please also note the characteristics of the relative humidity with different temperatures: Warm oil can dissolve more water than cold oil. Therefore, the relative humidity of the oil increases in case of no further water supply. Hot, relatively dry oil, may suddenly keep free water if the ambient temperature cools down.

The LubCos H₂O points out the current saturation of the oil with water, independent from oil type and temperature and additionally assures operation of systems by direct warning.

Measuring principle

The sensor records the relative oil humidity and oil temperature. Through an oil specific calibration, it is possible to calculate the absolute humidity up to the saturation limit.

The measuring values are given by RS 232 and the analogue outputs.

Early Warning Sensor Technology Group



Post Office Box 2128
Stuart, Florida 34995



772-215-8087 (M)



TechSales@dieselfp.com
www.DieselFiltrationProducts.com

A Process + Filtration Products LLC & Diesel Filtration Products LLC Joint Venture

Design characteristics

The sensor is provided with a G $\frac{3}{4}$ thread and can be integrated in the tank or via adapter in lines.
Communication with the sensor either takes place over a serial interface or over two analog outputs (4 ... 20 mA).

Software

A free software for data recording and evaluation of the measured values can be downloaded from our website at www.argo-hytos.com
> Products > Sensors & Measurements > Software.

Technical data

Measuring range

Rel. humidity	0 ... 100	%
Temperature	-20 ... +120	°C
	(-4 ... +248	°F)

Measuring accuracy

Rel. humidity	1	% r.H.
Temperature	0.1	K

Measuring accuracy⁶

Rel. humidity (10 ... 90%) ⁷	±3	% r.H.
Rel. humidity (<10%, >90%) ⁷	±5	% r.H.
Temperature	±2	K

Response time humidity measurement (0 to 100%)	<1	min
--	----	-----

Weight	115	g
--------	-----	---

¹ Outside the specified measuring range, there are possibly no plausible measuring values to be expected.

² With screwed on connector

³ Automatic switch off at U <8 V and U >36 V, with load-dump impulses over 50V an external protection must be provided

⁴ Outputs IOut1 and IOut2 are freely configurable (see interfaces and communication commands)

⁵ In relation to the analogue current signal (4 ... 20 mA)

⁶ Works calibration

⁷ Calibrated to air at room temperature.

Sensor data	Size	Unit
Max. operating pressure	50 (725)	bar (psi)

Operating conditions

Temperature ¹	-40 ... +105	°C
	(-40 ... +221	°F)
Rel. humidity ¹	0 ... 100	% r.H. (non-con- densing)

Compatible fluids

mineral oils
(H, HL, HLP, HLPD, HVLP),
synthetic esters
(HETG, HEPG, HEES, HEPR),
polyalkylenglycols (PAG),
zinc and ash-free oils (ZAF),
polyalphaolefins (PAO)

Wetted materials

aluminum, HNBR,
polyurethane resin, epoxy
resin, chemical nickel/gold
(ENIG), soldering tin
(Sn60Pb40, Sn96,5Ag3Cu0,5
NiGe), aluminum oxide,
glass (DuPont QQ550)

Protection class ²	IP67
-------------------------------	------

Power supply ³)	9 ... 33	V
-----------------------------	----------	---

Power input	max. 60	mA
-------------	---------	----

Output

Power output (2x) ⁴	4 ... 20	mA
Accuracy power output ⁵	± 2	%
Interface	RS 232	-

Connections

Threaded connection	G $\frac{3}{4}$	inch
Tightening torque of threaded connection	45 ±4.5	Nm
Electrical connection	M12 x 1, 8-pole	-
Tightening torque M12-connector	0.1	Nm

Early Warning Sensor Technology Group



Post Office Box 2128
Stuart, Florida 34995



772-215-8087 (M)



TechSales@dieselfp.com
www.DieselFiltrationProducts.com

A Process + Filtration Products LLC & Diesel Filtration Products LLC Joint Venture