

# DROP-IN ANCHORS



## APPLICATIONS


- PLUMBING
- HEATING
- AIR – CONDITIONING
- VENTILLATION INSTALLATIONS
- PIPE SUSPENSIONS
- AIR DUCTS
- SECURING CHANNELS
- RAILS
- PLATES
- BRACKETS
- SUSPENDED CEILINGS

## SUITABLE BASE MATERIAL

- CRACKED CONCRETE
- NON-CRACKED CONCRETE

## A-SDI-C GALVANIZED STEEL WITH COLLAR

#PREMIUM \*\*

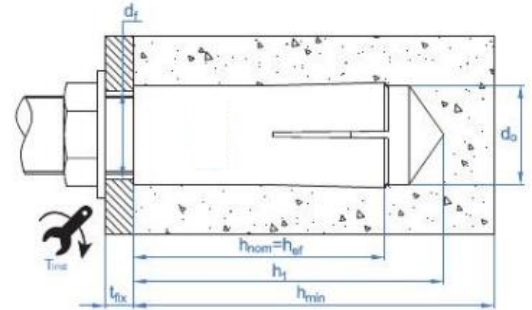

CODE	ART NO.	ΦDRILL MM	ANCHOR LENGTH MM	THREAD SIZE MM	DRILL HOLE DEPTH MM	SCREW IN DEPTH		MAX. RECOMM ENDED TORQUE NM	RECOMMENDED LOAD KN UNCRACKED CONCRETE C20/25 TENSION SHEAR		BOX PACKING CONTENT Pcs.
						MIN. MM	MAX. MM				
A-SDI-C-082506	4175021	8	25	6	27	6	12	4.5	2.1	1.7	100
A-SDI-C-103008	4175022	10	30	8	32	8	13	11	3.6	3.1	100
A-SDI-C-104008	4175023	10	40	8	42	8	20	11	3.6	3.1	50
A-SDI-C-123010	4175024	12	30	10	33	10	15	22	4.8	4.5	50
A-SDI-C-124010	4175025	12	40	10	43	10	17	22	4.8	4.5	50
A-SDI-C-165012	4175026	16	50	12	53	12	22	38	6.3	7.3	50
A-SDI-C-206516	4175027	20	65	16	69	16	27	95	10.5	12.2	25
A-SDI-C-258020	4175028	25	80	20	84	20	34	185	11.9	17.2	25

