


STANDARD	DIN 7991 / ISO 10642
GRADES	A2 , A4
TENSILE STRENGTH	700N/MM ²

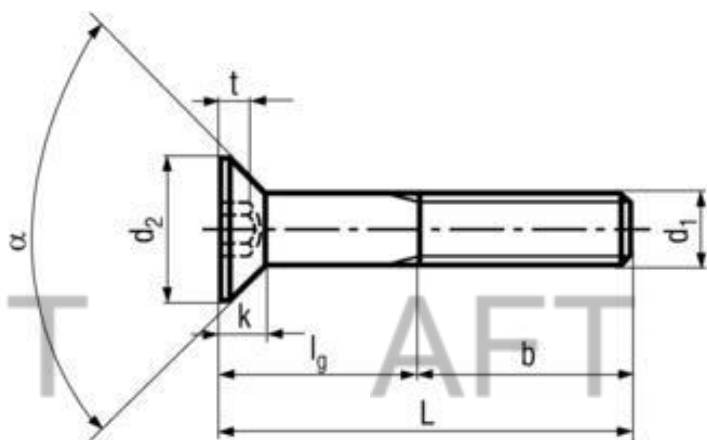

DIAMETER (D)	M5	M6	M8	M10	M12	M16
HEAD DIA Max. (D2)	10	12	16	20	24	30
HEAD HEIGHT (K)	2.8	3.3	4.4	5.5	6.5	7.5
ACROSS FLAT (S)	3	4	5	6	8	10
SOCKET DEPTH (T)	2.3	2.5	3.5	4.4	4.6	5.3
THREAD PITCH	0.80	1.00	1.25	1.50	1.75	2.00
ANGLE	90	90	90	90	90	90
LENGTHS (MM)	10-50	10-65	10-150	16-150	20-150	25-150

NOTE:

*ALL LOAD TOLERANCES CAN BE ACHIEVED IN ACCORDANCE WITH THE SPECIFIED DIMENSIONS MENTIONED ABOVE.
 *ANY MODIFICATIONS TO THE PRODUCT PORTFOLIO CAN BE IMPLEMENTED WITHOUT PRIOR NOTIFICATION TO THE STAKEHOLDERS.
 *SPECIAL LENGTHS CAN BE PROVIDED UPON REQUEST, SUBJECT TO A MINIMUM ORDER QUANTITY REQUIREMENT.