

NYLON FRAME FIXING ANCHORS

#ELITE ***

ANF-CSR- ANCHOR BODY POLYAMIDE PA6 WITH COUNTERSUNK STAINLESS STEEL A4 SCREW ***



FEATURES

PROFIED INTERNAL GEOMETRY ,
 DESIGNED TO FIT BOTH HEXAGONAL FLANGE AND COUNTERSUNK HEAD.
 EQUAL EMBEDDED DEPTH FOR ALL BASE MATERIALS, 70MM RESULTING IN HIGHER LOADING.
 MULTI AXIS EXPANSION
 THROUGH FIXING

SUITABLE BASE MATERIAL

CONCRETE
 AERATED CONCRETE
 HARD NATURAL STONE
 SOLID BRICK
 HOLLOW BRICK
 SANDLIME BRICK


MATERIAL

ANCHOR BODY MADE FROM HIGH QUALITY POLYAMIDE PA6.
 SCREW MADE OF GALVANIZED STEEL , STAINLESS STEEL A2/A4

APPLICATIONS

CLADDING / FAÇADE INSTALLATION
 FIXING METAL OR WOODEN SUB-CONSTRUCTION
 DOOR & WINDOW FRAMES

CODE	ART NO.	PLUG	PLUG	SCREW	SPANNER	DRILL	EMBEDDED	MAX. FASTENABLE THICKNESS MM	SAFE	SAFE
		Φ	LENGTH	DIA X LENGTH	SIZE	HOLE Φ	DEPTH MIN.		PERMISSIBLE LOAD KN SOLID BRICK >Mz12 TENSION	PERMISSIBLE LOAD KN CONCRETE >C12/15 TENSION
		MM	MM	MM	MM	MM	MM			
ANF-CSR-08080	8463310	8	80	6x85	T30	8	60	20	0.6	1.3
ANF-CSR-08100	8463311	8	100	6x105	T30	8	60	40	0.6	1.3
ANF-CSR-08120	8463312	8	120	6x125	T30	8	60	60	0.6	1.3
ANF-CSR-08140	8463313	8	140	6x145	T30	8	60	80	0.6	1.3
ANF-CSR-08160	8463314	8	160	6x165	T30	8	60	100	0.6	1.3
ANF-CSR-10080	8463315	10	80	7x89	T40	10	70	10	0.8	1.5
ANF-CSR-10100	8463316	10	100	7x109	T40	10	70	30	0.8	1.5
ANF-CSR-10120	8463317	10	120	7x129	T40	10	70	50	0.8	1.5
ANF-CSR-10140	8463318	10	140	7x149	T40	10	70	70	0.8	1.5

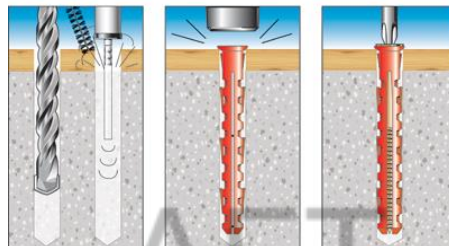

NOTE:

*ALL LOAD TOLERANCES CAN BE ACHIEVED IN ACCORDANCE WITH THE SPECIFIED DIMENSIONS MENTIONED ABOVE.
 *ANY MODIFICATIONS TO THE PRODUCT PORTFOLIO CAN BE IMPLEMENTED WITHOUT PRIOR NOTIFICATION TO THE STAKEHOLDERS.
 *SPECIAL LENGTHS CAN BE PROVIDED UPON REQUEST, SUBJECT TO A MINIMUM ORDER QUANTITY REQUIREMENT.
 *KN= KILONEWTON (1KN = 100KGS.)