

NYLON FRAME FIXING ANCHORS

#PREMIUM **

ANF-HR-ANCHOR BODY POLYAMIDE PA6 WITH HEXAGON FLANGE HEAD STAINLESS STEEL A2 SCREW **



FEATURES

PROFIED INTERNAL GEOMETRY ,
DESIGNED TO FIT BOTH HEXAGONAL FLANGE AND COUNTERSUNK HEAD.
EQUAL EMBEDDED DEPTH FOR ALL BASE MATERIALS, 70MM RESULTING IN HIGHER LOADING.
MULTI AXIS EXPANSION
THROUGH FIXING

SUITABLE BASE MATERIAL

CONCRETE
AERATED CONCRETE
HARD NATURAL STONE
SOLID BRICK
HOLLOW BRICK
SANDLIME BRICK


MATERIAL

ANCHOR BODY MADE FROM HIGH QUALITY POLYAMIDE PA6.
SCREW MADE OF GALVANIZED STEEL , STAINLESS STEEL A2/A4

APPLICATIONS

CLADDING/FAÇADE INSTALLATION
FIXING METAL OR WOODEN SUB-CONSTRUCTION
DOOR & WINDOW FRAMES

CODE	ART NO.	PLUG Φ	PLUG LENGTH	SCREW DIA X LENGTH	SPANNER SIZE	DRILL HOLE Φ	EMBEDDED DEPTH MIN.	MAX. FASTENABLE THICKNESS	SAFE PERMISSIBLE LOAD KN SOLID BRICK >Mz12 TENSION	SAFE PERMISSIBLE LOAD KN CONCRETE >C12/15 TENSION
ANF-HR-10080	8463255	10	80	7×89	17/T40	10	70	10	0.8	1.5
ANF-HR-10100	8463256	10	100	7×109	17/T40	10	70	30	0.8	1.5
ANF-HR-10120	8463257	10	120	7×129	17/T40	10	70	50	0.8	1.5
ANF-HR-10140	8463258	10	140	7×149	17/T40	10	70	70	0.8	1.5

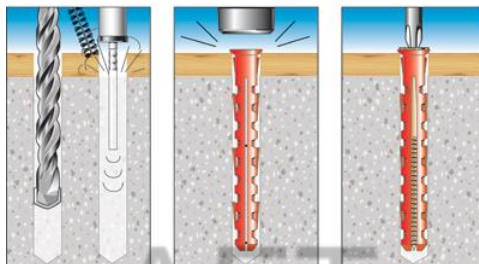

NOTE:

*ALL LOAD TOLERANCES CAN BE ACHIEVED IN ACCORDANCE WITH THE SPECIFIED DIMENSIONS MENTIONED ABOVE.
*ANY MODIFICATIONS TO THE PRODUCT PORTFOLIO CAN BE IMPLEMENTED WITHOUT PRIOR NOTIFICATION TO THE STAKEHOLDERS.
*SPECIAL LENGTHS CAN BE PROVIDED UPON REQUEST, SUBJECT TO A MINIMUM ORDER QUANTITY REQUIREMENT.
*KN= KILONEWTON (1 KN = 100KGS.)