

CONCRETE SCREWS

#STANDARD *

AUCS-C-COUNTERSUNK HEAD CONCRETE SCREW



FEATURES


- HIGH LOADING CAPACITY
- ULTIMATE SAFE ANCHORING IN CONCRETE
- CORRECT FUNCTIONING WITH REDUCED SPACING
- DIRECT INSTALLATION
- SMALL EDGE & SPACE DISTANC
- EASILY REMOVABLE

APPLICATIONS

- RACKS INSTALLATION
- SEAT FIXING
- BRIDGE FIXING
- PIPELINE HANGER
- INSTALLATION SUBWAY TUNNEL

SUITABLE BASE MATERIAL

- CONCRETE
- SOLID BRICK
- HARD NATURAL STONE

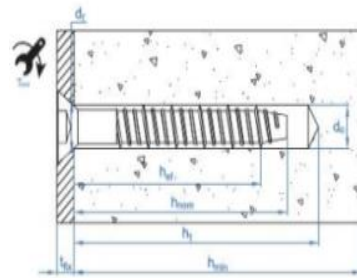

CODE	ART NO.	RECOMME NDE DRILL HOLE Ø MM	SCREW LENGTH MM	MIN DRILL HOLE DEPTH MM	MAX FIXTURE THICKNES S	WRENCH SIZE MM	RECOMMENDED LOAD KN UNCRACKED CONCRETE C20/25		MIN. SPACING MM	OUTER Ø THREAD
							TENSILE	SHEAR		
AUCSC-06050	4210301	6	50	60	5	10	1.7	2.1	35	7.65
AUCSC-06060	4210302	6	60	70	15	10	1.7	2.1	35	7.65
AUCSC-08060	4210306	8	60	70	5	13	5.5	8.5	50	10.30
AUCSC-08075	4210307	8	75	85	20	13	5.5	8.5	50	10.30
AUCSC-08090	4210308	8	90	100	35	13	5.5	8.5	50	10.30
AUCSC-08100	4210309	8	100	110	45	13	5.5	8.5	50	10.30
AUCSC-08120	4210310	8	120	130	65	13	5.5	8.5	50	10.30
AUCSC-08150	4210311	8	150	160	95	13	5.5	8.5	50	10.30
AUCSC-10060	4210321	10	60	70	5	15	13.2	15.8	70	12.35
AUCSC-10075	4210322	10	75	85	20	15	13.2	15.8	70	12.35
AUCSC-10090	4210323	10	90	100	35	15	13.2	15.8	70	12.35
AUCSC-10100	4210324	10	100	110	45	15	13.2	15.8	70	12.35
AUCSC-10110	4210325	10	110	120	55	15	13.2	15.8	70	12.35
AUCSC-10130	4210326	10	130	140	75	15	13.2	15.8	70	12.35
AUCSC-10150	4210327	10	150	160	95	15	13.2	15.8	70	12.35
AUCSC-10160	4210328	10	160	170	105	15	13.2	15.8	70	12.35
AUCSC-10200	4210329	10	200	210	145	15	13.2	15.8	70	12.35
AUCSC-12065	4210341	12	65	75	5	19	16.5	19.3	80	14.15
AUCSC-12075	4210342	12	75	85	20	19	16.5	19.3	80	14.15
AUCSC-12090	4210343	12	90	100	35	19	16.5	19.3	80	14.15
AUCSC-12100	4210344	12	100	110	45	19	16.5	19.3	80	14.15
AUCSC-12120	4210345	12	120	130	65	19	16.5	19.3	80	14.15
AUCSC-12140	4210346	12	140	150	85	19	16.5	19.3	80	14.15
AUCSC-12160	4210347	12	160	170	105	19	16.5	19.3	80	14.15
AUCSC-14075	4210361	14	75	85	5	21	22.8	29.8	100	16.80
AUCSC-14100	4210362	14	100	110	30	21	22.8	29.8	100	16.80
AUCSC-14130	4210363	14	130	140	60	21	22.8	29.8	100	16.80
AUCSC-14150	4210364	14	150	160	80	21	22.8	29.8	100	16.80



NOTE:

*ALL LOAD TOLERANCES CAN BE ACHIEVED IN ACCORDANCE WITH THE SPECIFIED DIMENSIONS MENTIONED ABOVE.
 *ANY MODIFICATIONS TO THE PRODUCT PORTFOLIO CAN BE IMPLEMENTED WITHOUT PRIOR NOTIFICATION TO THE STAKEHOLDERS.
 *SPECIAL LENGTHS CAN BE PROVIDED UPON REQUEST, SUBJECT TO A MINIMUM ORDER QUANTITY REQUIREMENT.
 *KN= KILONEWTON (1KN = 100KGS)