



HEXAGON HEAD SCREW

STANDARD	AS PER DIN
GRADES	HIGH TENSILE 8.8, 10.9, 12.9
SURFACE	ZINC PLATED BLACK

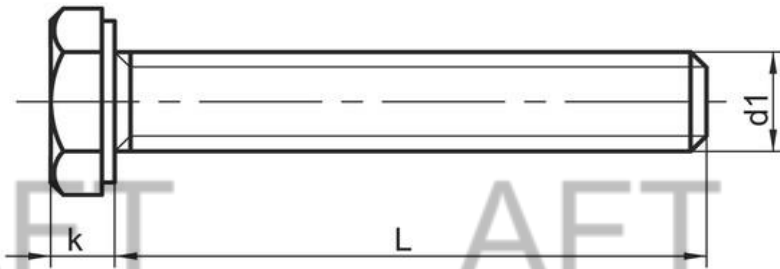

DIAMETER (D1)	M5	M6	M8	M10	M12
HEAD HEIGHT (K)	3.5	4	5.30	6.4	7.5
ACROSS FLAT (S)	8	10	13	16/17	18/19
ACROSS CORNER (E) MIN.	8.79	11.05	14.38	18.90	21.10
THREAD PITCH	0.80	1.00	1.25	1.50	1.75
LENGTHS (MM)	16-50	16-65	20-150	20-150	20-150

NOTE:

*ALL LOAD TOLERANCES CAN BE ACHIEVED IN ACCORDANCE WITH THE SPECIFIED DIMENSIONS MENTIONED ABOVE.
 *ANY MODIFICATIONS TO THE PRODUCT PORTFOLIO CAN BE IMPLEMENTED WITHOUT PRIOR NOTIFICATION TO THE STAKEHOLDERS.
 *SPECIAL LENGTHS CAN BE PROVIDED UPON REQUEST, SUBJECT TO A MINIMUM ORDER QUANTITY REQUIREMENT.