


SOCKET HEAD CAP SCREW

STANDARD	AS PER DIN
GRADES	HIGH TENSILE 8.8, 10.9, 12.9
SURFACE	ZINC PLATED BLACK

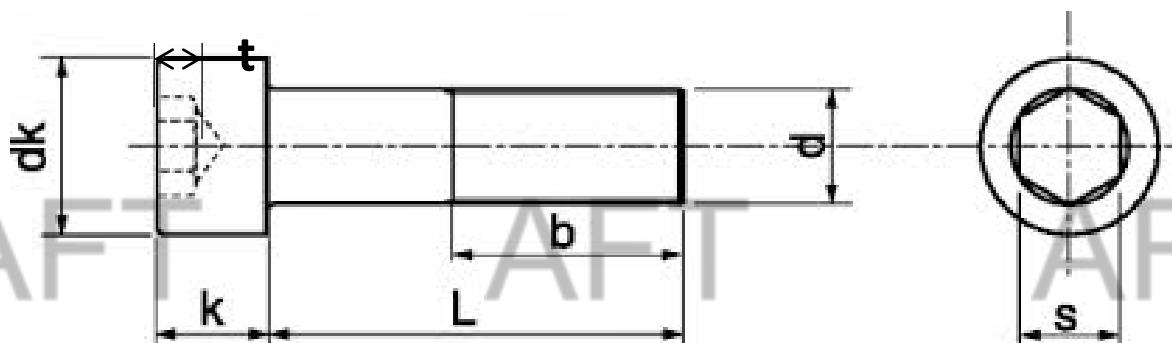

DIAMETER (D)	M5	M6	M8	M10	M12	M16
HEAD DIA (DK)	8.5	10	13	16	18	24
HEAD HEIGHT (K)	5	6	8	10	12	16
ACROSS FLAT (S)	4	5	6	8	10	14
SOCKET DEPTH (T)	2.5	3	4	5	6	8
THREAD PITCH	0.80	1.00	1.25	1.50	1.75	2.00
LENGTHS (MM)	10-50	10-65	10-150	16-150	20-150	25-150

NOTE:

*ALL LOAD TOLERANCES CAN BE ACHIEVED IN ACCORDANCE WITH THE SPECIFIED DIMENSIONS MENTIONED ABOVE.
 *ANY MODIFICATIONS TO THE PRODUCT PORTFOLIO CAN BE IMPLEMENTED WITHOUT PRIOR NOTIFICATION TO THE STAKEHOLDERS.
 *SPECIAL LENGTHS CAN BE PROVIDED UPON REQUEST, SUBJECT TO A MINIMUM ORDER QUANTITY REQUIREMENT.