


SOCKET HEAD CAP SCREW

STANDARD	DIN 912/ ISO 4762
GRADES	A2 , A4
TENSILE STRENGTH	700N/MM ²

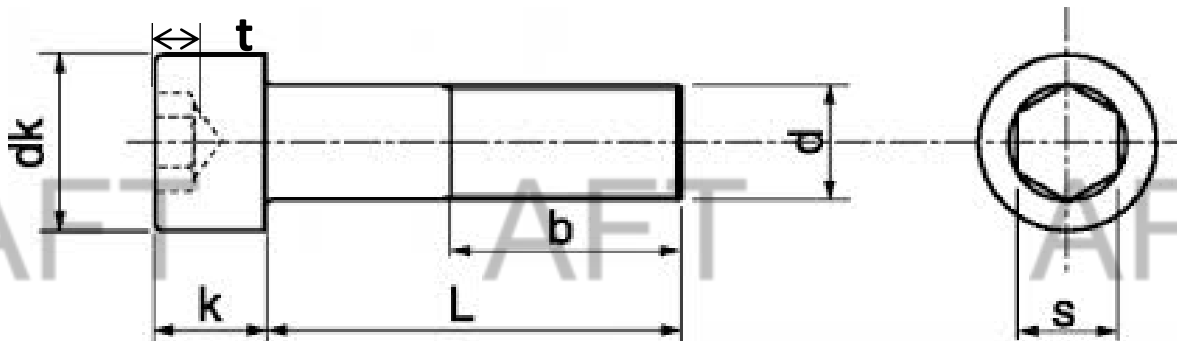

DIAMETER (D)	M5	M6	M8	M10	M12	M16
HEAD DIA (DK)	8.5	10	13	16	18	24
HEAD HEIGHT (K)	5	6	8	10	12	16
ACROSS FLAT (S)	4	5	6	8	10	14
SOCKET DEPTH (T)	2.5	3	4	5	6	8
THREAD PITCH	0.80	1.00	1.25	1.50	1.75	2.00
LENGTHS (MM)	10-50	10-65	10-150	16-150	20-150	25-150

NOTE:

*ALL LOAD TOLERANCES CAN BE ACHIEVED IN ACCORDANCE WITH THE SPECIFIED DIMENSIONS MENTIONED ABOVE.
 *ANY MODIFICATIONS TO THE PRODUCT PORTFOLIO CAN BE IMPLEMENTED WITHOUT PRIOR NOTIFICATION TO THE STAKEHOLDERS.
 *SPECIAL LENGTHS CAN BE PROVIDED UPON REQUEST, SUBJECT TO A MINIMUM ORDER QUANTITY REQUIREMENT.