



Fortune Africa
FORTUNE NAMIBIA

PDF PRINTER INFORMATION

Fortune YF-2512F LED UV Flatbed Printer



Quick Facts


- Print Area 2500mm x 1200mm
- Media thickness max 100mm
- Ricoh Gen5 Industrial Grade Printheads
- 7 Colours printing supported (Cyan, Magenta, Yellow, Black, Light Cyan, Light Magenta, White)
- Grayscale 7pl – 21pl ink droplet size respectively
- Built-in media height measurement
- Print Resolution up to 1200 dpi
- Vibration free water-cooled LED curing
- 4 Zoned Vacuum Sections

Description

Model	YF-2512F UV Flatbed Printer
Printhead	Ricoh GEN5 Grey Level Industrial Print Head
Print Head Number	3 - 8
Print Mode	(3 Printheads) CMYK + w (4 Printheads) CMYK + 2W, CMYY + CMYK, CMYK LCLM +W, CMYK +W +V (5 Printheads) CMYK + w, CMYK LCLM + 2W, CMYK + 2W +V, CMYK + SM +SY +W, CMYKLCLM+W +V (6 Printheads) CMYK + 2W, CMYK + CMYK + 2W, CMYK + W +V, CMYK LCLM +2W + v, CMYK+SM +SY +2W1 (7 Printheads) CMYK +2W + v, CMYK +SM +SY +WI (8 Printheads) CMYK +SM +SY + 2w, CMYK + CMYK, CMYK + CMYK + CMYK + CMYK
Print Width	2400MM*1300MM
Print Speed (sqm/h)	4 pass 40m ² /H 6 pass 34m ² /H 8 pass 20m ² /H
Print Resolution	720*1800 DPI
Media Type	Glass, Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic etc.
Media Thickness	Max.80 mm
Ink Type	UV Curing Ink (None VOC)
Special Ink	Optional White Ink or Varnish

Curing System	LED Curing Light (Low heat, environmental protection, energy saving, long life)
File Format	TIFF/PDF/JPEG/EPS/AI/Adobe Postscript Level 3
RIP	Photoprint/Onyx/Caldera/Colorget
Data Connector	USB 3.0
Power	220VAC (±10%) Single Phase, 50/60 HZ
Power Consumption	5.5KW(30A)
Machine Size	4750MM(L)*2100M(W)/1400(H)/1500KG
Packing Size	4900MM(L)*2280MM(H)*1750MM(H)
Environment Requirement	Separated, Clean, Low dust, Well-ventilated
Environmental temperature	20°C-30°C
Relative Humidity	40%-60% (Non-condensation)
Ventilating Device	Overhead exhaust fan is recommended, gas displacement:600cfm

Fortune YF-2512F LED UV Flatbed Printer

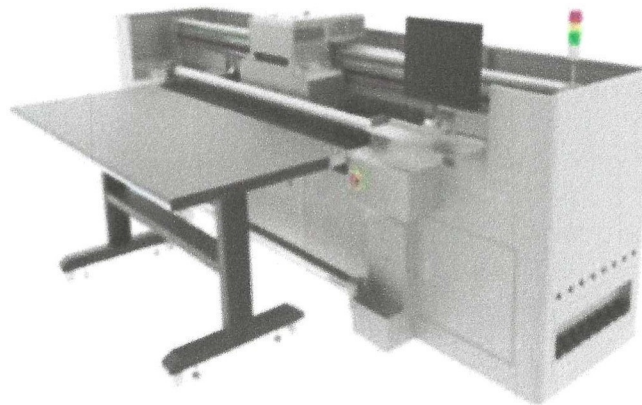

Quick Facts

- Stronger Body
- Ricoh Gen5 and Ricoh Gen6 printhead optional
- Printing Size 1800mm
- Automatic height detection System
- Highly Sensitive Carriage Protection Device
- Various Print Model
- Roll and Flatbed platform

Description

Model	YF-1800MH UV Hybrid printer
Printhead	Ricoh GEN6Gray level piezoelectric nozzle
Head No.	2-8
Print Speed (sqm/h)	4 pass: 25m ² /h 6 pass: 20m ² /h 8 pass: 12m ² /h
Print Mode	4C/6C/4C+W/6C+W/4C+W+V, Double 4C/6C, 4C/6C+W+4C/6C
Print Width	1800mm
Print Resolution	720*1800 DPI
Print Materials	Soft film, coated banner, Acrylic Wooden, Ceramic tiles, 3C product and all kinds of rolls and etc.
Media Thickness	≤45mm
Curing System	LED water cooling system
Input power	220VAC (±10%) single phase , 50/60 HZ
Power	4KW
Packing size/G W	4.3m(L)*1.65m(W)*1.6m(H)

AFRICA

Fortune YF-2000s Eco-solvent Printer



Quick Facts

- 9m (6.2 feet) Printing Width
- Max 1440dpi resolution
- Single Epson DX5 printhead installed (EPS XP600 AND EPS DX7 Optional)
- Auto-height Measurement System
- Auto Clean & Capping System

Description

Model	YF-2000S
Printhead	DX5*1 PCS
Print Speed (sqm/h)	4 pass : 40m ² /H 6 pass: 34m ² /H 8 pass: 17m ² /H
Print Mode	CMYK
Print Width	1900mm
Print Resolution	1440 DPI
Media Type	
Media Thickness	Max 3 mm
Ink Type	
Special Ink	
Curing System	Heating Dryer & Cooling Fan
File Format	TIFF/PDF/JPEG/EPS/AI/Adobe Postscript Level 3
RIP	Ultra Print V4.4 YIFANG Version/Photoprint/Maintop
Data Connector	USB 3.0
Power	220VAC (±10%) Single Phase, 50/60 HZ
Power Consumption	700W(10A)
Machine Size	2500mm(L)*800mm(W)*1200mm(H)/220KG
Packing Size	2600mm(L)*700mm(W)*700mm(H)/300KG
Environment Requirement	Separated, clean, low dust, well-ventilated
Environmental temperature	20°C-30°C
Relative humidity	40%-60% (Non-condensation)
Ventilation	Overhead exhaust fan is recommended, gas displacement:600cfm

Fortune YF-3200D Eco-solvent Printer




Quick Facts

- 3m (10 feet) Printing Width
- Max 1440dpi Resolution
- Single Epson DX7 Printhead Installed (EPS DX5 AND EPS XP600 Optional)
- Auto-height Measurement System
- Auto Clean & Capping System

Description

Model	YF-3200D
Printhead	DX5*2 PCS
Print Speed (sqm/h)	4 pass: 40m ² /H 6 pass: 34m ² /H 8 pass: 17m ² /H
Print Mode	CMYK
Print Width	3000mm
Print Resolution	1440 DPI
Media Type	
Media Thickness	Max 3 mm
Ink Type	
Special Ink	
Curing System	Heating Dryer & Cooling Fan
File Format	TIFF/PDF/JPEG/EPS/AI/Adobe Postscript Level 3
RIP	Ultra Print V4.4 YIFANG Version/Photoprint/Maintop
Data Connector	USB 3.0
Power	220VAC (±10%) Single Phase, 50/60 HZ
Power Consumption	700W(10A)
Machine Size	4500mm(L)*1100mm(W)*1300mm(H)/750KG
Packing Size	4700mm(L)*1360mm(W)*1480mm(H)/850KG
Environment Requirement	Separated, clean, low dust, well-ventilated
Environmental temperature	20°C-30°C
Relative humidity	40%-60% (Non-condensation)
Ventilation	Overhead exhaust fan is recommended, gas displacement:600cfm

Fortune YF-1700 UV Inkjet Printer

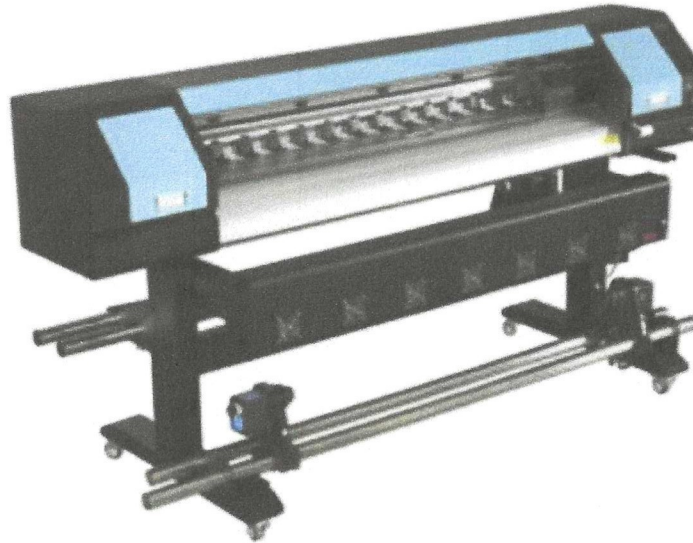


Quick Facts

- 6m (5.2 feet) Printing Width
- Max 1440dpi Resolution
- Single Epson DX5 Printhead Installed (EPS DX7 Optional)
- Auto-height Measurement System
- Auto Clean & Capping System
- Eco-friendly LED UV Lamp Curing System

Description

Models	1700, 1702, 1704
Printhead	DX5*1 PCS
Print Speed (sqm/h)	4 pass: 40m ² /H 6 pass: 34m ² /H 8 pass: 17m ² /H
Print Mode	CMYK
Print Width	1600mm
Print Resolution	1440 DPI
Media Type	Vinyl, Flex Banner, Mesh, One Way Vision, Paper, Textile, Wall Paper, Coated Banner, Lint-free Cloth, Photo Paper etc.
Media Thickness	Max 3 mm
Ink Type	EPSON UV Ink
Special Ink	White Ink
Curing System	LED Water Cooling
File Format	BMP/TIFF/PDF/JEPG
RIP	Ultra Print V4.4 YIFANG Version/Photoprint/Maintop
Data Connector	USB 3.0
Power	220VAC (±10%) Single Phase, 50/60 HZ
Power Consumption	2200W(10A)
Machine Size	2500mm(L)*800mm(W)*1200mm(H)/220KG
Packing Size	2600mm(L)*750mm(W)*700mm(H)/300KG
Environment Requirement	Separated, clean, low dust, well-ventilated
Environmental temperature	20°C-30°C
Relative humidity	40%-60% (Non-condensation)
Ventilation	Overhead exhaust fan is recommended, gas displacement:600cfm

Fortune YF-1610T LED UV Flatbed Printer

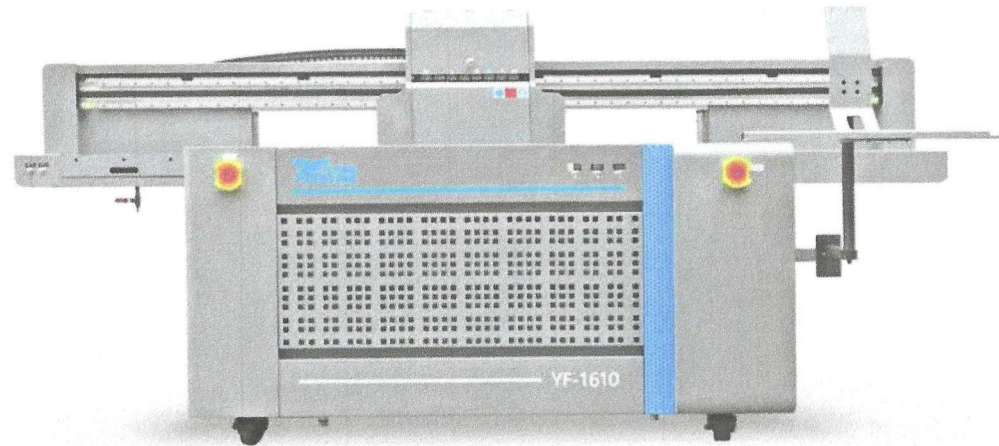

Description

Model	YF-1610TUV Flatbed Printer
Printhead	Toshiba CE4 Industrial Print Head
Print Head number	2-8
Print Mode	(4 Printheads) CMYK (5 Printheads) CMYK + w (6 Printheads) CMYK + 2W, CMYK LC LM (7 Printheads) CMYK +3W, CMYK LC LM+W (8 Printheads) CMYK +CMYK
Print Width	1600MM*1000MM
Print Speed (sqm/h)	6 pass 34m ² /H 8 pass 20m ² /H
Print Resolution	720*1800 DPI
Media Type	Glass, Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic etc.
Media Thickness	Max.150 mm
Ink Type	UV Curing Ink (None VOC)

Special Ink	Optional White Ink or Varnish
Curing System	UV LED Curing Light (Low heat, environmental protection, energy saving, long life)
File Format	TIFF/PDF/JPEG/EPS/AI/Adobe Postscript Level 3
RIP	Photoprint/Onyx/Caldera/Colorget
Data Connector	USB 3.0
Power	220VAC (±10%) Single Phase, 50/60 HZ
Power Consumption	3.5KW (30A)
Machine Size	3200 MM(L)*1700 MM(W)*1400 MM(H)
Packing Size	3500 MM(L)*2000 MM(H)*1600 MM(H)
Environment Requirement	Separated, clean, low dust, well-ventilated
Environmental temperature	20°C-30°C
Relative humidity	40%-60% (Non-condensation)

FORTUNE
AFRICA